

***Electromagnetic Emissions Test Report
and
Application for Grant of Equipment Authorization
pursuant to
FCC Part 15, Subpart C Specifications for an
Intentional Radiator on the
Savi Technology, Inc.
Model: EchoPoint Signpost, Model SP-600-101***

FCC ID: KL7-600SP-V1

GRANTEE: Savi Technology, Inc.
615 Tasman Drive
Sunnyvale, CA. 94089-1707

TEST SITE: Elliott Laboratories, Inc.
684 W. Maude Avenue
Sunnyvale, CA 94086

REPORT DATE: February 8, 2002

FINAL TEST DATE: January 18 and February 5, 2002



AUTHORIZED SIGNATORY: _____

Mark Briggs
Director of Engineering

This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

TABLE OF CONTENTS

COVER PAGE.....1

TABLE OF CONTENTS 2

SCOPE..... 3

OBJECTIVE..... 3

STATEMENT OF COMPLIANCE..... 3

EMISSION TEST RESULTS 4

 LIMITS OF CONDUCTED INTERFERENCE VOLTAGE.....4

 LIMITS OF RADIATED INTERFERENCE FIELD STRENGTH.....4

 MEASUREMENT UNCERTAINTIES4

EQUIPMENT UNDER TEST (EUT) DETAILS 5

 GENERAL.....5

 ENCLOSURE5

 MODIFICATIONS.....5

 SUPPORT EQUIPMENT.....5

 EUT INTERFACE PORTS5

 EUT OPERATION5

TEST SITE..... 6

 GENERAL INFORMATION.....6

 CONDUCTED EMISSIONS CONSIDERATIONS.....6

 RADIATED EMISSIONS CONSIDERATIONS6

MEASUREMENT INSTRUMENTATION..... 7

 RECEIVER SYSTEM.....7

 INSTRUMENT CONTROL COMPUTER.....7

 LINE IMPEDANCE STABILIZATION NETWORK (LISN).....7

 FILTERS/ATTENUATORS.....7

 ANTENNAS.....8

 ANTENNA MAST AND EQUIPMENT TURNTABLE.....8

 INSTRUMENT CALIBRATION.....8

TEST PROCEDURES 9

 EUT AND CABLE PLACEMENT9

 CONDUCTED EMISSIONS.....9

 RADIATED EMISSIONS9

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS 10

 CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207.....10

 RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.20910

 SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....11

 SAMPLE CALCULATIONS - RADIATED EMISSIONS12

 APPENDIX 1: Test Equipment Calibration Data..... 1

 APPENDIX 2: Test Data Log Sheets 2

SCOPE

An electromagnetic emissions test has been performed on the Savi Technology model EchoPoint Signpost, Model SP-600-101 pursuant to Subpart C of Part 15 of FCC Rules for intentional radiators. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Savi Technology model EchoPoint Signpost, Model SP-600-101 and therefore apply only to the tested sample. The sample was selected and prepared by Eugene Schlindwein of Savi Technology, Inc.

OBJECTIVE

The primary objective of the manufacturer is compliance with Subpart C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units which are subsequently manufactured.

STATEMENT OF COMPLIANCE

The tested sample of Savi Technology, Inc. model EchoPoint Signpost, Model SP-600-101 complied with the requirements of Subpart C of Part 15 of the FCC Rules for low power intentional radiators.

Maintenance of FCC compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

EMISSION TEST RESULTS

The following emissions tests were performed on the Savi Technology model EchoPoint Signpost, Model SP-600-101. The actual test results are contained in an Appendix of this report.

LIMITS OF CONDUCTED INTERFERENCE VOLTAGE

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.207.

The following measurement was extracted from the data recorded during the conducted emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an Appendix of this report.

Frequency MHz	Level dBuV	Power Lead	FCC B		Detector QP/Ave	Comments
			Limit	Margin		
0.6578	45.3	Neutral	48.0	-2.7	QP	

LIMITS OF RADIATED INTERFERENCE FIELD STRENGTH

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.209.

The following measurement was extracted from the data recorded during the radiated electric field emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an Appendix of this report.

Spurious Emissions, 130kHz – 30 MHz

Frequency kHz	Level dBuV/m	FCC 15.209		Detector Pk/QP/Avg	Comments
		Limit	Margin		
660	26.5	31.2	-4.8	QP	Data extrapolated from 20m to 30m using 40dB per decade correction factor.

Fundamental Field Strength @ 132kHz

Frequency kHz	Level dBuV/m	FCC 15.209		Detector Pk/QP/Avg	Comments
		Limit	Margin		
132	11.2	25.2	-14.0	Pk	Peak Reading, average limit. Data extrapolated from 20m to 300m using calculated factor

MEASUREMENT UNCERTAINTIES

ISO Guide 25 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.2

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Savi Technology model EchoPoint Signpost, Model SP-600-101 is a 132 kHz transmitter (signpost) that is designed to be used as part of an inventory tracking system.

Normally, the EUT would be installed at access monitoring and control points, mounted on a wall or pole during operation. The EUT was treated as tabletop equipment during testing to simulate the end user environment. The device was tested in both the flat and upright orientations to ensure that the maximum field strength from the device was recorded. The electrical rating of the EUT is 85-250 VAC, 47-440 Hz, 800/400 mA, 24 VDC, 800 mA.

The sample was received on January 18, 2002 and tested on January 18 and February 5, 2002. The EUT consisted of the following component(s):

Manufacturer/Model/Description	Serial Number
Savi Technology SP-600-101 Mobile Signpost Tag Reader	1005

ENCLOSURE

The EUT enclosure is primarily constructed of fabricated molded plastic. It measures approximately 17.5 cm wide by 17.5 cm deep by 7.5 cm high.

MODIFICATIONS

The EUT did not require modifications during testing in order to comply with emissions specifications.

SUPPORT EQUIPMENT

No support equipment was used during testing.

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Sync In	Unterminated	multiwire	Unshielded	15
Sync Out	Unterminated	multiwire	Unshielded	15
Sensor 1	Unterminated	multiwire	Unshielded	3
Sensor 2	Unterminated	multiwire	Unshielded	3
Power	AC Mains	3 wire	Shielded	2

EUT OPERATION

The EUT was continuously transmitting during testing.

TEST SITE

GENERAL INFORMATION

Final test measurements were taken on January 18 and February 5, 2002 at the Elliott Laboratories Open Area Test Site #1 & 2 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde and Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An Appendix of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES**EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207

Frequency Range (MHz)	Limit (uV)	Limit (dBuV)
0.450 to 30.000	250	48

RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}} @ 300\text{m}$	$67.6-20*\log_{10}(F_{\text{KHz}}) @ 300\text{m}$
0.490-1.705	$24000/F_{\text{KHz}} @ 30\text{m}$	$87.6-20*\log_{10}(F_{\text{KHz}}) @ 30\text{m}$
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - B = C$$

and

$$C - S = M$$

where:

R_r = Receiver Reading in dBuV

B = Broadband Correction Factor*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

- * Broadband Level - Per ANSI C63.4, 13 dB may be subtracted from the quasi-peak level if it is determined that the emission is broadband in nature. If the signal level in the average mode is six dB or more below the signal level in the peak mode, the emission is classified as broadband.

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

APPENDIX 1: Test Equipment Calibration Data

Conducted Emissions, 21-Jan-02

Engineer: jay

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Rohde & Schwarz	Test Receiver, 9kHz-2750MHz	ESCS 30 EMI	1337	12	12/26/2001	12/26/2002
Solar Electronics Co	LISN	8028-50-TS-24-BNC	904	12	5/18/2001	5/18/2002
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	372	12	7/27/2001	7/27/2002

Radiated Emissions, 30 - 1000 MHz, 05-Feb-02

Engineer: jmartinez

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Biconical Antenna, 30-300 MHz	3110B	1320	12	5/23/2001	5/23/2002
EMCO	Log Periodic Antenna, 0.2-1 GHz	3146	1294	12	3/27/2001	3/27/2002
Rohde & Schwarz	Test Receiver, 20-1300 MHz	ESVP	1317	12	5/9/2001	5/9/2002

Conducted Emissions, 05-Feb-02

Engineer: jmartinez

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Elliott Laboratories	FCC / CISPR LISN	LISN-3, OATS	304	12	6/14/2001	6/14/2002
Rohde& Schwarz	Pulse Limiter	ESH3 Z2	812	12	1/23/2002	1/23/2003
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	1316	12	5/9/2001	5/9/2002

Fundamental and Harmonic below 30MHz, 05-Feb-02

Engineer: jmartinez

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Magnetic Loop Antenna, 10k-30MHz	6502	1299	12	12/26/2001	12/26/2002
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	1316	12	5/9/2001	5/9/2002

APPENDIX 2: Test Data Log Sheets

ELECTROMAGNETIC EMISSIONS

TEST LOG SHEETS

AND

MEASUREMENT DATA

T45873 12 Pages



EMC Test Data

Client:	Savi	Job Number:	J45866
Model:	SP-600-101	T-Log Number:	T45873
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Emissions Spec:	FCC	Class:	A
Immunity Spec:	-	Environment:	-

EMC Test Data

For The

Savi

Model

SP-600-101



EMC Test Data

Client:	Savi	Job Number:	J45866
Model:	SP-600-101	T-Log Number:	T45873
Contact:	Gene Schlindwein	Proj Eng:	Mark Briggs
Emissions Spec:	FCC	Class:	A
Immunity Spec:	-	Environment:	-

EUT INFORMATION

General Description

The EUT is a 132 kHz transmitter (signpost) which is designed to be used as part of an inventory tracking system. Normally, the EUT would be installed at access monitoring and control points, mounted on a wall or pole during operation. The EUT was, therefore, treated as table-top equipment during testing to simulate the end user environment. The electrical rating of the EUT is 85-250 VAC, 47-440 Hz, 800/400 mA, 24 VDC, 800 mA.

Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Savi Technology	SP-600-101	mobile Signpost Tag reader	1005	

Other EUT Details

The SP-600-101 and SP-600-201 are identical except for antenna. The SP-600-101 has the internal antenna and the SP-600-201 has the external antenna.

EUT Enclosure

The EUT enclosure is primarily constructed of fabricated molded plastic. It measures approximately 17.5 cm wide by 17.5 cm deep by 7.5 cm high.

Modification History

Mod. #	Test	Date	Modification
1			
2			
3			



EMC Test Data

Client:	Savi	Job Number:	J45866
Model:	SP-600-101	T-Log Number:	T45873
Contact:	Gene Schlindwein	Proj Eng:	Mark Briggs
Emissions Spec:	FCC	Class:	A
Immunity Spec:	-	Environment:	-

Test Configuration #1

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
none				

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
none				

Interface Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Sync In	Unterminated	multiwire	Unshielded	15
Sync Out	Unterminated	multiwire	Unshielded	15
Sensor 1	Unterminated	multiwire	Unshielded	3
Sensor 2	Unterminated	multiwire	Unshielded	3
Power	AC Mains	3 wire	Shielded	2

EUT Operation During Emissions

The EUT was in a normal operating mode, continuously transmitting.



EMC Test Data

Client:	Savi	Job Number:	J45866
Model:	SP-600-101	T-Log Number:	T45873
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Spec:	FCC	Class:	A

Conducted Emissions - Power Ports

Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/18/2002
Test Engineer: Jay Dickinson
Test Location: SVOATS #1

Config. Used: 1
Config Change: none
EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment.

Ambient Conditions: Temperature: 13°C
Rel. Humidity: 40%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power 120V/60Hz	FCC B	Pass	-2.7dB @ .658MHz

Modifications Made During Testing:

No Modifications performed.

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client: Savi	Job Number: J45866
Model: SP-600-101	T-Log Number: T45873
	Proj Eng: Mark Briggs
Contact: Gene Schindwein	
Spec: FCC	Class: A


Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz,120V/60Hz

Frequency MHz	Level dB μ V	AC Line	FCC B		Detector QP/Ave	Comments
			Limit	Margin		
0.6578	45.3	Neutral	48.0	-2.7	QP	
0.6585	45.1	Neutral	48.0	-2.9	QP	
0.6578	44.8	Line	48.0	-3.2	QP	
0.6585	44.7	Line	48.0	-3.3	QP	
0.9220	42.2	Neutral	48.0	-5.8	QP	
0.9220	41.2	Line	48.0	-6.8	QP	
10.8960	37.0	Neutral	48.0	-11.0	QP	
10.8960	35.0	Line	48.0	-13.0	QP	
5.0000	31.6	Line	48.0	-16.4	QP	
5.0000	29.0	Neutral	48.0	-19.0	QP	

Elliott Laboratories Conducted Emissions

18. Jan 02 19:10


EUT: SP-600-101
Manuf: Savi Technology, Inc.
Op Cond: 120V / 60Hz
Operator: Jay Dickinson
Test Spec: FCC B
Comment: Line Neutral
T45866

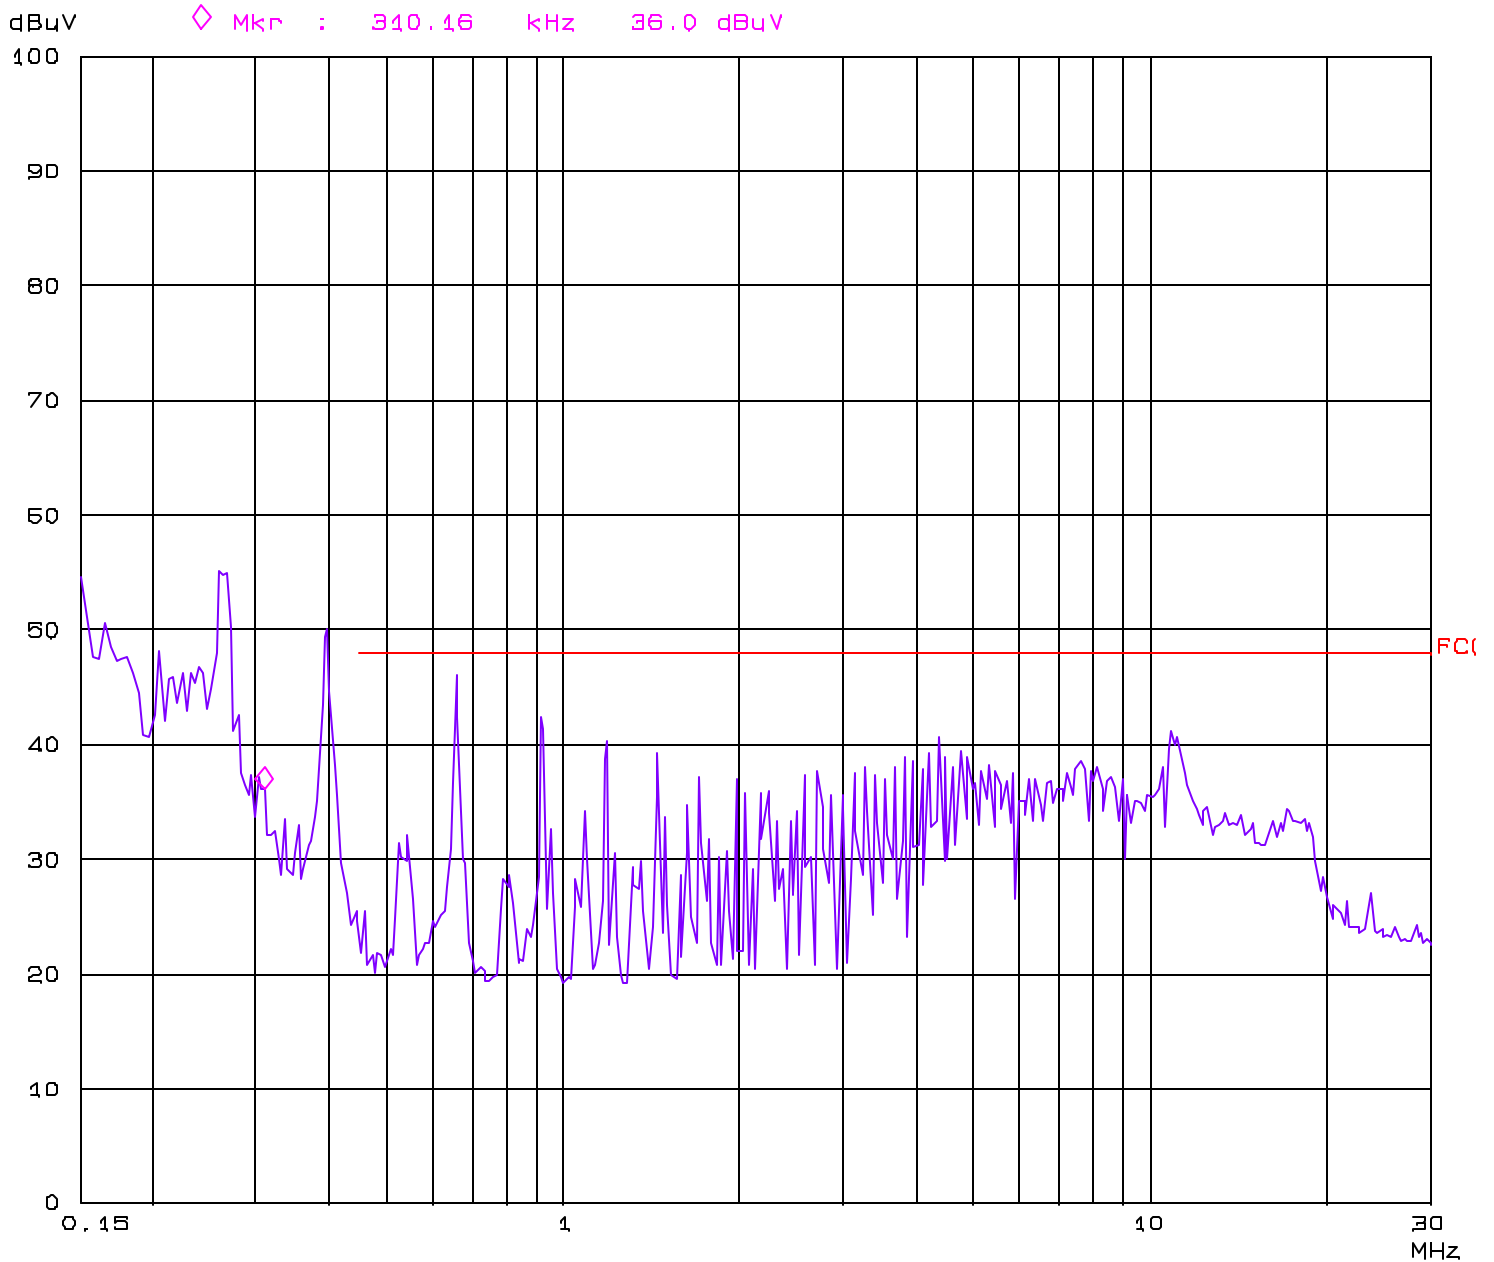

Elliott Laboratories Conducted Emissions

18. Jan 02 18:50

EUT: SP-600-101
Manuf: Savi Technology, Inc.
Op Cond: 120V / 60Hz
Operator: Jay Dickinson
Test Spec: FCC B
Comment: [] Line [x] Neutral
T45866

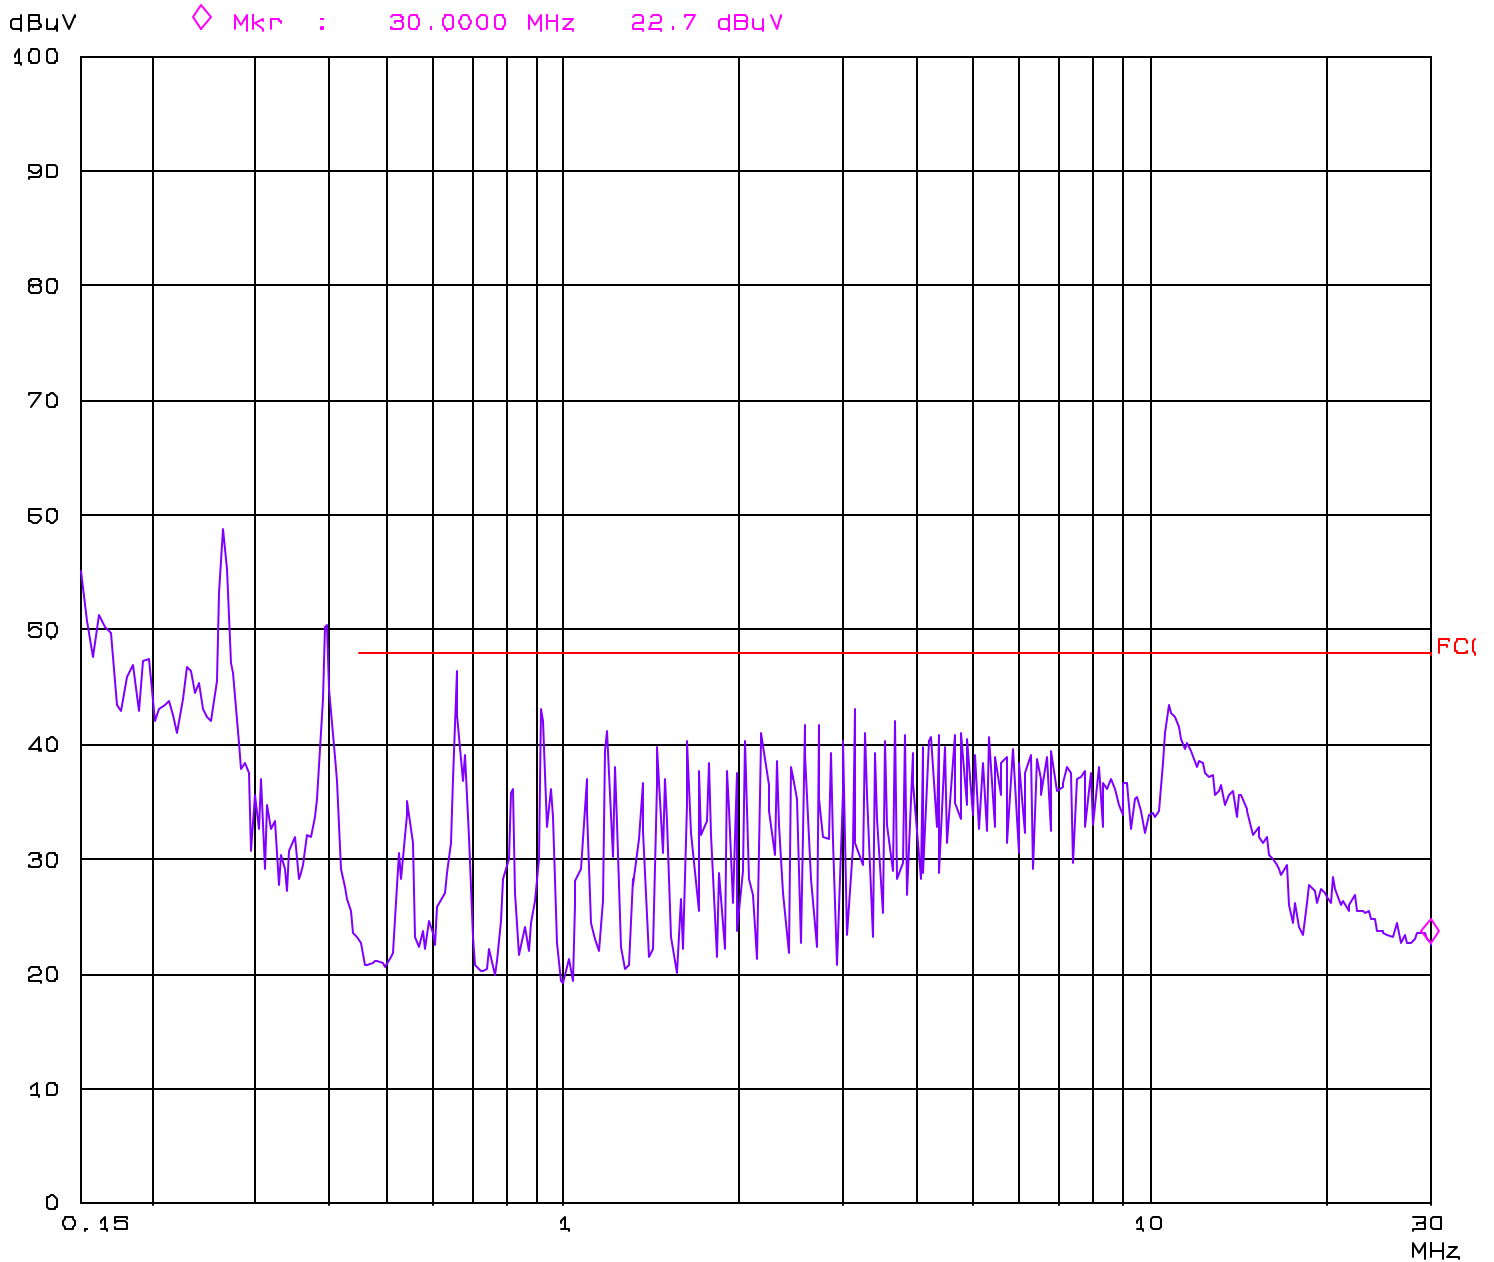



EMC Test Data

Client:	Savi	Job Number:	J45866
Model:	SP-600-101	T-Log Number:	T45873
		Proj Eng:	Mark Briggs
Contact:	Gene Schlindwein		
Spec:	FCC	Class:	A

Radiated Emissions - FCC 15.209 Radio

Test Specifics

Objective: The objective is to perform preliminary measurements of the fundamental field strength and field strength of spurious emissions at 3m, 10m, and 20m.

Date of Test: 2/5/2002

Config. Used: See below

Test Engineer: J Martinez

Config Change: None

Test Location: SVOATS #2

EUT Voltage: 120Vac, 60Hz

General Test Configuration

The radio and integral antennae were located on a table during testing.

For radiated emissions testing below 30 MHz the measurement antenna was located 4.6, 10, and 20 meters from the EUT as noted. Radiated magnetic field measurements were made with the loop antenna located one meter above the ground plane. The loop was place 0 degrees (Open Loop) and 90 degrees (Close Loop).

Ambient Conditions:

Temperature: 14.4°C

Rel. Humidity: 53%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1,2	Fundamental	15.209	Pass	-14dB @ 132 kHz
1,3	Spurious	15.209	Pass	-4.8dB @ 660 kHz

Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client: Savi	Job Number: J45866
Model: SP-600-101	T-Log Number: T45873
Contact: Gene Schlindwein	Proj Eng: Mark Briggs
Spec: FCC	Class: A

Run #1: Fundamental Field Strength -CW Mode w/ Unit Parallel to Table.

Below 150kHz a bandwidth of 1 kHz was used (Test receiver ESN)

EUT Loop antenna, Asset #1299, was elevated 1.00 meters from ground plane.

Frequency MHz	Reading dBμV	AF dB	Level dBuV/m	AF dB	Level dBuA/m	Detector	Distance (m)	Comments
0.132	66.0	10.5	76.5	-41.0	25.0	Pk	20.0	Open Loop
0.132	65.5	10.5	76.0	-41.0	24.5	AV	20.0	Open Loop
0.132	63.2	10.5	73.7	-41.0	22.2	Pk	20.0	Close Loop (Antenna Asset # 1299)
0.132	62.2	10.5	72.7	-41.0	21.2	AV	20.0	Close Loop (Antenna Asset # 1299)
0.132	84.7	10.5	95.2	-41.0	43.7	Pk	10.0	Open Loop
0.132	83.9	10.5	94.4	-41.0	42.9	AV	10.0	Open Loop
0.132	79.3	10.5	89.8	-41.0	38.3	Pk	10.0	Close Loop
0.132	78.5	10.5	89.0	-41.0	37.5	AV	10.0	Close Loop
0.132	113.7	10.5	124.2	-41.0	72.7	Pk	3.0	Open Loop
0.132	113.3	10.5	123.8	-41.0	72.3	AV	3.0	Open Loop
0.132	109.1	10.5	119.6	-41.0	68.1	Pk	3.0	Close Loop
0.132	108.7	10.5	119.2	-41.0	67.7	AV	3.0	Close Loop

Data Summary - Extrapolation Factor

Freq (kHz)	Level At Test Distance					
	@3m		@10m		@20m	
	dBuV/m	dBuA/m	dBuV/m	dBuA/m	dBuV/m	dBuA/m
132	124.2	72.7	95.2	43.7	76.5	25.0

Extrapolation Factors For Fundamental Signal

The following extrapolation factors are calculated by dividing the difference between the field strengths at the two distances by the log (base ten) of the ratio of the two distances.

- 10m to 20m -62.1
- 3m to 10m -55.5
- 3m to 20m -57.9

The equation used for extrapolation is:

$$\text{Extrapolation} = [(F_m - F) / \text{Log} (D_m/D_s)] \text{ dB}$$

Where:

- F_m = measured field strength in dBuV/m or dBuA/m
- D_s is the specification test distance
- D_m is the actual measurement distance used



EMC Test Data

Client: Savi	Job Number: J45866
Model: SP-600-101	T-Log Number: T45873
	Proj Eng: Mark Briggs
Contact: Gene Schlindwein	
Spec: FCC	Class: A

The calculated extrapolation factor of -55.5dB was used for extrapolating the fundamental signal level. For spurious emissions the theoretical extrapolation factor of -40dB was used.

FCC Part 15.209 Data

Freq (kHz)	Level (dBuV/m)	Limit dBuV/m	Margin dB	Comment
132	11.2	25.2	-14.0	Fundamental at 300m using extrapolation factor of -55.5 dB per decade of distance (Note 2)
264	-15.4	19.2	-34.6	Field strength extrapolated to 300m (Note 3)
396	1.4	15.7	-14.3	Field strength extrapolated to 300m (Note 3)
528	24.7	33.2	-8.5	Field strength extrapolated to 30m (Note 3)
660	26.5	31.2	-4.8	Field strength extrapolated to 30m (Note 3)
792	22.0	29.6	-7.7	Field strength extrapolated to 30m (Note 3)

Notes:

Limit is an average limit below 150kHz (with an additional peak limit of the stated average limit plus 20dB), QP above 150kHz. Measurements made with the appropriate detector.

Extrapolation factor was applied to the 20 m reading for the fundamental signal and harmonics. For the fundamental the calculated extrapolation factor of 55.5dB was used, for all others a 40dB factor was used.

Note 1: All emission levels for the harmonics were noise floor readings. Harmonics were measured with Open Loop, worst case from Run# 1, at a distance of 20 meters from the EUT.

Note 2 : Peak Measurement at 20m was used as the worst case.

Note 3: Extrapolation factor of $40\log(\text{Test Distance}/\text{Specification Distance})$ was used for the measurements of the harmonics.



EMC Test Data

Client: Savi	Job Number: J45866
Model: SP-600-101	T-Log Number: T45873
	Proj Eng: Mark Briggs
Contact: Gene Schindwein	
Spec: FCC	Class: A

Run #2c: Fundamental Field Strength -CW Mode w/ Unit Perpendicular to Table.

Below 150kHz a bandwidth of 1 kHz was used (Test receiver ESN)

EUT Loop antenna, Asset #1299, was elevated 1.00 meters from ground plane.

Frequency MHz	Reading dBμV	AF dB	Level dBuV/m	AF dB	Level dBuA/m	Detector	Distance (m)	
0.132	45.0	10.5	55.5	-41.0	4.0	Pk	20.0	Open Loop
0.132	40.4	10.5	50.9	-41.0	-0.6	Pk	20.0	Close Loop (Antenna Asset # 1299)
0.132	66.0	10.5	76.5	-41.0	25.0	Pk	10.0	Open Loop
0.132	65.6	10.5	76.1	-41.0	24.6	AV	10.0	Open Loop
0.132	50.3	10.5	60.8	-41.0	9.3	Pk	10.0	Close Loop
0.132	48.0	10.5	58.5	-41.0	7.0	AV	10.0	Close Loop
0.132	100.2	10.5	110.7	-41.0	59.2	Pk	3.0	Open Loop
0.132	100.0	10.5	110.5	-41.0	59.0	AV	3.0	Open Loop
0.132	76.0	10.5	86.5	-41.0	35.0	Pk	3.0	Close Loop
0.132	75.9	10.5	86.4	-41.0	34.9	AV	3.0	Close Loop

Data Summary

Freq (kHz)	Level At Test Distance					
	@3m		@10m		@20m	
	dBuV/m	dBuA/m	dBuV/m	dBuA/m	dBuV/m	dBuA/m
132	100.2	48.7	66.0	14.5	45.0	-6.5

Extrapolation Factors For Fundamental Signal

The following extrapolation factors are calculated by dividing the difference between the field strengths at the two distances by the log (base ten) of the ratio of the two distances.

- 10m to 20m -69.8
- 3m to 10m -65.4
- 3m to 20m -67.0

The equation used for extrapolation is:

$$\text{Extrapolation} = [(F_m - F) / \text{Log} (D_m/D_s)] \text{ dB}$$

Where:

- F_m = measured field strength in dBuV/m or dBuA/m
- D_s is the specification test distance
- D_m is the actual measurement distance used

The calculated extrapolation factor of -65.4dB was used for extrapolating the fundamental signal level. For spurious emissions the theoretical extrapolation factor of -40dB was used.



EMC Test Data

Client: Savi	Job Number: J45866
Model: SP-600-101	T-Log Number: T45873
	Proj Eng: Mark Briggs
Contact: Gene Schlindwein	
Spec: FCC	Class: A

FCC Part 15.209 Data

Freq (kHz)	Level (dBuV/m)	Limit dBuV/m	Margin dB	Comment
132	-31.9	25.2	-57.1	Fundamental at 300m using extrapolation factor of -65.4 dB per decade of distance (Note 2)
264	-15.4	19.2	-34.6	Field strength extrapolated to 300m (Note 3)
396	-2.8	15.7	-18.5	Field strength extrapolated to 300m (Note 3)
528	24.0	33.2	-9.2	Field strength extrapolated to 30m (Note 3)
660	24.2	31.2	-7.1	Field strength extrapolated to 30m (Note 3)
792	24.0	29.6	-5.7	Field strength extrapolated to 30m (Note 3)

Notes:

Limit is an average limit below 150kHz (with an additional peak limit of the stated average limit plus 20dB), QP above 150kHz. Measurements made with the appropriate detector.

Extrapolation factor was applied to the 20 m reading for the fundamental signal and harmonics. For the fundamental the calculated extrapolation factor of 65.4dB was used, for all others a 40dB factor was used.

Note 1: All emission levels for the harmonics were noise floor readings. Harmonics were measured with Open Loop, worst case from Run# 1, at a distance of 20 meters from the EUT.

Note 2 : Peak Measurement at 20m was used as the worst case.

Note 3: Extrapolation factor of $40\log(\text{Test Distance}/\text{Specification Distance})$ was used for the measurements of the harmonics.