

***Electromagnetic Emissions Test Report  
and  
Application for Grant of Equipment Authorization  
pursuant to  
FCC Part 15, Subpart C Specifications for an  
Intentional Radiator on the  
Savi Technology, Inc.  
Model: SP-600-201***


FCC ID: KL7-600SP-V2

GRANTEE: Savi Technology, Inc.  
615 Tasman Drive  
Sunnyvale, CA. 94089-1707

TEST SITE: Elliott Laboratories, Inc.  
684 W. Maude Avenue  
Sunnyvale, CA 94086

REPORT DATE: November 30, 2001

FINAL TEST DATE: November 29, 2001

AUTHORIZED SIGNATORY:   
David Bare  
CTO

This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

**TABLE OF CONTENTS**

<b>COVER PAGE</b> .....	<b>1</b>
<b>TABLE OF CONTENTS</b> .....	<b>2</b>
<b>SCOPE</b> .....	<b>3</b>
<b>OBJECTIVE</b> .....	<b>3</b>
<b>STATEMENT OF COMPLIANCE</b> .....	<b>3</b>
<b>EMISSION TEST RESULTS</b> .....	<b>4</b>
LIMITS OF CONDUCTED INTERFERENCE VOLTAGE.....	4
LIMITS OF RADIATED INTERFERENCE FIELD STRENGTH.....	4
MEASUREMENT UNCERTAINTIES.....	4
<b>EQUIPMENT UNDER TEST (EUT) DETAILS</b> .....	<b>5</b>
GENERAL.....	5
ENCLOSURE.....	5
MODIFICATIONS.....	5
SUPPORT EQUIPMENT.....	5
EXTERNAL I/O CABLING.....	6
TEST SOFTWARE.....	6
<b>TEST SITE</b> .....	<b>7</b>
GENERAL INFORMATION.....	7
CONDUCTED EMISSIONS CONSIDERATIONS.....	7
RADIATED EMISSIONS CONSIDERATIONS.....	7
<b>MEASUREMENT INSTRUMENTATION</b> .....	<b>8</b>
RECEIVER SYSTEM.....	8
INSTRUMENT CONTROL COMPUTER.....	8
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	8
FILTERS/ATTENUATORS.....	9
ANTENNAS.....	9
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	9
INSTRUMENT CALIBRATION.....	9
<b>TEST PROCEDURES</b> .....	<b>10</b>
EUT AND CABLE PLACEMENT.....	10
CONDUCTED EMISSIONS.....	10
RADIATED EMISSIONS.....	10
<b>SPECIFICATION LIMITS AND SAMPLE CALCULATIONS</b> .....	<b>11</b>
CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207.....	11
RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209.....	11
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS.....	12
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	13
EXHIBIT 1: Test Equipment Calibration Data.....	1
EXHIBIT 2: Test Data Log Sheets.....	2
EXHIBIT 3: Test Configuration Photographs.....	3
EXHIBIT 4: Proposed FCC ID Label & Label Location.....	4
EXHIBIT 5: Detailed Photographs of Savi Technology, Inc. Model SP-600-201.....	5
EXHIBIT 6: Operator's Manual for Savi Technology, Inc. Model SP-600-201.....	6
EXHIBIT 7: Block Diagram of Savi Technology, Inc. Model SP-600-201.....	7
EXHIBIT 8: Schematic Diagrams for Savi Technology, Inc. Model SP-600-201.....	8
EXHIBIT 9: Theory of Operation for Savi Technology, Inc. Model SP-600-201.....	9

---

## **SCOPE**

An electromagnetic emissions test has been performed on the Savi Technology inductive loop transmitter model SP-600-201 pursuant to Subpart C of Part 15 of FCC Rules for intentional radiators. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Savi Technology model SP-600-201 and therefore apply only to the tested sample. The sample was selected and prepared by Eugene Schindwein of Savi Technology, Inc.

## **OBJECTIVE**

The primary objective of the manufacturer is compliance with Subpart C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units which are subsequently manufactured.

## **STATEMENT OF COMPLIANCE**

The tested sample of Savi Technology, Inc. model SP-600-201 complied with the requirements of Subpart C of Part 15 of the FCC Rules for low power intentional radiators.

Maintenance of FCC compliance is the responsibility of the manufacturer. Any modification of the product that may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

**EMISSION TEST RESULTS**

The following emissions tests were performed on the Savi Technology model SP-600-201. The actual test results are contained in an exhibit of this report.

**LIMITS OF CONDUCTED INTERFERENCE VOLTAGE**

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.207.

The following measurement was extracted from the data recorded during the conducted emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an exhibit of this report.

**120V, 60Hz**

Frequency MHz	Level dBuV	Power Lead	FCC Limit	FCC Margin	Detector QP/Ave	Comments
0.6198	44.0	Line 1	48.0	-3.5	QP	

**LIMITS OF RADIATED INTERFERENCE FIELD STRENGTH**

The EUT tested complied with the limits detailed in FCC Rules Part 15 Section 15.209.

The following measurement was extracted from the data recorded during the radiated electric field emissions scan and represents the highest amplitude emission relative to the specification limit. The actual test data and any correction factors are contained in an exhibit of this report.

Frequency MHz	Level dBuV/m	Pol v/h	FCC Limit	FCC Margin	Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
0.1320	3.7	C	25.2	-21.5	Pk	0	1.0	Extrapolated

**MEASUREMENT UNCERTAINTIES**

ISO Guide 25 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.2

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Savi Technology model SP-600-201 is an inductive loop transmitter. The sample was received on November 28, 2001 and tested on November 29, 2001. The EUT input is rated at 120, 60 Hz. The EUT consisted of the following component(s):

Manufacturer/Model/Description	Serial Number
Savi Technology SP-600-201 Signpost	1034

**ENCLOSURE**

The EUT enclosure is primarily constructed of plastic. The antenna post measures approximately 47 cm wide by 6.5 cm deep by 276 cm high. The enclosure for the electronic circuitry measures approximately 18 cm wide by 7.5 cm deep by 18 cm high.

**MODIFICATIONS**

The following modifications were made to the product in order to comply with the emission specifications:

A five-turn, common-mode choke was added to the EUT's antenna connector cable inside the housing using a Steward ferrite P/N 35T0625-200.

**SUPPORT EQUIPMENT**

The following equipment was used as local support equipment for emissions testing:

Manufacturer	Model	Description	Serial Number	FCC ID
Power Design	6150D	DC power supply	902012	-

---

**EXTERNAL I/O CABLING**

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Power	AC Mains	Power cable (AC)	Shielded	2
Sync In	Unterminated	4-wire cable	Unshielded	30
Sync Out	Unterminated	4-wire cable	Unshielded	30
Sensor 1	Unterminated	2-wire cable	Unshielded	4
Sensor 2	Unterminated	2-wire cable	Unshielded	4

**TEST SOFTWARE**

The EUT was set to transmit continuously during testing. The transmitter has approximately a 50% duty cycle.

---

## TEST SITE

### GENERAL INFORMATION

Final test measurements were taken on November 29, 2001 at the Elliott Laboratories Open Area Test Site #2 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

### CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

### RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

---

**MEASUREMENT INSTRUMENTATION****RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

**INSTRUMENT CONTROL COMPUTER**

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

**LINE IMPEDANCE STABILIZATION NETWORK (LISN)**

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.



---

## **FILTERS/ATTENUATORS**

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

## **ANTENNAS**

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

## **ANTENNA MAST AND EQUIPMENT TURNTABLE**

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

## **INSTRUMENT CALIBRATION**

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

---

**TEST PROCEDURES****EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst case orientation is used for final measurements.

**CONDUCTED EMISSIONS**

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

**RADIATED EMISSIONS**

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

**SPECIFICATION LIMITS AND SAMPLE CALCULATIONS**

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

**CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207**

Frequency Range (MHz)	Limit (uV)	Limit (dBuV)
0.450 to 30.000	250	48

**RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209**

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}} @ 300\text{m}$	$67.6-20*\log_{10}(F_{\text{KHz}}) @ 300\text{m}$
0.490-1.705	$24000/F_{\text{KHz}} @ 30\text{m}$	$87.6-20*\log_{10}(F_{\text{KHz}}) @ 30\text{m}$
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

---

**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - B = C$$

and

$$C - S = M$$

where:

$R_r$  = Receiver Reading in dBuV

B = Broadband Correction Factor\*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

\* Broadband Level - Per ANSI C63.4, 13 dB may be subtracted from the quasi-peak level if it is determined that the emission is broadband in nature. If the signal level in the average mode is six dB or more below the signal level in the peak mode, the emission is classified as broadband.

---

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

**EXHIBIT 1: Test Equipment Calibration Data**

**Conducted Emissions, 27-Nov-01 11:03 PM****Engineer: Rafael**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Elliott Laboratories	FCC / CISPR LISN	LISN-3, OATS	304	12	6/14/2001	6/14/2002
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	812	12	1/23/2001	1/23/2002
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	1316	12	5/9/2001	5/9/2002

**Radiated Emissions,0.13-30MHz, 29-Nov-01 03:23 PM****Engineer: mfaustino**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Magnetic Loop Antenna, 10k-30MHz	6502	296	12	12/27/2000	12/27/2001
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	1316	12	5/9/2001	5/9/2002

**Conducted Emissions, 29-Nov-01 05:00 PM****Engineer: mfaustino**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Elliott Laboratories	FCC / CISPR LISN	LISN-3, OATS	304	12	6/14/2001	6/14/2002
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	812	12	1/23/2001	1/23/2002
Rohde & Schwarz	Test Receiver, 0.009-30 MHz	ESH3	1316	12	5/9/2001	5/9/2002

***EXHIBIT 2: Test Data Log Sheets***

***ELECTROMAGNETIC EMISSIONS***

***TEST LOG SHEETS***

***AND***

***MEASUREMENT DATA***

T 45399 10 Pages





## EMC Test Data

Client:	Savi	Job Number:	J45393
Model:	SP-600-201	T-Log Number:	T45399
		Proj Eng:	Mark Briggs
Contact:	Eugene Schlindwein		
Emissions Spec:	FCC 15.209	Class:	-
Immunity Spec:	EN 301 489-3	Environment:	-

# EMC Test Data

For The

**Savi**

Model

**SP-600-201**



## EMC Test Data

Client:	Savi	Job Number:	J45393
Model:	SP-600-201	T-Log Number:	T45399
		Proj Eng:	Mark Briggs
Contact:	Eugene Schlindwein		
Emissions Spec:	FCC 15.209	Class:	-
Immunity Spec:	EN 301 489-3	Environment:	-

### EUT INFORMATION

#### General Description

The EUT is a signal post which is designed to be used as part of an inventory tracking system. Normally, the EUT would be floor-standing during operation. But, in order to expose the signal post's electronic circuitry to the radiated field, the signal post was placed on top of 80 cm high table. The electrical rating of the EUT is 24V DC, 5 Amps and 120V/60Hz, 800mA .

#### Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Savi	SP-600-201	132 KHz Antenna Post	1034	

#### Other EUT Details

The EUT is designed to transmit commands to a rf tag at 132kHz.

#### EUT Enclosure

The EUT enclosure is primarily constructed of plastic. The antenna post measures approximately 47 cm wide by 6.5 cm deep by 276 cm high. The enclosure for the electronic circuitry measures approximately 18 cm wide by 7.5 cm deep by 18 cm high.

#### Modification History

Mod. #	Test	Date	Modification
1			
2			
3			



## EMC Test Data

Client: Savi	Job Number: J45393
Model: SP-600-201	T-Log Number: T45399
Contact: Eugene Schlindwein	Proj Eng: Mark Briggs
Emissions Spec: FCC 15.209	Class: -

### Test Configuration #2

#### Local Support Equipment (for DC configuration)

Manufacturer	Model	Description	Serial Number	FCC ID
Power Design	6150D	DC power supply	902012	-

#### Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None	-	-	-	-

#### Interface Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Power	AC Mains	Power cable (DC)	Shielded	2
Power	AC Mains	Power cable (AC)	Shielded	2
Sync In	Unterminated	4-wire cable	Unshielded	30
Sync Out	Unterminated	4-wire cable	Unshielded	30
Sensor 1	Unterminated	2-wire cable	Unshielded	4
Sensor 2	Unterminated	2-wire cable	Unshielded	4

#### EUT Operation During Emissions

The EUT was set to transmit continuously during testing. The transmitter has approximately a 50% duty cycle.

## EMC Test Data

Client:	Savi	Job Number:	J45393
Model:	SP-600-201	T-Log Number:	T45399
		Proj Eng:	Mark Briggs
Contact:	Eugene Schlindwein		
Spec:	FCC 15.209	Class:	-

### Radiated Emissions

#### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 11/29/2001  
Test Engineer: Marissa Faustino  
Test Location: SVOATS #2

Config. Used: 2  
Config Change:  
EUT Voltage: 120V/60Hz

#### General Test Configuration

The EUT was located on the turntable for radiated emissions testing.  
For radiated emissions testing below 30 MHz the measurement antenna was located 3 meters from the EUT, unless otherwise noted. Radiated magnetic field measurements were made with the loop antenna located one meter above the ground plane, with the loop of the antenna either parallel or perpendicular to the EUT.  
Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

**Ambient Conditions:** Temperature: 14°C  
Rel. Humidity: 71%

#### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	RE, Fundamental	FCC 15.209	Pass	-21.5dB @ 0.132MHz
2	RE, .13 - 30MHz - Maximized Emissions	FCC 15.209	Pass	-36.84dB @ 22631kHz

#### Modifications Made During Testing:

The following modifications were made to the EUT in order to comply with the standard:  
A five-turn, common-mode choke was added to the EUT's antenna connector using a Steward ferrite P/N 35T0625-200

#### Deviations From The Standard

No deviations were made from the requirements of the standard.

## EMC Test Data

Client: Savi	Job Number: J45393
Model: SP-600-201	T-Log Number: T45399
	Proj Eng: Mark Briggs
Contact: Eugene Schlindwein	
Spec: FCC 15.209	Class: -

### Run #1: Maximized emissions, 0.132 MHz fundamental

Frequency	Level	Antenna	Distance	Level	FCC 15.209		Detector	Height	Comments
kHz	dBuV/m	Dist.	Correction	dBuV/m	Limit	Margin	Pk/QP/Avg	meters	
Tested @ 5m									
131.6	116.2	5.0	-71.1	45.1			Pk	1.0	Open Loop
Tested @ 10m									
131.6	97.8	10.0	-59.1	38.7			Pk	1.0	Open Loop
Tested @ 20m									
131.6	75.6	20.0	-47.0	28.6			Pk	1.0	Open Loop

### Data Summary

Freq (kHz)	Level At Test Distance						
	@5m		@10m		@20m		-
	dBuV/m		dBuV/m		dBuV/m		
131	116.2		97.8		75.6		

### Extrapolation Factors For Fundamental Signal

The following extrapolation factors are calculated by dividing the difference between the field strengths at the two distances by the log (base ten) of the ratio of the two distances.

5m to 10m -61.1  
 10m to 20m -73.7  
 5m to 20m -67.4

### FCC Part 15.209 Fundamental Data

Freq (kHz)	Level (dBuV/m) Pk	Limit dBuV/m	Margin dB	Comment
131.6	3.7	25.2	-21.5	Fundamental at 300m using extrapolation factor

#### Notes:

Limit is an average between 110 and 490kHz (with an additional peak limit of the stated average limit plus 20dB), QP above 490kHz. Measurements made with a Peak detector.  
 Extrapolation factor was applied to the 20m reading for the fundamental signal. For the fundamental the calculated extrapolation factor of 61.1dB was used.

## EMC Test Data

Client:	Savi	Job Number:	J45393
Model:	SP-600-201	T-Log Number:	T45399
		Proj Eng:	Mark Briggs
Contact:	Eugene Schlindwein		
Spec:	FCC 15.209	Class:	-

**Run #2: Maximized Readings, 0.13 - 30MHz, excluding fundamental  
5-turn common mode choke on antenna connector**

**Tested @ 3m**

Frequency kHz	Level dBuV/m	Antenna Dist.	Distance Correction	Level dBuV/m	FCC 15.209		Detector Pk/QP/Avg	Height meters	Comments
					Limit	Margin			
22631.0	32.7	3.0	-40.0	-7.3	29.5	-36.8	QP	1.0	Closed Loop
14341.0	29.2	3.0	-40.0	-10.8	29.5	-40.3	QP	1.0	Closed Loop
19736.0	29.1	3.0	-40.0	-10.9	29.5	-40.4	QP	1.0	Closed Loop
14868.0	26.8	3.0	-40.0	-13.2	29.5	-42.7	QP	1.0	Closed Loop
28025.0	25.4	3.0	-40.0	-14.6	29.5	-44.1	QP	1.0	Closed Loop
22631.0	23.1	3.0	-40.0	-16.9	29.5	-46.4	QP	1.0	Open Loop
14867.0	20.7	3.0	-40.0	-19.3	29.5	-48.8	QP	1.0	Open Loop
14341.0	19.2	3.0	-40.0	-20.8	29.5	-50.3	QP	1.0	Open Loop
19736.0	18.4	3.0	-40.0	-21.6	29.5	-51.1	QP	1.0	Open Loop
28025.0	15.4	3.0	-40.0	-24.6	29.5	-54.1	QP	1.0	Open Loop





## EMC Test Data

Client:	Savi	Job Number:	J45393
Model:	SP-600-201	T-Log Number:	T45399
		Proj Eng:	Mark Briggs
Contact:	Eugene Schlindwein		
Spec:	FCC 15.209	Class:	-

### Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Frequency	Level	AC	FCC B		Detector	Comments
MHz	dB $\mu$ V	Line	Limit	Margin	QP/Ave	
0.6198	44.5	Neutral	48.0	-3.5	QP	
0.6198	44.0	Line 1	48.0	-4.0	QP	
8.4213	38.7	Line 1	48.0	-9.3	QP	
8.4213	38.1	Neutral	48.0	-9.9	QP	
3.6200	37.8	Neutral	48.0	-10.2	QP	
1.1839	35.4	Line 1	48.0	-12.6	QP	






SVOATS #2: Savi Technology Signpost Run 1

Spec:  
FCC-B  
Mains Lead  
Line 1

SP-600-201

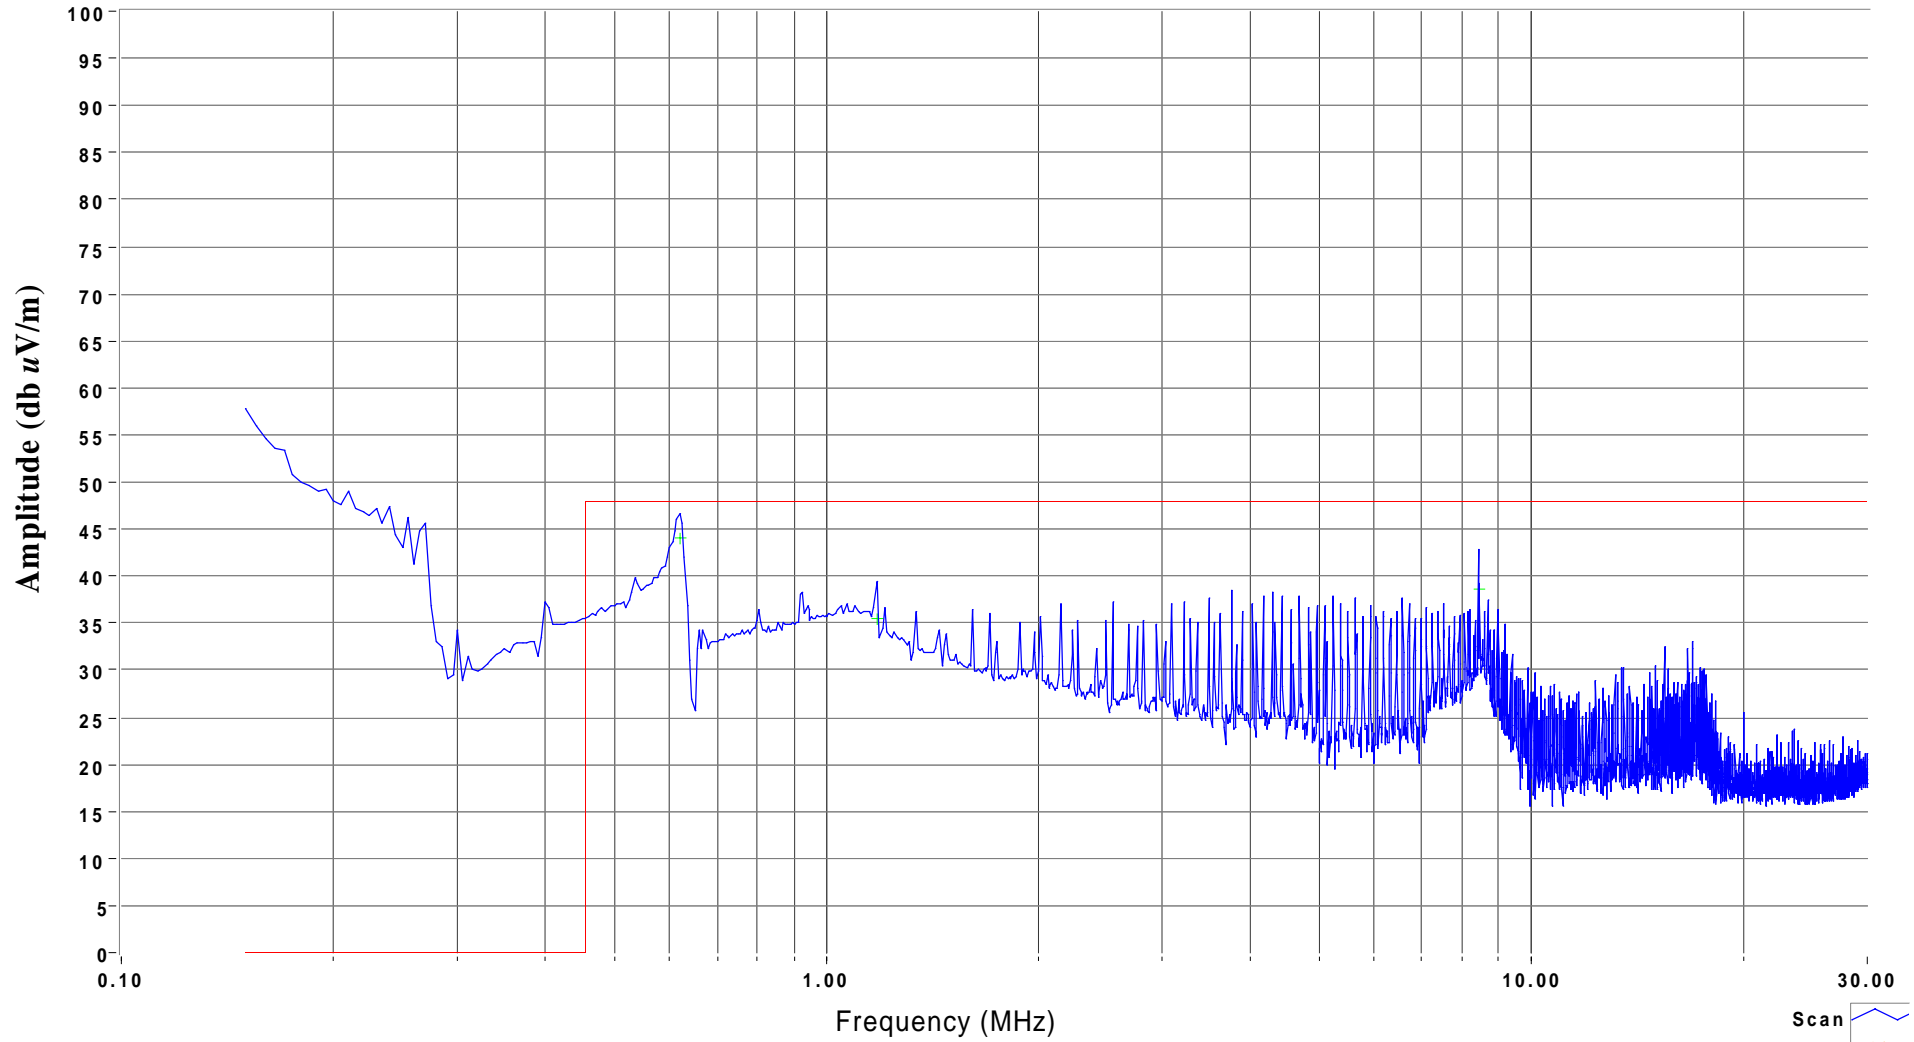

120v/60Hz Line

- Scan
- Peak
- Quasi-peak
- Average
- QuasiPeak Limit
- QuasiPeak Limit

11/30/01


David Bare



# SVOATS #2: Savi Technology Signpost Run 1

Spec:  
FCC-B  
Mains Lead  
Neutral

SP-600-201

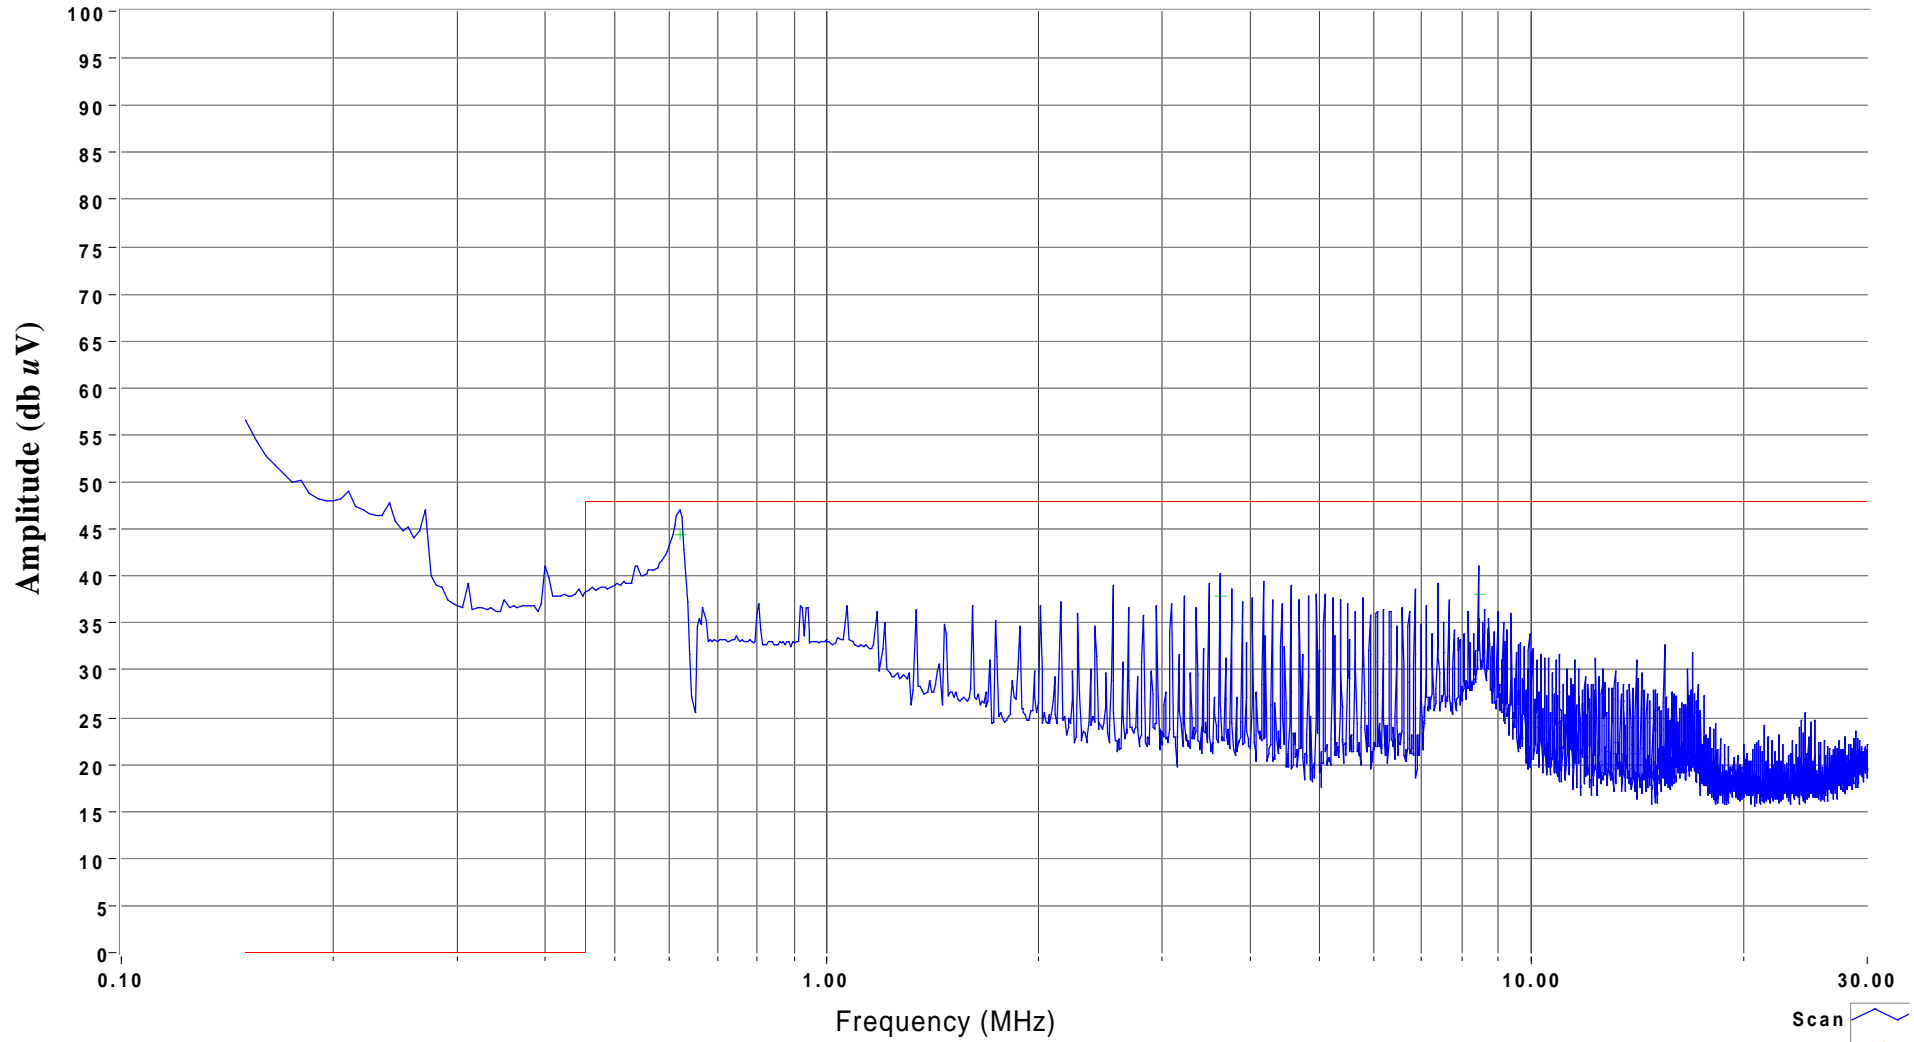

120v/60Hz Line

- Scan
- Peak
- Quasi-peak
- Average
- QuasiPeak Limit
- QuasiPeak Limit

11/30/01

David Bare

## ***EXHIBIT 3: Test Configuration Photographs***

Uploaded as A Separate Attachment

**EXHIBIT 4: Proposed FCC ID Label & Label Location**

Uploaded as A Separate Attachment

***EXHIBIT 5: Detailed Photographs of Savi Technology, Inc. Model SP-600-201***

External and Internal Photographs Uploaded as  
Separate Attachments

***EXHIBIT 6: Operator's Manual for Savi Technology, Inc. Model SP-600-201***

Uploaded as A Separate Attachment

**EXHIBIT 7:Block Diagram of Savi Technology, Inc. Model SP-600-201**

Uploaded as A Separate Attachment

***EXHIBIT 8: Schematic Diagrams for Savi Technology, Inc. Model SP-600-201***

Uploaded as A Separate Attachment



***EXHIBIT 9: Theory of Operation for Savi Technology, Inc. Model SP-600-201***

Uploaded as A Separate Attachment