



*EMC Test Report*

*Application for Grant of Equipment Authorization  
pursuant to*

*Industry Canada RSS-Gen Issue 2 / RSS 210 Issue 7*

*Models: ST-616-001 and ST-616-031*

IC CERTIFICATION #: 2404A-616T  
FCC ID: KL7-616T-V1

APPLICANT: Savi Technology, Inc.  
351 E. Evelyn Ave.  
Mountain View, CA 94041


TEST SITE(S): Elliott Laboratories  
684 W. Maude Avenue  
Sunnyvale, CA 94085

IC SITE REGISTRATION #: 2845A-2

REPORT DATE: July 16, 2009

FINAL TEST DATES: July 1, July 2 and July 8, 2009

AUTHORIZED SIGNATORY:

  
\_\_\_\_\_  
David W. Bare  
Chief Engineer  
Elliott Laboratories.



Testing Cert #2016-01

Elliott Laboratories is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report, except where noted otherwise. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories

**REVISION HISTORY**

Rev#	Date	Comments	Modified By
1	July 28, 2009	First release	

**TABLE OF CONTENTS**

**COVER PAGE**..... 1

**REVISION HISTORY** .....2

**TABLE OF CONTENTS** .....3

**SCOPE**.....5

**OBJECTIVE** .....5

**STATEMENT OF COMPLIANCE**.....6

**DEVIATIONS FROM THE STANDARDS**.....6

**TEST RESULTS SUMMARY** .....6

    RFID DEVICES OPERATING IN THE 433.5 – 434.5MHZ BANDS .....6

    GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....7

    MEASUREMENT UNCERTAINTIES.....7

**EQUIPMENT UNDER TEST (EUT) DETAILS**.....8

    GENERAL.....8

    ANTENNA SYSTEM .....8

    ENCLOSURE.....8

    MODIFICATIONS.....8

    SUPPORT EQUIPMENT .....8

    EUT INTERFACE PORTS .....9

    EUT OPERATION .....9

**TEST SITE**.....9

    GENERAL INFORMATION.....9

    CONDUCTED EMISSIONS CONSIDERATIONS .....9

    RADIATED EMISSIONS CONSIDERATIONS .....9

**MEASUREMENT INSTRUMENTATION** .....10

    RECEIVER SYSTEM .....10

    INSTRUMENT CONTROL COMPUTER .....10

    LINE IMPEDANCE STABILIZATION NETWORK (LISN).....10

    FILTERS/ATTENUATORS .....11

    ANTENNAS.....11

    ANTENNA MAST AND EQUIPMENT TURNTABLE .....11

    INSTRUMENT CALIBRATION.....11

**TEST PROCEDURES** .....12

    EUT AND CABLE PLACEMENT .....12

    CONDUCTED EMISSIONS.....12

    RADIATED EMISSIONS.....12

    RADIATED EMISSIONS.....13

    BANDWIDTH MEASUREMENTS .....14

    SPECIFICATION LIMITS AND SAMPLE CALCULATIONS .....15

    GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS .....15

    SAMPLE CALCULATIONS - CONDUCTED EMISSIONS .....15

    SAMPLE CALCULATIONS - RADIATED EMISSIONS.....16

    SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....17

*TABLE OF CONTENTS (Continued)*

**APPENDIX A TEST EQUIPMENT CALIBRATION DATA .....1**  
**APPENDIX B TEST DATA .....2**  
**APPENDIX C PHOTOGRAPHS OF TEST CONFIGURATIONS .....3**  
**APPENDIX D PROPOSED FCC ID LABEL & LABEL LOCATION .....4**  
**APPENDIX E DETAILED PHOTOGRAPHS .....5**  
**APPENDIX F OPERATOR'S MANUAL .....6**  
**APPENDIX G BLOCK DIAGRAM .....7**  
**APPENDIX H SCHEMATIC DIAGRAMS .....8**  
**APPENDIX I THEORY OF OPERATION .....9**  
**APPENDIX J ADVERTISING LITERATURE .....10**  
**APPENDIX K RF EXPOSURE INFORMATION .....11**

## **SCOPE**

An electromagnetic emissions test has been performed on the Savi Technology, Inc. model ST-616-001 pursuant to the following rules:

Industry Canada RSS-Gen Issue 2  
RSS 210 Issue 7 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"  
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

## **OBJECTIVE**

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

**STATEMENT OF COMPLIANCE**

The tested sample of Savi Technology, Inc. model ST-616-001 complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 2  
RSS 210 Issue 7 “Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment”  
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Savi Technology, Inc. model ST-616-001 and therefore apply only to the tested sample. The sample was selected and prepared by Eugene Schlindwein of Savi Technology, Inc.

**DEVIATIONS FROM THE STANDARDS**

No deviations were made from the published requirements listed in the scope of this report.

**TEST RESULTS SUMMARY****RFID DEVICES OPERATING IN THE 433.5 – 434.5MHz BANDS**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.240 (a)	RSS 210 A5	Location of operation	1	Must be limited to commercial and industrial areas	Complies
15.240 (f)	-	Information to user		Notification of geographic limitations	Complies
15.240 (b)	RSS 210 A5 (1)	Duration of transmissions	2	< 60s with 10s silent period	Complies
15.240 (b)	RSS 210 A5 (2)	Fundamental Signal Strength	79.2dB $\mu$ V/m (9120.1 $\mu$ V/m) @ 433.87MHz (-1.6dB)	11000uV/m avg 55000uV/m pk	Complies
15.240 (c) / 15.209	RSS 210 Table 2	Radiated Spurious Emissions, 30 MHz – 4339 MHz	34.6dB $\mu$ V/m (53.7 $\mu$ V/m) @ 867.75MHz (-11.4dB)	Table 2	Complies

<sup>1</sup> The Tag will only transmit under 15.240 in response to a fixed reader that sends transmissions under 15.240. Location of operation and information to user is therefore incumbent on the reader and not the tag. Savi's readers that operate under 15.240 have the appropriate geographical limitations and user manual information.

<sup>2</sup> Refer to the operational description included with this application for detailed description and timing diagrams for transmission duration.

**GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS**

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Antenna is integral to the device	Integral antenna or non-standard connector if not professionally installed	Complies
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	33.7dB $\mu$ V/m (48.4 $\mu$ V/m) @ 1288.3MHz (-20.3dB)	Refer to table in Standard	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	Battery operated	-	N/A
	RSS 102	RF Exposure Requirements	Refer to RSS 102 declaration	Refer RSS 102	Complies
	RSP 100 RSS GEN 7.1.5	User Manual	Statement in documents provided to the user	Statement required regarding non-interference	Complies
	RSP 100 RSS GEN 7.1.5	User Manual	No detachable antenna	Statement required regarding detachable antenna	N/A
	RSP 100 RSS GEN 4.4.1	99% Bandwidth	266 kHz	Information only	N/A

**MEASUREMENT UNCERTAINTIES**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	$\pm 2.4$
Radiated Emissions	0.015 to 30	$\pm 3.0$
Radiated Emissions	30 to 1000	$\pm 3.6$
Radiated Emissions	1000 to 40000	$\pm 6.0$

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Savi Technology, Inc. models ST-616-001 and ST-616-031 are RF Tagging devices that are designed to identify the container to which they are attached to the Savi System. Normally, the EUT would be mounted to a container or similar piece of equipment. The EUT was treated as tabletop equipment during testing to simulate the end user environment.

A response from the EUT is initiated by a 123 kHz signal from a Savi SignPost or 433.92 MHz signal from a Savi Reader. Upon receiving the initiation signal the EUT transmits a signal at 433.92 MHz. This signal is comprised of SignPost ID and Tag ID.

A response from the EUT is initiated by a 433.92 MHz Savi Reader signal. Upon receiving the initiation signal the EUT transmits a signal at 433.92 MHz. This signal is comprised of Tag ID.

There are two versions of the tag (ST-616-001 and ST-616-031). They are identical except for the model number. The difference between these two versions is that model ST-616-001 will be sold to legacy installations and model ST-616-031 will be sold to newer open standard installations.

The sample was received on July 1, 2009 and tested on July 1, July 2 and July 8, 2009. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Savi Technology	ST-616-001	Tag	6580458	KL7-616T-V1

**ANTENNA SYSTEM**

The antenna used with the Savi Technology, Inc. models ST-616-001 and ST-616-031 is integral to the device, thereby meeting the requirements of FCC 15.203.

**ENCLOSURE**

The EUT enclosure is primarily constructed of plastic and is provided with a plastic mounting bracket. It measures approximately 2.5cm wide by 2.0cm deep by 18.5cm high.

**MODIFICATIONS**

No modifications were made to the EUT during the time the product was at Elliott.

**SUPPORT EQUIPMENT**

No support equipment was used during testing.



**EUT INTERFACE PORTS**

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
None	-	-	-	-

**EUT OPERATION**

The transmitter was continuously transmitting a modulated signal during emissions tests. For receive mode and digital circuit tests the EUT was in receive mode with the LO and receiver circuit active.

**TEST SITE****GENERAL INFORMATION**

Final test measurements were taken on July 1, July 2 and July 8, 2009 at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
SVOATS #2	90593	2845A-2	684 West Maude Ave, Sunnyvale CA 94085-3518

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception, on OATS sites, of predictable local TV, radio, and mobile communications traffic. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

**CONDUCTED EMISSIONS CONSIDERATIONS**

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

**RADIATED EMISSIONS CONSIDERATIONS**

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

## **MEASUREMENT INSTRUMENTATION**

### **RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

### **INSTRUMENT CONTROL COMPUTER**

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

### **LINE IMPEDANCE STABILIZATION NETWORK (LISN)**

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

### *FILTERS/ATTENUATORS*

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

### *ANTENNAS*

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

### *ANTENNA MAST AND EQUIPMENT TURNTABLE*

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

### *INSTRUMENT CALIBRATION*

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.


## TEST PROCEDURES

### EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

### CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

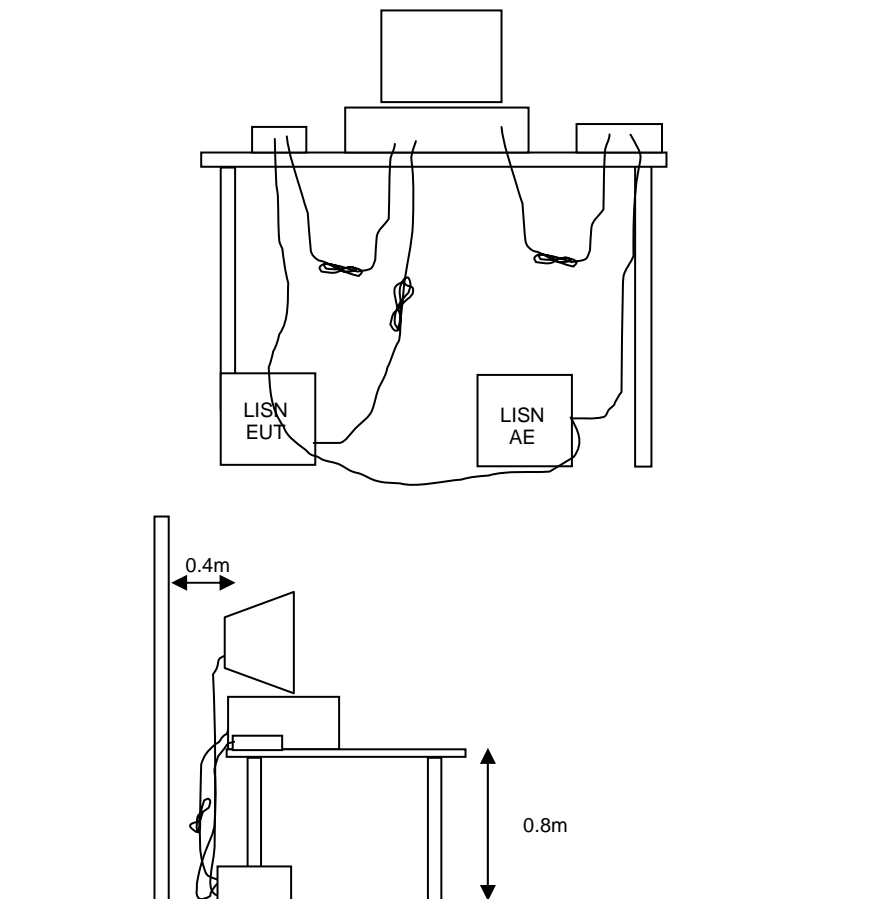


**RADIATED EMISSIONS**

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.


When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

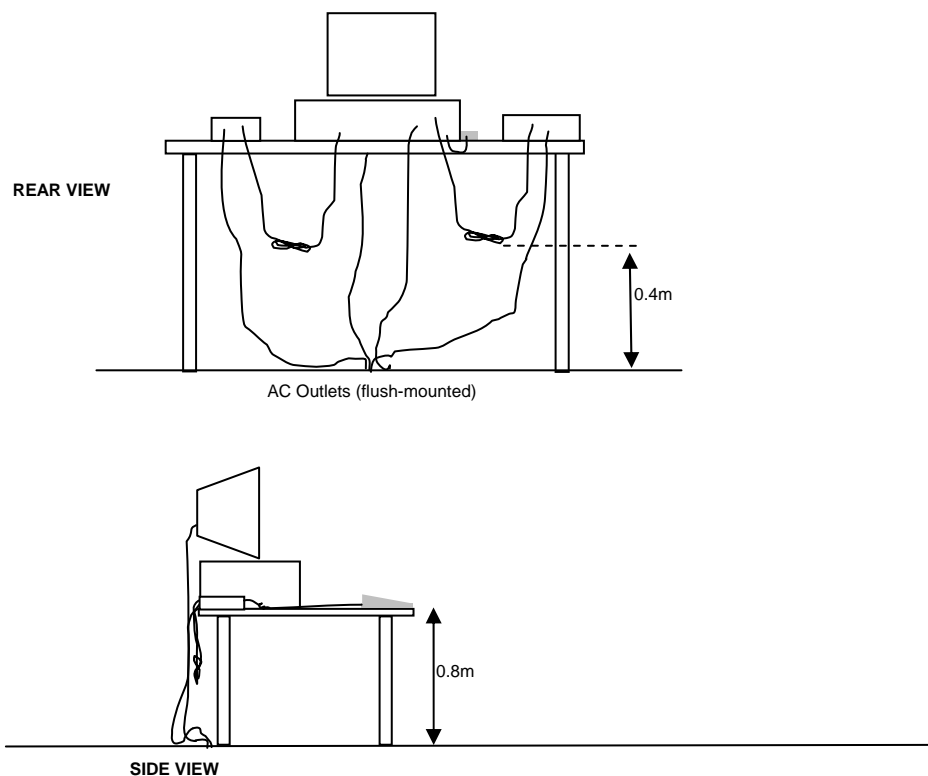

Typical Test Configuration for Radiated Field Strength Measurements

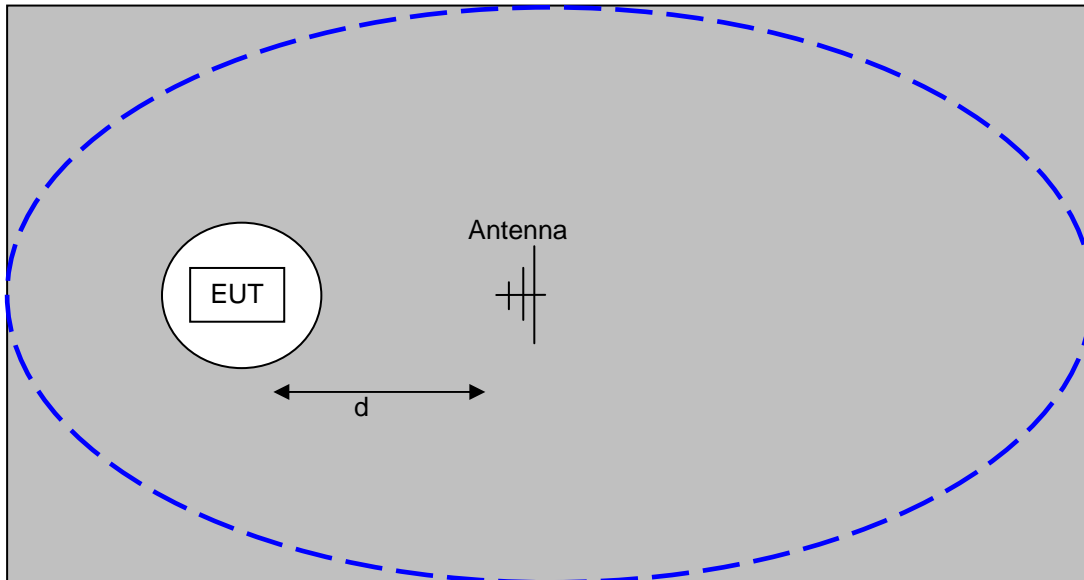

The ground plane extends beyond the ellipse defined in CISPR 16 / CISPR 22 / ANSI C63.4 and is large enough to accommodate test distances ( $d$ ) of 3m and 10m. Refer to the test data tables for the actual measurement distance.

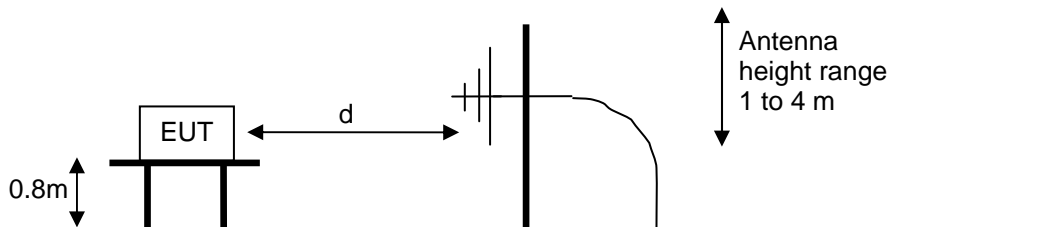

Test Configuration for Radiated Field Strength Measurements  
OATS- Plan and Side Views

**BANDWIDTH MEASUREMENTS**

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.

**SPECIFICATION LIMITS AND SAMPLE CALCULATIONS**

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

**GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS**

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands<sup>3</sup> (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F <sub>KHz</sub> @ 300m	67.6-20*log <sub>10</sub> (F <sub>KHz</sub> ) @ 300m
0.490-1.705	24000/F <sub>KHz</sub> @ 30m	87.6-20*log <sub>10</sub> (F <sub>KHz</sub> ) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

$R_r$  = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

<sup>3</sup> The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

---

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.



The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

#### *SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION*

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of 3m from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{3} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

## *Appendix A Test Equipment Calibration Data*

1 Page

**Radiated Emissions, 30 - 5,000 MHz, 01-Jul-09****Engineer: Mehran Birgani**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Elliott Laboratories	Log Periodic Antenna 300-1000 MHz	EL300.1000	55	03-Apr-10
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	09-Oct-09
Filtek	Filter, 1 GHz High Pass	HP12/1000-5BA	955	23-Jun-10
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	12-Mar-10
Rohde & Schwarz	Test Receiver, 0.009-2750 MHz	ESN	1332	14-Apr-10
Rohde & Schwarz	Power Meter, Single Channel	NRVS	1422	06-Nov-09

**Radiated Emissions, 30 - 2,000 MHz, 02-Jul-09****Engineer: Mehran Birgani**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Biconilog Transmitting	3143	180	N/A
EMCO	Log Periodic Antenna, 0.3-1 GHz	3146A	364	23-Dec-09
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	870	09-Oct-09
Hewlett Packard	EMC Spectrum Analyzer, 9 KHz-26.5 GHz	8593EM	1141	29-Dec-09
Hewlett Packard	Preamplifier, 100 kHz - 1.3 GHz	8447D OPT 010	1826	26-May-10

**Radiated Emissions, 30 - 2,000 MHz, 08-Jul-09****Engineer: Mehran Birgani**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Elliott Laboratories	Biconical Antenna, 30-300 MHz	EL30.300	54	03-Apr-11
Elliott Laboratories	Log Periodic Antenna 300-1000 MHz	EL300.1000	55	03-Apr-10
Rohde & Schwarz	Test Receiver, 0.009-2750 MHz	ESN	1332	14-Apr-10

## *Appendix B Test Data*

T76000 8 Pages

Client:	Savi	Job Number:	J75901
Model:	ST-616-001	T-Log Number:	T76000
	ST-616-031	Account Manager:	Sherren Washington
Contact:	Eugene Schlindwein	Project Engineer:	David Bear
Emissions Spec:	FCC 15.231(a/e); FCC 15.240	Class:	A
Immunity Spec:	-	Environment:	-

## EMC Test Data

For The

**Savi**

Model

**ST-616-001**

**ST-616-031**

Date of Last Test: 7/8/2009

Client:	Savi	Job Number:	J75901
Model:	ST-616-001	T-Log Number:	T76000
	ST-616-031	Account Manager:	Sherren Washington
Contact:	Eugene Schlindwein		
Emissions Spec:	FCC 15.231(a/e); FCC 15.240	Class:	A
Immunity Spec:	-	Environment:	-

## EUT INFORMATION

### General Description

The EUT is an RF Tagging device which is designed to identify the container to which it is attached to the Savi System. Normally, the EUT would be mounted to a container or similar piece of equipment. The EUT was treated as tabletop equipment during testing to simulate the end user environment.

A response from the EUT is initiated by a 123 kHz signal from a Savi SignPost or 433.92 MHz signal from a Savi Reader. Upon receiving the initiation signal the EUT transmits a signal at 433.92 MHz. This signal is comprised of SignPost ID and Tag ID.

A response from the EUT is initiated by a 433.92 MHz Savi Reader signal. Upon receiving the initiation signal the EUT transmits a signal at 433.92 MHz. This signal is comprised of Tag ID.

### Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Savi Technology	ST-616-001 ST-616-031	Tag	6580458	KL7-616T-V1

### Other EUT Details

The antenna is integral to the device, thereby meeting the requirements of FCC 15.203.

There are two versions of the tag (ST-616-001 and ST-616-031). They are identical except for the model number. The difference between these two versions is that model ST-616-001 will be sold to legacy installations and model ST-616-031 will be sold to newer open standard installations.

### EUT Enclosure

The EUT enclosure is primarily constructed of plastic and is provided with a plastic mounting bracket. It measures approximately 2.5cm wide by 2.0cm deep by 18.5cm high.

### Modification History

Mod. #	Test	Date	Modification
1	-	-	None

Modifications applied are assumed to be used on subsequent tests unless otherwise stated as a further modification.

Client:	Savi	Job Number:	J75901
Model:	ST-616-001	T-Log Number:	T76000
	ST-616-031	Account Manager:	Sherren Washington
Contact:	Eugene Schlindwein		
Emissions Spec:	FCC 15.231(a/e); FCC 15.240	Class:	A
Immunity Spec:	-	Environment:	-

### Test Configuration #1

#### Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None	-	-	-	-

#### Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None	-	-	-	-

#### Interface Cabling and Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
None	-	-	-	-

#### EUT Operation During Emissions Tests

The transmitter was continuously transmitting a modulated signal during emissions tests. For receive mode and digital circuit tests the EUT was in receive mode with the LO and receiver circuit active.

Client:	Savi	Job Number:	J75901
Model:	ST-616-001	T-Log Number:	T76000
	ST-616-031	Account Manager:	Sherren Washington
Contact:	Eugene Schlindwein		
Spec:	FCC 15.231(a/e); FCC 15.240	Class:	A

## Radiated Emissions

### Test Specifics

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

### General Test Configuration

Date of Test: 7/1/2009	Config. Used: 1
Test Engineer: Mehran Birgani	Config Change: None
Test Location: SVOATS #2	EUT Voltage: Battery

The EUT was located on the turntable for radiated emissions testing.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Note, for testing above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

**Ambient Conditions:**

Temperature (°C):	20-30
Rel. Humidity (%):	20-55

### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1a	RE, 433.92MHz, Fundamental	15.231(e) / RSS 210	Pass	71.2dBµV/m (3630.8µV/m) @ 433.87MHz (-1.7dB)
1a	RE, 433.92MHz, Fundamental	15.231(a) / RSS 210	Pass	79.2dBµV/m (9120.1µV/m) @ 433.87MHz (-1.6dB)
1a	RE, 433.92MHz, Fundamental	15.240 / RSS-210	Pass	79.2dBµV/m (9120.1µV/m) @ 433.87MHz (-1.6dB)
1b	RE, Tx Spurious Emissions	FCC 15.209	Pass	34.6dBµV/m (53.7µV/m) @ 867.75MHz (-11.4dB)
2	RE, Rx Spurious Emissions	15.109 & RSS-GEN	Pass	33.7dBµV/m (48.4µV/m) @ 1288.3MHz (-20.3dB)
3	Bandwidth (20dB)	15.231 / RSS 210	Pass	515 kHz
3	Bandwidth (99%)	RSS-GEN	N/A	266 kHz

### Modifications Made During Testing:

Special software is loaded into the device prior to testing to allow continuous transmission for ease of testing.

### Deviations From The Standard

No deviations were made from the requirements of the standard.



Client:	Savi	Job Number:	J75901
Model:	ST-616-001	T-Log Number:	T76000
	ST-616-031	Account Manager:	Sherren Washington
Contact:	Eugene Schlindwein		
Spec:	FCC 15.231(a/e); FCC 15.240	Class:	A

**Run #1: Radiated Emissions, 30 MHz - 4.3 GHz**

**Run #1a: Fundamental Measurement of 433.923**

**Operation under 15.231(e)**

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	FCC 15.231(e)		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
433.874	71.2	V	72.9	-1.7	AVG	338	1.1	Upright
433.874	69.2	V	75.9	-6.7	AVG	264	1.2	Flat
433.874	69.9	H	77.9	-8.0	AVG	178	1.0	Side
433.874	63.9	H	73.9	-10.0	AVG	253	3.4	Upright
433.874	62.6	H	74.9	-12.3	AVG	311	3.7	Flat
433.874	58.6	V	76.9	-18.3	AVG	103	1.1	Side
433.874	91.2	V	92.9	-1.7	PK	338	1.1	Upright
433.874	89.9	H	92.9	-3.0	PK	178	1.0	Side
433.874	89.2	V	92.9	-3.7	PK	264	1.2	Flat
433.874	83.9	H	92.9	-9.0	PK	253	3.4	Upright
433.874	82.6	H	92.9	-10.3	PK	311	3.7	Flat
433.874	78.6	V	92.9	-14.3	PK	103	1.1	Side

Note 1: Duty cycle is 10% . A -20dB correction was used to determine the average level from the peak reading

**Operation under 15.231(a)**

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	FCC 15.231(a)		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
433.874	79.2	V	80.8	-1.6	AVG	338	1.1	Upright
433.874	91.2	V	100.8	-9.6	PK	338	1.1	Upright

Note 1: Duty cycle is 25% . A -12dB correction was used to determine the average level from the peak reading

Note 2: Peak readings made using a receiver and measurement bandwidth set to 120kHz.

**Operation under 15.240**

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	FCC 15.240		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
433.874	79.2	V	80.8	-1.6	AVG	338	1.1	Upright
433.874	91.2	V	94.8	-3.6	PK	338	1.1	Upright

Note 1: Duty cycle is 25% . A -12dB correction was used to determine the average level from the peak reading

Note 2: Peak readings made using a receiver and measurement bandwidth set to 120kHz.

Client:	Savi	Job Number:	J75901
Model:	ST-616-001	T-Log Number:	T76000
	ST-616-031	Account Manager:	Sherren Washington
Contact:	Eugene Schlindwein		
Spec:	FCC 15.231(a/e); FCC 15.240	Class:	A

**Run #1b: Spurious Emissions, 30-4400 MHz (Tx Mode)**

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
867.746	34.6	V	46.0	-11.4	QP	139	1.1	Upright
867.746	32.3	H	46.0	-13.7	QP	207	1.0	Flat
867.746	31.9	H	46.0	-14.1	QP	326	1.1	Side
867.746	29.7	V	46.0	-16.3	QP	64	1.2	Flat
867.746	29.5	V	46.0	-16.5	QP	68	1.2	Side
867.746	28.7	H	46.0	-17.3	QP	136	1.2	Upright
1301.540	34.2	H	54.0	-19.8	AVG	243	1.5	Side
1301.610	33.5	H	54.0	-20.5	AVG	245	1.0	Flat
1301.650	34.1	H	54.0	-19.9	AVG	286	1.9	Upright
1301.700	34.0	V	54.0	-20.0	AVG	214	1.2	Upright
1301.710	35.9	V	54.0	-18.1	AVG	240	1.0	Flat
1301.720	31.6	V	54.0	-22.4	AVG	333	1.1	Side
1735.350	24.9	V	54.0	-29.1	AVG	82	1.0	Flat Note 2
1735.440	24.5	H	54.0	-29.5	AVG	0	1.1	Flat Note 2
2169.370	33.3	H	54.0	-20.7	AVG	53	2.0	Flat Note 2
2169.420	32.7	H	54.0	-21.3	AVG	51	2.0	Side Note 2
2169.460	33.1	V	54.0	-20.9	AVG	194	1.5	Upright Note 2
2169.470	36.2	V	54.0	-17.8	AVG	273	1.0	Flat Note 2
2169.470	33.3	H	54.0	-20.7	AVG	274	1.7	Upright Note 2
2169.580	32.8	V	54.0	-21.2	AVG	90	1.0	Side Note 2
2603.270	29.3	V	54.0	-24.7	AVG	38	1.0	Flat Note 2
3037.130	36.9	V	54.0	-17.1	AVG	210	1.0	Upright Note 2
3037.170	35.1	H	54.0	-18.9	AVG	358	2.0	Flat Note 2
3037.250	33.7	H	54.0	-20.3	AVG	292	1.5	Upright Note 2
3037.280	36.9	V	54.0	-17.1	AVG	272	1.1	Flat Note 2
3037.320	37.4	H	54.0	-16.6	AVG	253	2.0	Side Note 2
3037.340	34.1	V	54.0	-19.9	AVG	273	1.8	Side Note 2
1301.540	46.2	H	74.0	-27.8	PK	243	1.5	Side
1301.610	45.5	H	74.0	-28.5	PK	245	1.0	Flat
1301.650	46.1	H	74.0	-27.9	PK	286	1.9	Upright
1301.700	46.0	V	74.0	-28.0	PK	214	1.2	Upright
1301.710	47.9	V	74.0	-26.1	PK	240	1.0	Flat
1301.720	43.6	V	74.0	-30.4	PK	333	1.1	Side
1735.350	36.9	V	74.0	-37.1	PK	82	1.0	Flat Note 2
1735.440	36.5	H	74.0	-37.5	PK	0	1.1	Flat Note 2
2169.370	45.3	H	74.0	-28.7	PK	53	2.0	Flat Note 2
2169.420	44.7	H	74.0	-29.3	PK	51	2.0	Side Note 2
2169.460	45.1	V	74.0	-28.9	PK	194	1.5	Upright Note 2
2169.470	48.2	V	74.0	-25.8	PK	273	1.0	Flat Note 2

Client:	Savi	Job Number:	J75901
Model:	ST-616-001	T-Log Number:	T76000
	ST-616-031	Account Manager:	Sherren Washington
Contact:	Eugene Schlindwein		
Spec:	FCC 15.231(a/e); FCC 15.240	Class:	A

**Run #1b: Continue**

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments	
			Limit	Margin					
2169.470	45.3	H	74.0	-28.7	PK	274	1.7	Upright	Note 2
2169.580	44.8	V	74.0	-29.2	PK	90	1.0	Side	Note 2
2603.270	41.3	V	74.0	-32.7	PK	38	1.0	Flat	Note 2
3037.130	48.9	V	74.0	-25.1	PK	210	1.0	Upright	Note 2
3037.170	47.1	H	74.0	-26.9	PK	358	2.0	Flat	Note 2
3037.250	45.7	H	74.0	-28.3	PK	292	1.5	Upright	Note 2
3037.280	48.9	V	74.0	-25.1	PK	272	1.1	Flat	Note 2
3037.320	49.4	H	74.0	-24.6	PK	253	2.0	Side	Note 2
3037.340	46.1	V	74.0	-27.9	PK	273	1.8	Side	Note 2

Note 1:	Worst case duty cycle for all three operational modes is 25% . A -12dB correction was used to determine the average level from the peak reading. All three orientations evaluated and all readings within 30dB of the limit were recorded.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.

**Run #2: Spurious Emissions, Receive Mode, 30MHz - 2000 MHz (429.005MHz)**


Frequency MHz	Level dB $\mu$ V/m	Pol V/H	FCC 15.109		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments	
			Limit	Margin					
1286.880	33.6	V	54.0	-20.4	PK	0	1.0	Upright - Noise Floor, Note 1	
<b>1288.280</b>	<b>33.7</b>	<b>V</b>	<b>54.0</b>	<b>-20.3</b>	PK	360	1.0	Side - Noise Floor, Note 1	
429.005	20.6	H	46.0	-25.4	QP	0	1.0	Flat, Fundamental (Noise Floor)	
429.005	19.8	V	46.0	-26.2	QP	360	1.0	Side, Fundamental (Noise Floor)	
429.005	19.7	V	46.0	-26.3	QP	360	1.0	Flat, Fundamental (Noise Floor)	
429.005	18.3	H	46.0	-27.7	QP	0	1.0	Side, Fundamental (Noise Floor)	
429.005	18.1	H	46.0	-27.9	QP	0	1.0	Upright, Fundamental (Noise Floor)	
429.005	17.9	V	46.0	-28.1	QP	360	1.0	Upright, Fundamental (Noise Floor)	

Note 1:	Peak readings with the average limit.
Note 2:	All three orientations evaluated and all readings were within noise floor.

Client:	Savi	Job Number:	J75901
Model:	ST-616-001 ST-616-031	T-Log Number:	T76000
Contact:	Eugene Schlindwein	Account Manager:	Sherren Washington
Spec:	FCC 15.231(a/e); FCC 15.240	Class:	A

**Run #3: Transmit Mode (433.92 MHz) - Bandwidth**

Signal bandwidth was measured to be 515kHz (see graph below - RB=VB=100kHz). The maximum permitted bandwidth is 0.25% of the fundamental signal level = 1.08MHz

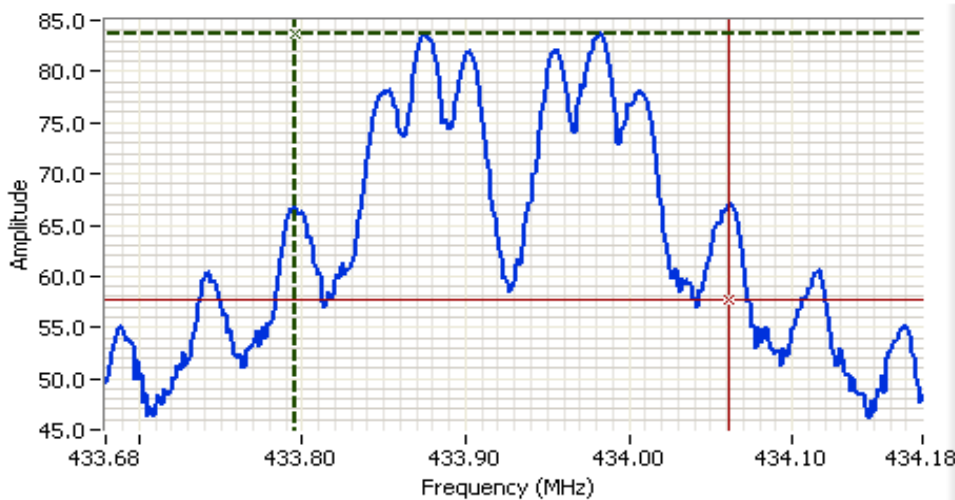


**Analyzer Settings**  
HP8595EM

CF: 433.930 MHz  
SPAN: 500 kHz  
RB 10.00 kHz  
VB 30.0 kHz  
Detector POS  
Att 10  
RL Offset 0.00  
Sweep Time 30.0ms  
Ref Lvl: 90.00DBUW

**Comments**  
99% BW: 266 kHz

Cursor 1	433.7956	83.64	⊕ ⊖ ⊞ ⊚
Cursor 2	434.0612	57.64	⊕ ⊖ ⊞ ⊚

Delta Freq. 266 kHz  
Delta Amplitude 26.00

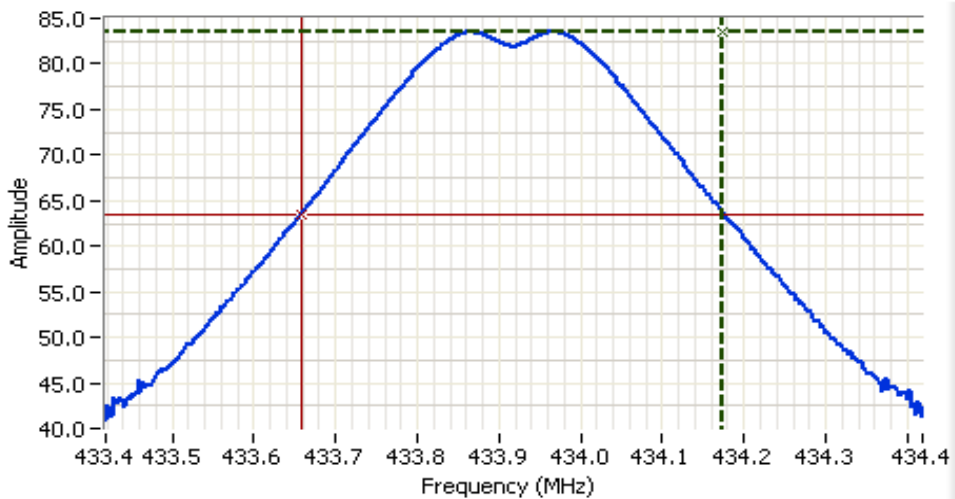

**Analyzer Settings**  
HP8595EM

CF: 433.918 MHz  
SPAN: 1.000 MHz  
RB 100 kHz  
VB 100 kHz  
Detector POS  
Att 10  
RL Offset 0.00  
Sweep Time 20.0ms  
Ref Lvl: 86.00DBUW

**Comments**  
20dB BW: 515 kHz

Cursor 1	434.1735	83.51	⊕ ⊖ ⊞ ⊚
Cursor 2	433.6585	63.51	⊕ ⊖ ⊞ ⊚

Delta Freq. 515 kHz  
Delta Amplitude 20.00



## *Appendix C Photographs of Test Configurations*

*Appendix D Proposed FCC ID Label & Label Location*

## *Appendix E Detailed Photographs*

*Appendix F Operator's Manual*



## *Appendix G Block Diagram*

## *Appendix H Schematic Diagrams*

## *Appendix I Theory of Operation*

## *Appendix J Advertising Literature*

## *Appendix K RF Exposure Information*