

REVISION	DESCRIPTION OF CHANGE	
A	ECO-5454: INITIAL RELEASE	By: T. TRAN

7. All components, hardware, materials, plating, finishes, mask, solders and coatings to meet the requirements of RoHs directive 2002/95 EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
6. Do not substitute or modify without compliance approval.
5. All markings and symbols are in accordance with specification, 735-03938-001.
4. Label dimensions may be adjusted to closest standard die.
3. Specifications:

Material	Polyester film minimum thickness 2 mils, with 1 mil acrylic adhesive compliant with UL-969 requirements for adhesion, text rubbing, temperature, UV and water resistance. Approved suppliers are: 3M, Flexmark, Sidco.
Color	Black letters on white background
Font	Arial, Arial Bold, Tahoma
Artworks	Savi-provided editable Adobe PhotoShop (.psd) file and JPEG file
Lamination	1 mil Clear Polyester




2. Label shall be manufactured using UL-listed label stock and thermal transfer printing process compliant to requirements of UL-969.
1. Dimensions are in inches, $\pm .02''$.

Notes: Unless otherwise specified:


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAVI TECHNOLOGY.
 ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SAVI TECHNOLOGY IS PROHIBITED.
SAVI TECHNOLOGY, INC., CONFIDENTIAL AND PROPRIETARY

	TITLE:	DRAWING No:	REV.
	LABEL, MODEL #, COMPLIANCE MARKING, 650 MOBILE READER USB (-217, -218)	735-04751-TAB	A
FILENAME: 73504751A.doc	Drawing By: T. TRAN	Date: 07/09/10 T.T.	SHEET 1 OF 2

LABEL, MODEL #, FCC ID, COMPLIANCE MARKING, 650 MOBILE READER USB (-217, -218)

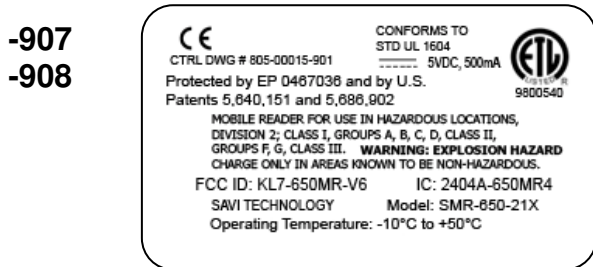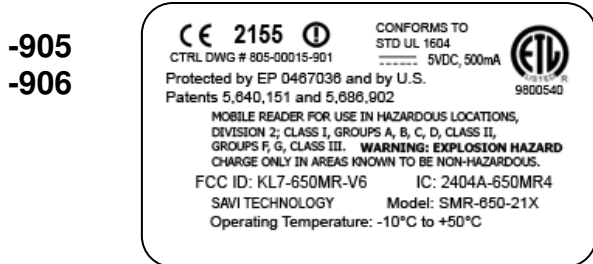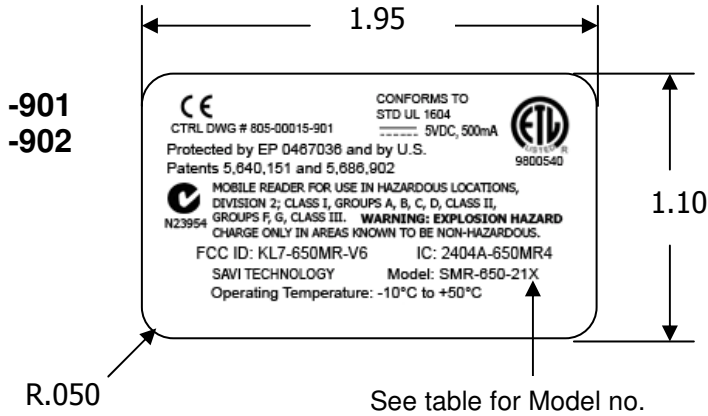

-TAB	Model:	Artwork Files
-901	SMR-650-217	04751-901A.psd 04751-901A.jpg
-902	SMR-650-218	04751-902A.psd 04751-902A.jpg
-903	SMR-650-217	04751-903A.psd 04751-903A.jpg
-904	SMR-650-218	04751-904A.psd 04751-904A.jpg
-905	SMR-650-217	04751-905A.psd 04751-905A.jpg
-906	SMR-650-218	04751-906A.psd 04751-906A.jpg
-907	SMR-650-217	04751-907A.psd 04751-907A.jpg
-908	SMR-650-218	04751-908A.psd 04751-908A.jpg
-946	SMR-650-217	None
-947	SMR-650-218	None

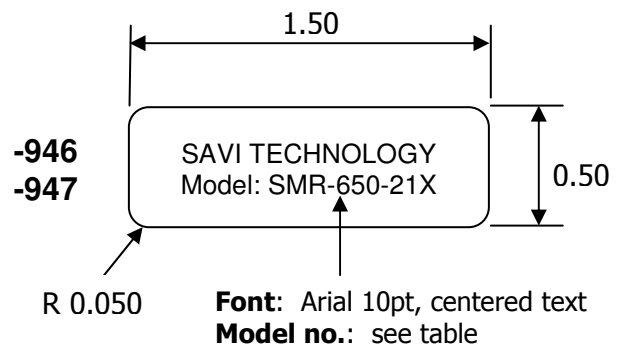

ASSY INSTRUCTIONS, USB SMR-650 SUB-ASSY (with 100 mA charging current)

With Compliance approval: Apply label (735-04751-xxx) in this location.



Add WEEE label (735-00016-001)



With Compliance approval:
Add Signapore Label (735-03917-001)
If not on BOM then don't apply it.



Attach Serial Label (510-00015-001) to the connector end of the SMR, after ultrasonic welding.
Reference 199-00015-001 for assignment of serial numbers each month



Test per test procedures: