

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions: (1)
this device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired
operation.


Model ST-654-031
FCC ID: KL7-654T-V4
IC: 2404A-654T2




2155



N23954
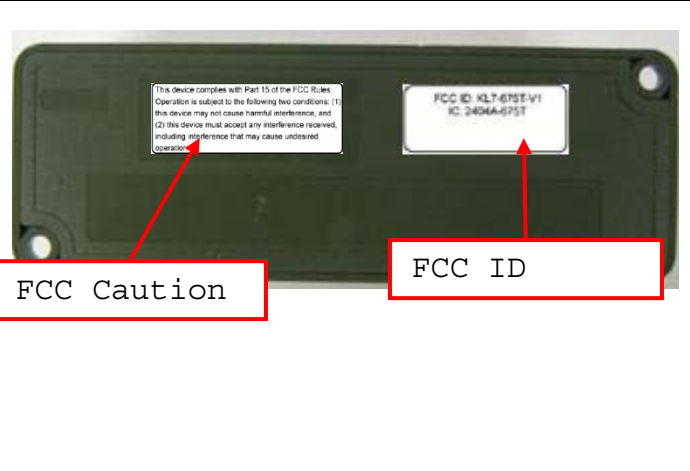
<p>9</p>	<p>Apply Savi Logo label (735-00085-901) on the unit as shown.</p> <p>Follow procedure P/N 510-06202-901 for applying label.</p>	 <p>Savi Logo</p>
<p>10</p>	<p>Apply the NO HERO label (735-00113-901) on the unit as shown.</p> <p>Align the right side of the label to the right edge of the indent wall.</p> <p>Follow procedure P/N 510-06202-901 for applying label.</p>	 <p>735-00113-901</p>
<p>11</p>	<p>Apply FCC ID label (P/N 735-00152-901) on the bottom side of the tag as shown.</p> <p>Apply FCC caution Text label (P/N 735-05166-001) on the bottom side of the tag as shown.</p> <p>Follow procedure P/N 510-06202-901 for applying label.</p> <p>Note: Pictures of the labels are for reference for placement only and are not the actual labels.</p>	 <p>FCC Caution</p> <p>FCC ID</p>

REVISION	DESCRIPTION OF CHANGE	
A	EO#3499 : INITIAL RELEASE (=R01, 12/2/05)	By: LLS
B	ECO-4744: Update notes 2 & 3 (Material) per Compliance Engineer; Add note 4 (RoHS statement); Reformat doc (newer Word template)	By: T. Tran

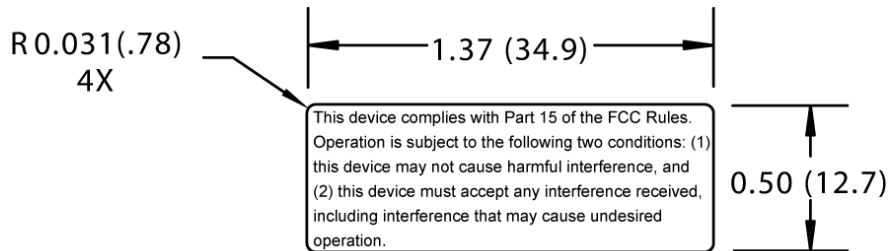

4. All components, hardware, materials, plating, finishes, mask, solders and coatings to meet the requirements of RoHs directive 2002/95 EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

3. Specifications:

MATERIAL	3 mil Polyester with 1 mil acrylic adhesive compliant with UL-969 requirements for adhesion, text rubbing, temperature, UV and water resistance. Approved suppliers are: 3m, Flexmark, Sidco.
COLOR	BLACK LETTERS ON WHITE BACKGROUND
FONT	ARIAL
LAMINATION	1 MIL CLEAR POLYESTER

2. Label shall be manufactured using UL-listed label stock and thermal transfer printing process compliant to requirements of UL-969.

1. Dimensions are in inches, $\pm .02$.

NOTES: (UNLESS OTHERWISE SPECIFIED)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAVI TECHNOLOGY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SAVI TECHNOLOGY IS PROHIBITED.

SAVI TECHNOLOGY, INC., CONFIDENTIAL AND PROPRIETARY

	TITLE:	DRAWING No:	REV.
	LABEL, FCC, CAUTION TEXT	735-05166-001	B
FILENAME: 73505166B.doc	Drawing By: L. Nicoli	Date: 02/05/09 T.T.	SHEET 1 OF 1

REVISION	DESCRIPTION OF CHANGE	
01	ECO-5910: Initial ENG Release	By: T. Tran
A	ECO-5930: Production Release; Revise Canada approval from 2404A-654T3 to 2404A-654T2; Add Model number; Remove Alert marking; Add -902 to -906	By: T. Tran

5. Specifications:

MATERIAL	3 mil Polyester with 1 mil acrylic adhesive compliant with UL-969 requirements for adhesion, text rubbing, temperature, UV and water resistance. Approved suppliers are: 3M, Flexmark, Sidco.
FONT	Savi to provide artworks (.PSD or .JPG). Files vault in Omnify.
LAMINATION	1 MIL Clear Polyester

4. All components, hardware, materials, plating, finishes, mask, solders and coatings to meet the requirements of RoHS directive 2002/95 EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
3. All symbols to be in accordance with Savi Technology Specification 735-03938-001.
2. Label shall be manufactured using UL-listed label stock and thermal transfer printing process compliant to requirements of UL-969.
1. Dimensions are in inches, $\pm .02$.

NOTES: (UNLESS OTHERWISE SPECIFIED)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAVI TECHNOLOGY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SAVI TECHNOLOGY IS PROHIBITED.

SAVI TECHNOLOGY, INC., CONFIDENTIAL AND PROPRIETARY



TITLE:
LABEL, MODEL No/COMPLIANCE [FCC/
CANADA/CE/NB/AU], SOC ASSET TAG

DRAWING No:
735-00152-TAB

REV.
A


FILENAME: 735-00152-TAB_revA.doc

Drawing By: T. Tran


Date: 02/16/2012

SHEET 1 OF 2


-901
[ST-654-031]

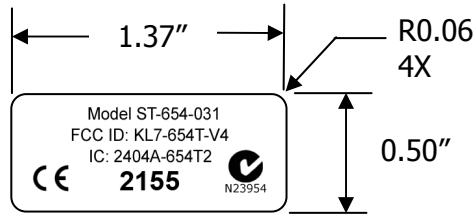


-902
[ST-654-031-NSN]

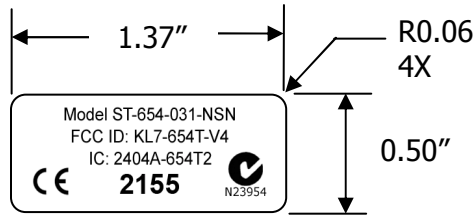


-903
[ST-618-030]

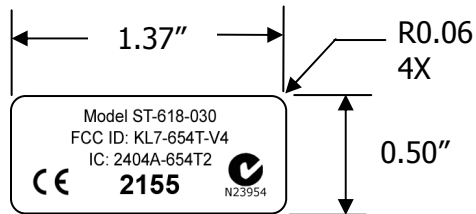


-904
[ST-618-030-NSN]

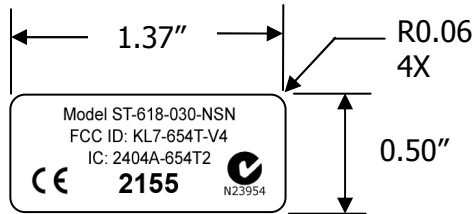

-905
[ST-621-030]

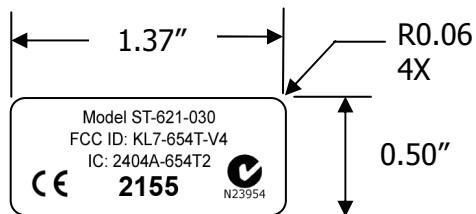


-906
[ST-621-030-NSN]

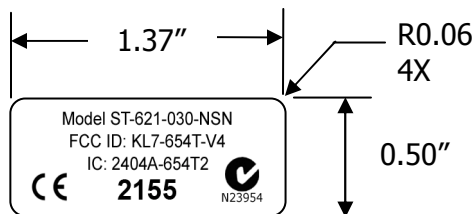


REVISION	DESCRIPTION OF CHANGE	
A	ECO-4625: Initial release	By: Robert Greene
B	ECO-5930: Update Logo (2012 design); Change note 2 and material making them generic	By: Thu Tran

735-00085-901

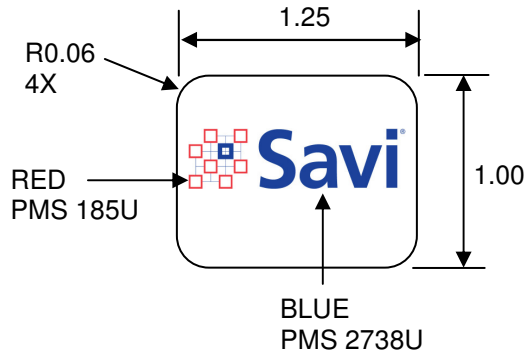

735-00085-902

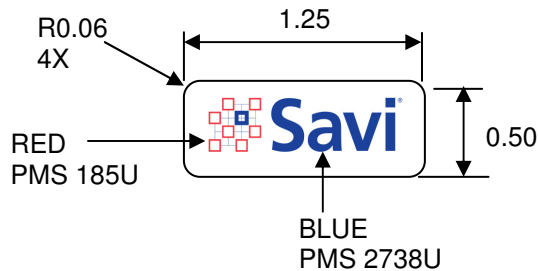

4. Specifications:

MATERIAL	Polyester film minimum thickness 2 mils, with 1 mil acrylic adhesive compliant with UL-969 requirements for adhesion, text rubbing, temperature, UV and water resistance. Approved suppliers are: 3M, Flexmark, Sidco.
FONT	Savi to provide artwork: Savi_Logo_2_Color_Final.eps or Savi_Logo_2_Color_Final.jpg
LAMINATION	1 MIL CLEAR POLYESTER


3. All components, hardware, materials, plating, finishes, mask, solders and coatings to meet the requirements of RoHs directive 2002/95 EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
2. Label shall be manufactured using UL-listed label stock and thermal transfer printing process compliant to requirements of UL-969.
1. Dimensions are in inches, $\pm .02$.

NOTES: (UNLESS OTHERWISE SPECIFIED)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAVI TECHNOLOGY.
 ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SAVI TECHNOLOGY IS PROHIBITED.
SAVI TECHNOLOGY, INC., CONFIDENTIAL AND PROPRIETARY

	TITLE:	DRAWING No:	REV.
	LABEL, SAVI LOGO (2012 DESIGN)	735-00085-TAB	B
FILENAME: 735-00085-TAB_RevB.doc	Drawing By: R. Greene	Date: 01/27/2012 T.T.	SHEET 1 OF 1

REVISION	DESCRIPTION OF CHANGE	
A	ECO-5346: INITIAL RELEASE	By: T. TRAN

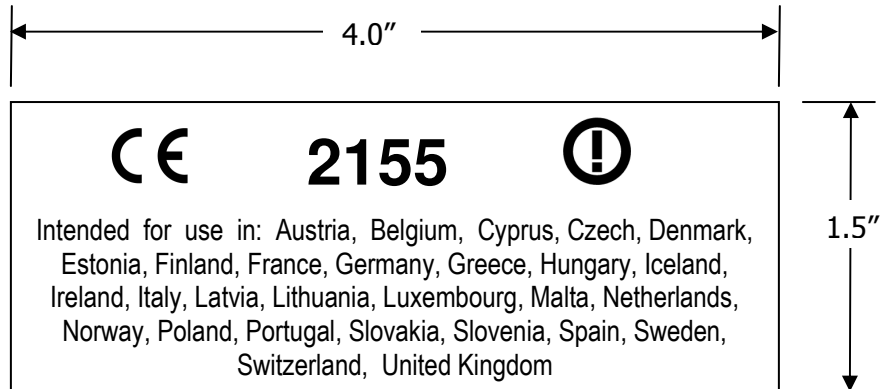

6. Do not substitute or modify without compliance approval.
5. Label dimensions may be adjusted to closest standard die.
4. Specifications:


Material	WHITE MATTE CHROME COAT WITH BLACK OUT (ROLL) or 3M 7872 (2 mil MATTE PLATINUM POLYESTER GLOSS) or approved material equivalent
Color	Black letters on white background
Font	General text: Arial Narrow 11pt, centered text; Center compliance markings as shown: <ul style="list-style-type: none"> . Notified Body: Arial 24pt Bold; . CE marking: ~0.3H x 0.45W; Alert marking: ~0.35H x 0.5W
Lamination	1 mil Clear Polyester

3. **RoHS Compliance:** All materials, finishes, masks, and coatings to meet the requirements of RoHS directive 20002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
2. Label shall be manufactured using UL-listed label stock and thermal transfer printing process compliance in accord with UL-969.
1. Dimensions are in inches, ± 0.015 ".

Notes: Unless otherwise specified:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAVI TECHNOLOGY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SAVI TECHNOLOGY IS PROHIBITED.

SAVI TECHNOLOGY, INC., CONFIDENTIAL AND PROPRIETARY

	TITLE:	DRAWING No:	REV.
	LABEL, COUNTRY USAGE, EUROPEAN COUNTRIES + CE, NB [2155], ALERT	735-00073-901	A
FILENAME: 735-00073-901A.doc	Drawing By: T. TRAN	Date: 04/20/10	SHEET 1 OF 1