


| REVISION | DESCRIPTION OF CHANGE | |
|----------|---------------------------|-------------|
| A | ECO-5167: Initial Release | By: T. Tran |

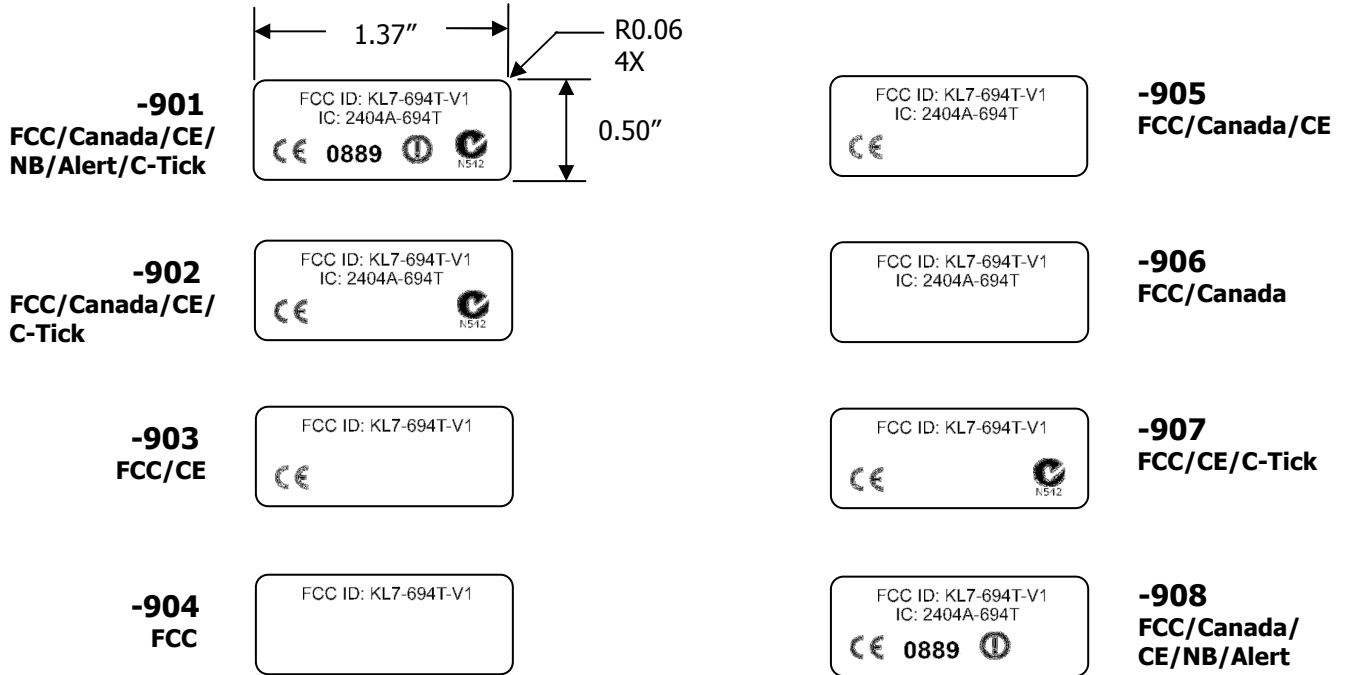

5. Specifications:


| | |
|-------------------|--|
| MATERIAL | Polyester film minimum thickness 2 mils, with 1 mil acrylic adhesive compliant with UL-969 requirements for adhesion, text rubbing, temperature, UV and water resistance. Approved suppliers are: 3M, Flexmark, Sidco. |
| FONT | Savi to provide artworks (.PSD or .JPG). Files vault in Omnify. |
| LAMINATION | 1 MIL Clear Polyester |

4. All components, hardware, materials, plating, finishes, mask, solders and coatings to meet the requirements of RoHs directive 2002/95 EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
3. All symbols to be in accordance with Savi Technology Specification 735-03938-001.
2. Label shall be manufactured using UL-listed label stock and thermal transfer printing process compliant to requirements of UL-969.
1. Dimensions are in inches, $\pm .02$.

NOTES: (UNLESS OTHERWISE SPECIFIED)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAVI TECHNOLOGY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SAVI TECHNOLOGY IS PROHIBITED.

SAVI TECHNOLOGY, INC., CONFIDENTIAL AND PROPRIETARY

| | | | |
|---|---|-------------------------------------|---------------------|
|  | TITLE: LABEL, COMPLIANCE, ST-694 GLOBAL TAG | DRAWING No: 735-00115-TAB | REV. A |
| | FILENAME: 735-00115-TAB_RevA.doc | Drawing By: T. Tran | Date: 12/07/09 T.T. |