



TEST REPORT

Part 15 Subpart C 15.231

Equipment under test Mobile Security Parent

Model name ST-900-CP

FCC ID KL7ST-900-CP

Applicant Savi Technology Inc.

Manufacturer Dae Kyung Philippines, Inc.

Date of test(s) 2016.10.04 ~ 2016.11.10

Date of issue 2016.11.10

Issued to

Savi Technology Inc.

3601 Eisenhower Avenue, STE 280,
Alexandria VA 22304

Tel: +1-571-227-7950 / Fax: +1-571-227-7960



Issued by

KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, Korea

473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Hyeon-su Jang Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0092-R1
Page (2) of (21)

Revision history

Revision	Date of issue	Test report No.	Description
-	2016.10.17	KES-RF-16T0092	Initial
R1	2016.11.10	KES-RF-16T0092-R1	Retest a Transmission time and added a test plot of duty cycle

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. General information	4
1.1. EUT description	4
1.2. Test configuration	4
1.3. Device modifications	4
1.4. Derivation model information	5
1.5. Frequency/channel operations	5
2. Summary of tests	6
3. Test results	7
3.1. Field strength of fundamental and the field strength of spurious emission	7
3.2. Bandwidth of operation frequency	17
3.3. Transmission time	18
3.4. Duty cycle correction factor	19
Appendix A. Measurement equipment	20
Appendix B. Test setup photos	21



1. General information

Applicant: Savi Technology Inc.
Applicant address: 3601 Eisenhower Avenue, STE 280, Alexandria VA 22304
Test site: KES Co., Ltd.
Test site address: C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
FCC rule part(s): 15.231
FCC ID: KL7ST-900-CP
Test device serial No.: Production Pre-production Engineering

1.1. EUT description

Equipment under test Mobile Security Parent
Frequency range Tx :433.92 Mhz, 123 khz
Rx :433.92 Mhz,
GSM 850 : 824.2 Mhz ~ 848.8 Mhz
PCS 1900 : 1850.2 Mhz ~ 1909.8 Mhz
Modulation technique 433.92 Mhz : FSK, 123 khz : ASK
GSM : GMSK
Number of channels 433.92 Mhz : 1ch, 123 khz : 1ch
GSM 850 : 125ch, GSM 1900 : 300ch
Antenna specification 433.92 UHF Antenna type: PCB, Peak gain: -0.97 dBi
GSM 850 Antenna type: PCB, Peak gain: -0.30 dBi
GSM 1900 Antenna type: PCB, Peak gain: -1.70 dBi
Power source DC 3.7 V / 2800 mAh Li-polymer battery

Note:

1. Certificated GSM/GPRS module is mounted in the EUT as following
 - Applicant: Shanghai Simcom Ltd.
 - FCC Identifier : UDV-20160416
 - Model: SIM808
2. The installed module is completed identical as original.
3. ST-900-CP does not operate when charging through USB cable to AC outlet.

1.2. Test configuration

The **Savi Technology, Inc. Mobile Security Parent FCC ID: KL7ST-900-CP** was tested per the guidance of ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

1.3. Device modifications

N/A



KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-16T0092-R1
Page (5) of (21)

1.4. Derivation model information

N/A

1.5. Frequency/channel operations

Ch.	Frequency (MHz)
01	433.92

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.



2. Summary of tests

Reference	Parameter	Test results
15.209(a) 15.231(b)	Radiated emission, Spurious emission and Field Strength of Fundamental	Pass
15.231(c)	Bandwidth of operation frequency	Pass
15.231(a)	Transmission time	Pass


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

3. Test results


3.1. Field strength of fundamental and the field strength of spurious emission

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

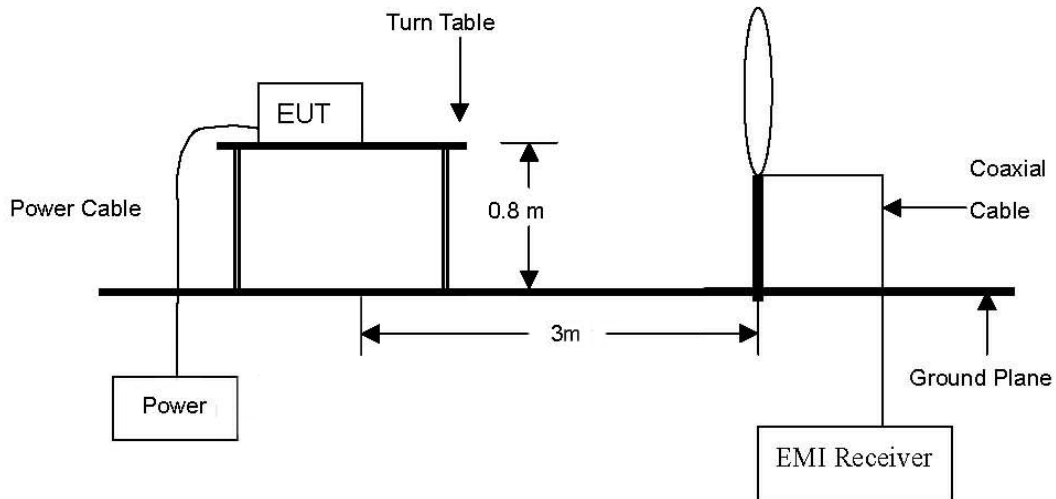

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

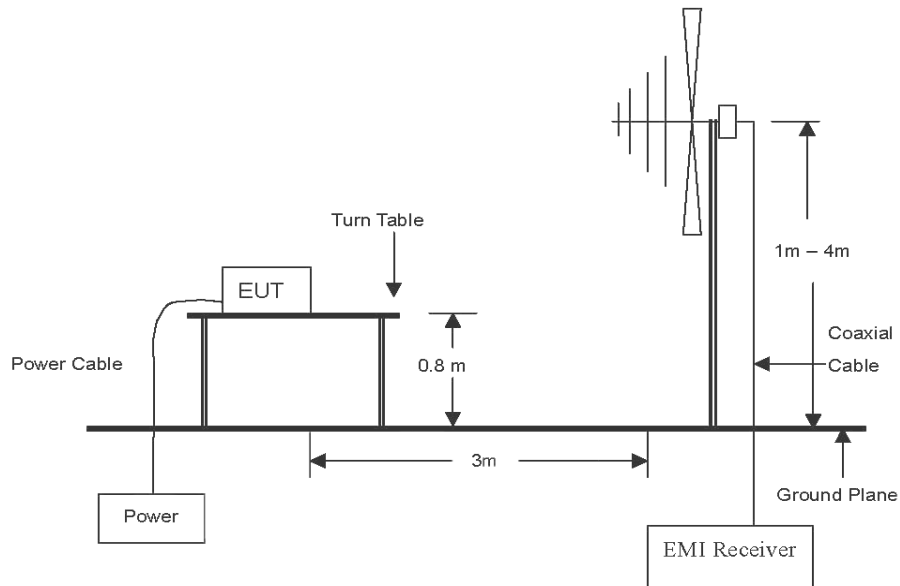

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

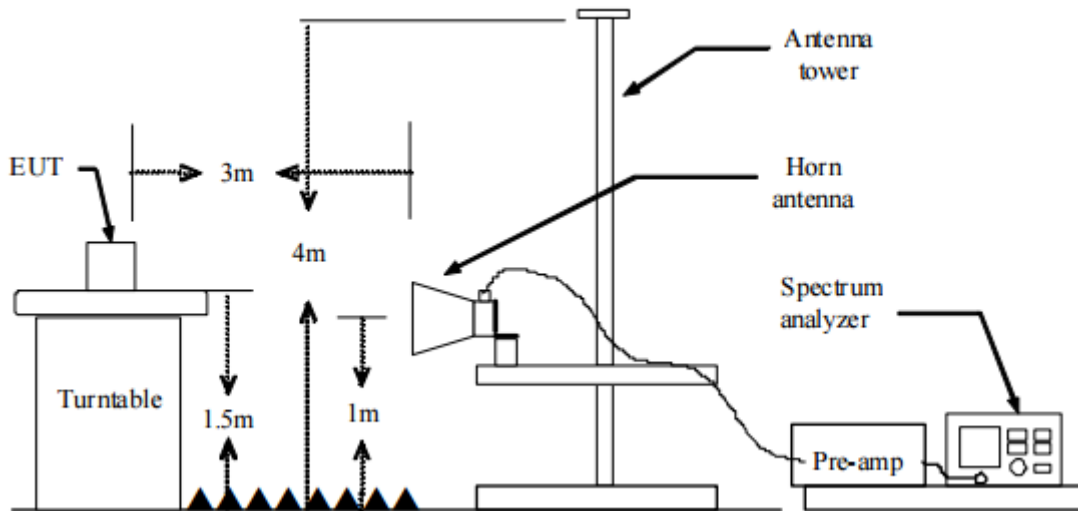

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. Spectrum analyzer settings for $f < 1$ GHz:
 - ① Span = wide enough to fully capture the emission being measured
 - ② RBW = 100 kHz
 - ③ VBW \geq RBW
 - ④ Detector = Peak detection (PK) or Quasi-peak detection (QP)
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
2. Spectrum analyzer settings for $f \geq 1$ GHz: Peak
 - ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
 - ② RBW = 1 MHz
 - ③ VBW \geq 3 MHz
 - ④ Detector = peak
 - ⑤ Sweep time = auto
 - ⑥ Trace = max hold
 - ⑦ Trace was allowed to stabilize

Note.

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$
Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. CF(Correction factors(dB)) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
3. Field strength(dB μ V/m) = Level(dB μ V) + CF (dB) + or DCF(dB)
4. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
5. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **Y orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **Y orientation**.
6. The emissions are reported however whose levels were not within 20 dB of respective limits were not reported.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ($\mu V/m$)
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to 15.231(b), in addition to the provisions of section 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts / meter)	Field strength of spurious emission (microvolts / meter)
40.66 ~ 40.70	2,250	225
70 ~ 130	1,250	125
130 ~ 174	1,250 to 3,750**	125 to 375**
174 ~ 260	3,750	375
260 ~ 470	3,750 to 12,500**	375 to 1,250**
Above 470	12,500	1,250

**Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130 ~ 174 MHz, $\mu V/m$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260 ~ 470 MHz, $\mu V/m$ at 3 meters = $41.6667(F) - 7083.333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.


Field strength

Test results

Mode: FSK
 Distance of measurement: 3 meter
 Channel: 1

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
433.92	76.75	Peak	H	17.43	-	94.18	100.83	6.65
		Average	H	17.43	-20.93	73.25	80.83	7.58
433.92	71.17	Peak	V	17.43	-	88.60	100.83	12.23
		Average	V	17.43	-20.93	67.67	80.83	13.16

Test plots

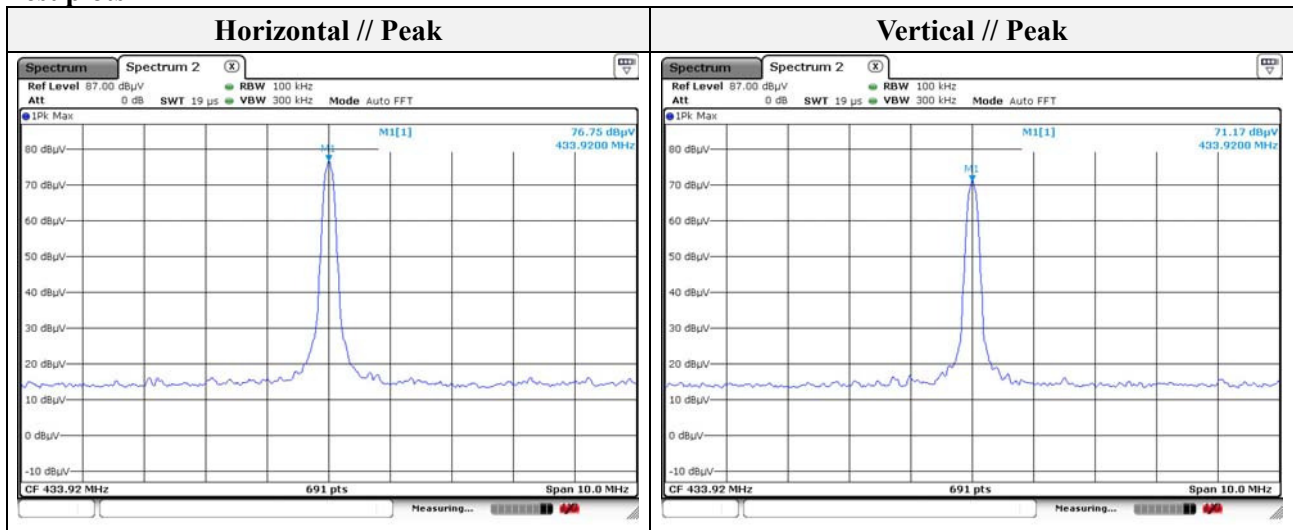

Note.

- $3\text{m Average Limit}(\text{dB}\mu\text{V}/\text{m}) = 20\log[41.6667(\text{F}(\text{MHz})-7083.3333)] = 80.83$
 $3\text{m Peak Limit}(\text{dB}\mu\text{V}/\text{m}) = \text{Average limit} + 20 = 100.83$
 Average Field strength = Peak Field strength + Duty Cycle Correction Factor
- Duty Cycle Correction Factor : $20\log(\text{Ton} / 100 \text{ ms}) = 20\log(8.986 / 100) = -20.93$
 $\text{Tx}_{\text{on time}} = 8.986 \text{ ms}$
 $\text{Tx}_{\text{on+off}} \geq 100 \text{ ms}$ (pulse train is 100 ms)


3. Spurious emission

Test results (Below 30 MHz)

Mode: FSK
 Distance of measurement: 3 meter
 Channel: 1

Frequency (MHz)	Level (dB μ V)	Ant. Pol. (H/V)	CF (dB)	F _d (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No spurious emissions were detected within 20 dB of the limit							

Test plots (Below 30 MHz)

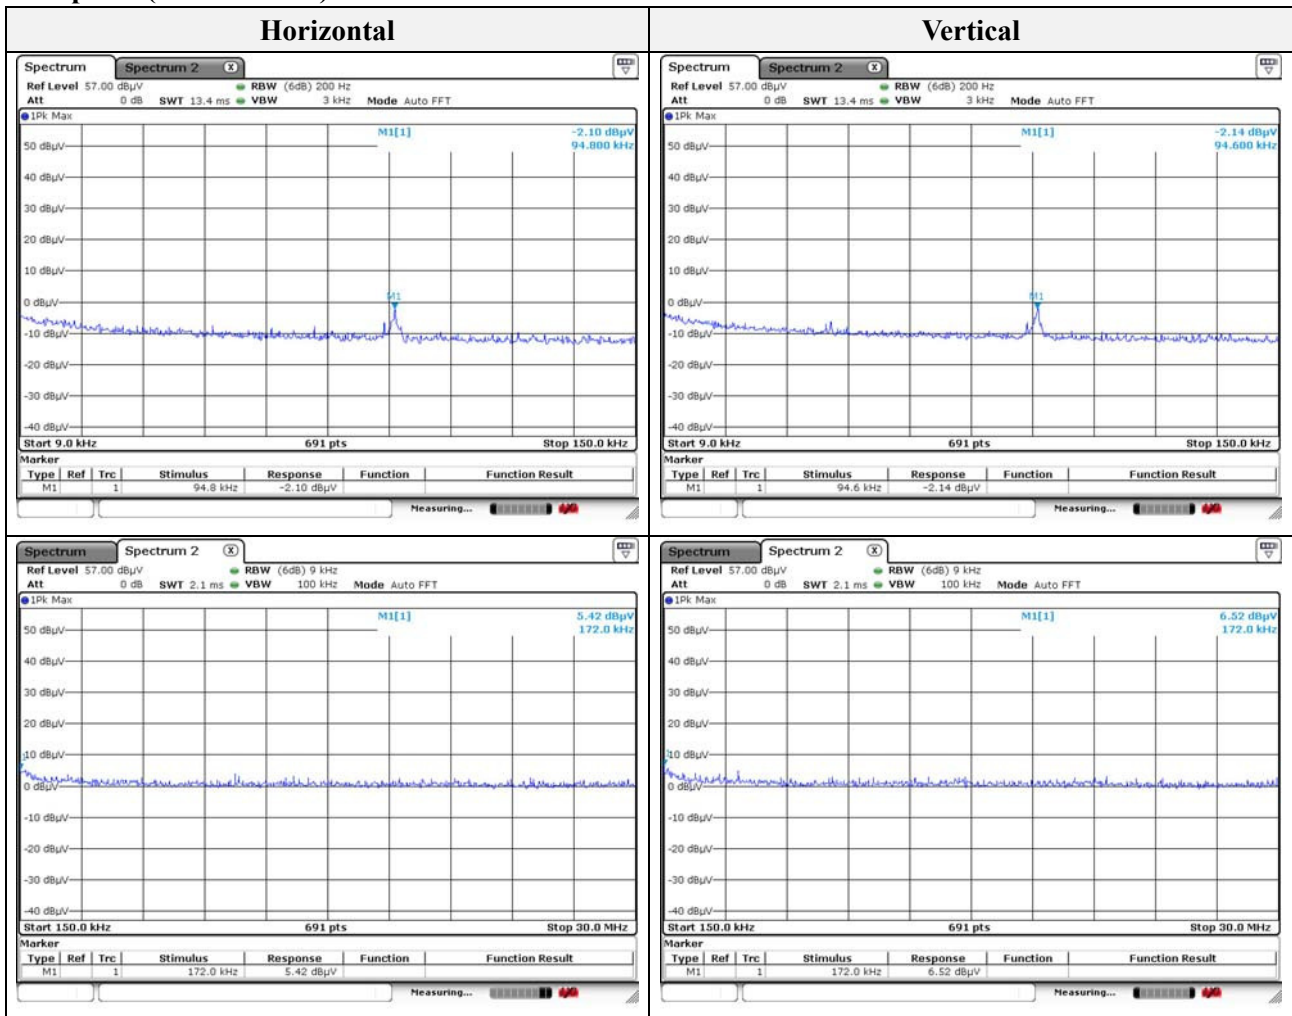

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.




Test results (Below 1 000 MHz)

Mode: FSK
Distance of measurement: 3 meter
Channel: 1

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
110.70	20.23	Peak	V	11.19	-	31.42	43.50	12.08
217.40	19.28	Peak	H	12.53	-	31.81	46.00	14.19
252.50	18.07	Peak	H	13.44	-	31.51	46.00	14.49
399.90	16.51	Peak	H	16.96	-	33.47	46.00	12.53
479.90	21.39	Peak	H	18.15	-	39.54	46.00	6.46
520.60	18.03	Peak	H	19.01	-	37.04	46.00	8.96
722.80	17.82	Peak	V	21.61	-	39.43	46.00	6.57
867.84	51.68	Peak	V	-6.08	-	45.60	80.83	35.23
867.84	52.38	Peak	V	-6.08	-	46.30	80.83	34.53

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The test results in the report only apply to the tested sample.

Test plots (Below 1 000 MHz)

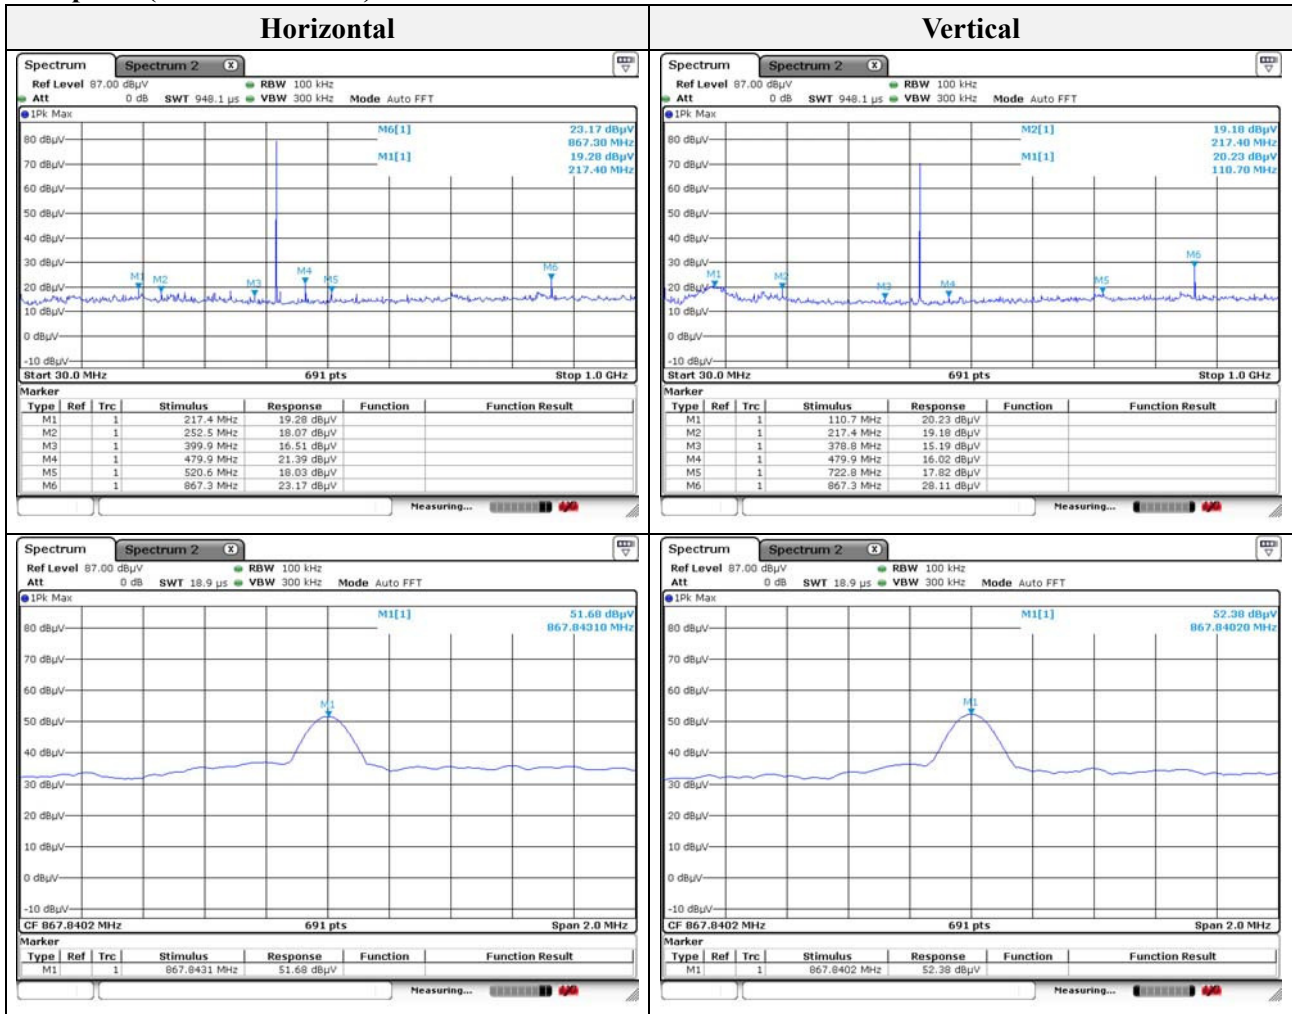

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.



Test results (Above 1 000 MHz)

Mode: FSK
Distance of measurement: 3 meter
Channel: 1


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*1 303.90	56.25	Peak	H	-7.91	-	48.34	74.00	25.66
*1 303.90	48.22	Peak	V	-7.91	-	40.31	74.00	33.69
1 738.10	50.66	Peak	H	-4.79	-	45.87	80.83	34.96
1 738.10	55.00	Peak	V	-4.79	-	50.21	80.83	30.62
2 172.20	43.27	Peak	H	-1.49	-	41.78	80.83	39.05
2 172.20	44.64	Peak	V	-1.49	-	43.15	80.83	37.68
2 606.40	43.11	Peak	H	0.74	-	43.85	80.83	36.98
2 606.40	43.92	Peak	V	0.74	-	44.66	80.83	36.17
3 040.50	37.57	Peak	H	2.39	-	39.90	80.83	40.93
3 040.50	37.24	Peak	V	2.39	-	39.63	80.83	41.20
3 468.90	47.20	Peak	H	2.17	-	49.37	80.83	31.46
3 468.90	46.42	Peak	V	2.17	-	48.59	80.83	32.24
*3 908.80	42.86	Peak	H	4.17	-	47.03	74.00	26.97
*3 908.80	44.87	Peak	V	4.17	-	49.04	74.00	24.96
4 337.19	44.46	Peak	H	5.46	-	49.92	80.83	30.91
4 337.19	35.07	Peak	V	5.46	-	40.53	80.83	40.30

Note.

1. $3m \text{ PeakLimit}(\text{dB}\mu\text{V}/\text{m}) = 20\log[41.6667(F_{(\text{MHz})}-7083.3333)] = 80.83$
 $3m \text{ Average Limit}(\text{dB}\mu\text{V}/\text{m}) = \text{Peak limit} - 20 = 60.83$
Average Field strength = Peak Field strength + Duty Cycle Correction Factor
2. Correction Factors = Antenna Factor + Cable Loss + Amp.Gain
3. “*” means the restricted band.
4. Average test would not be applied if the peak results were lower than the average limit.
4. Duty Cycle Correction Factor : $20\log(T_{\text{on}} / 100 \text{ ms}) = 20\log(8.986 / 100) = -20.93$
 $T_{\text{X on time}} = 8.986 \text{ ms}$
 $T_{\text{X on+off}} \geq 100 \text{ ms}$ (pulse train is 100 ms)




Test plots (Above 1 000 MHz)

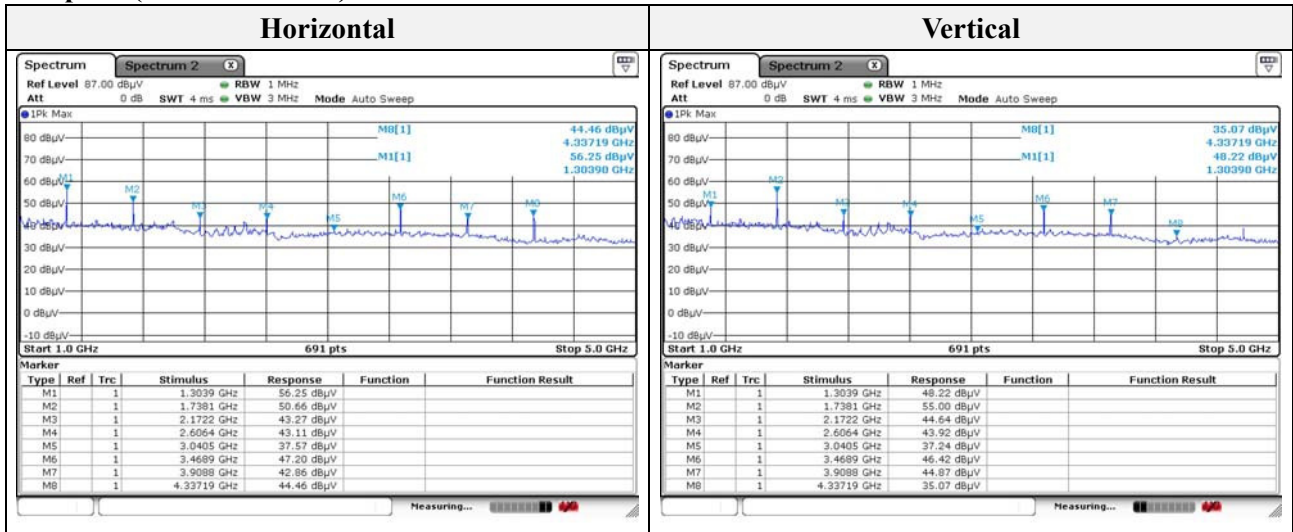

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.2. Bandwidth of operation frequency

Test setup



Test procedure


1. Use the following spectrum analyzer setting
2. RBW = 10 kHz
3. VBW = 30 kHz (≥ RBW)
4. Span = 1 MHz
5. Detector function = peak
6. Trace = max hold

Limit

The bandwidth of the emissions shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test results


Frequency(MHz)	Bandwidth(kHz)	Limit (kHz)
433.92	186.7	1 084.80

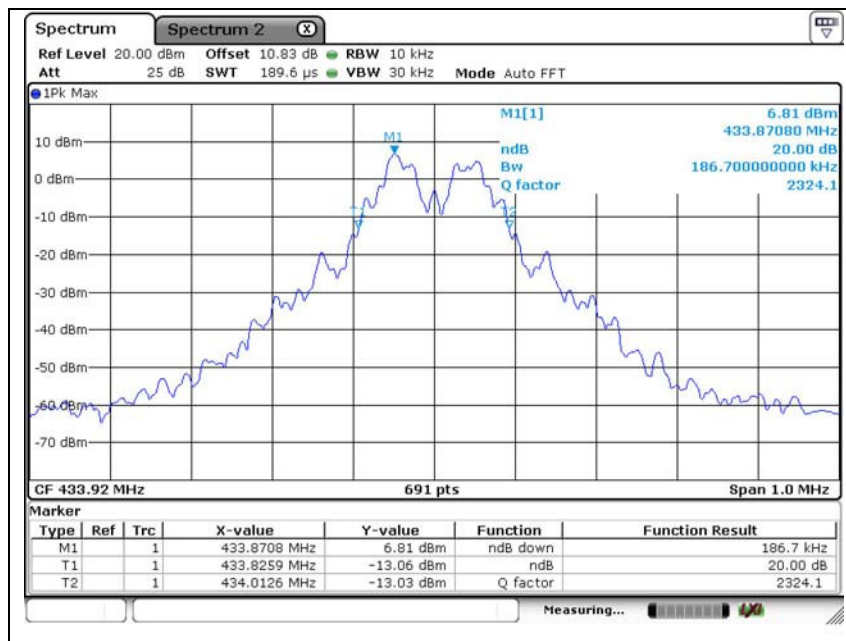

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.3. Transmission time

Test setup



Test procedure


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span=0 Hz.

Limit

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Test results


Frequency(MHz)	Transmission time (ms)	Limit (s)
433.92	8.696	Same or less than 5

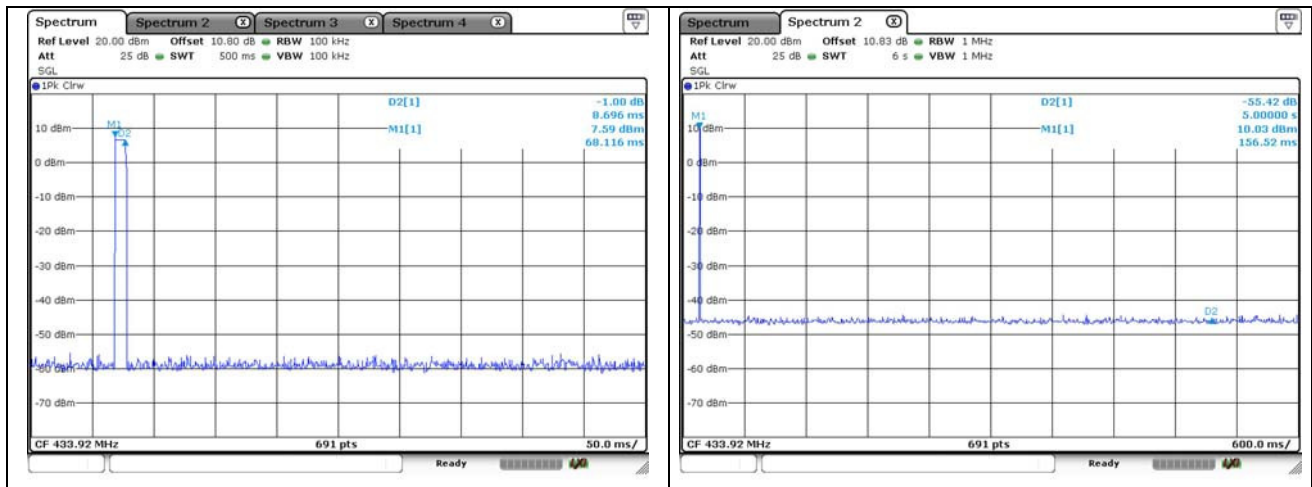

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.

3.4. Duty cycle correction factor

Test setup



Test procedure

1. The transmitter output is connected to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span=0 Hz and Sweep time =100 ms.

Limit


None (No dedicated Limit specified in the Rules)

Test results

Duty Cycle Correction Factor : $20\log(\text{Ton} / 100 \text{ ms}) = 20\log(8.986 / 100) = -20.93$

Tx_{on time} = 8.986 ms

Tx_{on+off} ≥ 100 ms (pulse train is 100 ms)

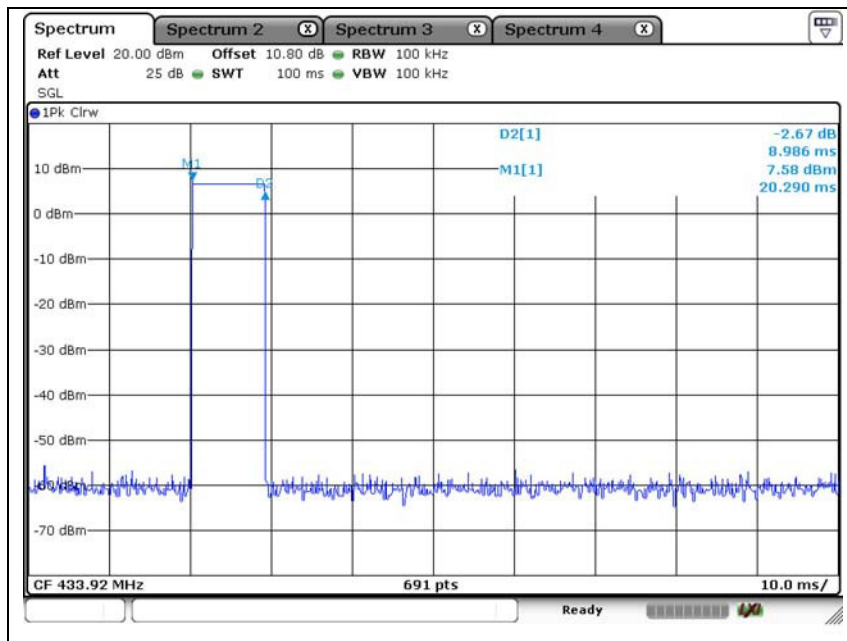

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The test results in the report only apply to the tested sample.



Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV30	10076	1 year	2017.07.06
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2017.01.25
PSG Analog Signal Generator	AGILENT	E8257C	US42340237	1 year	2017.07.05
DC Power Supply	HP	6674A	US36370369	1 year	2017.07.04
Attenuator	Agilent	8493C	51401	1 year	2017.07.05
Loop Antenna	R&S	HFH2-Z2.335.4711.52	826532	2 years	2017.03.03
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-713	2 years	2017.05.15
Horn Antenna	A.H.	SAS-571	781	2 years	2017.05.07
High Pass Filter	WAINWRIGHT INSTRUMENT	WHJS3000-10TT	1	1 year	2017.07.04
Low Pass Filter	WEINSCHEL	WLK1.0/18G-10TT	1	1 year	2017.07.04
Preamplifier	SCHWARZBECK	BBV-9718	9718-246	1 year	2016.10.23
EMI Test Receiver	R&S	ESR3	101781	1 year	2017.05.03
EMI Test Receiver	R&S	ESU26	100552	1 year	2017.04.24

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook	SAMSUNG	NT-R519-BA24J	ZKPA93ES900086Z