

Radio test report

99367931

based on:
IEC 61993-2 First edition 2001

Class A Shipborne AIS equipment
McMurdo
MT-1

Contents

MAIN MODULE.....	4
1 Introduction.....	4
2 Product.....	5
3 Test schedule.....	5
4 Product documentation	5
5 Hardware list.....	6
6 Observations and comments	6
7 Summary.....	7
8 Conclusions.....	8
TEST RESULTS MODULE	9
1 Summary.....	10
2 Test results	11
2.1 4.4 Marking & identification	11
2.2 14.8 Transceiver protection.....	11
2.3 15.1 TDMA Transmitter	12
2.3.1 15.1.1 Frequency Error	12
2.3.2 15.1.2 Carrier Power	13
2.3.3 15.1.3 Modulation Spectrum 25 kHz channel mode.....	14
2.3.3.1 GMSK Spectrum TDMA at 156.025 MHz.....	14
2.3.3.2 GMSK Spectrum TDMA at 162.025 MHz.....	16
2.3.3.3 AFSK Spectrum DSC at 156.525 MHz	18
2.3.4 15.1.4 Modulation Spectrum 12.5 kHz channel mode.....	19
2.3.4.1 GMSK Spectrum TDMA at 156.025 MHz.....	19
2.3.4.2 GMSK Spectrum TDMA at 162.025 MHz.....	21
2.3.5 15.1.5 Transmitter Attack Time.....	23
2.3.6 15.1.6 Transmitter Release Time	24
2.4 15.2 DSC Transmissions.....	25
2.4.1 15.2.1 Frequency error of the DSC Signal.....	25
2.4.2 15.2.2 Modulation Rate.....	26
2.5 15.3 TDMA Receivers	27
2.5.1 15.3.1 Sensitivity - 25 kHz Operation.....	27
2.5.2 15.3.2 Sensitivity - 12.5 kHz Operation.....	28
2.5.3 15.3.3 Error Behaviour at High Input Levels.....	29
2.5.4 15.3.4 Co-channel Rejection - 25 kHz Operation	30
2.5.5 15.3.5 Co-channel Rejection - 12.5 kHz Operation	31
2.5.6 15.3.6 Adjacent Channel selectivity - 25 kHz Operation.....	32
2.5.7 15.3.7 Adjacent Channel selectivity - 12.5 kHz Operation.....	33
2.5.8 15.3.8 Spurious Response Rejection at 156.025 MHz.....	34
2.5.9 15.3.8 Spurious Response Rejection at 162.025 MHz.....	35
2.5.10 15.3.9 Intermodulation response rejection and blocking	36
2.5.11 15.3.10 Transmit to receive switching time	37
Screen dump test software	38
2.6 15.4 DSC Receiver.....	39
2.6.1 15.4.1 Maximum sensitivity.....	39
2.6.2 15.4.2 Error Behaviour at High Input Levels.....	40
2.6.3 15.4.3 Co-Channel Rejection.....	41



Report number: 99367931

2.6.4	15.4.4 Adjacent Channel selectivity.....	42
2.6.5	15.4.5 Spurious Response Rejection.....	43
2.6.6	15.4.6 Intermodulation response Rejection.....	44
2.6.7	15.4.7 Blocking or Desensitisation	45
2.7	15.5 Conducted Spurious Emissions conveyed to the antenna	46
2.7.1	15.5.1 Spurious Emissions from the Receiver	46
2.7.2	15.5.2 Spurious Emissions from the Transmitter at 156.025 MHz.....	47
2.7.2.1	15.5.2 Spurious Emissions plot at 156.025 MHz.....	48
2.7.3	15.5.2 Spurious Emissions from the Transmitter at 162.025 MHz.....	49
2.7.3.1	15.5.2 Spurious Emissions from the Transmitter at 162.025 MHz.....	50
USED TEST EQUIPMENT MODULE		51
PHOTOGRAPHS MODULE.....		54
ADDITIONAL INFORMATION MODULE		72

This report comprises of five modules. The total number of pages exclusive of the pages enclosed in the additional information module is: 72.



Main module

1 Introduction

This report contains the result of tests performed by:

Telefication bv
Edisonstraat 12a
6902 PK Zevenaar
The Netherlands

Telefication complies with the accreditation criteria for test laboratories as laid down in ISO/IEC 17025:1999. The accreditation covers the quality system of the laboratory as well as the specific activities as described in the authorized annex bearing the accreditation number L021 and is granted on 30 November 1990 by the Dutch Council For Accreditation (RvA: Raad voor Accreditatie).

Ordering party:

Company name	:	McMurdo Ltd
Address	:	Silver Point, Airpoint Service Road
Zipcode	:	P03 5PB
City/town	:	Portsmouth
Country	:	United Kingdom
Date of order	:	14 January 2003

The above-mentioned documentation will be filed at Telefication by for a period of 10 years following the issue of this report.

5 Hardware list

The table below shows the release version of hardware used by various processes at date of testing.

Module	Hardware Nr.	PCB release version
Transmitter module	89-411	iss 2
TDMA & DSC Receiver	89-421 serial number 2295/002 mod 5	iss E 09-03
RX processing board	89-461 software VOC serial number 2003038303 R08	iss F
Control board	89-401 P16, checksum start prom 0xF400	iss D
Power supply	89-441	iss 2
GPS receiver	89-465 μ-BLOX AG: GPS-MS1E B9079-C010-01-02 SO242518 YK01/07	iss A
Screw_terminal	89-431	iss 3
Display Main PCB	89-201	Iss E

6 Observations and comments

This Test Report is a revised copy of Telefication Test Report 99367930. New test equipment became available to be able to conduct the Transmit to Receive Switching time test as required by clause 15.3.10. The test results concerned were replaced.

This new revision also includes several minor editorial updates.

This Test Report include the testing of the MT-1 AIS transponder MT-1 and MT-1 VDU.

This Test Report is complementary to Telefication Test Report 99367921, which covers the EN60945 testing.

During extreme temperature tests a 16 hours soak period was used to conduct the EN60945 Performance Check (PC) tests. The application of extreme temperatures was according to EN60945.



7 Summary

The product is intended for use in the following application area:

Universal Automatic Identification System

The sample was tested according to the following specifications:

IEC 61993-2: (2001-12),	Clause 4.4	Marking & Identification
	Clause 14.8	Transmitter Protection
	Clause 15	Physical Tests.

8 Conclusions

The sample of the product showed **NO NON-COMPLIANCES** to the specification stated in chapter 7 of this report.


The results of the test as stated in this report are exclusively applicable to the product item as identified in this report. Telefication bv does not accept any responsibility for the results stated in this report, with respect to the properties of product items not involved in these tests.

All tests are performed by:

name : H.H. Lodewijk

function : Test Engineer Radio/EMC

signature :




Review of test methods and report by:

name : M.W. Jansen

function : Senior Engineer Maritime

signature :

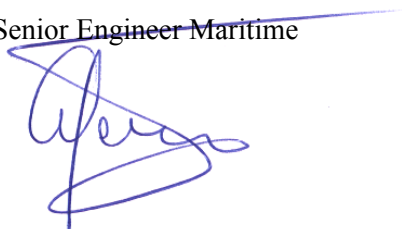


The above conclusions have been verified by the following signatory:

date : 18 November 2003

name : J.P. van de Poll

function : Co-ordinator Test Group

signature :

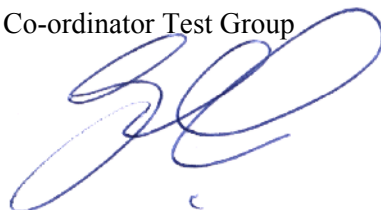

Test results module

1 Summary

LIST OF VERIFICATION

The list of measured or checked parameters called for in IEC 61993-2 Clause 15 is given below.

IEC 61993-2 Clause	GENERAL REQUIREMENTS	Performed verification (yes/no/n.a)
15 Physical Tests		
15.1 TDMA Transmitter		
15.1.1	Frequency Error	yes
15.1.2	Carrier Power	yes
15.1.3	Modulation Spectrum 25 kHz channel mode	yes
15.1.4	Modulation Spectrum 12.5 kHz channel mode	yes
15.1.5	Transmitter Attack Time	yes
15.1.6	Transmitter Release Time	yes
15.2 DSC Transmissions		
15.2.1	Frequency error of the DSC Signal	yes
15.2.2	Modulation Rate	yes
15.3 TDMA Receivers		
15.3.1	Sensitivity - 25 kHz Operation	yes
15.3.2	Sensitivity - 12.5 kHz Operation	yes
15.3.3	Error Behaviour at High Input Levels	yes
15.3.4	Co-Channel Rejection - 25 kHz Operation	yes
15.3.5	Co-Channel Rejection - 12.5 kHz Operation	yes
15.3.6	Adjacent Channel selectivity - 25 kHz Operation	yes
15.3.7	Adjacent Channel selectivity - 12.5 kHz Operation	yes
15.3.8	Spurious Response Rejection	yes
15.3.9	Intermodulation response rejection and blocking	yes
15.3.10	Transmit to receive switching time	yes
15.4 DSC Receiver		
15.4.1	Maximum sensitivity	yes
15.4.2	Error Behaviour at High Input Levels	yes
15.4.3	Co-Channel Rejection	yes
15.4.4	Adjacent Channel selectivity	yes
15.4.5	Spurious Response Rejection	yes
15.4.6	Intermodulation response Rejection	yes
15.4.7	Blocking or Desensitisation	yes
15.5 Conducted Spurious Emissions conveyed to the antenna		
15.5.1	Spurious Emissions from the Receiver	yes
15.5.2	Spurious Emissions from the Transmitter	yes

2 Test results

2.1 4.4 Marking & identification

Date of test: 25 August 2003

Ambient temp.: 25 °C

R.H.: 46 %

Marking and identification	Result
Information power supply	Pass

Remark: Marking can be found on photographs.

2.2 14.8 Transceiver protection

Date of test: 25 August 2003

Ambient temp.: 25 °C

R.H.: 46 %

Transceiver protection	Result
Open and short circuit VHF-antenna terminal 60 seconds	Pass

Remark: EUT operative within 2 minutes after refitting antenna.

2.3 15.1 TDMA Transmitter

2.3.1 15.1.1 Frequency Error

Date of test: Tnom. 10 July 2003 Ambient temp.: 24 °C R.H.: 44 %
 Date of test: Tmin. 22 August 2003 Ambient temp.: 26 °C R.H.: 42 %
 Date of test: Tmax. 25 August 2003 Ambient temp.: 25 °C R.H.: 46 %

TEST CONDITIONS		FREQUENCY ERROR (Hz)			
Temperature	Voltage	156.025 kHz	157.4125 kHz	160.6375 kHz	162.025 kHz
<i>T_{nom}</i> (+15 – 35 °C)	<i>V_{nom}</i> (24.0 V)	+ 36	+ 40	+ 42	+ 42
<i>T_{min}</i> (-15 °C)	<i>V_{min}</i> (21.6 V)	+ 212	+ 196	+ 192	+ 189
<i>T_{max}</i> (+55 °C)	<i>V_{max}</i> (31.2 V)	- 118	- 124	- 135	- 144
Measurement uncertainty		± 4 Hz			
Limits		≤ ±0.5 kHz under normal conditions, ≤ ±1 kHz under extreme conditions.			

Test equipment used: (Item numbers)	2, 13, 20, 29
-------------------------------------	---------------

2.3.2 15.1.2 Carrier Power

Date of test: Tnom. 10 July 2003 Ambient temp.: 24 °C R.H.: 44 %
 Date of test: Tmin. 22 August 2003 Ambient temp.: 26 °C R.H.: 42 %
 Date of test: Tmax. 25 August 2003 Ambient temp.: 25 °C R.H.: 46 %

Rated output carrier power: H.P. : 12.5 W
 L.P. : 2.0 W

TEST CONDITIONS		CARRIER POWER (dBm)							
		156.025 kHz		157.4125 kHz		160.6375 kHz		162.025 kHz	
Temperature	Voltage	H.P.	L.P.	H.P.	L.P.	H.P.	L.P.	H.P.	L.P.
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	40.9	33.4	40.8	33.2	40.7	32.9	40.6	32.7
<i>Tmin</i> (-15 °C)	<i>Vmin</i> (21.6 V)	40.9	31.6	41.1	31.8	40.8	31.6	40.7	31.7
<i>Tmax</i> (+55 °C)	<i>Vmax</i> (31.2 V)	40.5	33.0	40.2	33.1	40.1	32.9	40.3	32.9
Measurement uncertainty		0.5 dB							
Limits		<u>Normal test conditions:</u> => H.P.: - between 8.8 and 17.7 W => L.P.: - between 1.4 and 2.8 W - within ± 1.5 dB of the rated carrier power <u>Extreme test conditions:</u> => H.P.: - between 6.3 and 19.8 W => L.P.: - between 1.0 and 3.2 W - within +2.0 & -3.0 dB of the rated carrier power							

H.P. = Output carrier power set at its nominal High: 12.5 W
 L.P. = Output carrier power set at its nominal Low: 2 W

Test equipment used: (Item numbers)	2, 13, 20, 29
-------------------------------------	---------------


2.3.3 15.1.3 Modulation Spectrum 25 kHz channel mode

2.3.3.1 GMSK Spectrum TDMA at 156.025 MHz

Date of test: Tnom. 10 July 2003 Ambient temp.: 24 °C R.H.: 44 %


TX freq.: 156.025 MHz Carrier power: H. P.

(1) TDMA Type 1 mode (Standard Test Signal Number 2):

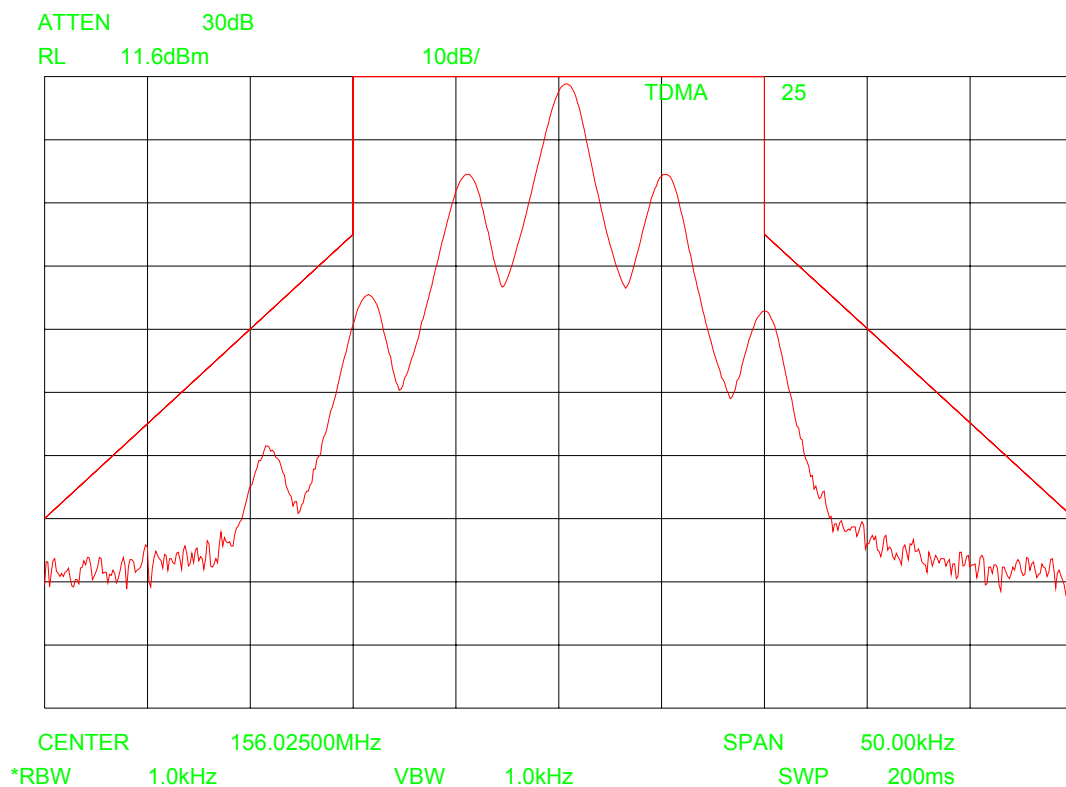

Remark: Reference levels are relative

(2) TDMA Type 2 ((Standard Test Signal Number 3):

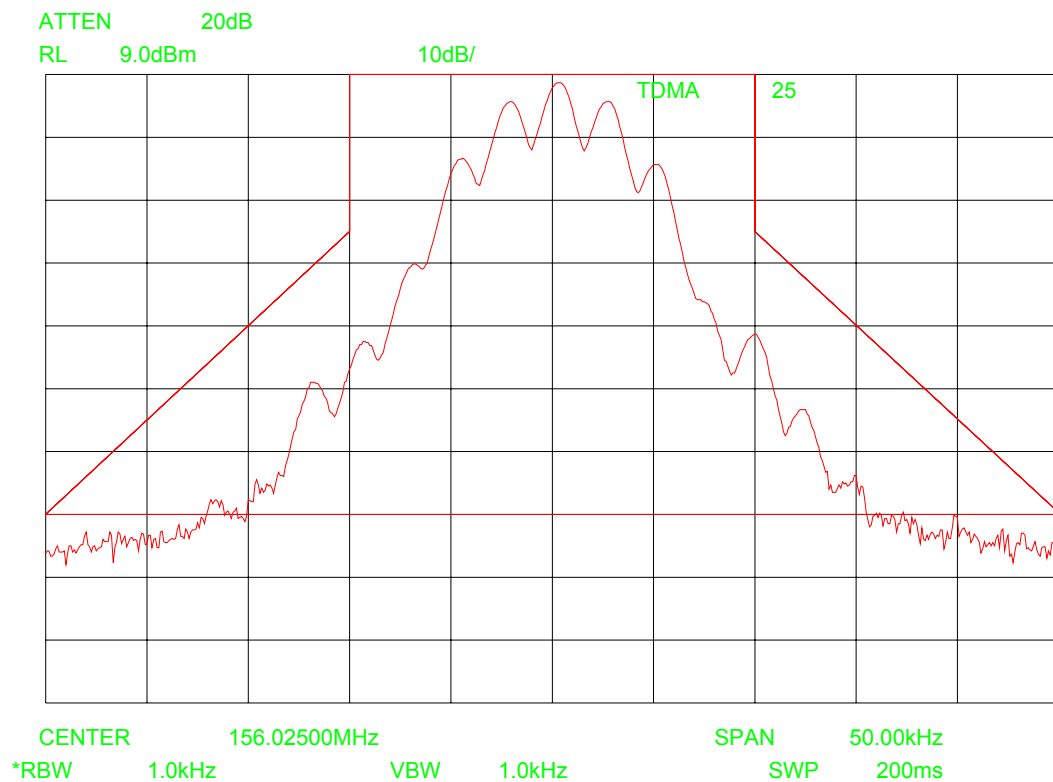

Remark: Reference levels are relative


Test equipment used: (Item numbers)	1, 2, 6, 7, 20
-------------------------------------	----------------

2.3.3.2 GMSK Spectrum TDMA at 162.025 MHz

Date of test: Tnom. 10 July 2003 Ambient temp.: 24 °C R.H.: 44 %


TX freq.: 162.025 MHz Carrier power: H. P.

(1) TDMA Type 1 mode (Standard Test Signal Number 2):

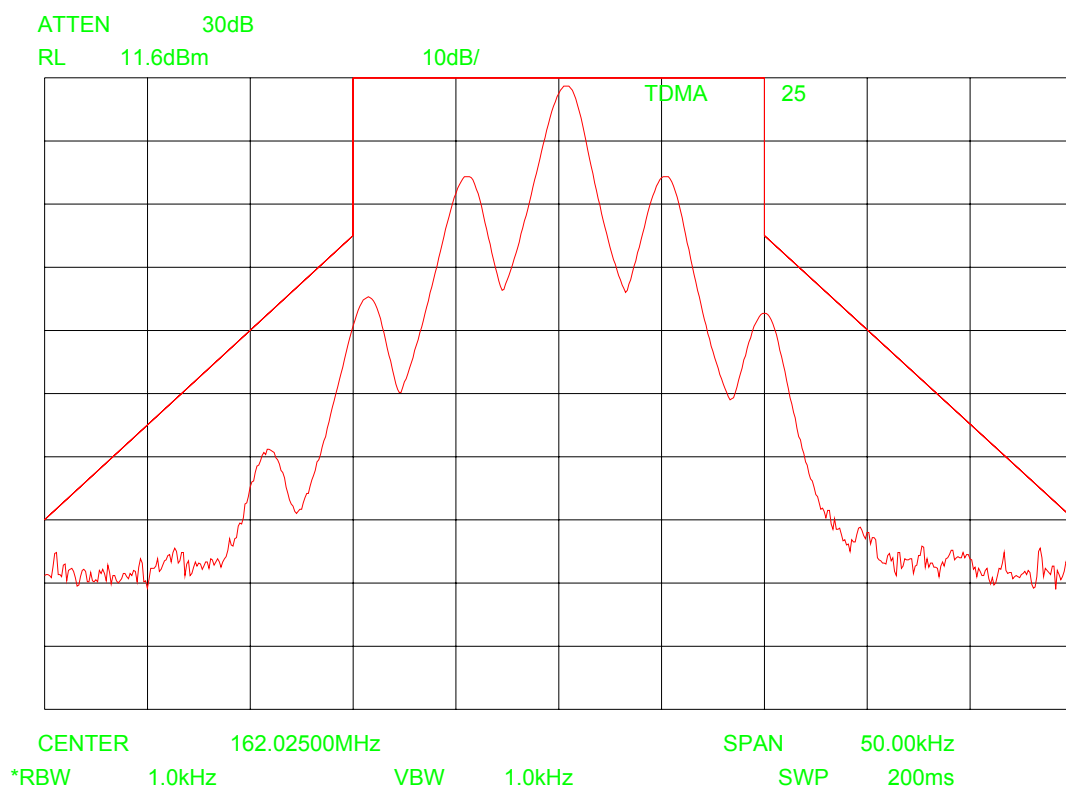

Remark: Reference levels are relative

(2) TDMA Type 2 ((Standard Test Signal Number 3):

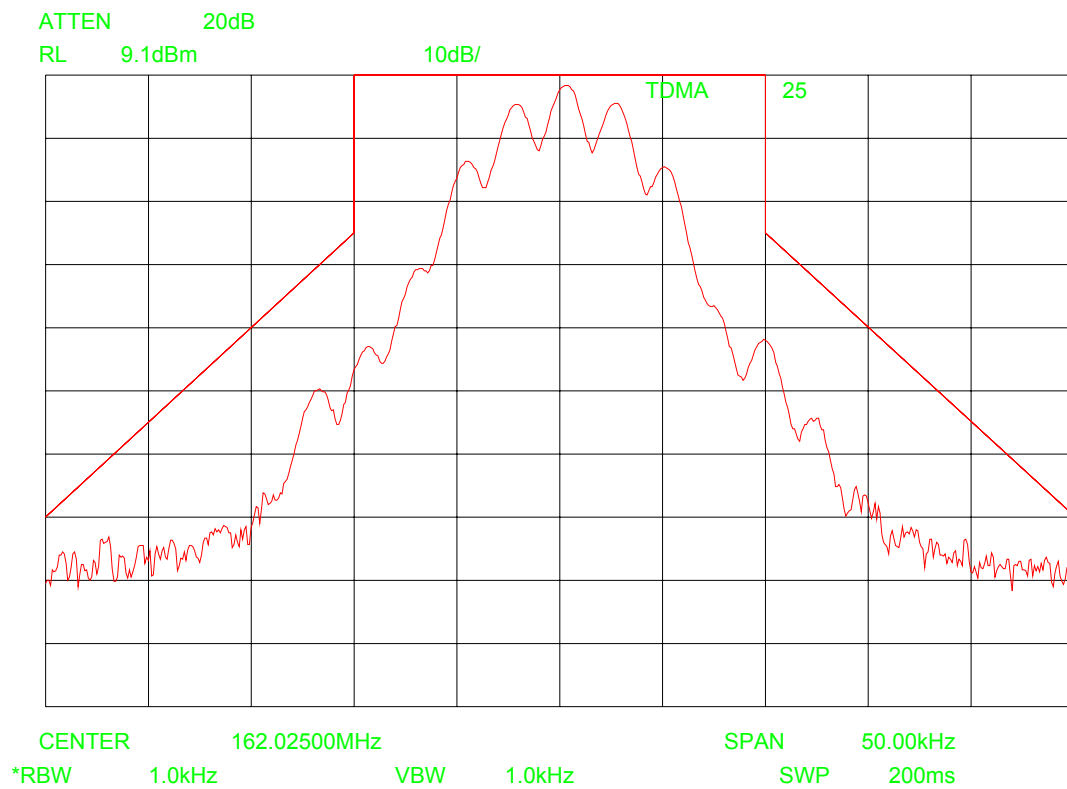


Remark: Reference levels are relative

Test equipment used: (Item numbers)	1, 2, 6, 7, 20
-------------------------------------	----------------

2.3.3.3 AFSK Spectrum DSC at 156.525 MHz

Date of test: Tnom. 10 July 2003 Ambient temp.: 24 °C R.H.: 44 %

- (3) DSC mode (standard Test Signal Number 1):
TX freq.: 156.525 MHz Carrier power: H.P

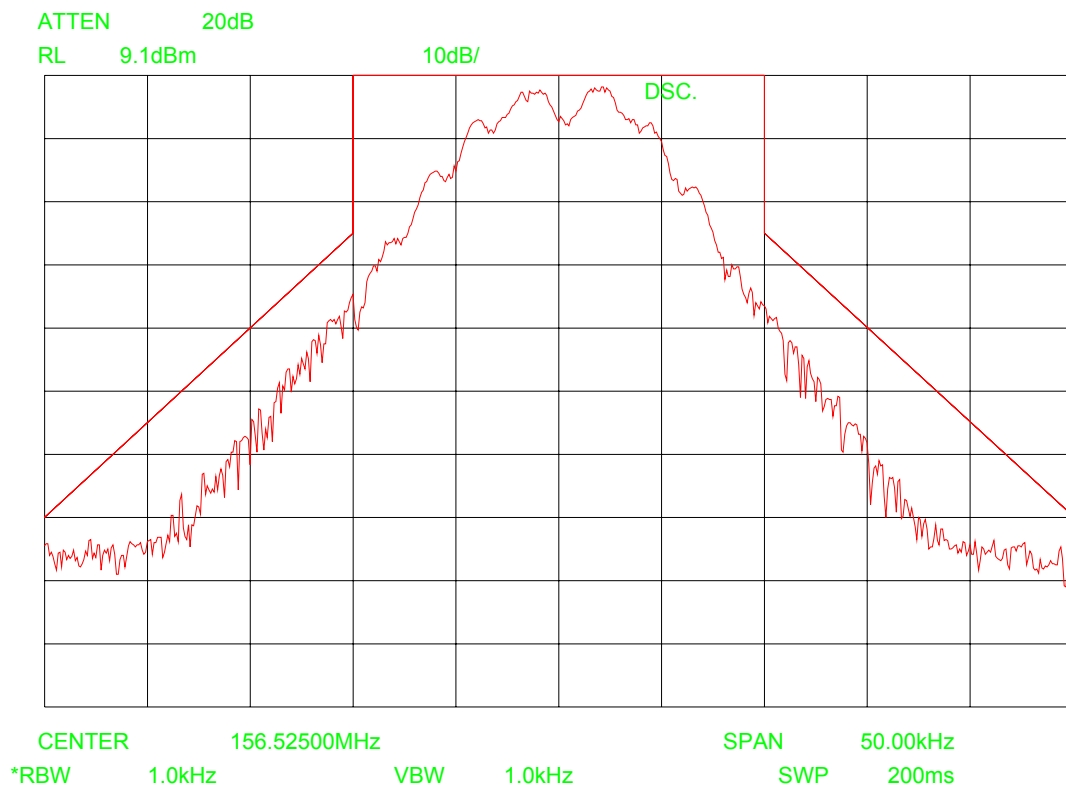

Limit : within the mask specified in figure 4, Clause 15.1.3, IEC 61993-2.

(Emission mask):

- At ± 10 kHz removed from the carrier, the modulation sidebands is below -25 dBc.
- At ± 25 kHz removed from the carrier, the modulation sidebands is below -70 dBc, without any need to be below 0.25 μ W.

In the region between ± 10 kHz and ± 25 kHz removed from the carrier, the modulation sidebands is below a line specified between these two points.

Test equipment used: (Item numbers)	1, 2, 6, 7, 20
-------------------------------------	----------------


2.3.4 15.1.4 Modulation Spectrum 12.5 kHz channel mode

2.3.4.1 GMSK Spectrum TDMA at 156.025 MHz


Date of test: Tnom. 10 July 2003 Ambient temp.: 24 °C R.H.: 44 %

TX freq.: 156.025 MHz Carrier power: H. P.

(1) TDMA Type 1 mode (Standard Test Signal Number 2):

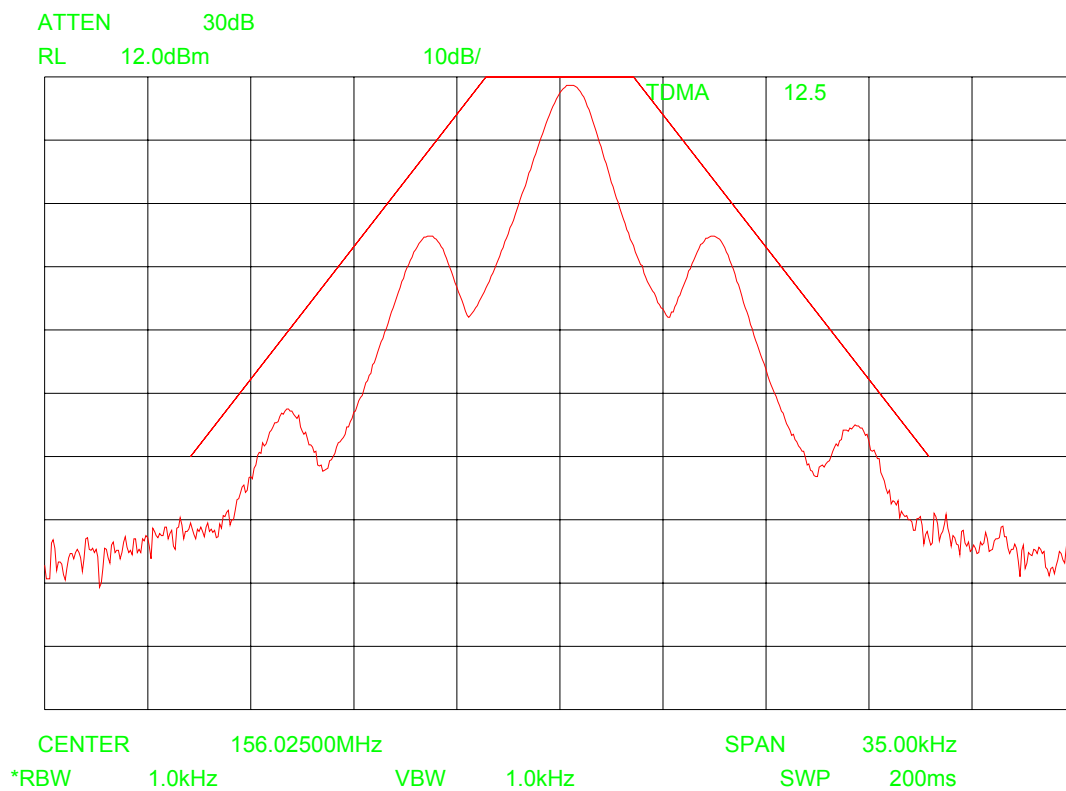

(2) TDMA Type 2 (Standard Test Signal Number 3):

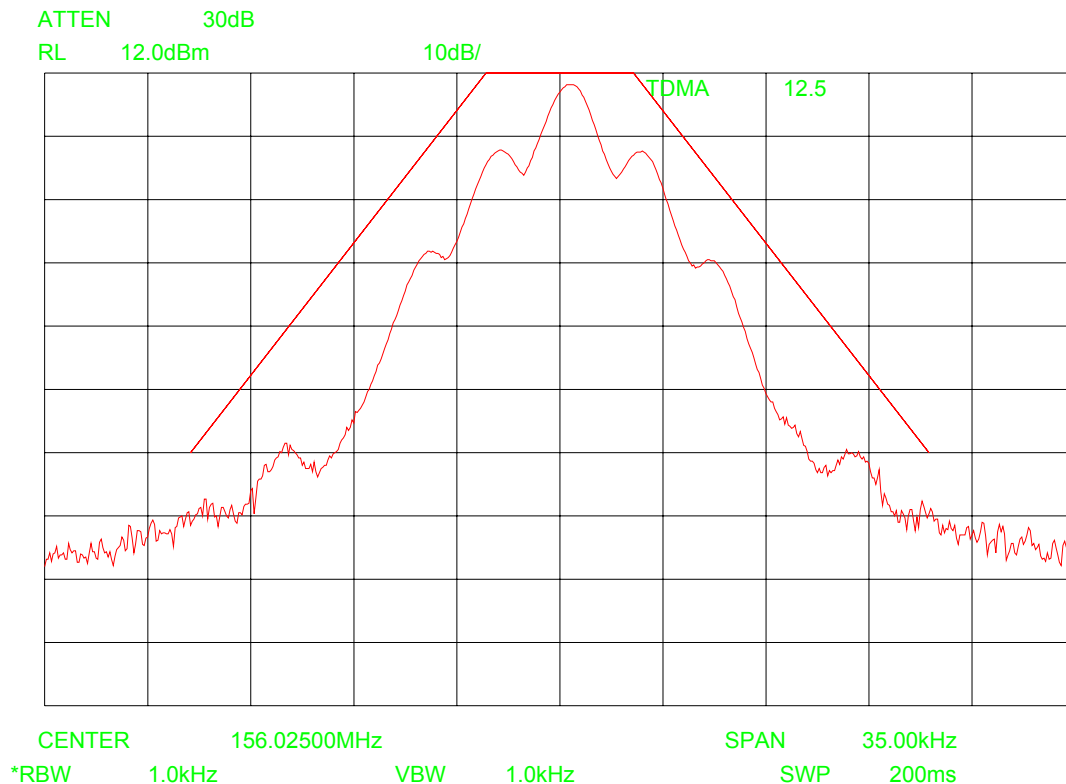

Limit: within the mask specified in figure 5, Clause 15.1.4, IEC 61993-2.

(Emission mask):

At ± 12.5 kHz removed from the carrier, the modulation sidebands is below -60 dBc.

In the region between ± 2.5 kHz and ± 12.5 kHz removed from the carrier, the modulation sidebands is below a line starting at 0 dBc / ± 2.5 kHz and ending at -60 dBc / ± 12.5 kHz without any need to be below 0.25 μ W.


Test equipment used: (Item numbers)	1, 2, 6, 7, 20
-------------------------------------	----------------

2.3.4.2 GMSK Spectrum TDMA at 162.025 MHz


Date of test: Tnom. 10 July 2003 Ambient temp.: 24 °C R.H.: 44 %

TX freq.: 162.025 MHz Carrier power: H. P.

(1) TDMA Type 1 mode (Standard Test Signal Number 2):

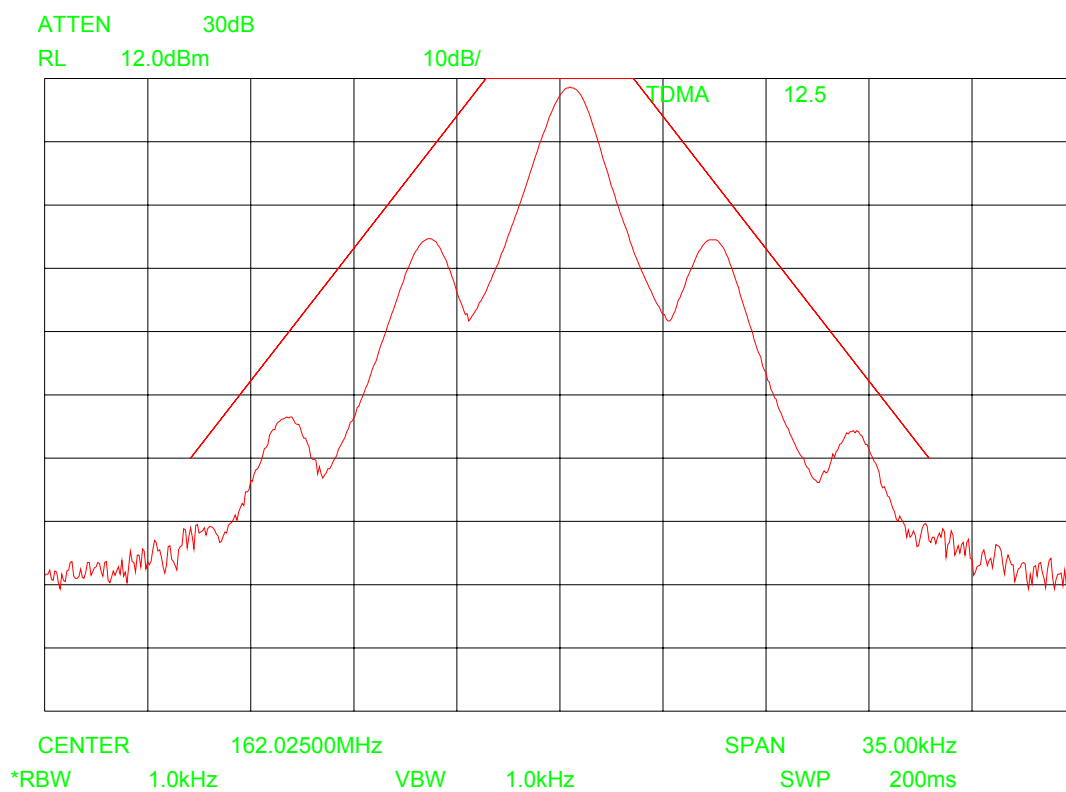

(2) TDMA Type 2 (Standard Test Signal Number 3):

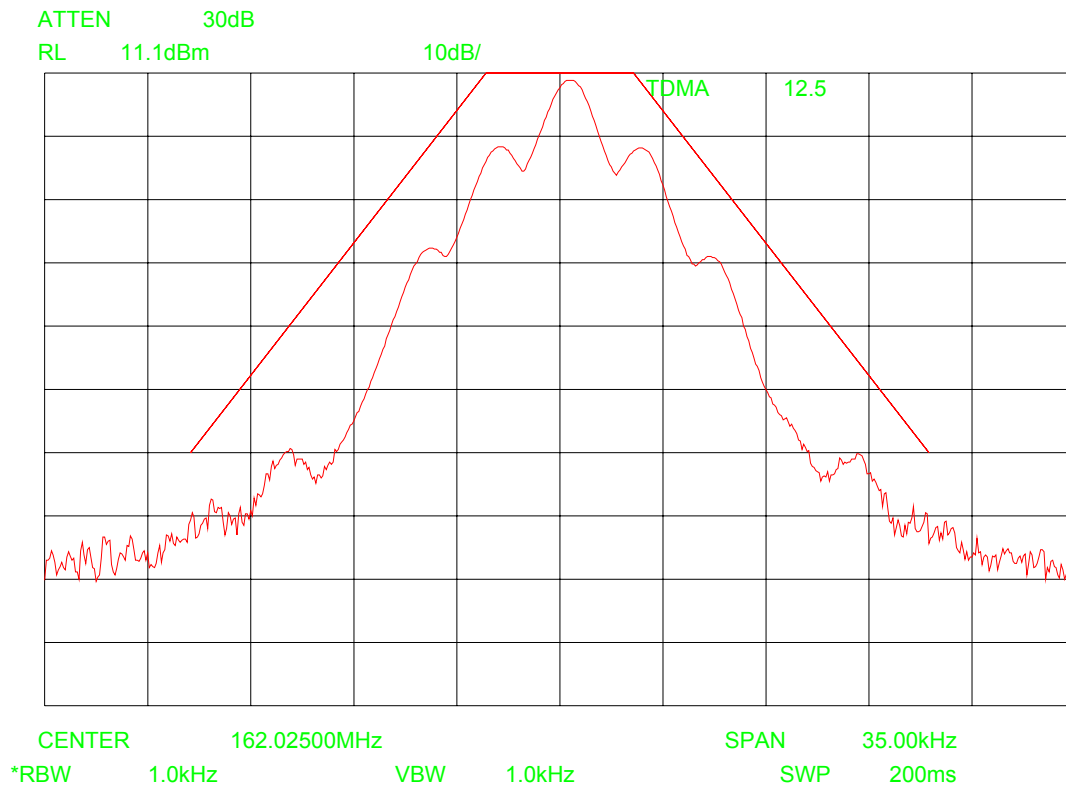

Limit: within the mask specified in figure 5, Clause 15.1.4, IEC 61993-2.

(Emission mask):

At ± 12.5 kHz removed from the carrier, the modulation sidebands is below -60 dBc.

In the region between ± 2.5 kHz and ± 12.5 kHz removed from the carrier, the modulation sidebands is below a line starting at 0 dBc / ± 2.5 kHz and ending at -60 dBc / ± 12.5 kHz without any need to be below 0.25 μ W.


Test equipment used: (Item numbers)	1, 2, 6, 7, 20
-------------------------------------	----------------

2.3.5 15.1.5 Transmitter Attack Time

Date of test: Tnom. 11 July 2003 Ambient temp.: 27 °C R.H.: 42 %

TX freq.: 159.025 MHz
Carrier power: H. P.

PLOT OF FREQUENCY AND POWER BEHAVIOUR

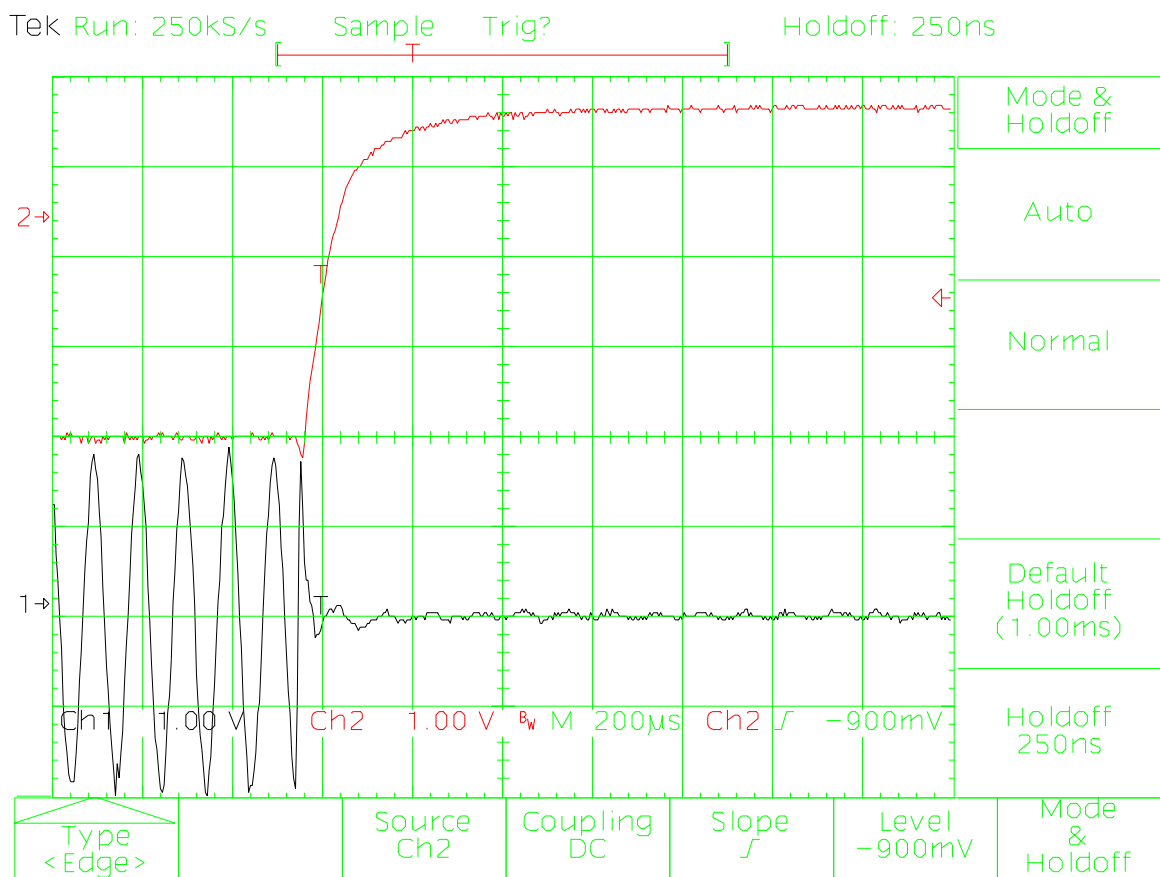
Measurement Uncertainty: $\pm 2\%$

Limit:

- Transmitter attack time T_0 : within 1 ms,
- Transient power level: within ± 1.5 dB of its final value at any time,
- Carrier frequency F_c : within ± 1 kHz of its required value after 1 ms.

High trace : RF Power transient behaviour

Lower trace: output from test discriminator (2.5 kHz / div)

Time base = 200 μS/div.


Test equipment used: (Item numbers) 2, 6, 7, 12, 13, 17, 20, 21, 24, 30

2.3.6 15.1.6 Transmitter Release Time

Date of test: Tnom. 11 July 2003 Ambient temp.: 27 °C R.H.: 42 %

TX freq.: 159.025 MHz
Carrier power: H. P.

PLOT OF FREQUENCY AND POWER BEHAVIOUR

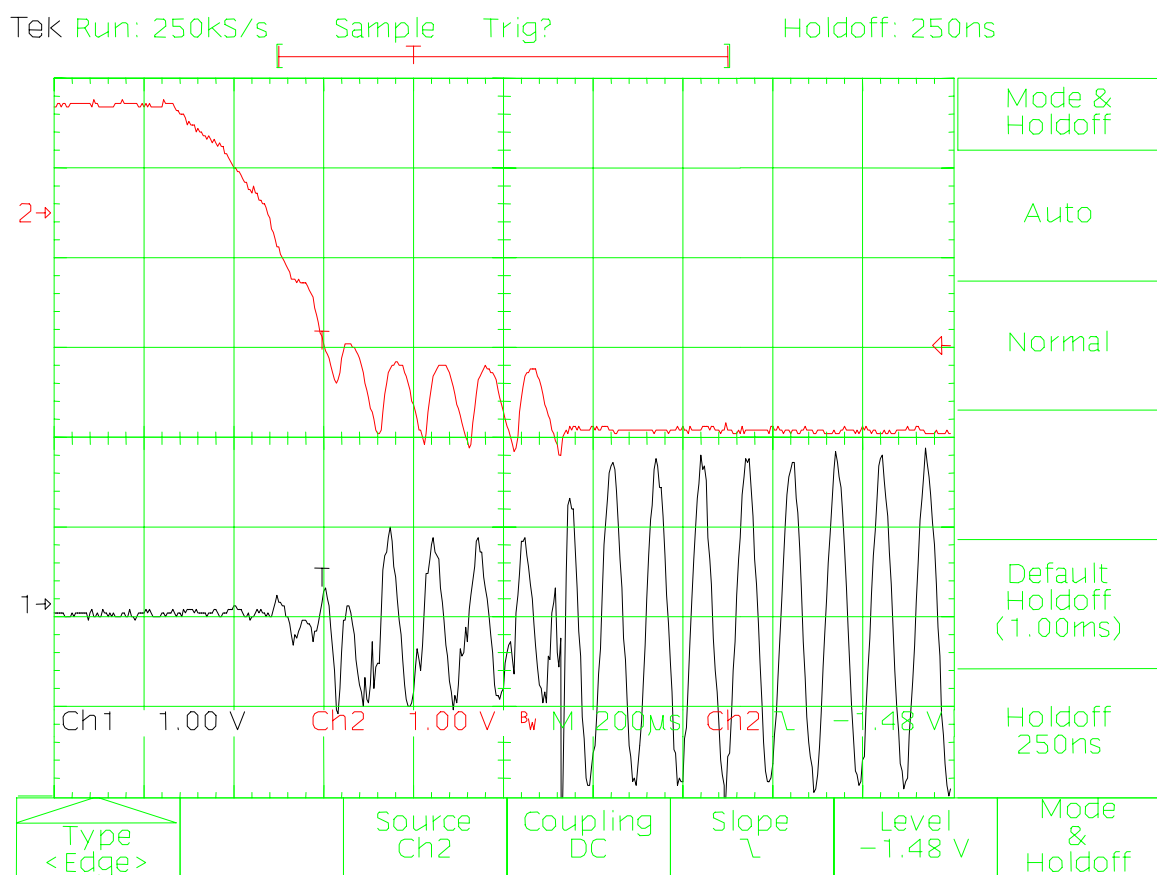
Measurement Uncertainty: $\pm 2\%$

Limit:

Transmitter release time T_r : within 1 ms,

High trace : RF Power transient behaviour

Lower trace: output from test discriminator (2.5 kHz / div)

Time base = 200µS/div.

Test equipment used: (Item numbers) 2, 6, 7, 12, 13, 17, 20, 21, 24, 30

2.4 15.2 DSC Transmissions

2.4.1 15.2.1 Frequency error of the DSC Signal

Date of test: Tnom. 11 July 2003 Ambient temp.: 27 °C R.H.: 42 %
 Date of test: Tmin. 22 August 2003 Ambient temp.: 26 °C R.H.: 42 %
 Date of test: Tmax. 25 August 2003 Ambient temp.: 25 °C R.H.: 46 %

CHANNEL 70

Fn = 156.525 MHz

TEST CONDITIONS		FREQUENCY ERROR (Hz)	
Temperature	Voltage	B-STATE (2100 Hz)	Y-STATE (1300Hz)
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	- 0.1	+ 0.1
<i>Tmin</i> (-15 °C)	<i>Vmin</i> (21.6 V)	0	+ 0.2
<i>Tmax</i> (+55 °C)	<i>Vmax</i> (31.2 V)	0	+0.1
Limits		≤ ±1%	
Measurement uncertainty		± 0.5 Hz	

Test equipment used: (Item numbers)	2, 13, 20, 21, 29
-------------------------------------	-------------------

2.4.2 15.2.2 Modulation Rate

Date of test: Tnom. 11 July 2003 Ambient temp.: 27 °C R.H.: 42 %

CHANNEL 70 Fn = 156.525 MHz

TEST CONDITIONS		Modulation Rate error (ppm)
Temperature	Voltage	
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	-7.55
Limit		1200 bit/s ± 30 ppm (± 0.036 bits/s).
Measurement uncertainty		2 ppm

Test equipment used: (Item numbers)	2, 13, 20, 21, 23, 24, 29
-------------------------------------	---------------------------

2.5 15.3 TDMA Receivers

2.5.1 15.3.1 Sensitivity - 25 kHz Operation

Date of test: Tnom.	19 August 2003	Ambient temp.: 29 °C	R.H.: 44 %
Date of test: Tmin.	22 August 2003	Ambient temp.: 26 °C	R.H.: 42 %
Date of test: Tmax.	25 August 2003	Ambient temp.: 25 °C	R.H.: 46 %

TEST CONDITIONS		SENSITIVITY LEVEL	
		Fn: 156.025 MHz	Fn: 162.025 MHz
Temperature	Voltage	RF level (dBm)	RF level (dBm)
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	-112 dBm at 6.9% PER	-113 dBm at 17.4% PER
<i>Tmin</i> (-15 °C)	<i>Vmin</i> (21.6 V)	- 111 dBm at 8.8% PER	- 111 dBm at 16.3% PER
<i>Tmax</i> (+55 °C)	<i>Vmax</i> (31.2 V)	- 111 dBm at 16.2% PER	- 111 dBm at 9.6% PER
Measurement uncertainty		±1.2 dB	
Limits		≤ - 107 dBm with a PER of 20% under normal test conditions, ≤ - 101 dBm with a PER of 20% under extreme test conditions,	

Test equipment used: (Item numbers)	2, 13, 19, 20, 21, 29
-------------------------------------	-----------------------

2.5.2 15.3.2 Sensitivity - 12.5 kHz Operation

Date of test: Tnom. 19 August 2003 Ambient temp.: 29 °C R.H.: 44 %
 Date of test: Tmin. 22 August 2003 Ambient temp.: 26 °C R.H.: 42 %
 Date of test: Tmax. 25 August 2003 Ambient temp.: 25 °C R.H.: 46 %

TEST CONDITIONS		SENSITIVITY LEVEL	
		Fn: 157.4125 MHz	Fn: 160.6375 MHz
Temperature	Voltage	RF level (dBm)	RF level (dBm)
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	- 105 dBm at 11.3% PER	- 105 dBm at 10.5% PER
<i>Tmin</i> (-15 °C)	<i>Vmin</i> (21.6 V)	- 104 dBm at 11.2% PER	- 104 dBm at 6.0% PER
<i>Tmax</i> (+55 °C)	<i>Vmax</i> (31.2 V)	-104 dBm at 19.7% PER	- 104 dBm at 16.0% PER
Measurement uncertainty		±1.2 dB	
Limits		≤ - 98 dBm with a PER of 20% under normal test conditions, ≤ - 92 dBm with a PER of 20% under extreme test conditions,	

Test equipment used: (Item numbers)	2, 13, 19, 20, 21, 29
-------------------------------------	-----------------------

2.5.3 15.3.3 Error Behaviour at High Input Levels

Date of test: Tnom. 19 August 2003

Ambient temp.: 29 °C

R.H.: 44 %

TEST CONDITIONS		Packet Error Rate (%)	
		Fn = 156.025 MHz (CH 60)	
Standard Test Signal		as described in clause 15.3.1	
Input signal (dBm)		-77	-7
Temperature	Voltage		
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	0	0
Measurement uncertainty		±1.2 dB (signal level)	
Limits		Difference < 1%	

Test equipment used: (Item numbers)	2, 13, 19, 20, 21, 29
-------------------------------------	-----------------------

2.5.4 15.3.4 Co-channel Rejection - 25 kHz Operation

Date of test: Tnom. 20 August 2003

Ambient temp.: 25 °C

R.H.: 40 %

TEST CONDITIONS		CO-CHANNEL REJECTION RATIO (dB)	
Temperature	Voltage	Fn = 159.025 MHz	
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	Fn +3 kHz	-10 dB at 12.6% PER
		Fn	-10 dB at 18.6% PER
		Fn –3 kHz	-10 dB at 9.0% PER
Measurement uncertainty		±1.1 dB	
Limits		Between -10.0 dB and 0 dB. Any positive value is also acceptable.	

Remark: Unwanted signal modulated with GMSK test signal #2, 2.4 kHz deviation, BT 0.4

TEST CONDITIONS		CO-CHANNEL REJECTION RATIO (dB)	
Temperature	Voltage	Fn = 159.025 MHz	
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	Fn +3 kHz	-10 dB at 8.3% PER
		Fn	-9 dB at 5.5% PER
		Fn –3 kHz	-10dB at 13.1% PER
Measurement uncertainty		±1.1 dB	
Limits		Between -10.0 dB and 0 dB. Any positive value is also acceptable.	

Remark: Unwanted signal modulated with 400Hz / 3kHz deviation

Test equipment used: (Item numbers)	2, 12, 13, 17, 19, 20, 21, 29
-------------------------------------	-------------------------------

2.5.5 15.3.5 Co-channel Rejection - 12.5 kHz Operation

Date of test: Tnom. 20 August 2003

Ambient temp.: 25 °C

R.H.: 40 %

TEST CONDITIONS		CO-CHANNEL REJECTION RATIO (dB)	
Temperature	Voltage	Fn = 159.025 MHz	
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	Fn +1.5 kHz	-17 dB at 10.0% PER
		Fn	-17 dB at 15.8% PER
		Fn –1.5 kHz	-17 dB at 13.8% PER
Measurement uncertainty		±1.1 dB	
Limits		Between -18.0 dB and 0 dB. Any positive value is also acceptable.	

Remark: Unwanted signal modulated with GFSK, test signal #2, 1.2 kHz deviation, BT 0.3

TEST CONDITIONS		CO-CHANNEL REJECTION RATIO (dB)	
Temperature	Voltage	Fn = 159.025 MHz	
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	Fn +1.5 kHz	-18 dB at 14.6% PER
		Fn	-17 dB at 2.5% PER
		Fn –1.5 kHz	-18 dB at 15.2% PER
Measurement uncertainty		±1.1 dB	
Limits		Between -18.0 dB and 0 dB. Any positive value is also acceptable.	

Remark: Unwanted signal modulated with 400Hz / 1.5 kHz deviation

Test equipment used: (Item numbers)	2, 12, 13, 17, 19, 20, 21, 29
-------------------------------------	-------------------------------

2.5.6 15.3.6 Adjacent Channel selectivity - 25 kHz Operation

Date of test: Tnom. 20 August 2003 Ambient temp.: 26 °C R.H.: 41 %
 Date of test: Tmin. 22 August 2003 Ambient temp.: 26 °C R.H.: 42 %
 Date of test: Tmax. 25 August 2003 Ambient temp.: 25 °C R.H.: 46 %

TEST CONDITIONS		ADJACENT CHANNEL SELECTIVITY (dB)	
		Fn: 159.025 MHz	
Temp.	Voltage	Unwanted signal – 25 kHz	Unwanted signal + 25 kHz
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0V)	74 dB at 13.1% PER	73dB at 9.2% PER
<i>Tmin</i> (-15 °C)	<i>Vmin</i> (21.6 V)	70 dB at 19.9% PER	70 dB at 19.7% PER
<i>Tmax</i> (+55 °C)	<i>Vmax</i> (31.2 V)	73 dB at 14.7% PER	73 dB at 16.5% PER
Measurement uncertainty		+2.3 / -2.8 dB	
Limits		> 70.0 dB @ ≤20% PER under normal test conditions, > 60.0 dB @ ≤20% PER under extreme test conditions.	

Test equipment used: (Item numbers)	2, 12, 13, 17, 19, 20, 21, 29
-------------------------------------	-------------------------------

2.5.7 15.3.7 Adjacent Channel selectivity - 12.5 kHz Operation

Date of test: Tnom. 20 August 2003 Ambient temp.: 26 °C R.H.: 41 %
 Date of test: Tmin. 22 August 2003 Ambient temp.: 26 °C R.H.: 42 %
 Date of test: Tmax. 25 August 2003 Ambient temp.: 25 °C R.H.: 46 %

TEST CONDITIONS		ADJACENT CHANNEL SELECTIVITY (dB)	
		Fn = 159.025 MHz	
Temp.	Voltage	Unwanted signal – 12.5 kHz	Unwanted signal + 12.5 kHz
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0V)	55 dB at 20.0% PER	54 dB at 13.3% PER
<i>Tmin</i> (-15 °C)	<i>Vmin</i> (21.6 V)	52 dB at 14.4% PER	52 dB at 14.3% PER
<i>Tmax</i> (+55 °C)	<i>Vmax</i> (31.2 V)	52 dB at 16.2% PER	52 dB at 17.7% PER
Measurement uncertainty		+2.3 / -2.8 dB	
Limits		> 50.0 dB @ ≤20% PER under normal test conditions, > 50.0 dB @ ≤20% PER under extreme test conditions.	

Test equipment used: (Item numbers)	2, 12, 13, 17, 19, 20, 21, 29
-------------------------------------	-------------------------------

2.5.8 15.3.8 Spurious Response Rejection at 156.025 MHz

Date of test: Tnom. 21 August 2003 Ambient temp.: 24 °C R.H.: 42 %

Tested frequency : 156.025 MHz

Funw (MHz)	SPURIOUS RESPONSE REJECTION RATIO (dB)
*	--
*	--
*	--
Measurement uncertainty: +2.4 / -2.9 dB	
Limit: 70 dB	

Funw = unwanted frequency

* : Rejection on all spurious responses was >80 dB.

- (1) Frequency of the Receiver (f_R): 156.025 MHz
- (2) Frequency of the local oscillator signal applied to the 1st mixer of the Receiver (f_{LO}): 134.625 MHz
- (3) The frequency of the second LO = 20.945 MHz.
- (4) Intermediate frequencies (f_{I1} , f_{I2} , f_{I3}): f_{I1} = 21.4 MHz, f_{I2} = 455 kHz, f_{I3} = --
- (5) Switching range of the Receiver (sr): 156.025 to 162.025 MHz

2.5.9 15.3.8 Spurious Response Rejection at 162.025 MHz

Date of test: Tnom. 21 August 2003 Ambient temp.: 24 °C R.H.: 42 %

Tested frequency : 162.025 MHz

Funw (MHz)	SPURIOUS RESPONSE REJECTION RATIO (dB)
*	--
*	--
*	--
Measurement uncertainty: +2.4 / -2.9 dB	
Limit: 70 dB	

Funw = unwanted frequency

* : Rejection on all spurious responses was >80 dB.

- (1) Frequency of the Receiver (f_R): 162.025 MHz
- (2) Frequency of the local oscillator signal applied to the 1st mixer of the Receiver (f_{LO}): 140.625 MHz
- (3) The frequency of the second LO = 20.945 MHz.
- (4) Intermediate frequencies (f_{I1} , f_{I2} , f_{I3}): f_{I1} = 21.4 MHz, f_{I2} = 455 kHz, f_{I3} = --
- (5) Switching range of the Receiver (sr): 156.025 to 162.025 MHz

Test equipment used: (Item numbers)	2, 12, 13, 17, 19, 20, 21, 29
-------------------------------------	-------------------------------

2.5.10 15.3.9 Intermodulation response rejection and blocking

Date of test: Tnom. 21 August 2003 Ambient temp.: 24 °C R.H.: 42 %

TEST CONDITIONS		PACKET ERROR RATE (%)	
		Fn = 156.025 MHz	Fn = 162.025 MHz
Temperature	Voltage	Test #1	Test #2
T_{nom} (+15 – 35 °C)	V_{nom} (24.0 V)	16.9%	12.5%
Measurement uncertainty		+2.4 / -2.8 dB (signal levels)	
Limits		≤20% PER	

Remark: test configuration

	Generator A wanted –101 dbm	Generator B unwanted –27 dbm unmodulated	Generator C unwanted –27 dbm Mod. 400Hz / 3 kHz	Generator D unwanted –15 dbm unmodulated
Test #1	156.025MHz	Fn + 500 kHz (156.525 MHz)	Fn + 1000 kHz (157.025 MHz)	Fn + 5.725 (161.750 MHz)
Test #2	162.025MHz	Fn - 500 kHz (162.025 MHz)	Fn - 1000 kHz (161.525 MHz)	Fn - 5.725 (156.300 MHz)

Test equipment used: (Item numbers)	2, 12, 13, 14, 15, 16, 17, 19, 20, 21, 29
-------------------------------------	---

2.5.11 15.3.10 Transmit to receive switching time

Date of test: Tnom. 23 October 2003

Ambient temp.: 20 °C

R.H.: 39 %

TEST CONDITIONS	TEST RESULTS	
Receive frequency	RX-A 161.975 MHz	RX-B 162.025 MHz
Received packets	944	944
Packet Error Rate	5.6 %	5.6 %
Result	Pass	Pass
Measurement uncertainty	±1.2 dB (applied RF levels)	
Limits	PER 20% or better @ -107 dBm	

Test set-up:

The test was carried out by connecting 2 signal generators via combiner and attenuators to the VHF antenna connector. The signal generators were modulated by the GMSK packet generator box which was triggered at the TX slot start signal from the transponder under test. In the next slot after the trigger signal the packet contents was send to the radio on both channels. The presentation interface was monitored for VDO and VDM messages. 1000 packets were sent and a calculation was performed upon the correct received packets by a special program which received the presentation interface data via a RS422-RS232 converter.

The test was carried out under normal test conditions.

Test equipment used: (Item numbers)	11, 12, 14, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40
-------------------------------------	--

Screen dump test software

EN 61993-2 Transmit to Receive test software V1.0

File About

telefication

EN 61993-2 Transmit to Receive Test

Date: 23-10-03 Time: 15:28:52

```

$AIALR,,30,A,V.No valid COG information*3F
$AIALR,,32,A,V.Heading lost/invalid*5F
IAIVDM,1,1,,B,13Pv<8PP?w<tSF04Q@>4?wp10I,0*05
IAIVDM,1,1,,A,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*26
IAIVDM,1,1,,B,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*25
IAIVDM,1,1,,A,13Pv<8PP?w<tSF04Q@>4?wp10I,0*06
IAIVDM,1,1,,A,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*26
IAIVDM,1,1,,B,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*25
IAIVDM,1,1,,B,13Pv<8PP?w<tSF04Q@>4?wp1w3h,0*64
IAIVDM,1,1,,A,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*26
IAIVDM,1,1,,B,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*25
$AIALR,,35,A,V.No valid ROT information*38
$AIALR,,25,A,V.External EPFS lost*52
$AIALR,,26,A,V.No sensor position in use*22
$AIALR,,29,A,V.No valid SOG information*27
$AIALR,,30,A,V.No valid COG information*3F
$AIALR,,32,A,V.Heading lost/invalid*5F
IAIVDM,1,1,,A,13Pv<8PP?w<tSF04Q@>4?wp1*6L,0*71
IAIVDM,1,1,,A,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*26
IAIVDM,1,1,,B,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*25
  
```

Received frame

IAIVDM,1,1,,B,bbbbbbbbbbbbbbbbbbbbbbbbbbbbbb,0*25

Transmissions counter 1000	Receiver A packet counter 944	Receiver B packet counter 944	% ready of 1000 	Program End
Characters in frame 98	Receiver A PER 5.6	Receiver B PER 5.6		
Received characters 48	Receiver A Result Pass	Receiver B Result Pass		

Reset counters

2.6 15.4 DSC Receiver

2.6.1 15.4.1 Maximum sensitivity

Date of test: Tnom. 18 August 2003 Ambient temp.: 28 °C R.H.: 42 %
 Date of test: Tmin. 22 August 2003 Ambient temp.: 26 °C R.H.: 42 %
 Date of test: Tmax. 25 August 2003 Ambient temp.: 25 °C R.H.: 46 %

TEST CONDITIONS		SENSITIVITY LEVEL (dBm)		
		Fn: 156.525 MHz (CH 70)		
Temperature	Voltage	Fn	Fn - 1.5 kHz	Fn + 1.5 kHz
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	- 114 dBm at 0.2 % BER	- 114 dBm at 0.6 % BER	- 114 dBm at 1.0 % BER
<i>Tmin</i> (-15 °C)	<i>Vmin</i> (21.6 V)	- 114 dBm at 0.3 % BER	- 114 dBm at 0.6 % BER	- 114 dBm at 0.8 % BER
<i>Tmax</i> (+55 °C)	<i>Vmax</i> (31.2 V)	- 114 dBm at 0.8 % BER	- 114 dBm at 0.5 % BER	- 112 dBm at 0.5 % BER
Measurement uncertainty		±1.2 dB		
Limits		≤ - 107 dBm with a BER of 1% under normal test conditions, ≤ - 101 dBm with a BER of 1% under extreme test conditions,		

Test equipment used: (Item numbers)	2, 13, 19, 20, 21, 29
-------------------------------------	-----------------------

2.6.2 15.4.2 Error Behaviour at High Input Levels

Date of test: Tnom. 18 August 2003 Ambient temp.: 28 °C R.H.: 42 %

CHANNEL 70: Fn: 156.525 MHz

TEST CONDITIONS		BIT ERROR RATE (%)
Temperature	Voltage	RF input -7 dBm / Standard Test Signal #1
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	0.0
Measurement uncertainty		±1.2 dB (signal level)
Limits		BER <1%

Test equipment used: (Item numbers)	2, 13, 19, 20, 21, 29
-------------------------------------	-----------------------

2.6.3 15.4.3 Co-Channel Rejection

Date of test: Tnom. 18 August 2003 Ambient temp.: 28 °C R.H.: 42 %

CHANNEL 70: Fn: 156.525 MHz

TEST CONDITIONS		CO-CHANNEL REJECTION RATIO (dB)	
		Standard Test Signal #1/ -104 dBm	
		Unwanted signal (Fn: 156.525 MHz)	
Temperature	Voltage	Unwanted signal	
<i>Tnom</i> (+15 – 35 °C)	<i>Vnom</i> (24.0 V)	Fn + 3 kHz	- 5 dB at 0.5% BER
		Fn	- 7 dB at 0.8 % BER
		Fn - 3 kHz	- 5 dB at 0.3 % BER
Measurement uncertainty		±1.1 dB	
Limits		Between -10.0 dB and 0 dB @ BER < 1%	

Test equipment used: (Item numbers)	2, 12, 13, 17, 19, 20, 21, 29
-------------------------------------	-------------------------------

2.6.4 15.4.4 Adjacent Channel selectivity

Date of test: Tnom. 18 August 2003 Ambient temp.: 28 °C R.H.: 42 %
 Date of test: Tmin. 22 August 2003 Ambient temp.: 26 °C R.H.: 42 %
 Date of test: Tmax. 25 August 2003 Ambient temp.: 25 °C R.H.: 46 %

TEST CONDITIONS		ADJACENT CHANNEL SELECTIVITY (dB)	
		Fn = 156.525 MHz(CH70)	
Temp.	Voltage	Funw =Fn - 25 kHz	Funw =Fn + 25 kHz
Tnom (+15 – 35 °C)	Vnom (24.0V)	73 dB at 0.2% BER	73 dB at 0.2% BER
Tmin (-15 °C)	Vmin (21.6 V)	69 dB at 0.2% BER	69 dB at 0.5% BER
Tmax (+55 °C)	Vmax (31.2 V)	74 dB at 0.2% BER	74 dB at 0.4% BER
Measurement uncertainty		+2.3 / -2.8 dB	
Limits		≥ 70.0 dB @ BER <1% under normal test conditions, ≥ 60.0 dB @ BER <1% under extreme test conditions.	

Funw = unwanted frequency modulated with 400Hz / 3 kHz deviation

Test equipment used: (Item numbers)	2, 12, 13, 17, 19, 20, 21, 29
-------------------------------------	-------------------------------

2.6.5 15.4.5 Spurious Response Rejection

Date of test: Tnom. 22 August 2003 Ambient temp.: 25 °C R.H.: 42 %

CHANNEL 70: Fn: 156.525 MHz

Funw (MHz)	SPURIOUS RESPONSE REJECTION RATIO (dB)
--	--
*	--
--	--
Measurement uncertainty	+2.4 / -2.9 dB
Limit	≥ 70 dB @ BER < 1%

Funw = unwanted frequency

* : Rejection on all spurious responses was > 80 dB.

- (1) Frequency of the Receiver (f_R): 156.525 MHz
- (2) Frequency of the local oscillator signal applied to the 1st mixer of the Receiver (f_{LO}): 135.125 MHz
- (3) Intermediate frequencies (f_{I1}, f_{I2}, f_{I3}): $f_{I1} = 21.4$ MHz, $f_{I2} = 455$ kHz, $f_{I3} = --$
- (4) Switching range of the Receiver (sr): 156.025 to 162.025 MHz

Test equipment used: (Item numbers)	2, 12, 13, 17, 19, 20, 21, 29
-------------------------------------	-------------------------------

2.6.6 15.4.6 Intermodulation response Rejection

Date of test: Tnom. 22 August 2003 Ambient temp.: 25 °C R.H.: 42 %

CHANNEL 70: Fn: 156.525 MHz

TEST CONDITIONS		Intermodulation response rejection ratio (dB)	
Temperature	Voltage	Test #1	Test #2
<i>Tnom</i> (+20 °C)	<i>Vnom</i> (24.0 V)	65 dB at 0% BER	65 dB at 0% BER
Measurement uncertainty		+2.4 / 2.8 dB	
Limits		65.0 dB at BER < 1%	

Remark: test configuration

	Generator A wanted –104 dbm	Generator B unwanted –39 dbm unmodulated	Generator C unwanted –39 dbm Mod. 400Hz / 3 kHz
Test #1	156.525MHz (Fn)	Fn + 50 kHz	Fn + 100 kHz
Test #2	156.525MHz (Fn)	Fn - 50 kHz	Fn - 100 kHz

Test equipment used: (Item numbers)	2, 12, 13, 14, 15, 16, 19, 20, 21, 29
-------------------------------------	---------------------------------------

2.6.7 15.4.7 Blocking or Desensitisation

Date of test: Tnom. 22 August 2003 Ambient temp.: 25 °C R.H.: 42 %

CHANNEL 70: Fn: 156.525 MHz

Unwanted frequency (MHz)	BER (%)
Fn - 10	0.0 @ 84 dB
Fn - 9	0.0 @ 84 dB
Fn - 8	0.0 @ 84 dB
Fn - 7	0.0 @ 84 dB
Fn - 6	0.0 @ 84 dB
Fn - 5	0.0 @ 84 dB
Fn - 4	0.0 @ 84 dB
Fn - 3	0.0 @ 84 dB
Fn - 2	0.0 @ 84 dB
Fn - 1	0.0 @ 84 dB
Fn + 1	0.0 @ 84 dB
Fn + 2	0.0 @ 84 dB
Fn + 3	0.0 @ 84 dB
Fn + 4	0.0 @ 84 dB
Fn + 5	0.0 @ 84 dB
Fn + 6	0.0 @ 84 dB
Fn + 7	0.0 @ 84 dB
Fn + 8	0.0 @ 84 dB
Fn + 9	0.0 @ 84 dB
Fn + 10	0.0 @ 84 dB
Measurement uncertainty	+2.3 / -2.8 dB
Limit	≥ 84 dB @ BER < 1% except at spurious response frequencies

Test equipment used: (Item numbers)	2, 12, 13, 14, 15, 19, 20, 21, 29
-------------------------------------	-----------------------------------

2.7 15.5 Conducted Spurious Emissions conveyed to the antenna

2.7.1 15.5.1 Spurious Emissions from the Receiver

Date of test: Tnom. 20 August 2003 Ambient temp.: 25 °C R.H.: 41 %

TDMA Receivers and DSC Receiver

 $F_n = 156.025, 162.025 \text{ MHz and } 156.525 \text{ MHz}$

SPURIOUS EMISSIONS POWER LEVEL	
Spurious frequency (MHz)	Power level (dBm)
*	All emissions more than 20 dB below the limit
*	--
Measurement uncertainty	+1.7 / -1.9 dB
Limit (150 kHz - 2 GHz)	$\leq -57 \text{ dBm (2 nW) for } 150 \text{ kHz} - 1 \text{ GHz,}$ $\leq -47 \text{ dBm (20 nW) for } 1 \text{ GHz} - 2 \text{ GHz.}$

Test equipment used: (Item numbers)	1, 2, 20
-------------------------------------	----------

2.7.2 15.5.2 Spurious Emissions from the Transmitter at 156.025 MHz

Date of test: Tnom. 20 August 2003 Ambient temp.: 25 °C R.H.: 41 %

Fn = 156.025 at High and Low power

SPURIOUS EMISSIONS POWER LEVEL	
Spurious frequency (MHz)	Power level (dBm)
150.130	-44.2
162.110	-43.7
312.050	-41.3
468.075	-44.2
1092.175	-39.8
1248.200	-42.8
*	All other frequencies more than 10 dB below the limit
Measurement uncertainty	+1.7 / -1.9 dB
Limit (150 kHz - 2 GHz)	≤ -36 dBm (0.25 μ W) for 150 kHz - 1 GHz, ≤ -30 dBm (1 μ W) for 1 GHz - 2 GHz.


Remark: Test was carried out on high and low power.

Highest emission levels were measured when the transmitter was on high power


Test equipment used: (Item numbers)	1, 2, 6, 10, 20, 26, 28
-------------------------------------	-------------------------

2.7.2.1 15.5.2 Spurious Emissions plot at 156.025 MHz

Harmonic emissions (high power, suppressed carrier)

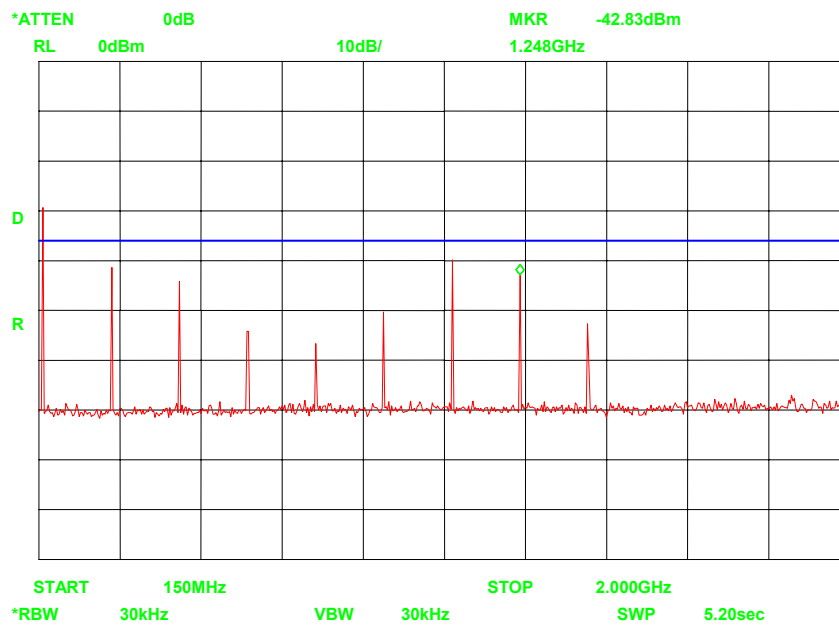

Close to carrier emissions(high power, suppressed carrier)

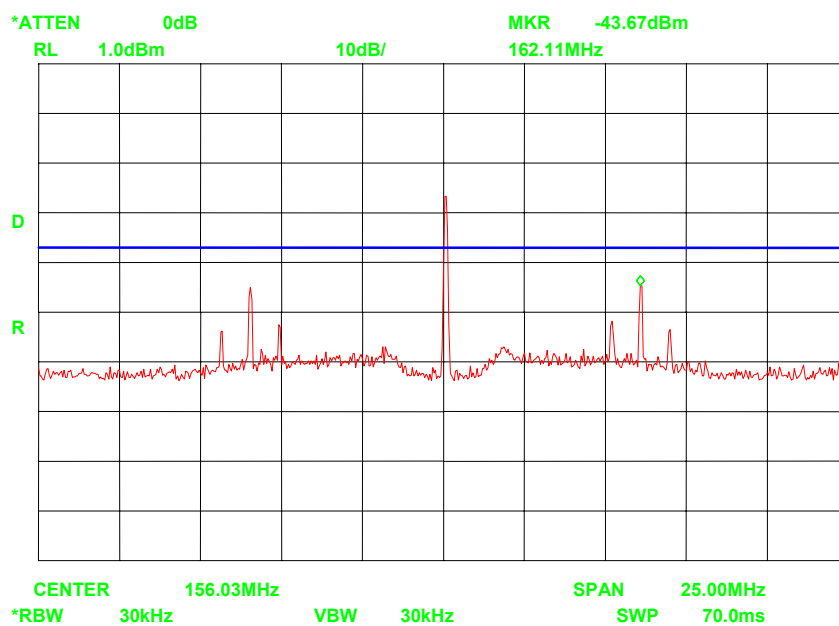

2.7.3 15.5.2 Spurious Emissions from the Transmitter at 162.025 MHz

Date of test: Tnom. 20 August 2003 Ambient temp.: 25 °C R.H.: 41 %

Fn = 162.025 at High and Low power

SPURIOUS EMISSIONS POWER LEVEL	
Spurious frequency (MHz)	Power level (dBm)
324.050	-39.7
486.075	-46.2
1134.175	-45.8
*	all other frequencies more then 10 dB below the limit
Measurement uncertainty	+1.7 / -1.9 dB
Limit (150 kHz - 2 GHz)	≤ -36 dBm (0.25 μ W) for 150 kHz - 1 GHz, ≤ -30 dBm (1 μ W) for 1 GHz - 2 GHz.


Remark: Test was carried out on high and low power.

Highest emission levels were measured when the transmitter was on high power


Test equipment used: (Item numbers)	1, 2, 6, 10, 20, 26, 28
-------------------------------------	-------------------------

2.7.3.1 15.5.2 Spurious Emissions from the Transmitter at 162.025 MHz

Harmonic emissions(high power, suppressed carrier)

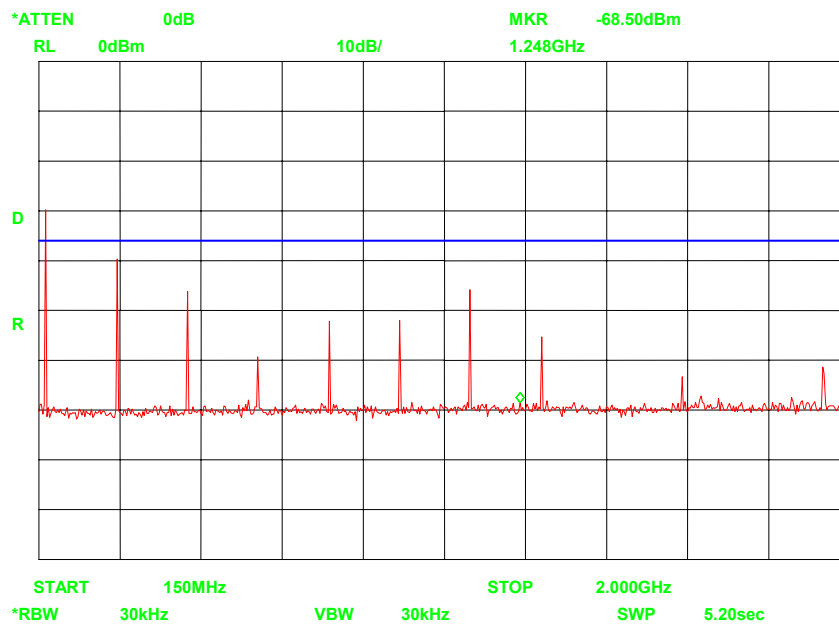

Close to carrier measurement(high power, suppressed carrier)

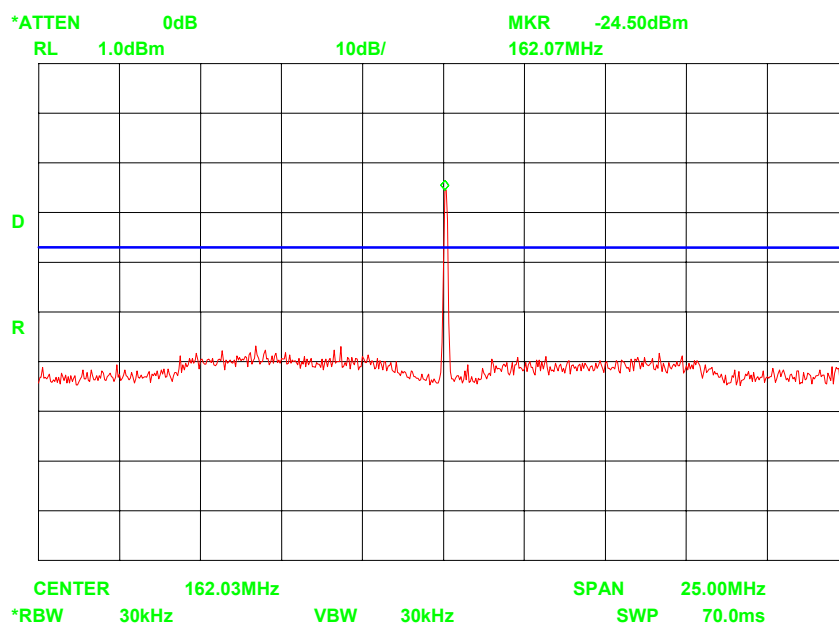

Used test equipment module

This module contains the total list of test equipment used.

Item	Description	Manufacturer	Model	Reference	Serial number
1	Spectrum analyser 20Hz – 26.5 GHz	HP	8563E	TE 00359	--
2	Power supply	Delta	SM3004	TE 00702	--
3	Power supply	Delta	E030-3	TE 00706	--
4	Power supply	Delta	E030-3	TE 00549	--
5	Environmental chamber	CTS	C-40/350	TE 00741	--
6	RF Attenuator 20 dB 100 Watt	Tenuline	8343-200	TE 00072	--
7	RF Attenuator 10 dB 1 Watt	HP	8491A	TE 00784	--
8	RF Attenuator 20 dB 1 Watt	HP	8491A	TE 00736	--
9	RF Attenuator 20 dB 100 Watt	Tenuline	8343-200	TE 00125	--
10	RF Attenuator 10 dB 25 Watt	Tenuline	8340-100	TE 00239	--
11	RF Attenuator 10 dB 25 Watt	Tenuline	8340-100	TE 00069	--
12	Signal generator	Marconi	2042	TE 00427	--
13	Radiocommunication Analyser	Marconi	2945A		--
14	Radiocommunication Analyser	Rohde & Schwartz	CMTA	TE 00221	--
15	Radiocommunication Analyser	Rohde & Schwartz	CMTA	TE 00035	--
16	RF Splitter	Minicircuits	ZSC-3-1	--	8931-03
17	RF Splitter	Minicircuits	ZSC-2-1W	--	9601-03
18	RS232-USB hub	Edgeport	50001231-01	--	--
19	Programmable modulation generator	Sine Qua Non	PMG1	--	010101-0016
20	Multimeter	HP	3478A	TE 00358	--
21	Oscilloscope	Tektronics	TDS860B	TE 00204	--
22	Thermometer	Keithley	870	TE 00853	
23	Frequency counter	Philips	PM6615	TE 00037	--
24	Transient detector 10 Mhz	JOZ	JOZ-1	TE 00800	--
25	FSK demodulator 1200 baud	Telefication	JOZ-2	TE 00800	--
26	Tuneable Notch filter	K&L	3TNF-100/200-N/N	TE 00588	--
27	Crystal detector	HP	8470A	TE 00422	--
28	RF diplexer	Procom	Pipx 225/330	--	220798242
29	GPS Time base receiver	HP	58503A	TE 00222	--
30	RF Mixer	HP	10514A	TE 00417	--

[illegible]

Photographs module

List of Photographs

Photograph 1: <i>MT-1 Enclosure</i>	55
Photograph 2: <i>MT-1 VDU display and control unit</i>	56
Photograph 3: <i>Display enclosure label</i>	57
Photograph 4: <i>MT-1 removed cover</i>	58
Photograph 5: <i>Label</i>	59
Photograph 6: <i>Control board</i>	60
Photograph 7: <i>RX processing board</i>	61
Photograph 8: <i>TDMA & DSC receiver</i>	62
Photograph 9: <i>Transmitter board</i>	63
Photograph 10: <i>GPS receiver</i>	64
Photograph 11: <i>Power supply</i>	65
Photograph 12: <i>Screw terminal board</i>	66
Photograph 13: <i>Display main PCB</i>	67
Photograph 14: <i>Display LCD module PCB</i>	68
Photograph 15: <i>Display enclosure rear side</i>	69
Photograph 16: <i>Internal view side-2</i>	70
Photograph 17: <i>Transmit to receive test setup</i>	71

Photograph 1: *MT-1 Enclosure*



Photograph 2: *MT-1 VDU display and control unit*



Photograph 3: *Display enclosure label*




Photograph 4: *MT-1 removed cover*




Photograph 5: *Label*




Photograph 6: *Control board*

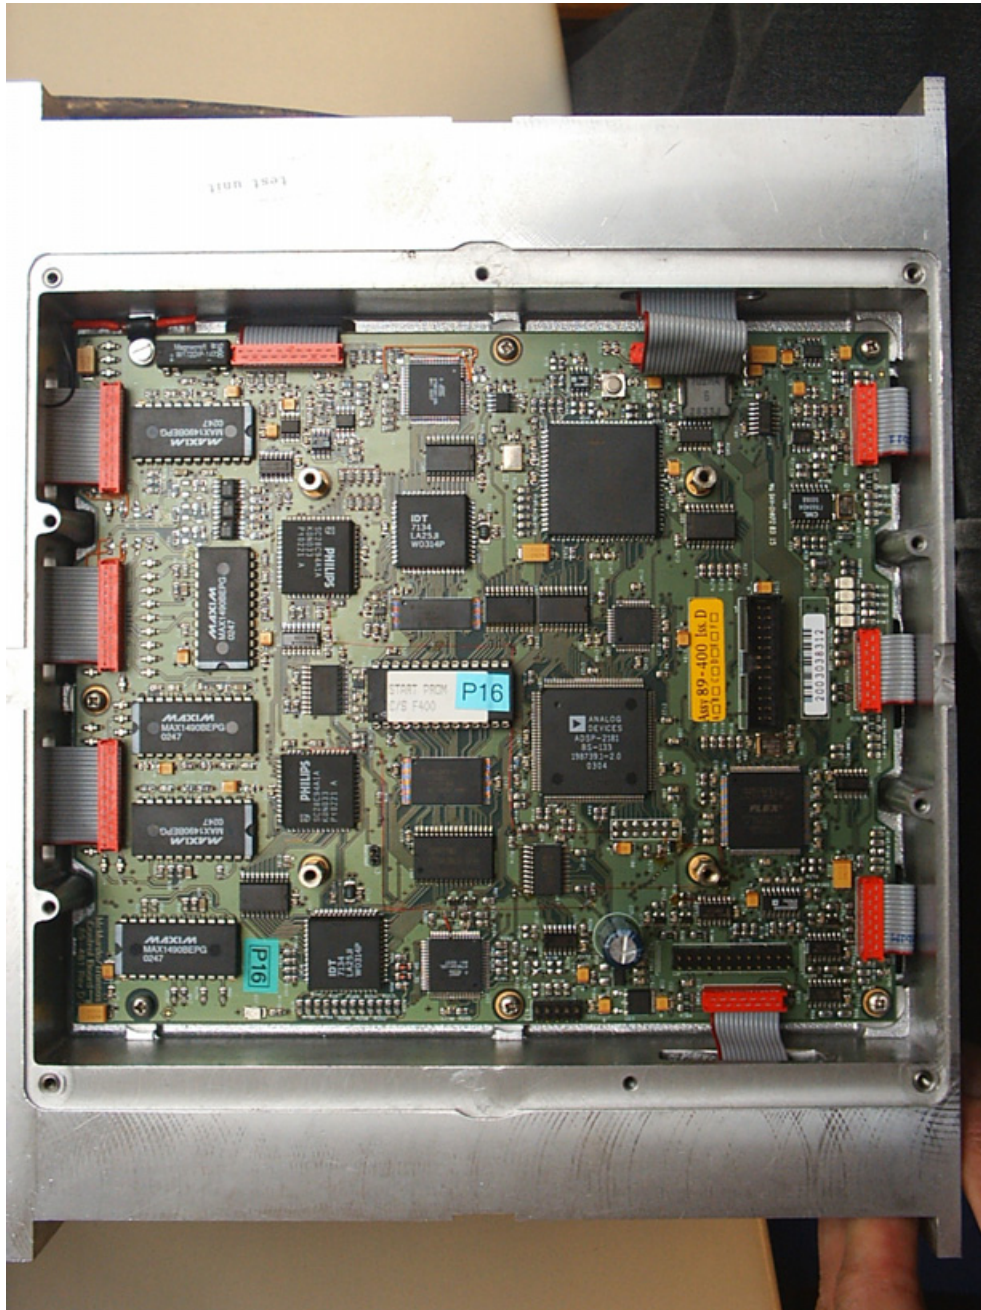


Photograph 7: *RX processing board*

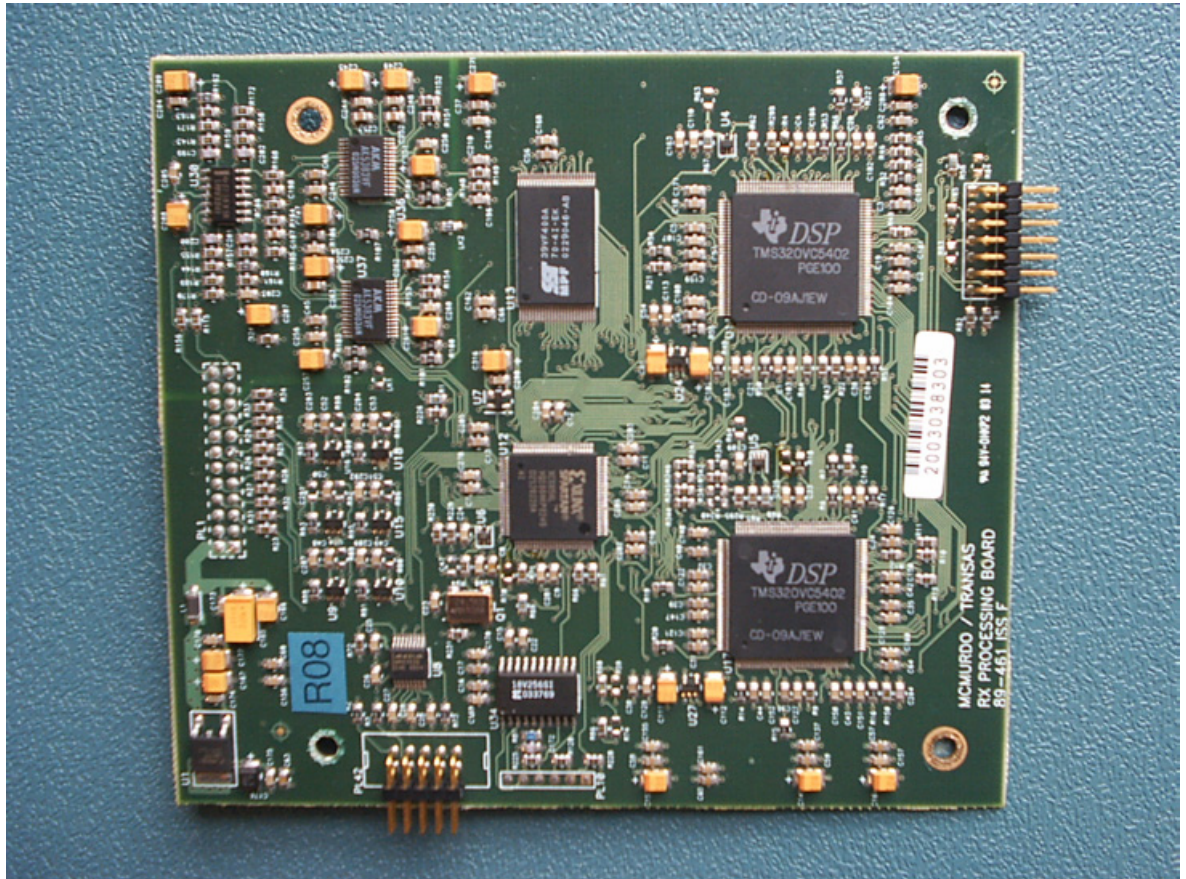

Photograph 8: *TDMA & DSC receiver*

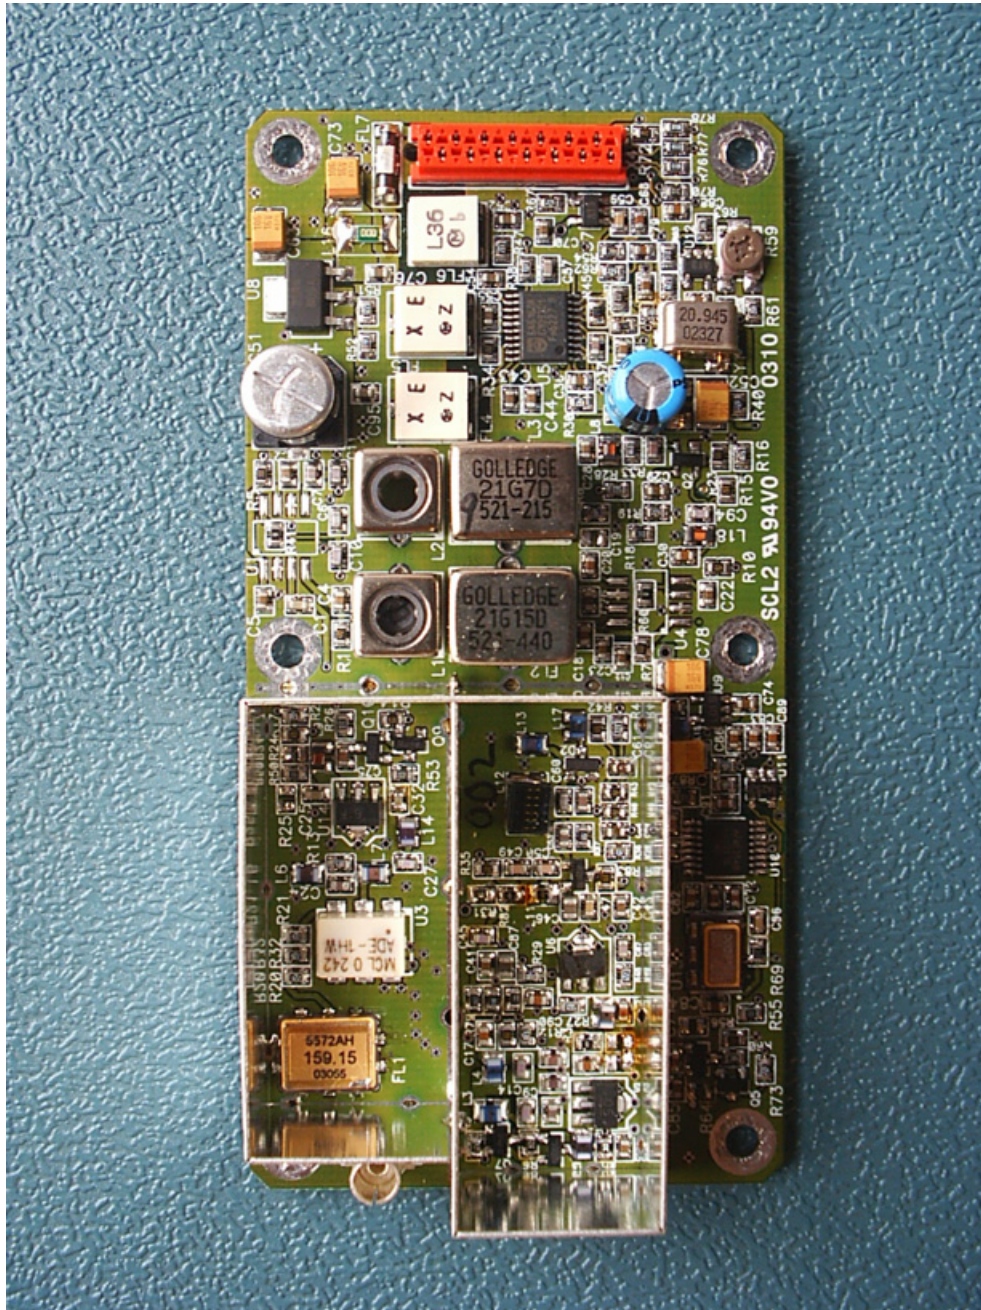

Photograph 9: *Transmitter board*

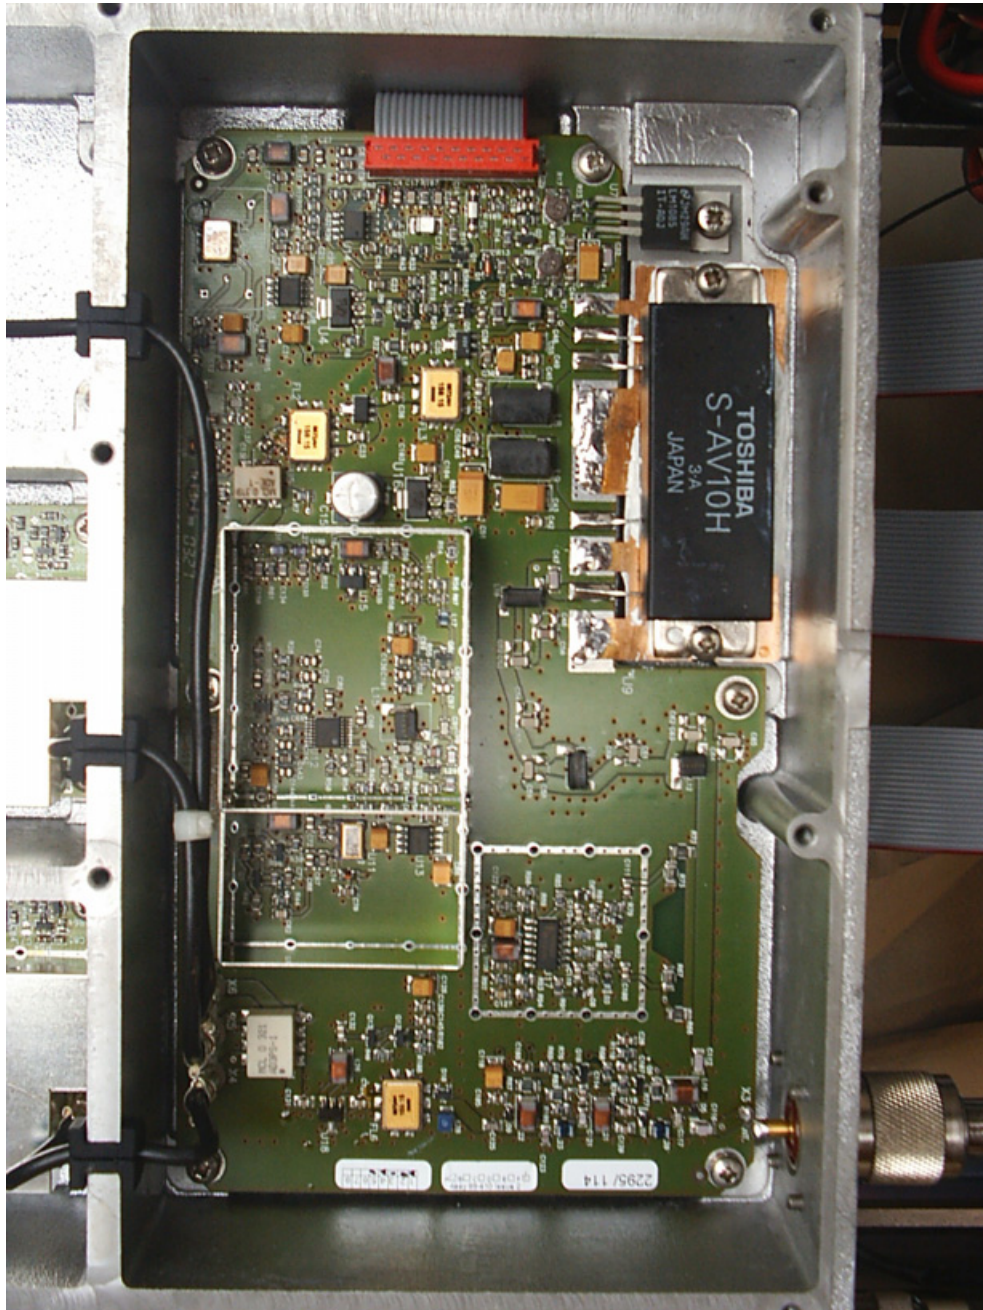

Photograph 10: *GPS receiver*

