

**McMurdo**  
**Smartfind S10 AIS Beacon**






operating instructions



deployment instructions






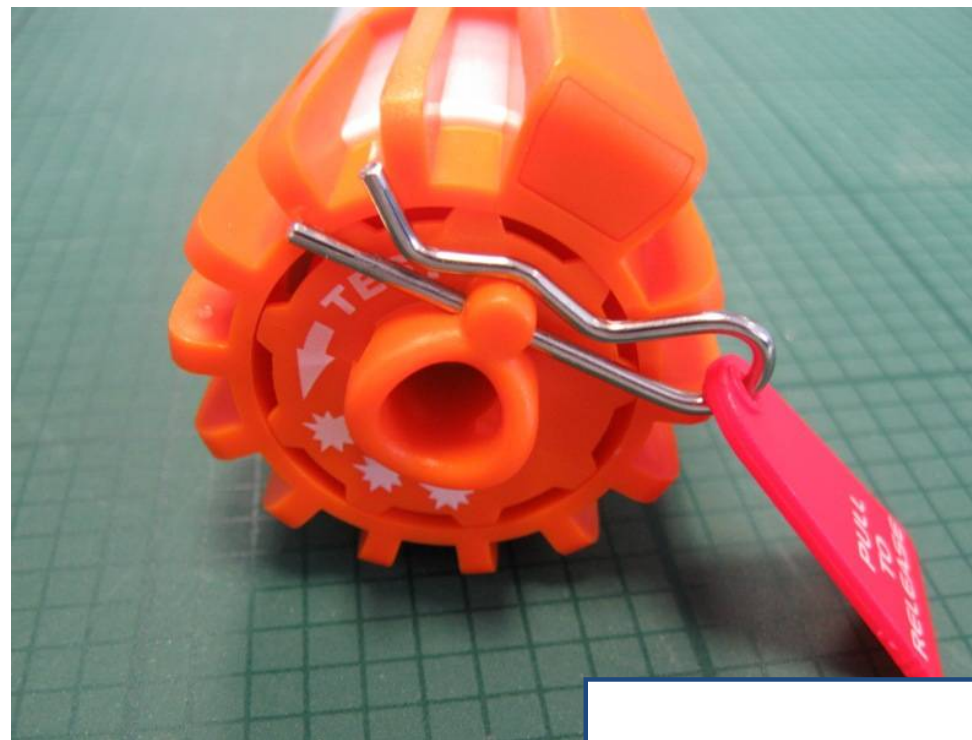

The Arming Clip must be removed before the Beacon can be activated - the arrangement shown is likely to be refined further for production

The Neoprene Belt Pouch is still at concept stage  
- the tip of the beacon remains exposed so that any inadvertent activation will be obvious due to the flashing of the indicator light

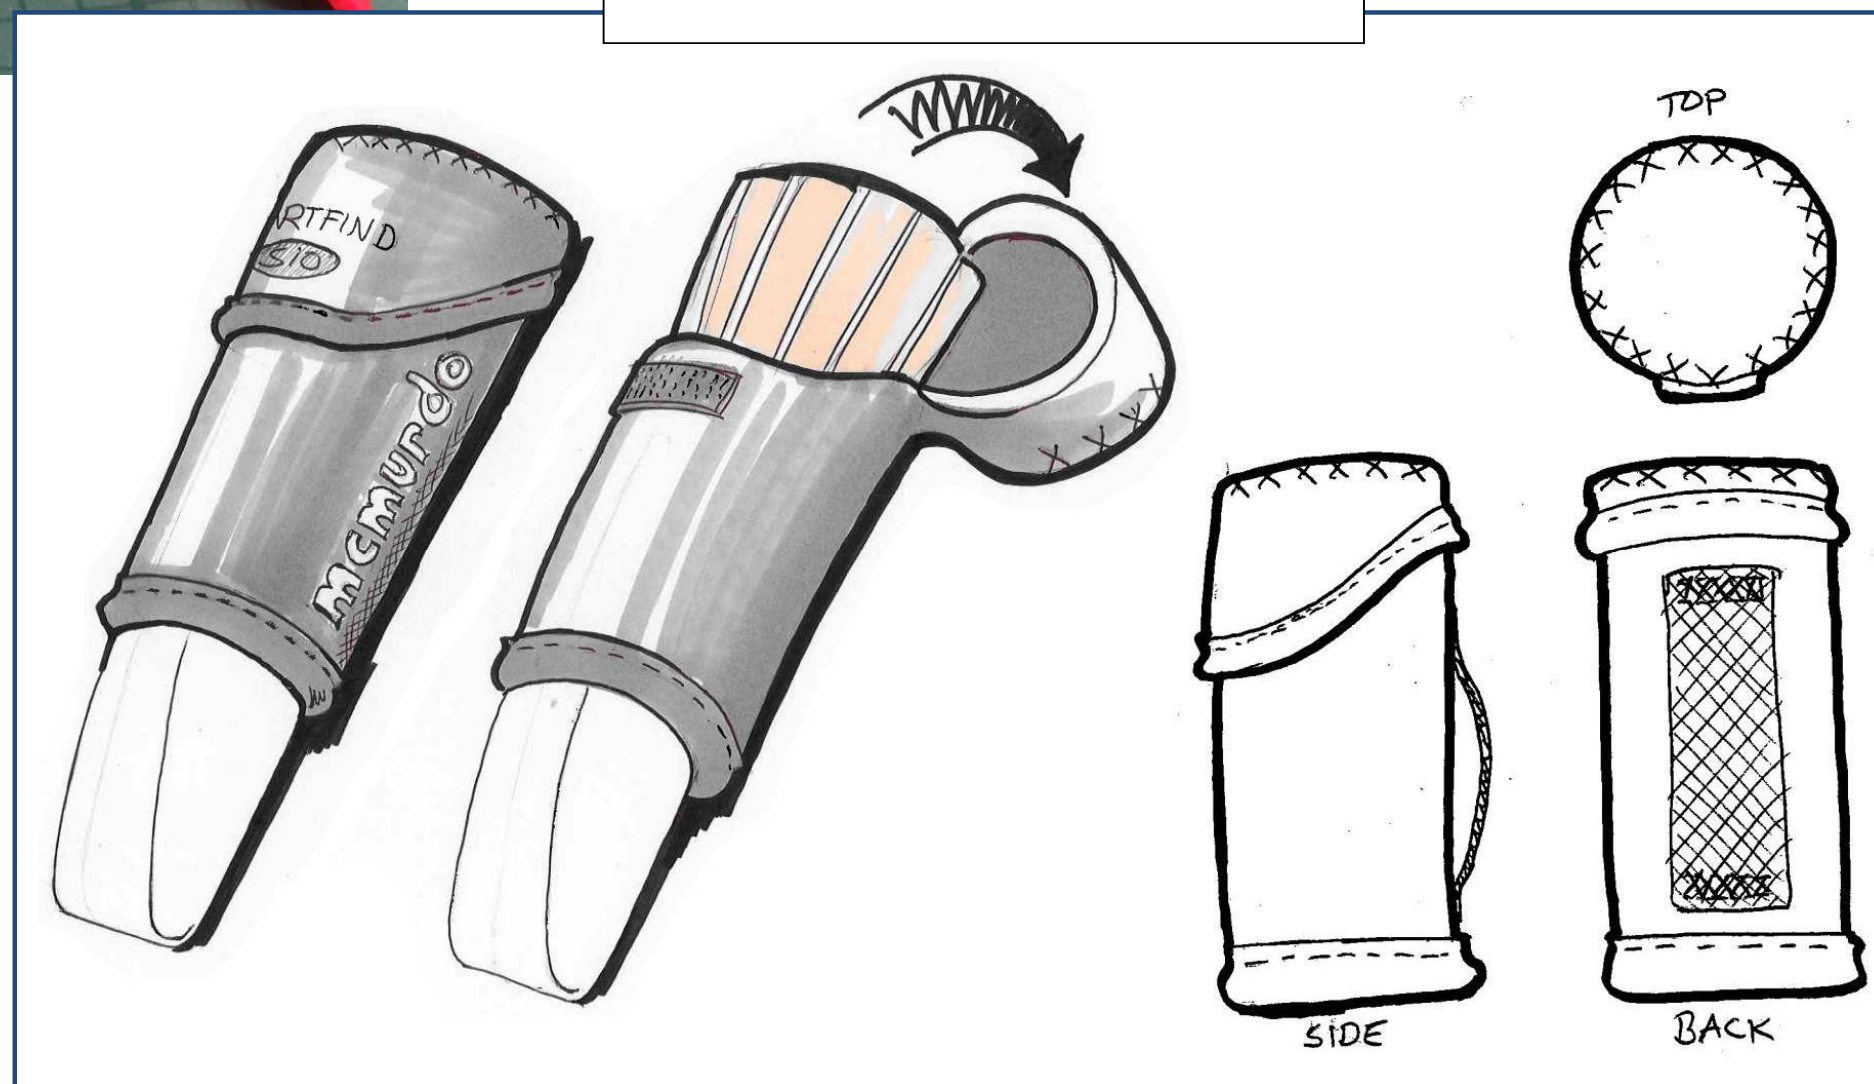

Programming Label

Product Label



ON / OFF control is effected by means of internal reed switches and a magnet mounted in the orange end-cap

