

**COMPLIANCE WORLDWIDE INC.
TEST REPORT 295-16R2**

In Accordance with the Requirements of
Federal Communications Commission 47 CFR Part 15.517, Subpart F
Technical Requirements for Indoor UWB Systems

Issued to


**Secure Care Products, LLC
39 Chenell Drive
Concord, NH 03301
(603) 233 0745**

For the
**ENVisionIT[®]
Low Cost Node**

FCC ID: KNK-LCNODE2


Report Issued on September 28, 2016
Revision R2 Issued on November 7, 2016

Tested By

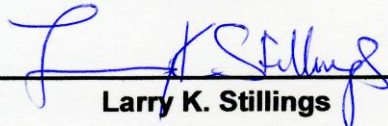

Larry K. Stillings

Reviewed By



Brian F. Breault

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1. Scope.....	3
2. Product Details	3
2.1. Manufacturer	3
2.2. Model Number.....	3
2.3. Serial Number	3
2.4. Description	3
2.5. Power Source.....	3
2.6. Hardware Revision.....	3
2.7. Software Revision	3
2.8. Modulation Type.....	3
2.9. Operating Frequency	3
2.10. EMC Modifications	3
3. Product Configuration	3
3.1. Operational Characteristics & Software	3
3.2. EUT Hardware	3
3.3. Support Equipment	3
3.4. Test Setup.....	4
4. Measurements Parameters	5
4.1. Measurement Equipment Used to Perform Test	5
4.2. Measurement & Equipment Setup	6
4.3. Measurement Procedure	6
4.4. Measurement Uncertainty.....	6
5. Measurement Summary	7
6. Measurement Data	8
6.1. Antenna Requirement	8
6.2. Operational Requirements	9
6.3. UWB Bandwidth	10
6.4. Radiated Emissions below 960 MHz	11
6.5. Radiated Emissions above 960 MHz	18
6.6. Radiated Emissions in the GPS Bands.....	26
6.7. RMS Power in a 1 MHz Bandwidth.....	29
6.8. Peak Emissions in a 50 MHz Bandwidth	31
6.9. Conducted Emissions Test Setup.....	33
6.10. Conducted Emissions Test Results	34
6.11. Public Exposure to Radio Frequency Energy Levels.....	36
7. Test Site Description	37
8. Test Images	38
8.1. Spurious and Harmonic Emissions - 30 kHz to 1 GHz Front.....	38
8.2. Spurious and Harmonic Emissions - 30 kHz to 30 MHz Rear	39
8.3. Spurious and Harmonic Emissions - 30 MHz to 1 GHz Rear	40
8.4. Spurious and Harmonic Emissions - Above 1 GHz Front.....	41
8.5. Spurious and Harmonic Emissions - 1 to 18 GHz Rear.....	42
8.6. Spurious and Harmonic Emissions - 18 to 40 GHz Side	43
8.7. Conducted Emissions (Front)	44
8.8. Conducted Emissions (Rear)	45

1. Scope

This test report certifies that the Secure Care Patient ENVisionIT Low Cost Node as tested, meets the FCC Part 15, Subpart F requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required. Revision R1 separates the 15.517 (c) data into two sections and improves the readability of the test report. Revision R1 revises the data in Section 6.5

2. Product Details

- 2.1. **Manufacturer:** Secure Care Products, LLC
- 2.2. **Model Number:** 612
- 2.3. **Serial Number:** Pre-production unit
- 2.4. **Description:** ENVisionIT[®] RTLS Low Cost node is an anchor mounted on a wall or ceiling used to determine patient, employee, and asset locations within a building.
- 2.5. **Power Source:** 12 VDC via External Wall Adapter (Solytech Enterprise Corp Model AD2412CW)
- 2.6. **Hardware Revision:** N/A
- 2.7. **Software Revision:** N/A
- 2.8. **Modulation Type:** Pulse Modulation, Frequency Hopping
- 2.9. **Operating Frequency:** 3.993 GHz Center Frequency Nominal (Channel 2 – 500 MHz BW)
- 2.10. **EMC Modifications:** None

3. Product Configuration

3.1 Operational Characteristics & Software

Hardware Setup:

Connect the Low Cost Node to the laptop via its USB/Cheetah adapter.

Using the decaranging software configure the device to transmit on Channel 2 using a 64M PRF with a data rate of 110 kbps in continuous frame mode.

Remove the USB/Cheetah adapter from the Low cost node.

3.2. EUT Hardware


Manufacturer	Model/Part # / Options	Serial Number	Input Volts	Freq (Hz)	Description/Function
Secure Care	612	Pre production	12.0	DC	Anchor Node
Gainspan	GS2011MIE	FCC ID: YOPGS2011MIE			2.4 GHz WiFi Module

3.3. Support Equipment

Device	Manufacturer	Model	Serial No.
Laptop with USB Cheetah SPI	Lenovo ThinkPad	T500	L3-B0371

3. Product Configuration (cont.)

3.4. Test Setup Diagram

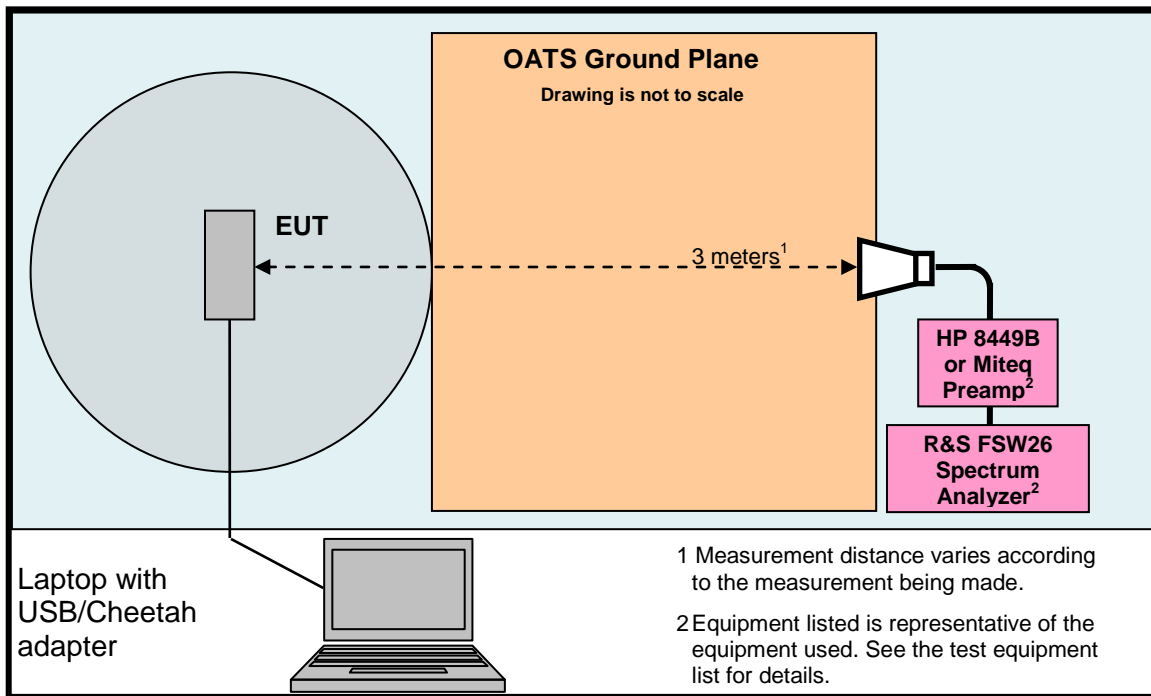

Cable Type	Shield	Length	From	To
Power Cable	No	2M	Low Cost Node	12 VDC Adapter / 120V 60 Hz
Ethernet Cable	No	2M	Node	Un-terminated

4. Measurements Parameters

4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Receiver 9 kHz to 7 GHz	Rohde & Schwarz	ESR7	101156	7/23/2017	2 Years
Spectrum Analyzer 9 kHz to 40 GHz	Rohde & Schwarz	FSV40	100899	7/23/2017	2 Years
Spectrum Analyzer 10 Hz to 40 GHz	Rohde & Schwarz	FSVR40	100909	7/23/2017	2 Years
Spectrum Analyzer 3 Hz to 26.5 GHz	Rohde & Schwarz	FSW26	102044	6/1/2017	1 Year
Comilog Antenna, 30 MHz to 2 GHz	Com-Power	AC-220	25509	5/12/2018	2 Years
Loop Antenna 9 kHz to 30 MHz	EMCO	6512	9309-1139	9/23/2016	2 Years
Preamplifier 100 MHz to 7 GHz	Miteq	AFS3-00100200-10-15P-4	988773	6/2/2017	1 Year
Preamplifier 100 MHz to 18 GHz	Miteq	AMF-7D-00101800-30-10P	1953081	10/15/2016	1 Year
Preamplifier 1 to 26.5 GHz	Hewlett Packard	8449B	3008A01323	7/22/2017	2 Years
Preamplifier 18 to 40 GHz	Avantek	AWT-40039	FM22038832	11/25/2016	1 Year
Horn Antenna 1 to 18 GHz	ETS-Lindgren	3117	00143292	2/22/2019	3 Years
Horn Antenna 18 to 40 GHz	Com Power	AH-840	101032	2/24/2018	2 Years
High Pass Filter 8 to 18 GHz	Micro-Tronics	HPM50107	G036	5/15/2017	1 Year
Barometer	Control Company	4195	Cal ID# 236	10/8/2017	2 Years

¹ ESR7 Firmware revision: V2.28,SP1 Date installed: 9/2/2016 Previous V2.26, installed 8/15/2014.
² FSV40 Firmware revision: V2.30 SP4, Date installed: 5/4/2016 Previous V2.30 SP1, installed 10/22/2014.
³ FSVR40 Firmware revision: V2.23, Date installed: 10/20/2014 Previous V1.63 SP1, installed 8/28/2013.
⁴ FSW26 Firmware revision: V2.50, Date installed: 9/12/2016 Previous V2.40, installed 5/4/2016.

4. Measurements Parameters (continued)

4.2. Measurement & Equipment Setup

Test Dates:	5/24/2016, 6/24/2016, 6/27/2016, 7/25/2016, 9/28/2016, 11/7/2016
Test Engineers:	Brian Breault, Larry Stillings
Normal Site Temperature (15 - 35°C):	21.6
Relative Humidity (20 -75%RH):	35
Frequency Range:	30 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 30 kHz to 150 kHz
	9 kHz – 150 kHz to 30 MHz
	120 kHz - 30 MHz to 1 GHz 1 MHz - Above 1 GHz
EMI Receiver Avg Bandwidth:	300 Hz – 30 kHz to 150 kHz
	30 kHz – 150 kHz to 30 MHz
	300 kHz - 30 MHz to 1 GHz 3 MHz - Above 1 GHz
Detector Function:	Peak, Quasi-Peak & Average

4.3. Measurement Procedure

Test measurements were made in accordance FCC Parts 15.209, 15.517 Subpart F.

The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

4.4. Measurement Uncertainty

The following uncertainties are expressed for an expansion/coverage factor of K=2.

RF Frequency (out of band)	$\pm 1 \times 10^{-8}$
Radiated Emission of Transmitter to 100 GHz	± 4.55 dB
Radiated Emission of Receiver	± 4.55 dB
Temperature	$\pm 0.91^{\circ}$ C
Humidity	$\pm 5\%$

5. Measurements Summary

Test Requirement	FCC Rule Requirement	Test Report Section	Result	Comment
Antenna Requirement	15.203	6.1	Compliant	The antenna is pcb printed type.
Operational Requirements	15.517 (a)	6.2	Compliant	
UWB Bandwidth	15.503 (a) (d) 15.517 (b)	6.3	Compliant	
Radiated Emissions below 960 MHz	15.517 (c) 15.209	6.4	Compliant	
Radiated Emissions above 960 MHz	15.517 (c) 15.521 (d)	6.5	Compliant	
Radiated Emissions in GPS Bands	15.517 (d)	6.6	Compliant	
RMS Power of UWB in a 1 MHz Bandwidth	15.517 (c) 15.521 (d)	6.7	Complaint	
Peak Emissions in a 50 MHz Bandwidth	15.517 (e) 15.521 (g)	6.8	Compliant	
Conducted Emissions	15.207	6.9 6.10	Compliant	
Radio Frequency Exposure	FCC OET Bulletin 65	6.11	Compliant	

6. Measurement Data

6.1. Antenna Requirement (15.203)

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply

Result: The antenna utilized by the device under test is a pcb printed type.

6. Measurement Data (continued)**6.2. Operational Requirements of the Device under Test (15.517 (a))**

Requirement: (1) Indoor UWB devices, by the nature of their design, must be capable of operation only indoors. The necessity to operate with a fixed indoor infrastructure, e.g., a transmitter that must be connected to the AC power lines, may be considered sufficient to demonstrate this.

Result: Compliant, the EUT uses and external wall adapter.

(2) The emissions from the equipment operated under this section shall not be intentional directed outside of the building in which the equipment is located, such as through a window or a doorway, to perform an outside function, such as the detection of persons about to enter a building.

Result: Compliant, the EUT is designed to be wall or ceiling mounted with a permanently attached antenna.

(3) The use of outdoor mounted antennas, e.g. antennas mounted on the outside of a building or on a telephone pole, or any other outdoors infrastructure is prohibited.

Result: Compliant, the EUT is designed to be wall or ceiling mounted with a permanently attached antenna.

(4) Field disturbance sensors installed inside of metal or underground storage tanks are considered to operate indoors provided the emissions are directed towards the ground.

Result: Not Applicable, Compliant.

(5) A communications system shall transmit only when the intentional radiator is sending information to an associated receiver.

Result: Compliant, the EUT transmits time-stamp information to associated receivers (nodes).

6. Measurement Data (continued)


6.3. UWB Bandwidth (15.503 (a) (d), 15.517 (b))

Requirement: The UWB bandwidth of a device operating under the provisions of this section shall be contained between 3,100 MHz and 10,600 MHz and at any point in time, and has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

6.3.1. Measurement Data – Values in GHz

f_M	The highest emission peak	4.0879
f_L	10 dB below the highest peak	3.7542
f_H	10 dB above the highest peak	4.3257
f_C	Calculated: $(f_H + f_L) / 2$	4.0400
Bandwidth	Calculated: $(f_H - f_L)$	0.5715
Fractional BW	Calculated: $2*(f_H - f_L) / (f_H + f_L)$	0.1415

6.3.2. Measurement Plot of 10 dB frequencies (Channel 2, 110 kbps, 64M PRF)

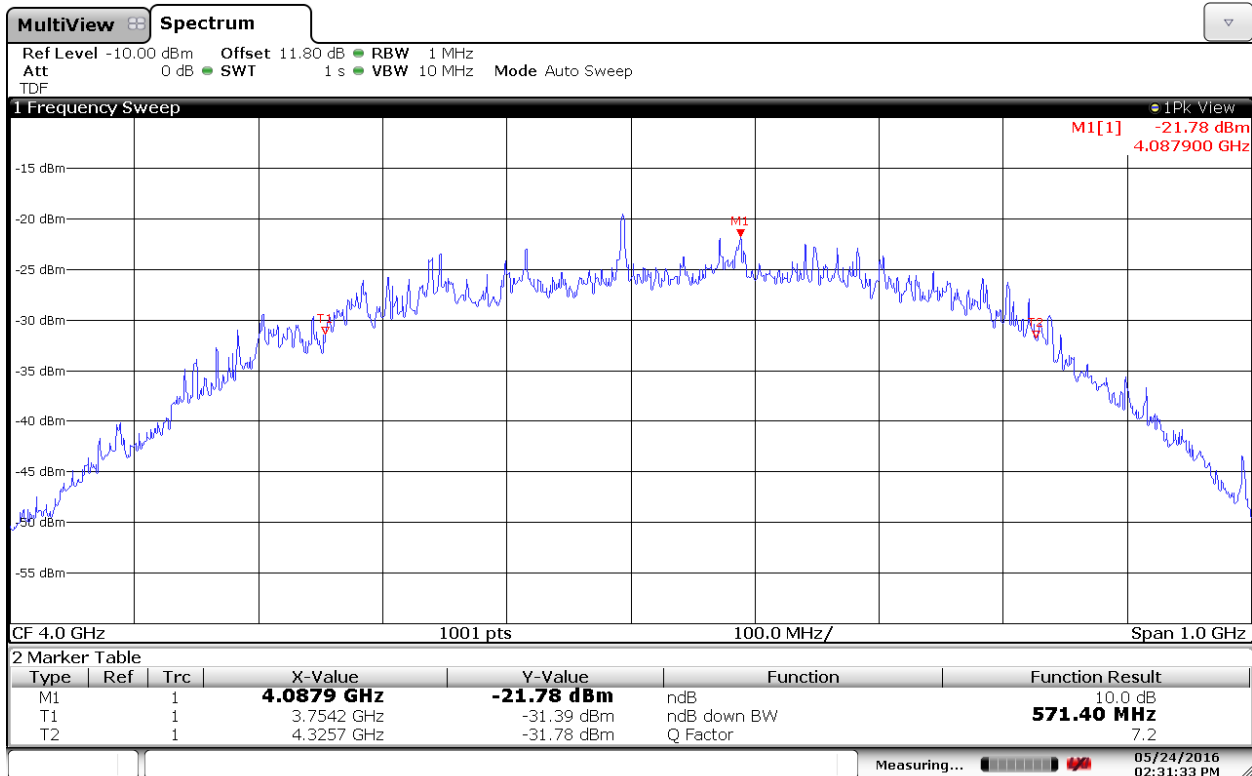

02:31:33 PM 05/24/2016

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.517 (c), 15.209)

Requirement: The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

Radiated Emissions Field Strength Limits at 3 Meters (Section 15.209)

Frequency (MHz)	Field Strength (dBµV/m)
0.009 to 0.490	128.5 to 93.8
0.490 to 1.705	73.8 to 63
1.705 - 30	69.5
30 - 88	40
88 - 216	43.5
216 - 960	46
960 - 40,000	54

Test Notes: Refer to Section 4.1 for the test equipment used.

Frequency Range:	30 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 30 kHz to 150 kHz
	9 kHz – 150 kHz to 30 MHz
	120 kHz - 30 MHz to 1 GHz
EMI Receiver Avg Bandwidth (minimum):	1 MHz - Above 1 GHz
	300 Hz – 30 kHz to 150 kHz
	30 kHz – 150 kHz to 30 MHz
	300 kHz - 30 MHz to 1 GHz
Detector Function:	3 MHz - Above 1 GHz
	Peak, Quasi-Peak & Average


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.517 (c), 15.209)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 30 MHz on our 3 Meter OATS.

6.4.1.1 Parallel Measurement Antenna – 30 to 150 kHz

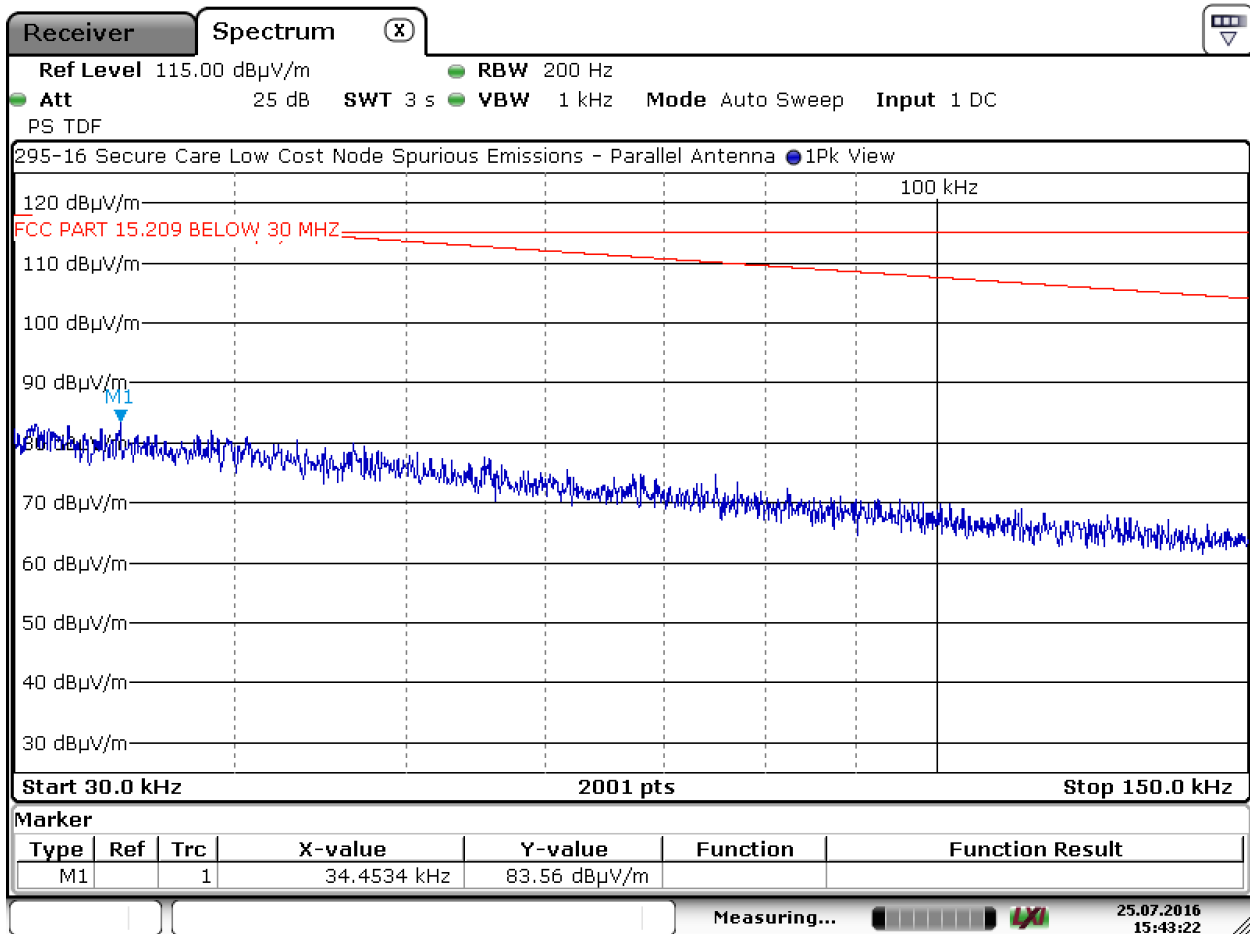

Date: 25.JUL.2016 15:43:22


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.517 (c), 15.209)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 30 MHz on our 3 Meter OATS.

6.4.1.2 Perpendicular Measurement Antenna – 10 to 150 kHz

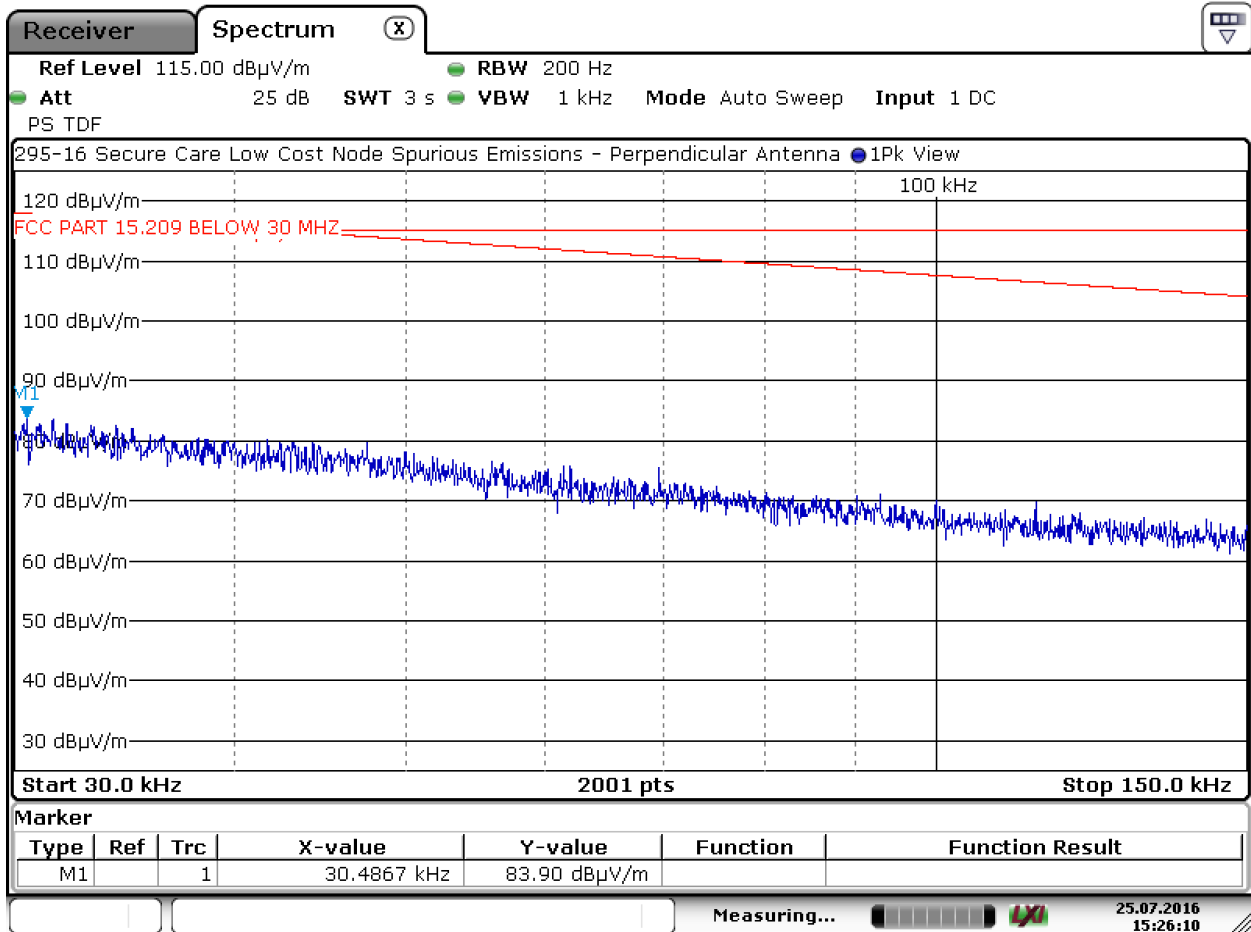

Date: 25.JUL.2016 15:26:09


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.517 (c), 15.209)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 30 MHz on our 3 Meter OATS.

6.4.1.3 Parallel Measurement Antenna – 150 kHz to 30 MHz

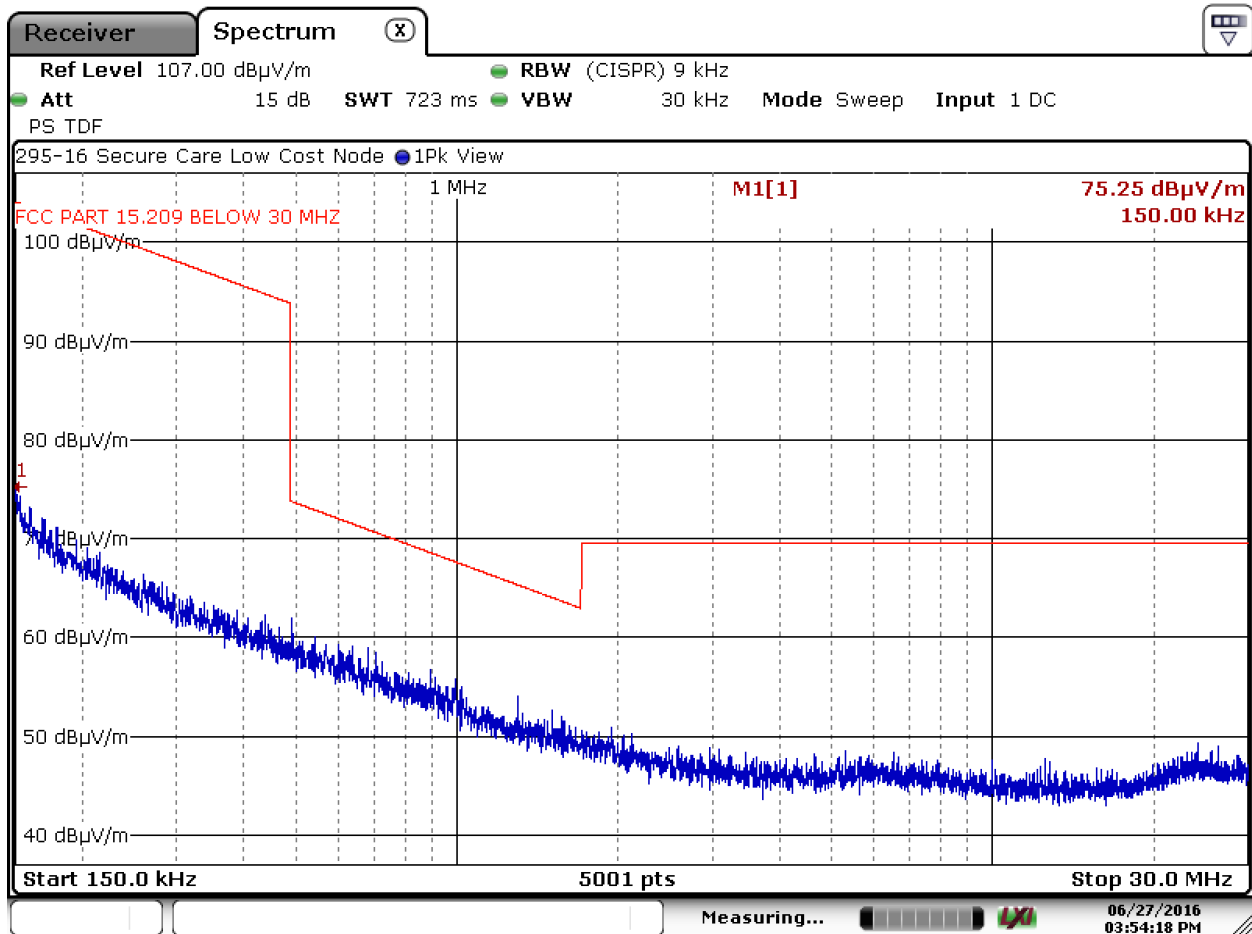

Date: 27.JUN.2016 15:54:18


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.517 (c), 15.209)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.4 Perpendicular Measurement Antenna – 150 kHz to 30 MHz

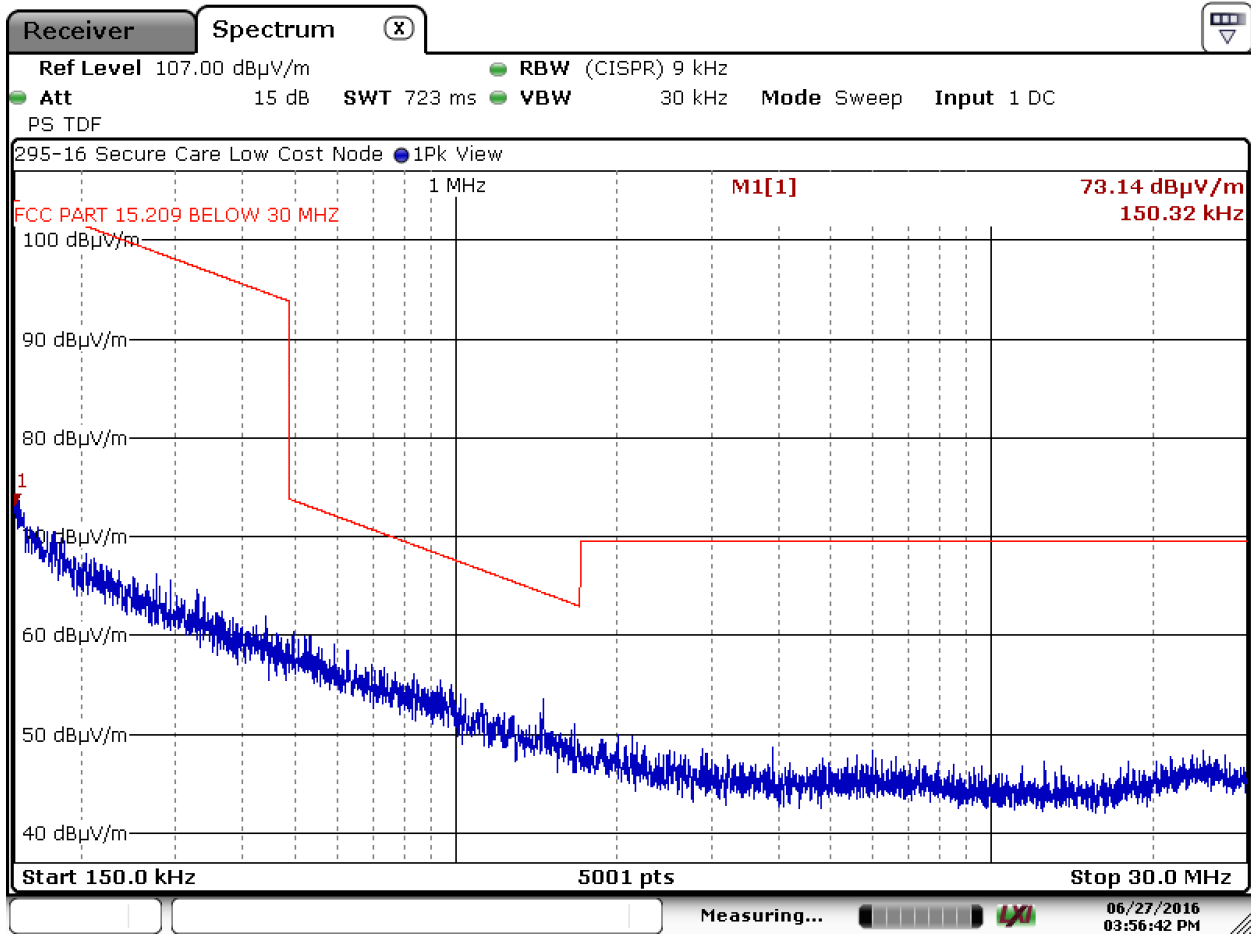


Date: 27.JUN.2016 15:56:41

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.517 (c), 15.209)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

6.4.1.5 Horizontal Polarity – 30 to 960 MHz

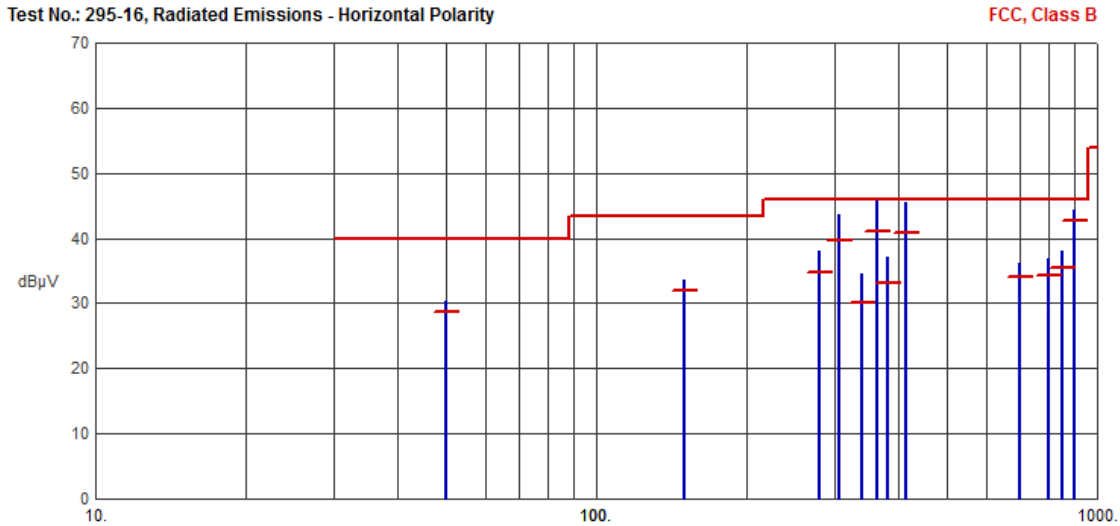


Frequency (MHz)	Pk Amp (dBµV/m)	QP Amp (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Ant Ht (cm)	Table (Deg)	Comments
49.9862	30.40	28.59	40.00	-11.41	N/A	N/A	
149.9882	33.50	31.88	43.50	-11.62	N/A	N/A	
279.8141	37.92	34.88	46.00	-11.12	N/A	N/A	
304.6803	43.74	39.61	46.00	-6.39	N/A	N/A	
338.3085	34.48	30.02	46.00	-15.98	N/A	N/A	
363.1217	45.70	41.09	46.00	-4.91	N/A	N/A	
382.9407	37.12	33.10	46.00	-12.90	N/A	N/A	
413.7374	45.51	40.84	46.00	-5.16	N/A	N/A	
699.9732	36.23	33.98	46.00	-12.02	N/A	N/A	
799.9689	36.83	34.35	46.00	-11.65	N/A	N/A	
849.9785	37.95	35.53	46.00	-10.47	N/A	N/A	
899.9819	44.27	42.70	46.00	-3.30	N/A	N/A	

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.517 (c), 15.209)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

6.4.1.6 Vertical Polarity – 30 to 960 MHz

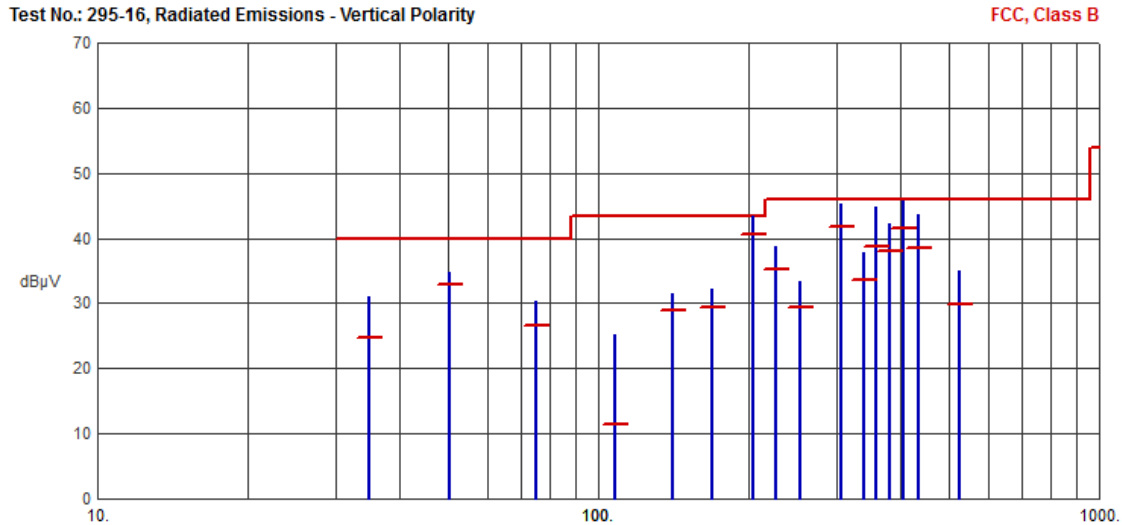

Frequency (MHz)	Pk Amp (dBµV/m)	QP Amp (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Ant Ht (cm)	Table (Deg)	Comments
34.8755	30.94	24.79	40.00	-15.21	N/A	N/A	
50.5912	34.87	32.83	40.00	-7.17	N/A	N/A	
75.3439	30.28	26.50	40.00	-13.50	N/A	N/A	
108.3107	25.20	11.47	43.50	-32.03	N/A	N/A	
140.8784	31.42	29.03	43.50	-14.47	N/A	N/A	
168.5974	32.18	29.34	43.50	-14.16	N/A	N/A	
204.3557	43.39	40.64	43.50	-2.86	N/A	N/A	
226.3151	38.66	35.12	46.00	-10.88	N/A	N/A	
252.9576	33.43	29.51	46.00	-16.49	N/A	N/A	
305.5078	45.16	41.71	46.00	-4.29	N/A	N/A	
338.4392	37.75	33.69	46.00	-12.31	N/A	N/A	
358.3925	44.75	38.70	46.00	-7.30	N/A	N/A	
382.9517	42.29	37.99	46.00	-8.01	N/A	N/A	
405.8203	45.76	41.51	46.00	-4.49	N/A	N/A	
434.5546	43.67	38.51	46.00	-7.49	N/A	N/A	
525.0681	34.96	29.95	46.00	-16.05	N/A	N/A	

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions above 960 MHz (15.517 (c), 15.521 (d))

Requirement: The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz: The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dBµV/m)
960 - 1610	-75.3	19.9
1610 - 1990	-53.3	41.9
1990 - 3100	-51.3	43.9
3100 - 10600	-41.3	53.9
Above 10600	-51.3	43.9

Frequency Range: 960 MHz to 40 GHz
 Measurement Distance: 1 Meter and 0.3 Meter
 EMI Receiver IF Bandwidth: 1 MHz
 EMI Receiver Avg Bandwidth: 10 MHz
 Detector Function: RMS 1 mS Average as defined in 15.521(d)

Notes: Measurements made from 960 MHz to 18 GHz were made in a semi-anechoic chamber at 1 Meter using a -9.54 dB distance offset was programmed into the spectrum analyzer.


Narrowband emissions at 50 MHz increments are from the processor and Ethernet circuitry and fall under 15.209 requirements as demonstrated in the 6.5.1 to 6.5.4 plots with the UWB turned on and disabled.

Measurements made from 18 to 40 GHz were done at 0.3 meters and a -20.00 dB distance offset was programmed into the spectrum analyzer.

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.517 (c))

6.5.1. 960 MHz to 1610 MHz Horizontal at 1 Meter

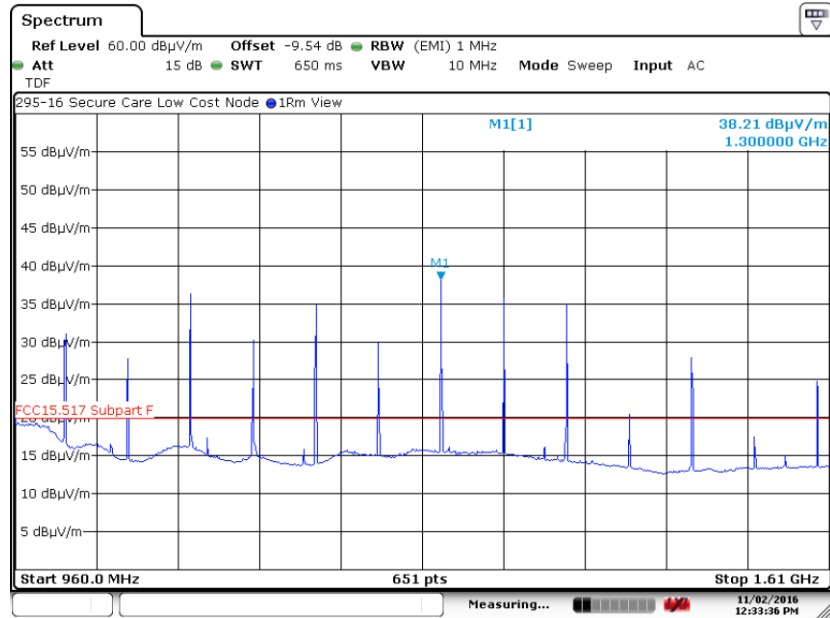

Date: 2.NOV.2016 12:33:35

6.5.2. 960 MHz to 1610 MHz Horizontal at 1 Meter (UWB Disabled)

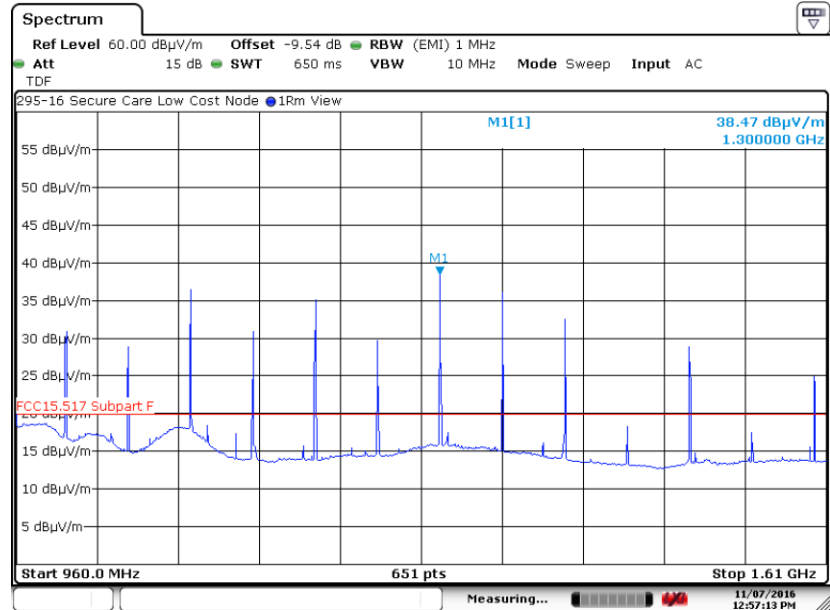


Date: 7.NOV.2016 12:57:11

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.517 (c))

6.5.3. 960 MHz to 1610 MHz Vertical at 1 Meter

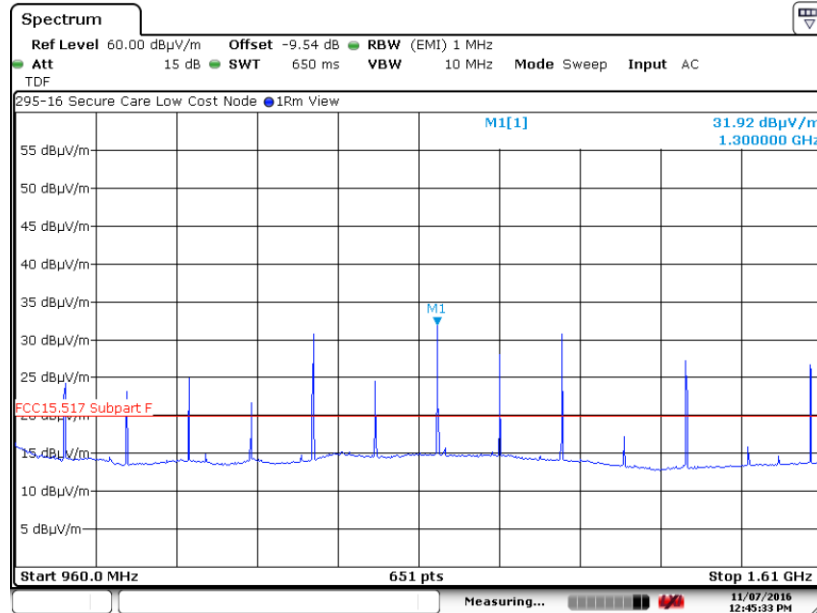

Date: 7.NOV.2016 12:45:32

6.5.4. 960 MHz to 1610 MHz Vertical at 1 Meter (UWB Disabled)

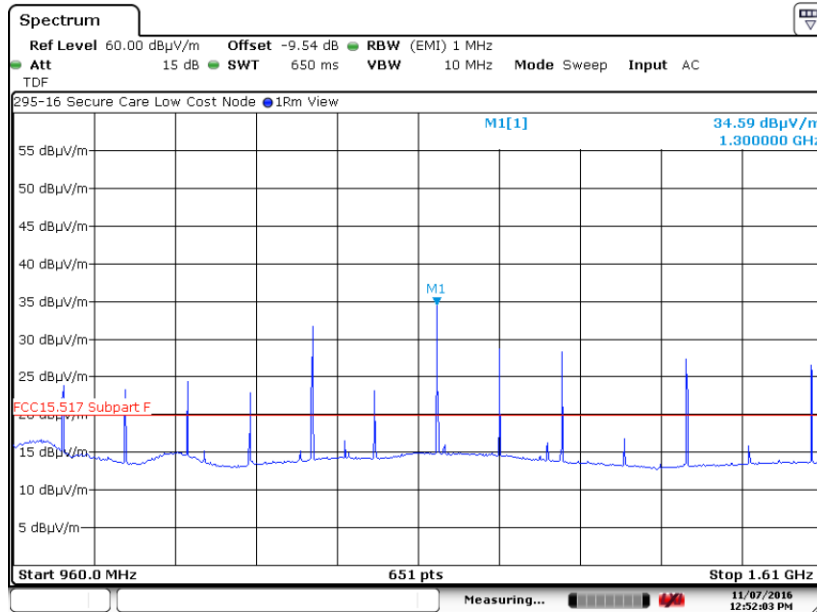


Date: 7.NOV.2016 12:52:01

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.517 (c))

6.5.5. 1610 MHz to 1990 MHz Horizontal at 1 Meter

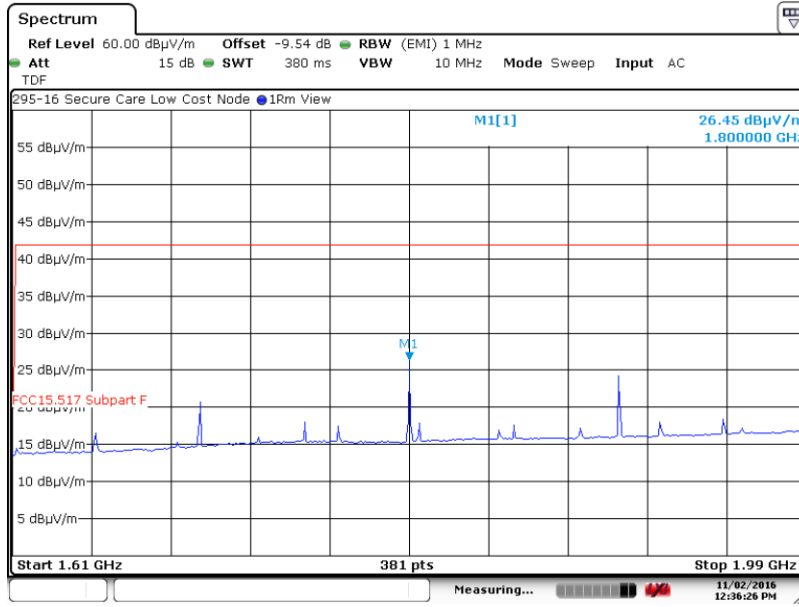

Date: 2.NOV.2016 12:36:25

6.5.6. 1610 MHz to 1990 MHz Vertical at 1 Meter

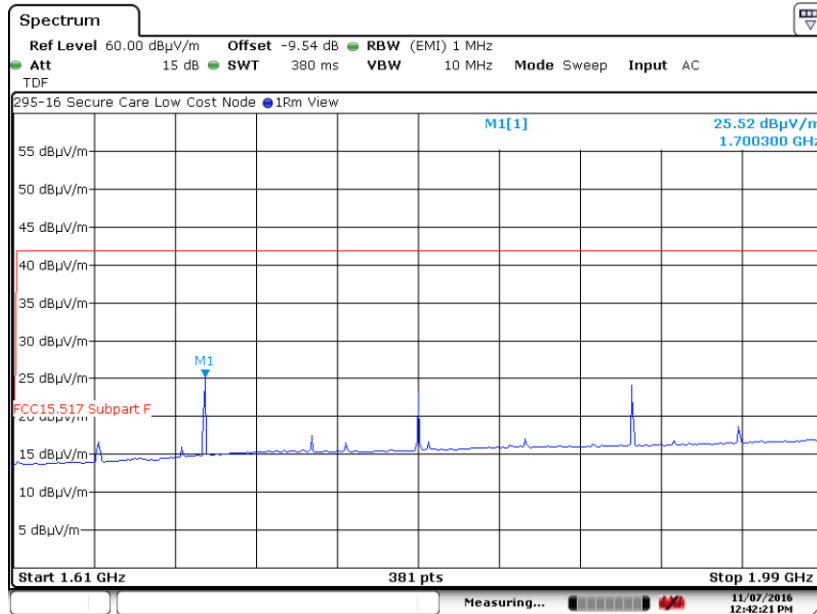


Date: 7.NOV.2016 12:42:20

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.517 (c))

6.5.7. 1990 MHz to 3.1 GHz Horizontal at 1 Meter

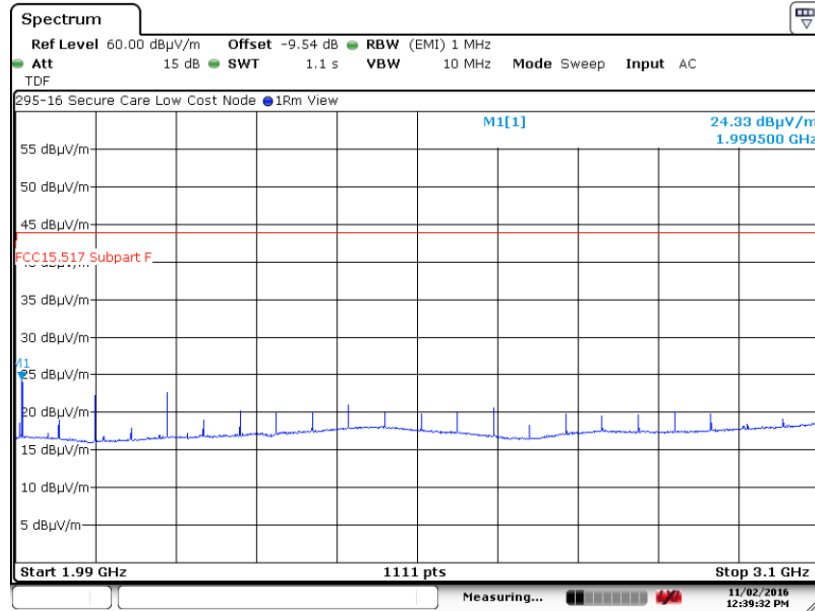

Date: 2.NOV.2016 12:39:31

6.5.8. 1990 MHz to 3.1 GHz Vertical at 1 Meter

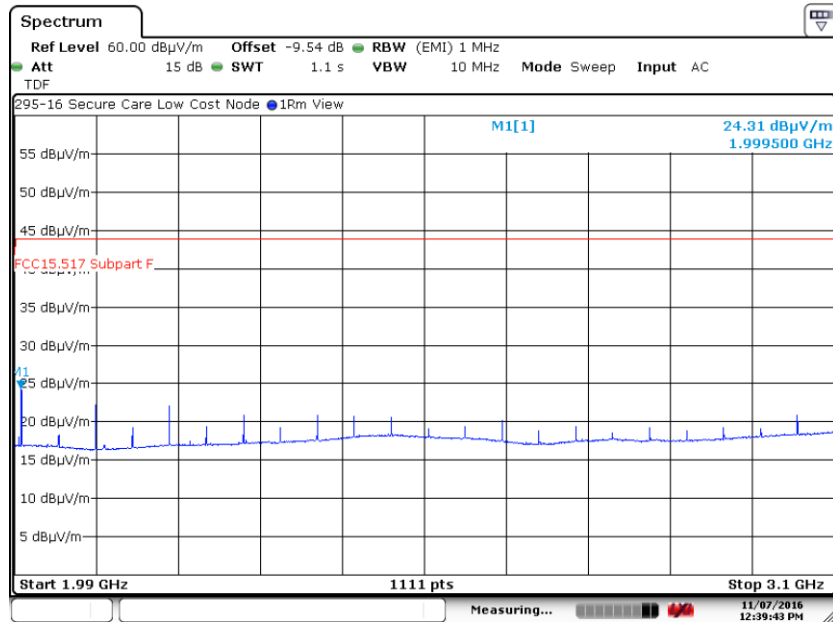


Date: 7.NOV.2016 12:39:42

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.517 (c))

6.5.9. 3.1 to 10.6 GHz Horizontal at 1 Meter

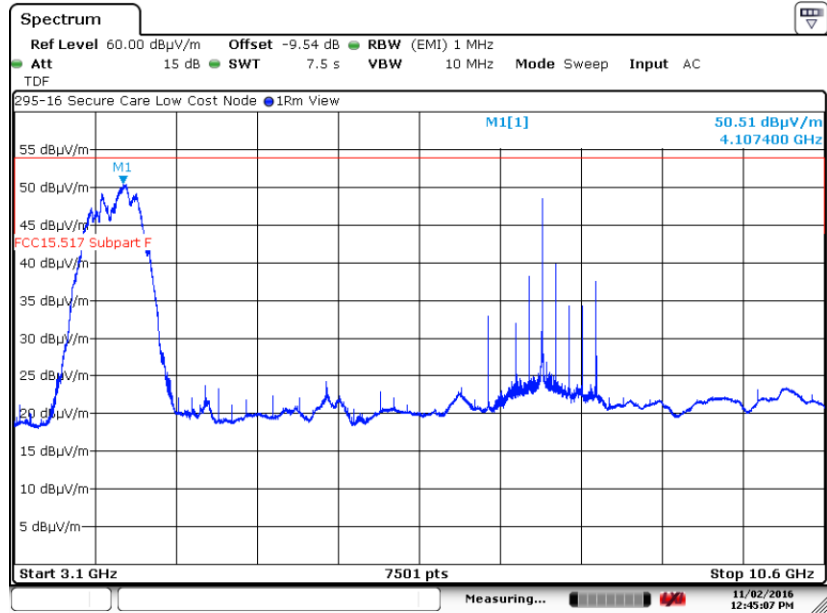

Date: 2.NOV.2016 12:45:06

6.5.10. 3.1 to 10.6 GHz Vertical at 1 Meter

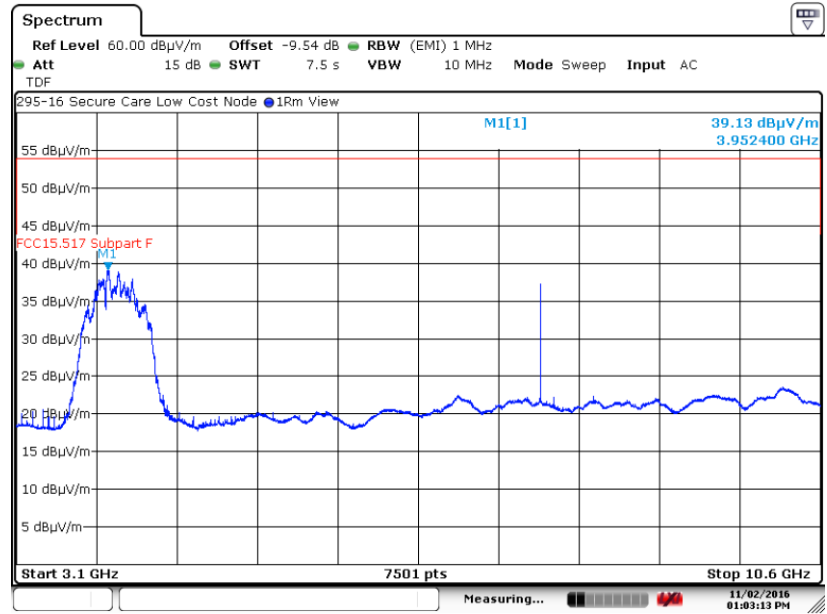


Date: 2.NOV.2016 13:03:11

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.517 (c))

6.5.11. 10.6 to 18 GHz Horizontal at 1 Meter

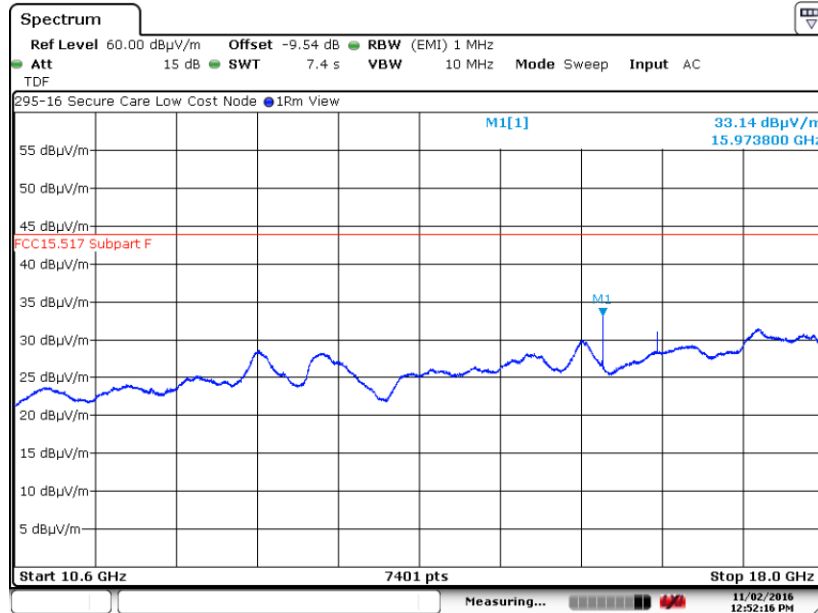

Date: 2.NOV.2016 12:52:15

6.5.12. 10.6 to 18 GHz Vertical at 1 Meter

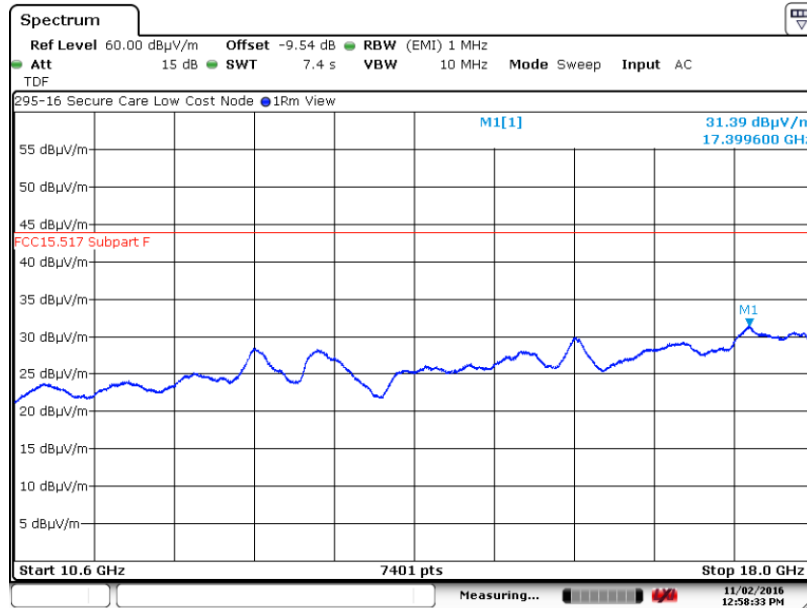


Date: 2.NOV.2016 12:58:32

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (15.517 (c))

6.5.13. 18 to 40 GHz Horizontal at 0.3 Meter

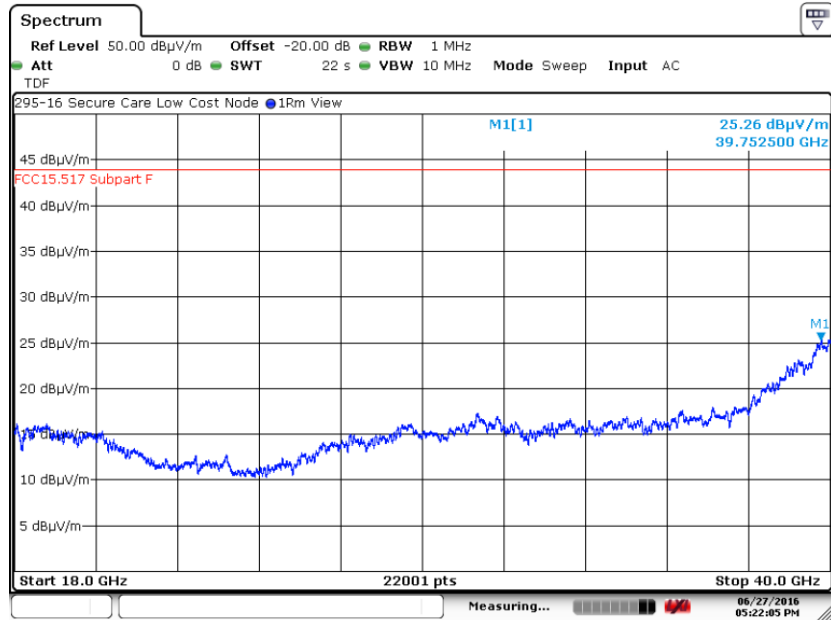

Date: 27.JUN.2016 17:22:04

6.5.14. 18 to 40 GHz Vertical at 0.3 Meter

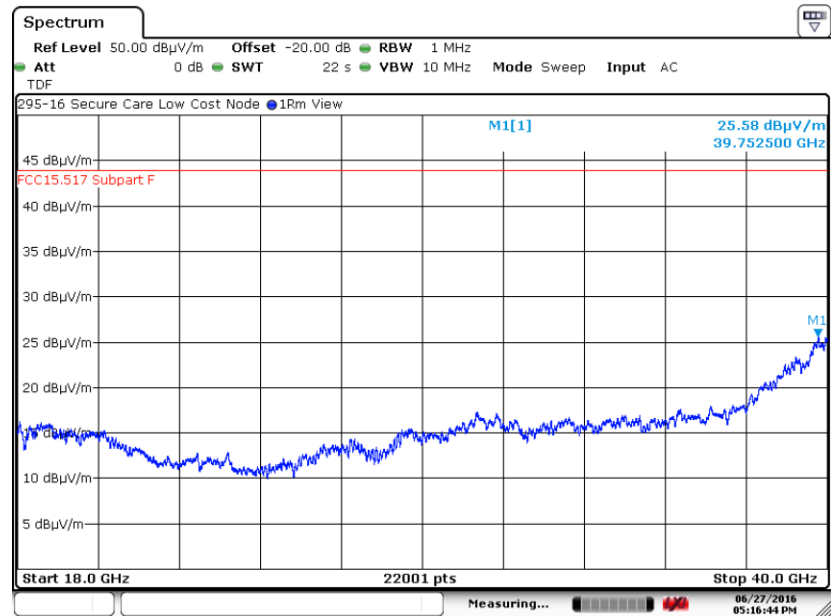

Date: 27.JUN.2016 17:16:42

6. Measurement Data (continued)**6.6. Spurious Radiated Emissions in GPS Bands (15.517 (d))**

Requirement: In addition to the radiated emission limits specified in the table in paragraph (d) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
1164 - 1240	-85.3	9.9
1559 - 1610	-85.3	9.9

6.6.1. Measurement & Equipment Setup

EMI Receiver IF Bandwidth: 1 kHz
EMI Receiver Avg Bandwidth: 10 kHz
Detector Function: RMS


6.6.2. 1164 to 1240 MHz & 1559 to 1610 MHz

There were no broadband emissions related to the UWB transmitter. Measured signals were narrowband and related to the microprocessor / clocks and do not fall under the requirements of this section. Measurements were made at 3 Meters and the -85.3 dBm limit was converted to a field strength limit of 9.9 dB μ V/m using a factor of 95.2

6. Measurement Data (continued)


6.6. Spurious Radiated Emissions in GPS Bands (15.517 (d))

6.6.3.1 Horizontal Measurement Polarity 1164 to 1240 MHz

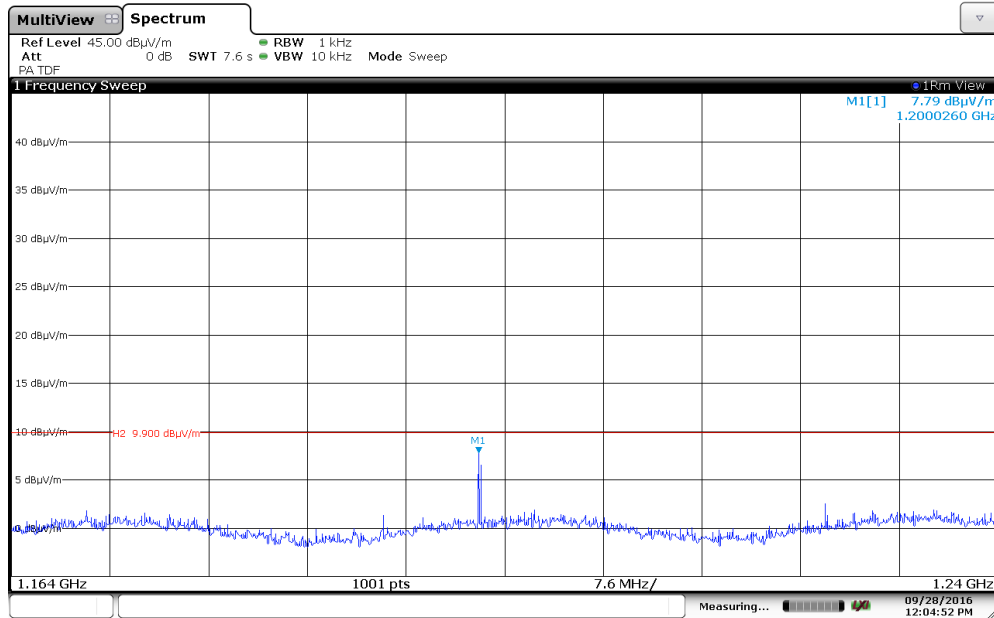

12:04:52 PM 09/28/2016

6.6.3.2 Vertical Measurement Polarity 1164 to 1240 MHz

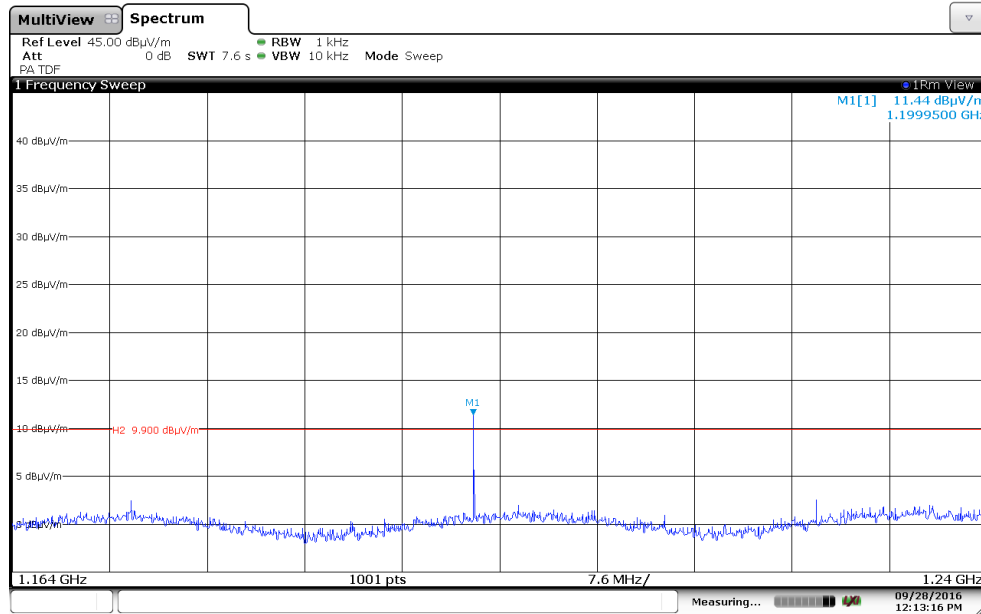


12:13:17 PM 09/28/2016

Note: Narrow band emission @ 1.19995 GHz fails under 15.209 limit

6. Measurement Data (continued)


6.6. Spurious Radiated Emissions in GPS Bands (15.517 (d))

6.6.3.3 Horizontal Measurement Polarity 1559 to 1610 MHz

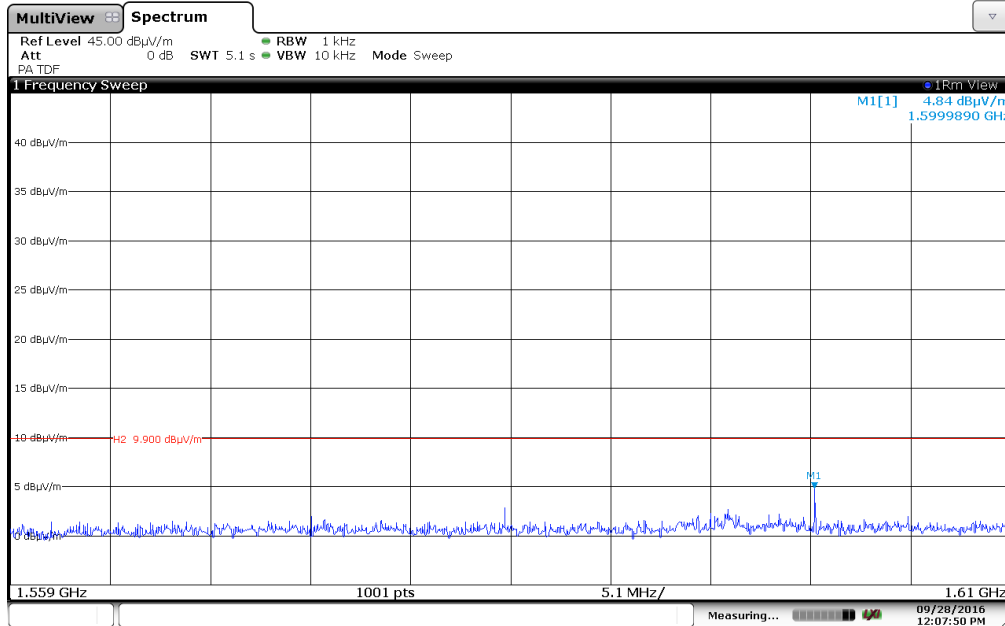

12:07:51 PM 09/28/2016

6.5.3.4 Vertical Measurement Polarity 1559 to 1610 MHz

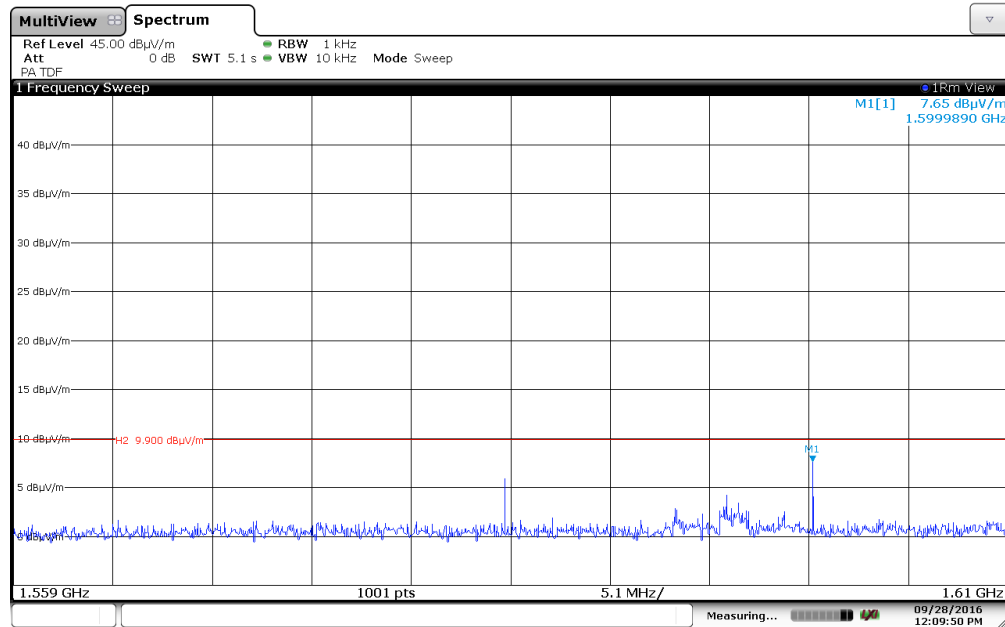

12:09:51 PM 09/28/2016

6. Measurement Data (continued)

6.7. Radiated Emissions of UWB Transmission (15.517 (c), 15.521 (d))

Requirement: The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz: The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dBµV/m)
3100 - 10600	-41.3	53.9

Frequency Range: 3.5 to 4.5 GHz
 Measurement Distance: 3 Meters
 EMI Receiver IF Bandwidth: 1 MHz
 EMI Receiver Avg Bandwidth: 10 MHz
 Detector Function: RMS 1 mS Average as defined in 15.521(d)

6. Measurement Data (continued)

6.7. RMS Power in a 1 MHz RBW (15.517 (c), 15.521 (d))


6.7.1. Plot of RMS Power at 3 Meters (Channel 2, 110 kbps, 64M PRF)

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBμV/m)	(dBμV/m)	(dB)	H/V	cm	Deg	
4.1499	53.46	53.90	-0.44	H	100	297	Compliant

Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Pre-amplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log(d_{meas}) - 104.7$; $d_{meas} = 3$
 $EIRP (dBm) = E_{meas} (dBμV/m) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
4.1499	-41.74	-41.30	-0.44	H	100	297	Compliant

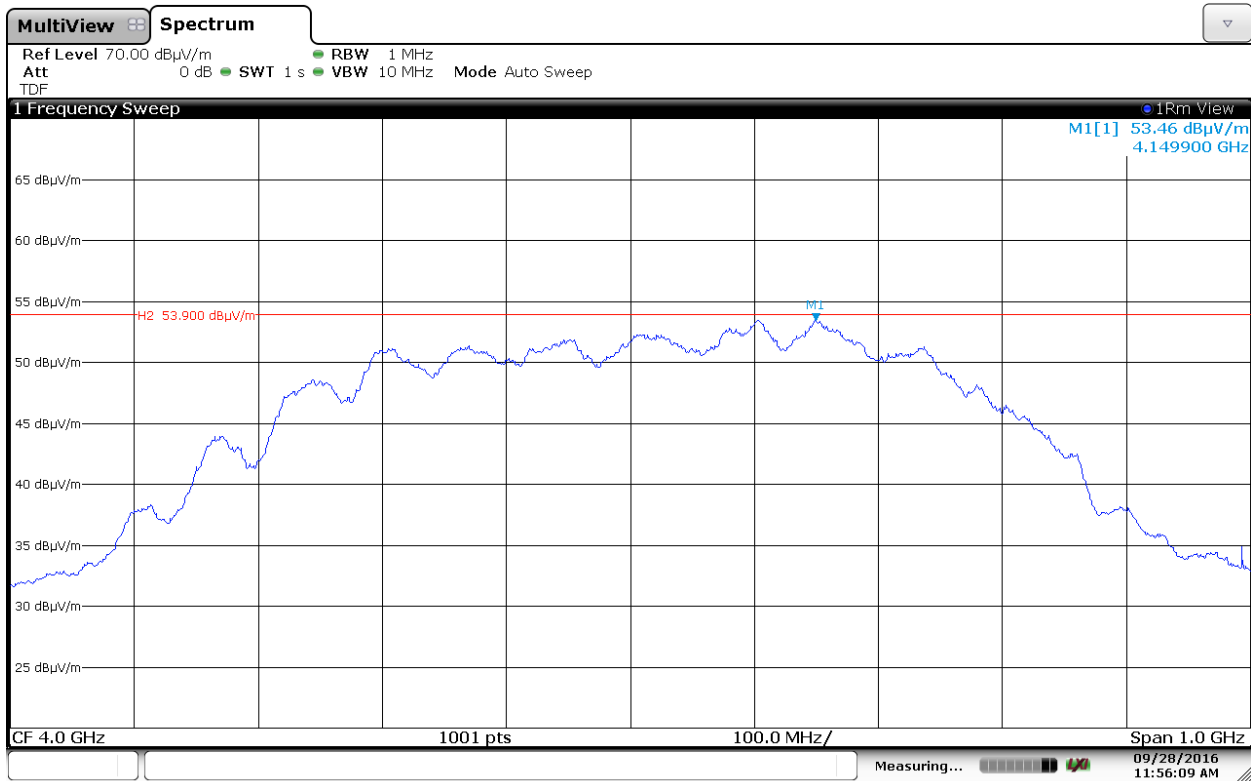

11:56:09 AM 09/28/2016

6. Measurement Data (continued)

6.8. Peak Emissions in a 50 MHz Bandwidth (15.517 (e), 15.521 (g))

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

The EIRP in terms of dBm, can be converted to a field strength, in dB μ V/m at 3 Meters by adding 95.2. As used in this subpart, EIRP refers to the highest signal strength measured in any direction and at any frequency from the UWB device.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
3100 - 10600	0	95.2

Frequency Range: 3.5 to 4.5 GHz
 Measurement Distance: 3 Meters
 EMI Receiver IF Bandwidth: 50 MHz
 EMI Receiver Avg Bandwidth: 80 MHz
 Detector Function: Peak, Max Held

6. Measurement Data (continued)

6.8. Peak Emissions in a 50 MHz Bandwidth (15.517 (e), 15.521(g))


6.8.1 Plot of Peak Power at 3 Meters (Channel 2, 110 kbps, 64M PRF)

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBμV/m)	(dBμV/m)	(dB)	H/V	cm	Deg	
3.997	87.38	95.20	-7.82	H	100	297	Compliant

Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Pre-amplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log(d_{meas}) - 104.7$; $d_{meas} = 3$
 $EIRP (dBm) = E_{meas} (dBμV/m) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
3.997	-7.82	0.00	-7.82	H	100	297	Compliant

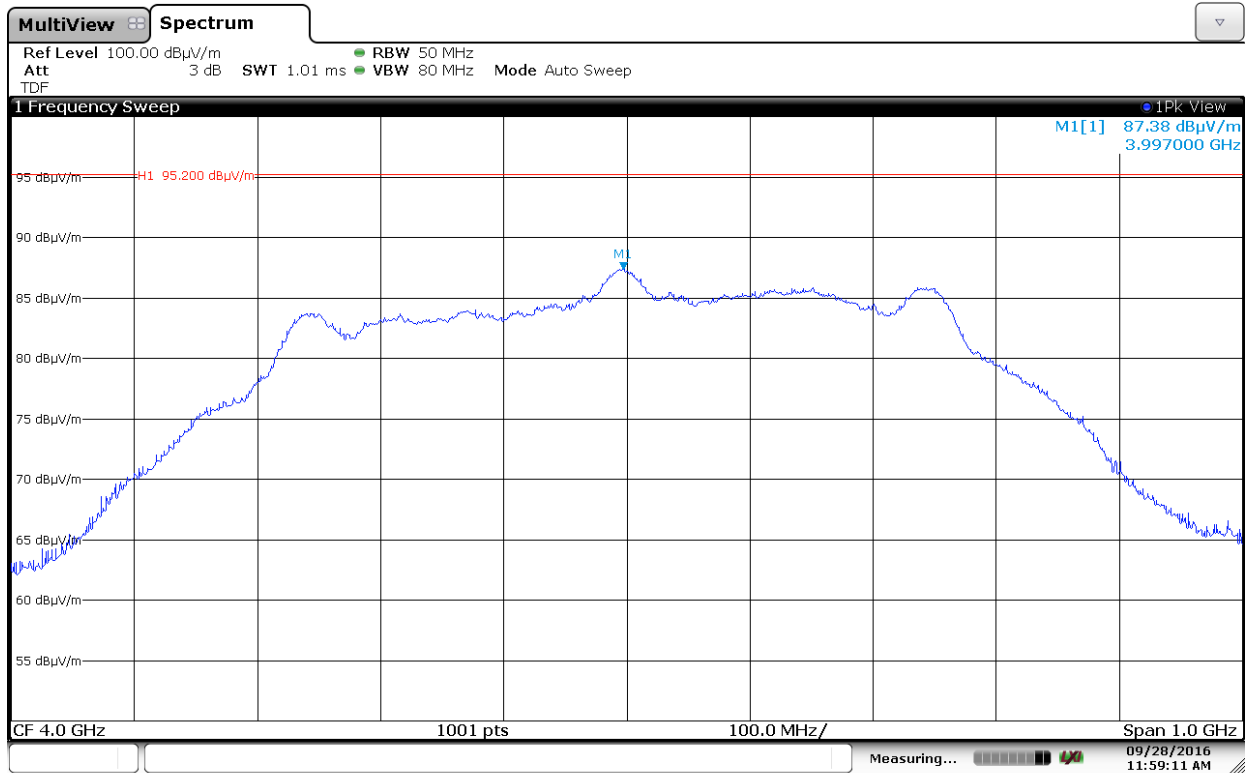

11:59:11 AM 09/28/2016

6. Measurement Data (continued)

6.9 Conducted Emissions Test Setup 15.207

6.9.1. Regulatory Limit: FCC Part 15, Class B

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

6.9.2 Measurement Equipment and Software Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due
EMI Receiver	Hewlett Packard	8546A	3330A00115	6/2/2017
RF Filter Section	Hewlett Packard	85460A	3325A00121	6/2/2017
LISN	EMCO	3825/2	9109-1860	7/21/2016
Manufacturer	Software Description		Title/Model #	Rev.
Compliance Worldwide	Test Report Generation Software		Test Report Generator	1.0

6.9.3. Measurement & Equipment Setup

Test Date: 06/24/2016
 Test Engineer: Mark McSweeney
 Site Temperature (°C): 23
 Relative Humidity (%RH): 32
 Frequency Range: 0.15 MHz to 30 MHz
 EMI Receiver IF Bandwidth: 9 kHz
 EMI Receiver Avg Bandwidth: 30 kHz
 Detector Functions: Peak, Quasi-Peak. & Average

6.9.4. Test Procedure

Test measurements were made in accordance with ANSI C63.4-2014, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.


6. Measurement Data (continued)

6.10 Conducted Emissions Test Results

6.10.1. 120 Volts, 60 Hz Phase

Test No.: 295-16, 120 Volts, 60 Hz Phase

FCC, Class B

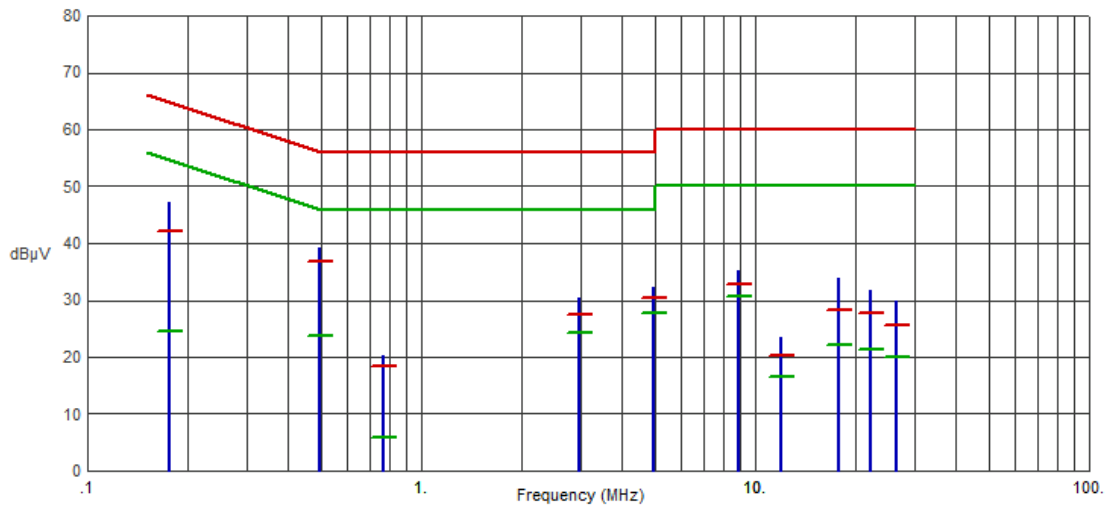

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1767	47.33	42.05	64.64	-22.59	24.46	54.64	-30.18	
.4953	39.19	36.72	56.08	-19.36	23.82	46.08	-22.26	
.7735	20.20	18.29	56.00	-37.71	5.93	46.00	-40.07	
2.9803	30.27	27.34	56.00	-28.66	24.19	46.00	-21.81	
4.9702	32.36	30.35	56.00	-25.65	27.71	46.00	-18.29	
8.9500	35.18	32.91	60.00	-27.09	30.59	50.00	-19.41	
11.9276	23.36	20.22	60.00	-39.78	16.66	50.00	-33.34	
17.6919	33.78	28.23	60.00	-31.77	22.01	50.00	-27.99	
22.2104	31.76	27.72	60.00	-32.28	21.46	50.00	-28.54	
26.4880	29.94	25.47	60.00	-34.53	20.08	50.00	-29.92	


6. Measurement Data (continued)

6.10 Conducted Emissions Test Results (continued)

6.10.2. 120 Volts, 60 Hz Neutral

Test No.: 295-16, 120 Volts, 60 Hz Neutral

FCC, Class B

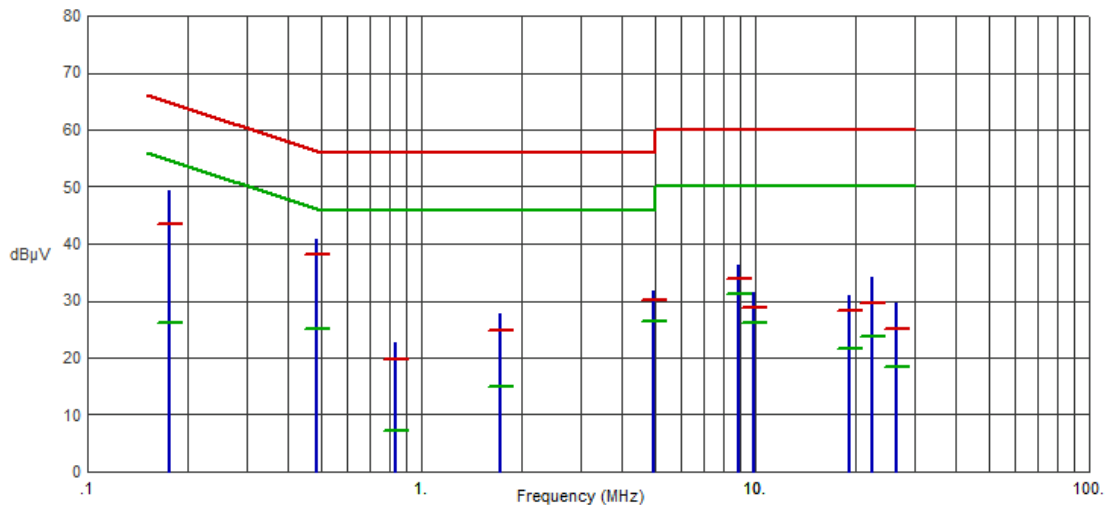

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1763	49.33	43.52	64.66	-21.14	26.00	54.66	-28.66	
.4832	40.86	38.09	56.28	-18.19	25.16	46.28	-21.12	
.8388	22.68	19.67	56.00	-36.33	7.33	46.00	-38.67	
1.7174	27.74	24.79	56.00	-31.21	14.84	46.00	-31.16	
4.9671	31.85	30.16	56.00	-25.84	26.39	46.00	-19.61	
8.9441	36.29	33.96	60.00	-26.04	31.14	50.00	-18.86	
9.9402	31.49	28.67	60.00	-31.33	26.06	50.00	-23.94	
19.1582	30.99	28.25	60.00	-31.75	21.56	50.00	-28.44	
22.4570	34.22	29.65	60.00	-30.35	23.83	50.00	-26.17	
26.4846	29.55	25.16	60.00	-34.84	18.50	50.00	-31.50	

6. Measurement Data (continued)

6.11. Public Exposure to Radio Frequency Energy Levels (1.1307 (b)(1))

6.11.1. MPE Power Density Table

Frequency (GHz)	MPE Distance (cm)	DUT Output Power (dBm)	DUT Antenna Gain (dBi)	Power Density		Limit (mW/cm ²)	Result
				(mW/cm ²)	(W/m ²)		
	(1)	(2)	(3)	(4)		(5)	
3.997	20	-7.82	1.0	0.0000414	0.0004137	1	Compliant
2.412	20	20.44	2.0	0.0348923	0.3489234	1	Compliant
			SUM	0.0349337	0.3493372	1	Compliant

$$PD = \frac{OP + AG}{(4 \times \pi \times d^2)}$$

PD = Power Density
 OP = DUT Output Power (dBm)
 AG = Antenna Gain (dBi)
 D = MPE Distance

1. Reference CFR 2.1093(b): For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.
2. Section 6.1 of this test report.
3. Power density is calculated from conducted power output measurement and antenna gain.
4. Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure.

7. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025:2005 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0208.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 22, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

Both sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

8. Test Images

8.1. Spurious and Harmonic Emissions – 30 kHz to 1 GHz Front



8. Test Images

8.2. Spurious and Harmonic Emissions – 30 kHz to 30 MHz Rear



8. Test Images

8.3. Spurious and Harmonic Emissions – 30 MHz to 1 GHz Rear



8. Test Images

8.4. Spurious and Harmonic Emissions – Above 1 GHz Front




8. Test Images

8.5. Spurious and Harmonic Emissions – 1 to 18 GHz Rear



8. Test Images

8.6. Spurious and Harmonic Emissions – 18 to 40 GHz Side

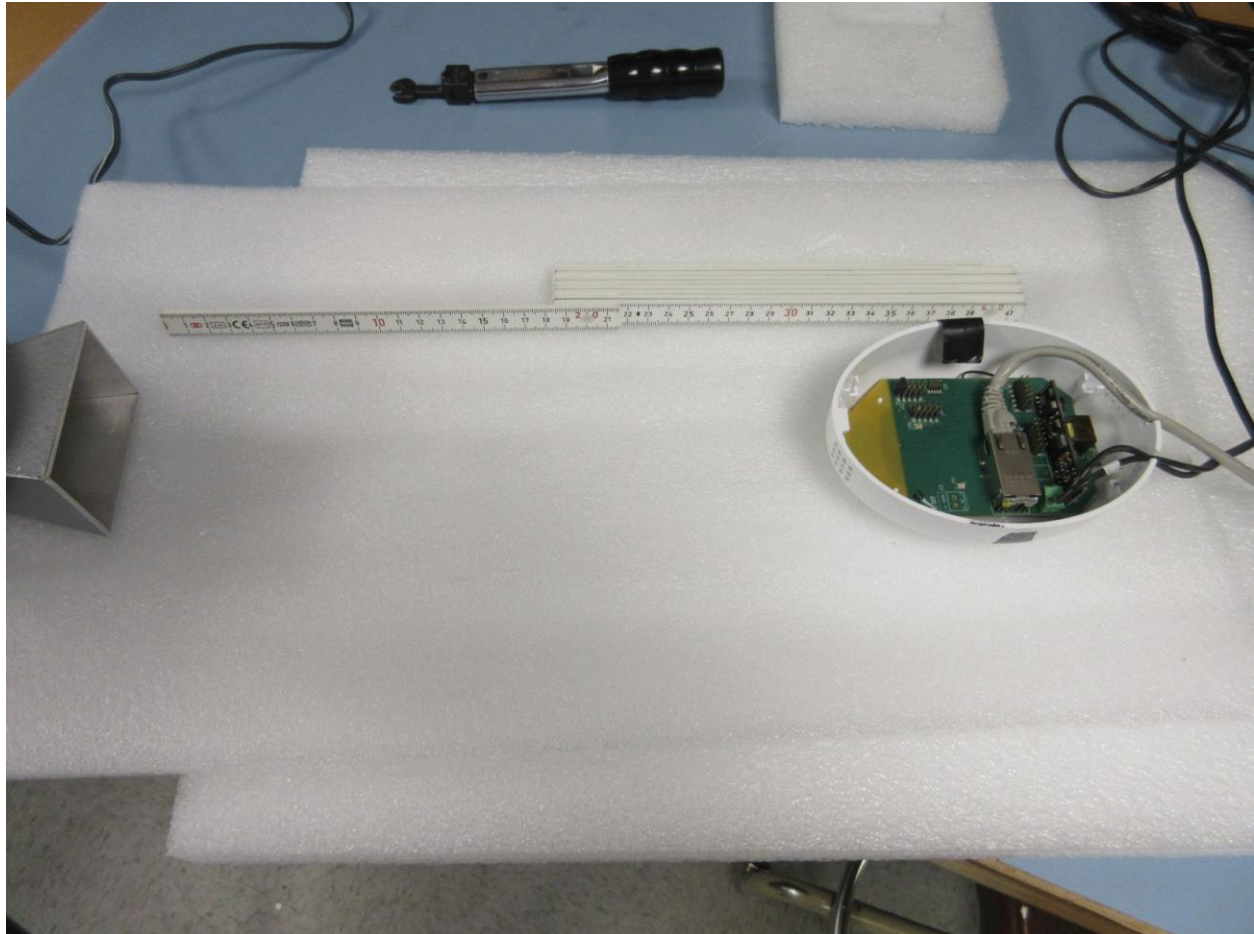

8. Test Images

8.7. Conducted Emissions (Front)



8. Test Images

8.8. Conducted Emissions (Rear)

