

**COMPLIANCE WORLDWIDE INC.
TEST REPORT 349-15R1**

In Accordance with the Requirements of
Industry Canada RSS 210, Issue 8
Federal Communications Commission CFR Title 47 Part 15.223
Low Power License-Exempt Radio Communication Devices
Intentional Radiators

Issued to

**Secure Care Products, LLC
39 Chenell Drive
Concord, NH 03301
603-223-0745**

for the

**Secure Care
Model 135 STAT[®] ID
6.78 MHz Door Management Radio**

FCC ID: KNK-NRTLS678

Report Issued on August 14, 2015
Report Revised on September 2, 2015

Testing performed by



Brian F. Breault
EMC Test Engineer

Reviewed By


Larry K. Stillings

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

| | |
|---|----|
| 1. Scope | 3 |
| 2. Product Details | 3 |
| 2.1. Manufacturer | 3 |
| 2.2. Model Number | 3 |
| 2.3. Serial Number | 3 |
| 2.4. Description | 3 |
| 2.5. Power Source | 3 |
| 2.6. EMC Modifications | 3 |
| 3. Product Configuration | 3 |
| 3.1. Operational Characteristics & Software | 3 |
| 3.2. EUT Hardware | 3 |
| 3.3. Support Equipment | 3 |
| 3.4. Support Equipment Cables | 4 |
| 3.5. Block Diagram | 4 |
| 4. Measurements Parameters | 4 |
| 4.1. Measurement Equipment Used to Perform Test | 4 |
| 4.2. Measurement & Equipment Setup | 5 |
| 4.3. Test Procedure | 5 |
| 5. Measurement Summary | 6 |
| 6. Measurement Data | 7 |
| 6.1. Antenna Requirement | 7 |
| 6.2. Emission Bandwidth | 8 |
| 6.3. Radiated Field Strength of Fundamental | 9 |
| 6.4. Duty Cycle Correction Factor | 11 |
| 6.5. Spurious Radiated Emissions | 13 |
| 7. Test Setup Photographs | 26 |
| 8. Test Site Description | 32 |

1. Scope

This test report certifies that the Secure Care Products, LLC. Model 135 STAT ID 6.78 MHz door management radio, as tested, meets the Subpart C, FCC Part 15.209 requirements and the RSS 210 Annex II Rules. In addition, the FCC Part 15.223 requirements have also been met. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

Revision R1 – Test engineer name, title and signature updated.

2. Product Details

- 2.1. **Manufacturer:** Secure Care Products, LLC.
- 2.2. **Model Number:** Model 135, A20470901
- 2.3. **Serial Number:** None
- 2.4. **Description:** Model 135 STAT ID
Infant and child abduction protection device
6.78 MHz door management radio
Software version 1165
- 2.5. **Power Source:** 3.0 VDC (Lithium) non-replaceable
- 2.6. **EMC Modifications:** None

3. Product Configuration

3.1. Operational Characteristics & Software

Operating Instructions for Test

Use the tester to enable continuous wave features. With the transmitter at the top of the tester, push the “6” key to enable continuous wave output on the low frequency radio. This will output a continuous wave for one minute and then revert back to normal operation.

The “#” key will put the transmitter in sleep mode. The strap needs to be removed to stay in sleep mode.

The “7” key will enable a quick wakeup of the transmitter. The strap must be installed to wake up the transmitter.

3.2. EUT Hardware

| Manufacturer | Model/Part # / Options | Serial Number | Volts | Frq (Hz) | Description/Function |
|----------------------------|------------------------|---------------|-------|----------|--|
| Secure Care Products, LLC. | Door management Radio | | 3.0 | DC | Infant and child abduction protection device |

3.3. Support Equipment

| Manufacturer | Model/Part # / Options | Serial Number | Input Voltage | Frq (Hz) | Description/Function |
|----------------------------|------------------------|---------------|---------------|----------|--|
| Secure Care Products, LLC. | A07390900 | 0121200014 | N/A | - | For setting up the DUT operation. Not used during testing. |



Test Number: 349-15




Issue Date: 08/14/2015

3. Product Configuration (continued)

3.4. Support Equipment Cables

| Cable Type | Length | Shield | From | To |
|------------|--------|--------|------|----|
| None | | | | |

3.5. Block Diagram



4. Measurements Parameters

4.1 Measurement Equipment Used to Perform Test

| Device | Manufacturer | Model No. | Serial No. | Cal Due | Interval |
|---|---------------------|-------------|------------|-----------|----------|
| EMI Test Receiver, 9kHz - 7GHz ¹ | Rohde & Schwarz | ESR7 | 101156 | 7/23/2017 | 2 Years |
| Spectrum Analyzer 20 Hz – 40 GHz ² | Rohde & Schwarz | FSV40 | 100899 | 7/23/2017 | 2 Years |
| Spectrum Analyzer, 9 kHz to 40 GHz ³ | Rohde & Schwarz | FSVR40 | 100909 | 7/23/2017 | 2 Years |
| EMI Receiver, 9 kHz to 6.5 GHz | Hewlett Packard | 8546A | 3650A00360 | 6/4/2016 | 2 Years |
| Loop Antenna, 9 kHz to 30 MHz | EMCO | 6512 | 9309-1139 | 9/23/2016 | 2 Years |
| Biconilog Antenna, 30 MHz to 2 GHz | Sunol Sciences Corp | JB1 | 25509 | 5/15/2016 | 3 Years |
| Horn Antenna, 960 MHz – 18 GHz | Electro-Metrics | RGA-50 / 60 | 2813 | 7/15/2016 | 2 Years |
| LISN 50 Ω 50 μH, 9 kHz to 30 MHz | EMCO | 3825/2 | 9109-1860 | 7/23/2016 | 1 Year |
| Barometric Press/Humidity & Temp Datalogger | Extech Instruments | SD700 | Q590483 | 9/18/2015 | 2 Years |

¹ ESR7 Firmware revision: V2.26,

Date installed: 8/15/2014

Previous V2.17, installed 6/11/2014.

² FSV40 Firmware revision: V2.30 SP1

Date installed: 10/22/2014

Previous V2.30, installed 7/23/2014.

³ FSVR40 Firmware revision: V2.23,

Date installed: 10/20/2014

Previous V1.63 SP1, installed 8/28/2013.

4. Measurements Parameters (continued)

4.2 Measurement & Equipment Setup

| | |
|-----------------------------|--|
| Test Dates: | 8/07/2015 to 8/14/2015 |
| Test Engineers: | Brian Breault |
| Site Temperature (°C): | 21.4 |
| Relative Humidity (%RH): | 32 |
| Frequency Range: | 30 kHz to 2.0 GHz |
| Measurement Distance: | 3 Meters |
| EMI Receiver IF Bandwidth: | 120 kHz (30 MHz – 1 GHz) 1 MHz (>1 GHz) |
| EMI Receiver Avg Bandwidth: | 300 kHz (30 MHz – 1 GHz) 3 MHz (>1 GHz) |
| Detector Functions: | Peak, Quasi-Peak and Average |

4.3 Test Procedure

Test measurements were made in accordance FCC Part 15.209: Radiated emission limits; general requirements and FCC Part 15.223: Operation in the band 1.705–10 MHz.

The test methods used to generate the data in this test report are in accordance with ANSI C63.10: 2013, American National Standard for Methods for Unlicensed Wireless Devices

In addition, the measurements were performed with the device in three orthogonal positions in accordance with ANSI C63.10-2013, sections 5.10.1, 6.4.6 and Annex H. The three orthogonal axes were defined as follows:



X-Axis



Y-Axis



Z-Axis

| | | |
|--------|-----------------------------|---|
| X Axis | Upright (Strap toward rear) | Front of unit is facing the antenna at 0° |
| Y Axis | Horizontal on left edge | Front of unit is facing the antenna at 0° |
| Z Axis | Face Up (Strap down) | Bottom edge of the unit is facing the antenna at 0° |

5. Measurement Summary

| Test Requirement | FCC Requirement | IC Requirement | Test Report Section | Result | Comment |
|---|-------------------------|----------------------|---------------------|--------------|---|
| Antenna Requirement | 15.203 | RSS210 A1.1 | 6.1 | Compliant | The antenna is enclosed within the device under test. |
| Emission Bandwidth | 15.223 | RSS-210 §2.3 | 6.2 | Compliant | |
| Radiated Field Strength of Fundamental | 15.223 (a) | RSS-Gen Tbl 6 | 6.3 | Compliant | |
| Duty Cycle Correction Factor | 15.35 (c) | RSS-Gen Tbl 6 | 6.4 | Compliant | |
| Spurious Radiated Emissions | 15.223 (b), 15.209 | A13.1.2 (2) | 6.5 | Compliant | |
| Frequency Stability | 15.229 (d) | Not Required | --- | Not Required | |
| Conducted Emissions | 15.207 | --- | --- | Not Required | Unit operates on an internal battery. |
| Public Exposure to Radio Frequency Energy Levels. | 15.247(i) 1.1307 (b)(1) | RSS-GEN 5.5, RSS 102 | --- | Not Required | Intentional emission frequency is below 100 MHz. |

6. Measurement Data

6.1. Antenna Requirement (Section 15.203)

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

Status: The Model 135 STAT ID door management radio antenna is contained inside a sealed unit.

6. Measurement Data

6.2. Emission Bandwidth (FCC Sections 15.223, 15.209, IC RSS-210 Section A2.3)


Requirement: For FCC Part 15.223 and IC RSS-210, the field strength of any emission within the band 1.705–10.0 MHz shall not exceed 100 microvolts/meter at a distance of 30 meters. However, if the bandwidth of the emission is less than 10% of the center frequency, the field strength shall not exceed 15 microvolts/meter or (the bandwidth of the device in kHz) divided by (the center frequency of the device in MHz) microvolts/meter at a distance of 30 meters, whichever is the higher level. For the purposes of this section, bandwidth is determined at the points 6 dB down from the modulated carrier.

For FCC Part 15.209, the bandwidth requirement is not specified. The 20 dB bandwidth has been included as part of this test report.

Test Note: Reference ANSI C63.10-2013, Section 6.9.1. for the bandwidth measurement method.

Conclusion: The -6 dB bandwidth is less than 10% of the intentional emission center frequency. Therefore, the emission field strength cannot exceed 15 microvolts/meter (23.53 dB μ V/m) at 30 meters.

| Fundamental Frequency (MHz) | -6 dB Bandwidth (kHz) | -20 dB Bandwidth (kHz) | Result |
|-----------------------------|-----------------------|------------------------|--------|
| 6.78 | 5.837 | 12.934 | N/A |

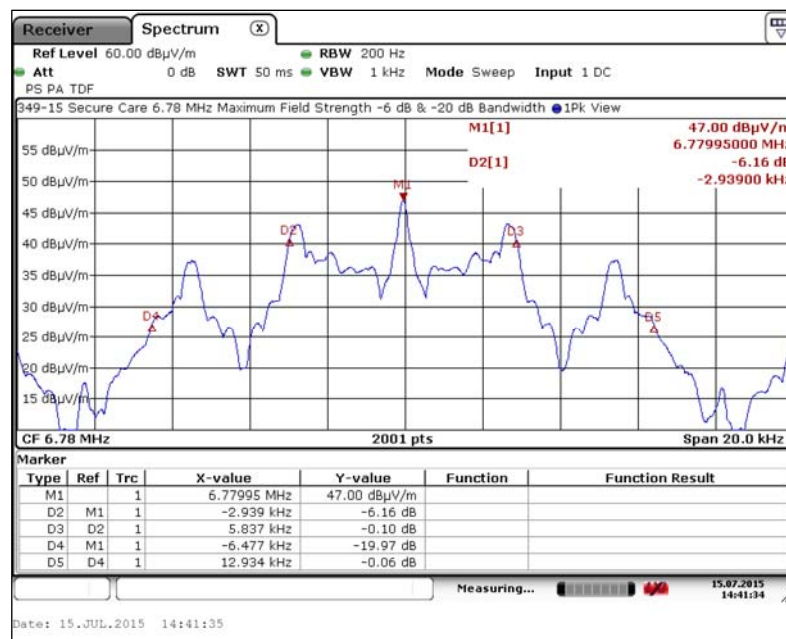

6. Measurement Data (continued)

6.3. Radiated Field Strength of Fundamental (15.223, Section (a), Rss-Gen Tbl 6)

Requirement: The field strength of any emission within the band 1.705–10.0 MHz shall not exceed 100 microvolts/meter at a distance of 30 meters. However, if the bandwidth of the emission is less than 10% of the center frequency, the field strength shall not exceed 15 microvolts/meter or (the bandwidth of the device in kHz) divided by (the center frequency of the device in MHz) microvolts/meter at a distance of 30 meters, whichever is the higher level. For the purposes of this section, bandwidth is determined at the points 6 dB down from the modulated carrier. The emission limits in this paragraph are based on measurement instrumentation employing an average detector.

Test Note: Reference ANSI C63.10-2013 sections 5.3.2 and 6.4.4.2. The following formula was used to extrapolate the measurement distance to the limit distance:

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{near field}}}{d_{\text{measure}}} \right) - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{near field}}} \right) \quad \text{Equation 1}$$

| | |
|---|--------------|
| FS _{limit} is the calculation of field strength at the limit distance (dBμV/m) | 29.39 |
| FS _{max} is the measured field strength, expressed in (dBμV/m) | 56.80 |
| d _{near field} is the λ/2π distance (Meters) | 7.04 |
| d _{measure} is the distance of the measurement point from the EUT (Meters) | 3.00 |
| d _{limit} is the reference limit distance (Meters) | 30.00 |

Conclusion: The fundamental frequency radiated field strength of the device under test complies with the requirements detailed in FCC Part 15.223, Section (a) and Part 15.209, Section (a).

6. Measurement Data (continued)

6.3. Radiated Field Strength of Fundamental (15.209, Section (a), Rss-GEN Tbl 6)

6.3.1. Worst Case Radiated Field Strength of Fundamental

| Freq. (MHz) | Amplitude ¹ (dBµV/m) | Duty Cycle Correction | Corr. Ampl. ² (dBµV/m) | FCC 15.223 Limit (dBµV/m) | Margin (dB) | Ant Polarity | Ant Height | Turntable Azimuth | Result |
|-------------|---------------------------------|-----------------------|-----------------------------------|---------------------------|-------------|--------------|------------|-------------------|-----------|
| | Peak | dB | Average | Par/Per | | cm | Deg | | |
| 6.78 | 29.39 | -28.64 | 0.75 | 23.52 | -22.77 | Per | 100 | 180 | Compliant |

¹ Measurement has been extrapolated from 3 meters to 30 meters using Equation 1 on the previous page.

² The average field strength was determined by applying a duty cycle correction factor to the peak field strength.

6.3.2. Worst Case Radiated Field Strength of Fundamental



6. Measurement Data (continued)

6.4. Duty Cycle Correction Factor (FCC Part 15.35(c), ANSI C63.10, Section 7.5)


Requirement: Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval. To determine the duty cycle, the following equation is used:

$$\bar{\delta}(\text{dB}) = 20\log[\Sigma(nt_1 + mt_2 + \dots + \xi t_x)/T]$$

n is the number of pulses of duration t_1
 m is the number of pulses of duration t_2
 ξ is the number of pulses of duration t_x
 T is the period of the pulse train
 If $T > 100$ ms then $T = 100$ ms

Applied: $nt_1 = .285$ ms x 5 pulses = 1.425 ms Plot 6.5.1
 $mt_2 = .175$ ms x 13 pulses = 2.275 ms Plot 6.5.1
 $T = 100$ ms (maximum allowable period) Plot 6.5.2
 Duty Cycle Correction Factor = $20\log((1.425 + 2.275)/100)$
 Duty Cycle Correction Factor = -28.64


6.4.1. DUT Pulse Train during Normal Operation

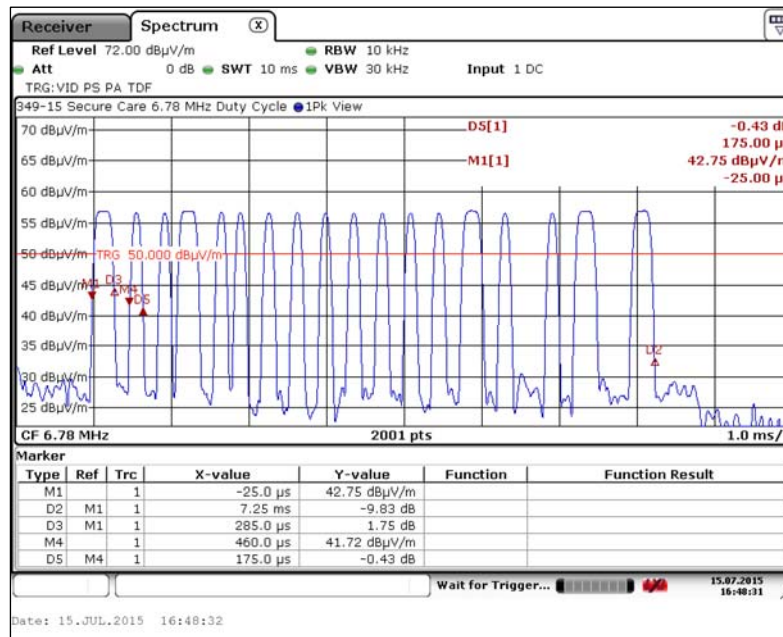

6. Measurement Data (continued)

6.4. Duty Cycle Correction Factor (FCC Part 15.35(c), ANSI C63.10, § 7.5) (Continued)

6.4.2. Time of One Period (416.25 ms)

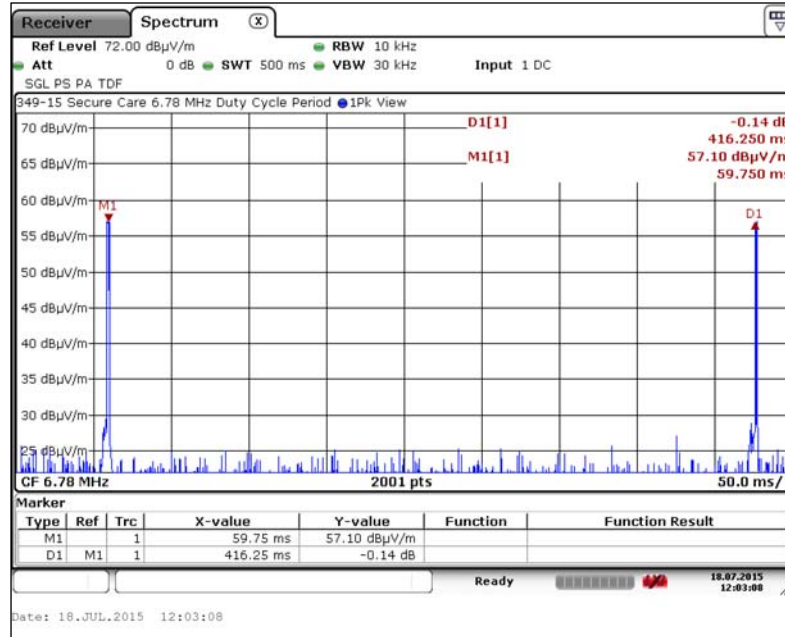

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions, 30 MHz to 2.0 GHz (15.223 Section (b), 15.209)

Requirement: The spurious radiated emissions requirements for intentional radiators shall demonstrate compliance with the field strength limits detailed in Part 15.223, Section (b): The field strength of any emissions appearing outside of this band shall not exceed the general radiated emissions limits in Section 15.209. FCC Part 15.33 requires that, due to the highest frequency used in the device being between 108 MHz and 500 MHz (433.92 MHz), the upper frequency of measurement will be 2 GHz.

FCC Part 15.209 Spurious Emissions Limits:

| Frequency (MHz) | Field Strength (µV/m) | Meas. Distance (meters) |
|-----------------|-----------------------|-------------------------|
| 0.009–0.490 | 2400/F(kHz) | 300 |
| 0.490–1.705 | 24000/F(kHz) | 30 |
| 1.705–30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Procedure: This test was performed in accordance with the information provided in ANSI C63.10-2013, Section 6.5.

Test Notes: Screen captures test notes:

- Section 6.5.2: The emission marked by the pair of vertical cursors is the DUT intentional emissions frequency covered by this test report.
- Section 6.5.3: The emission marked by the pair of vertical cursors is another DUT intentional emissions frequency and is covered by a separate test report.


Conclusion: Compliant. The Emissions from the DUT did not exceed the field strength levels specified in FCC Part 15.209.

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.1. Spurious Radiated Emissions, 30 kHz to 150 kHz Test Results

6.5.1.1. X-Axis, Parallel Antenna

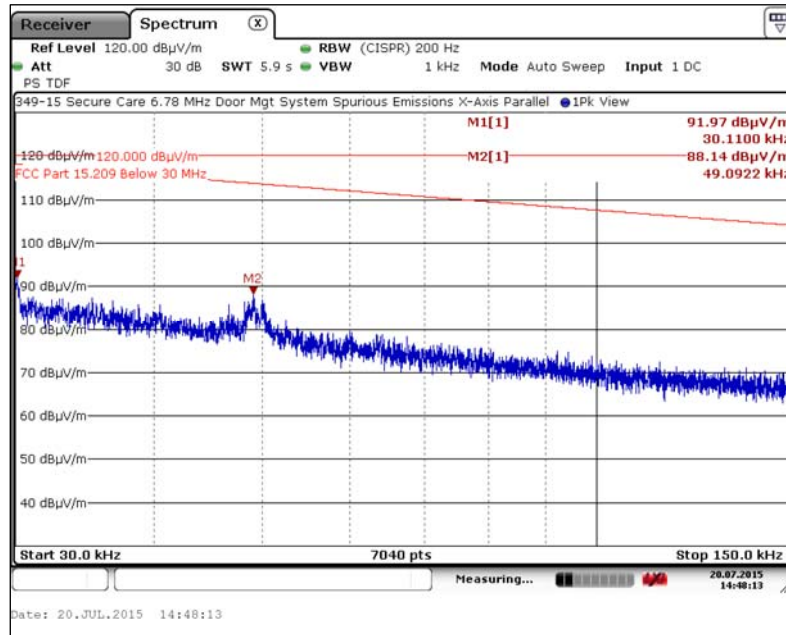

6.5.1.2. X-Axis, Perpendicular Antenna

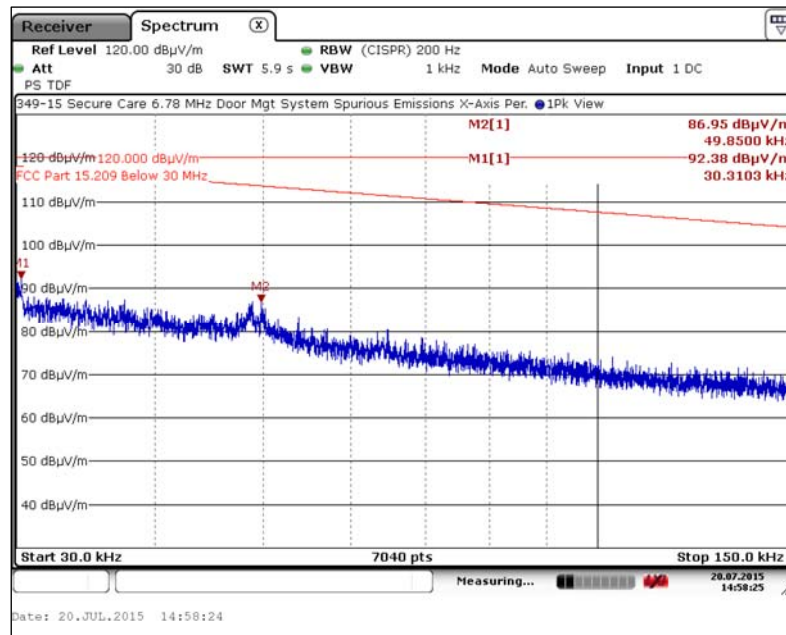


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.1. Spurious Radiated Emissions, 30 kHz to 150 kHz Test Results

6.5.1.3. Y-Axis, Parallel Antenna

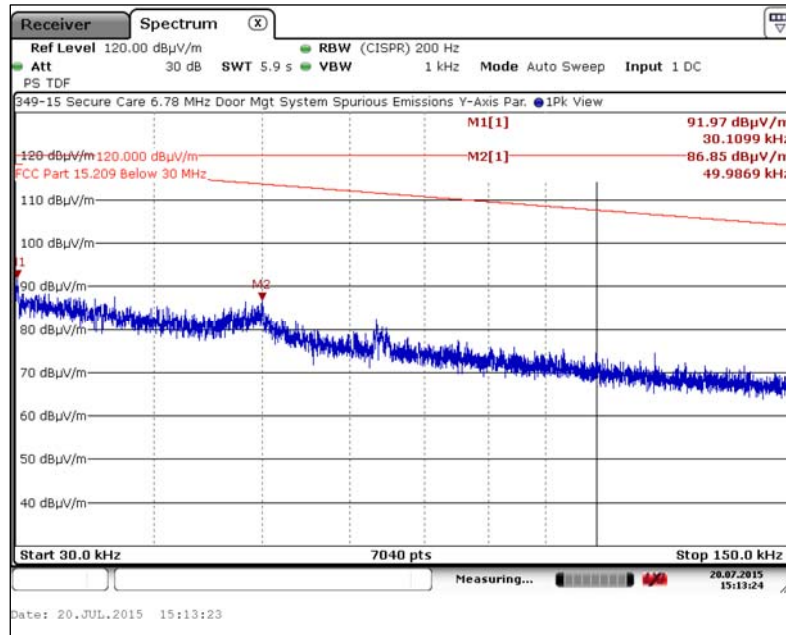

6.5.1.4. Y-Axis, Perpendicular Antenna

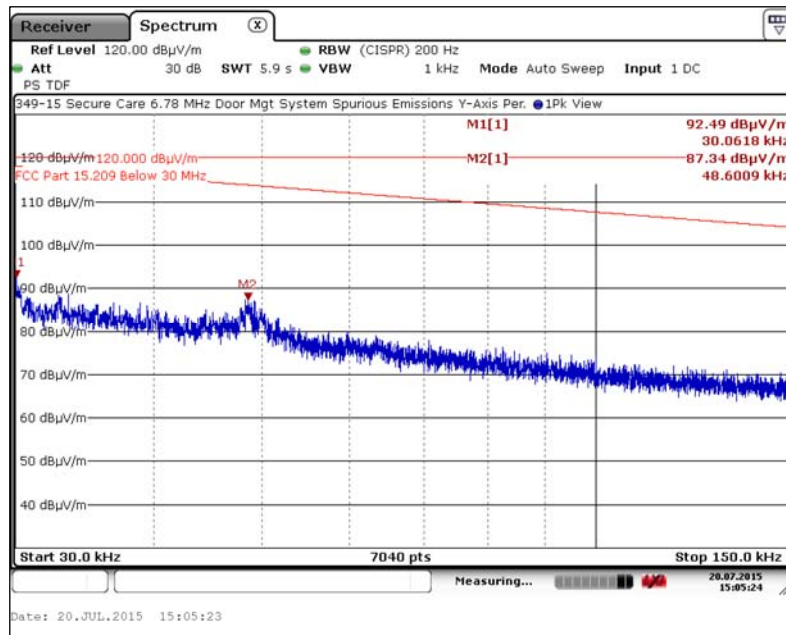


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.1. Spurious Radiated Emissions, 30 kHz to 150 kHz Test Results

6.5.1.5. Z-Axis, Parallel Antenna

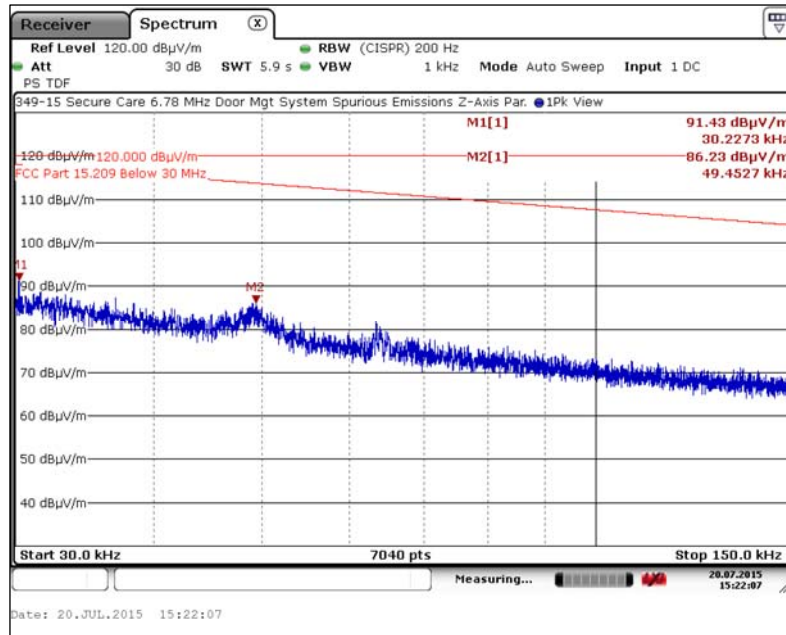

6.5.1.6. Z-Axis, Perpendicular Antenna

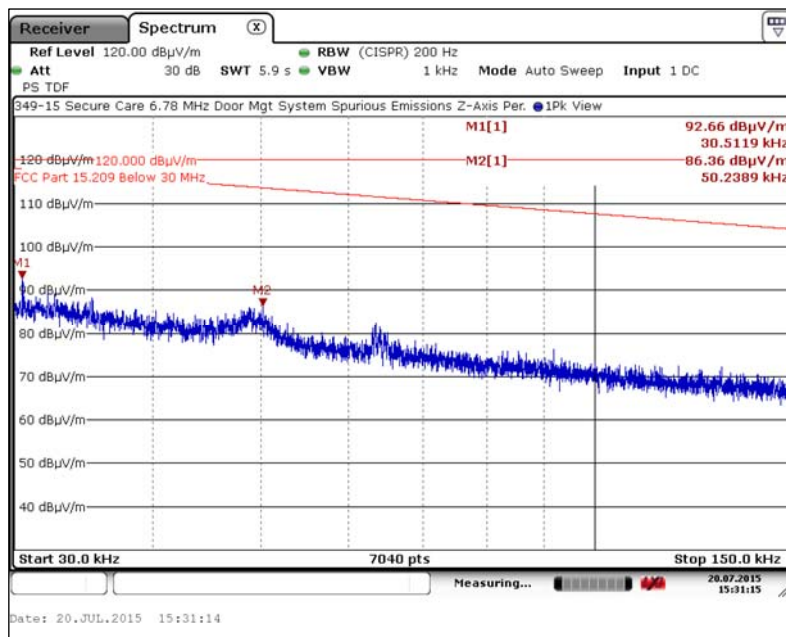


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.2. Spurious Radiated Emissions, 150 kHz to 30 MHz Test Results

6.5.2.1. X-Axis, Parallel Antenna

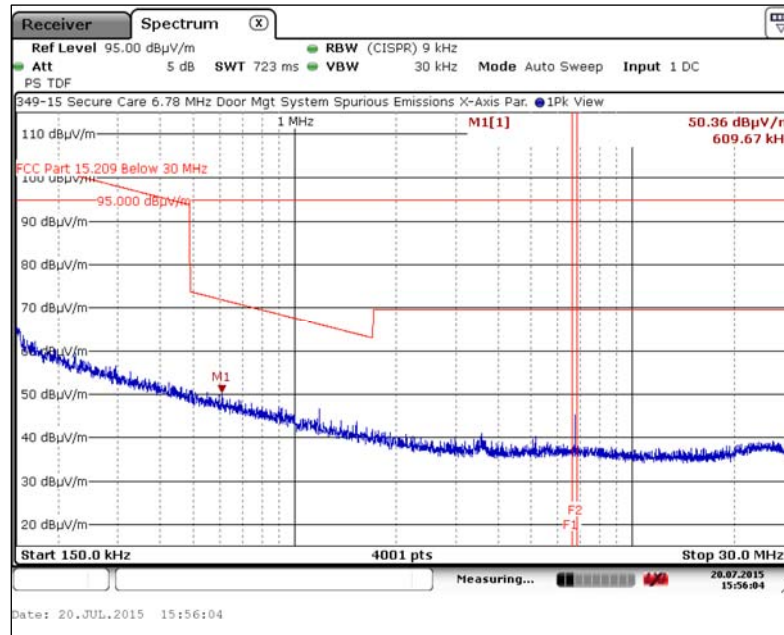

6.5.2.2. X-Axis, Perpendicular Antenna

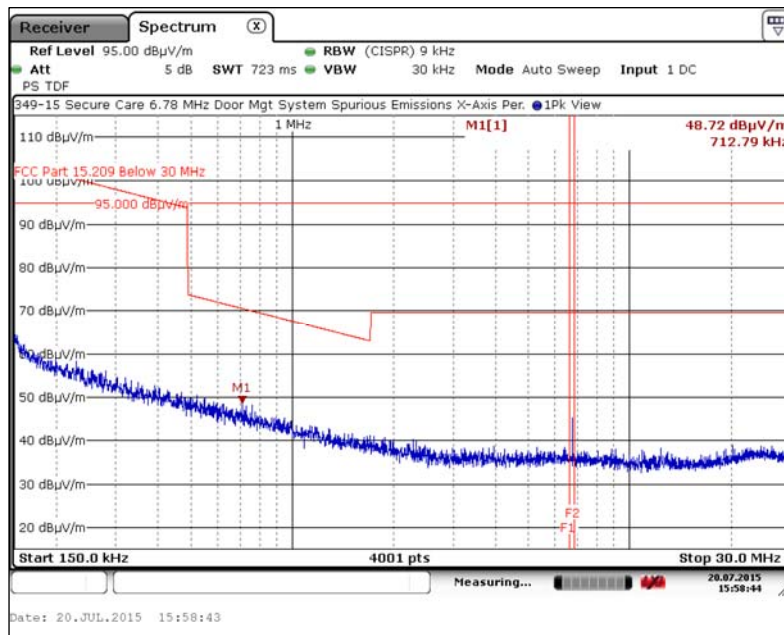


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.2. Spurious Radiated Emissions, 150 kHz to 30 MHz Test Results

6.5.2.3. Y-Axis, Parallel Antenna

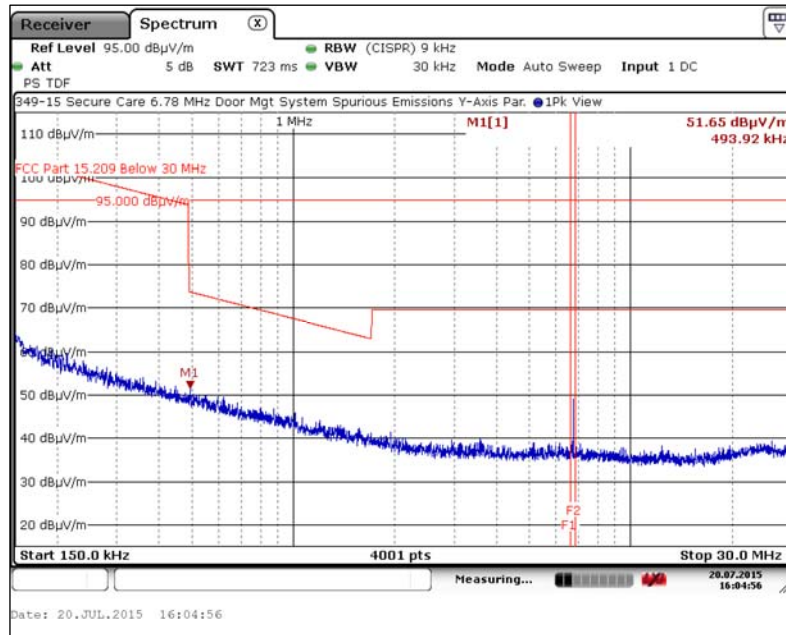

6.5.2.4. Y-Axis, Perpendicular Antenna

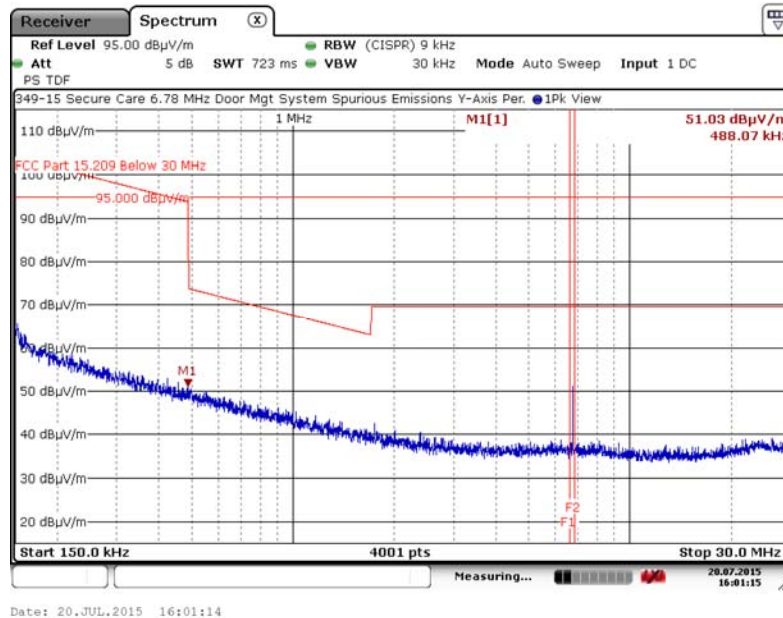


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.2. Spurious Radiated Emissions, 150 kHz to 30 MHz Test Results

6.5.2.5. Z-Axis, Parallel Antenna

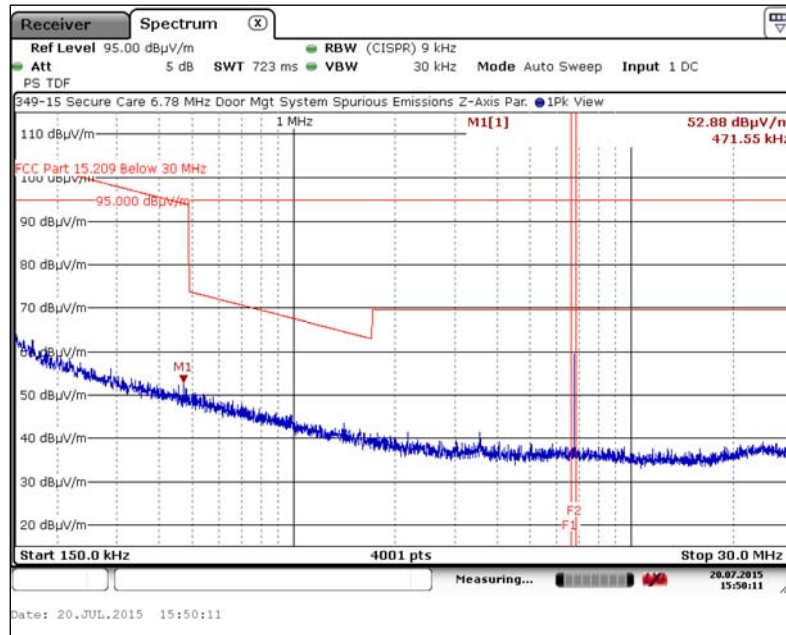

6.5.2.6. Z-Axis, Perpendicular Antenna

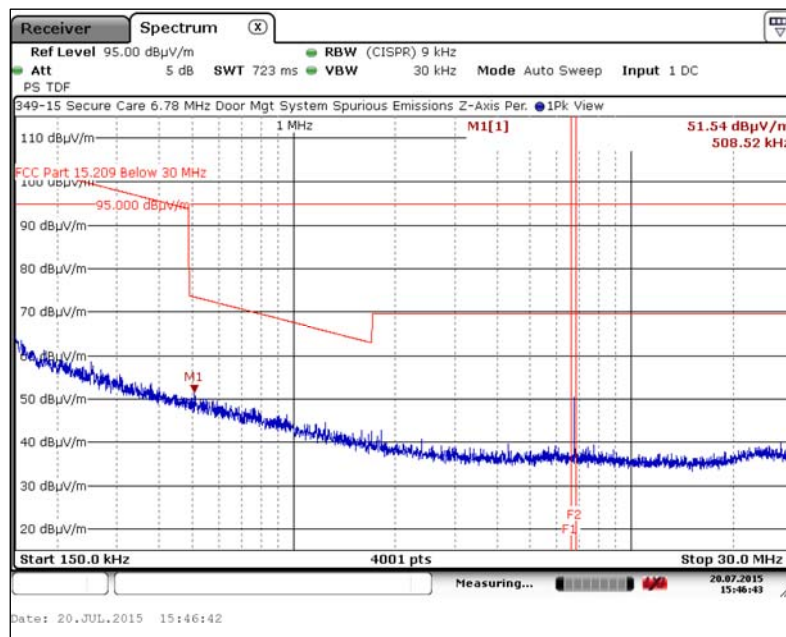


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.3. Spurious Radiated Emissions, 30 MHz to 1 GHz Test Results

6.5.3.1. X-Axis, Horizontal Polarity

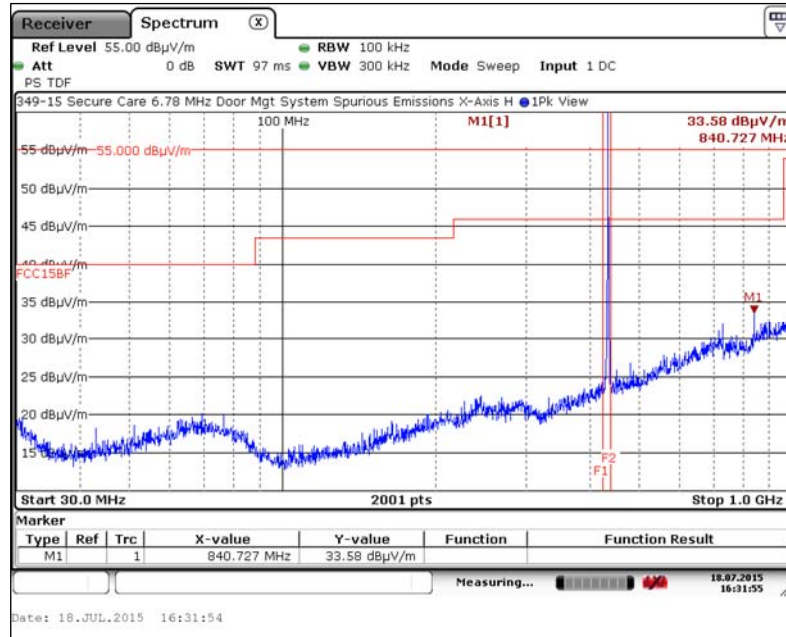

6.5.3.2. X-Axis, Vertical Polarity

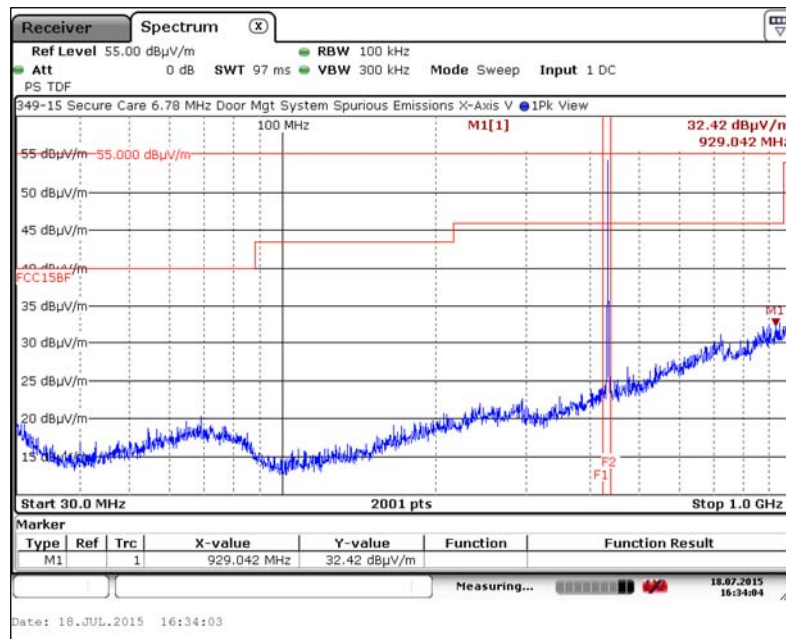


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.3. Spurious Radiated Emissions, 30 MHz to 1 GHz Test Results

6.5.3.3. Y-Axis, Horizontal Polarity

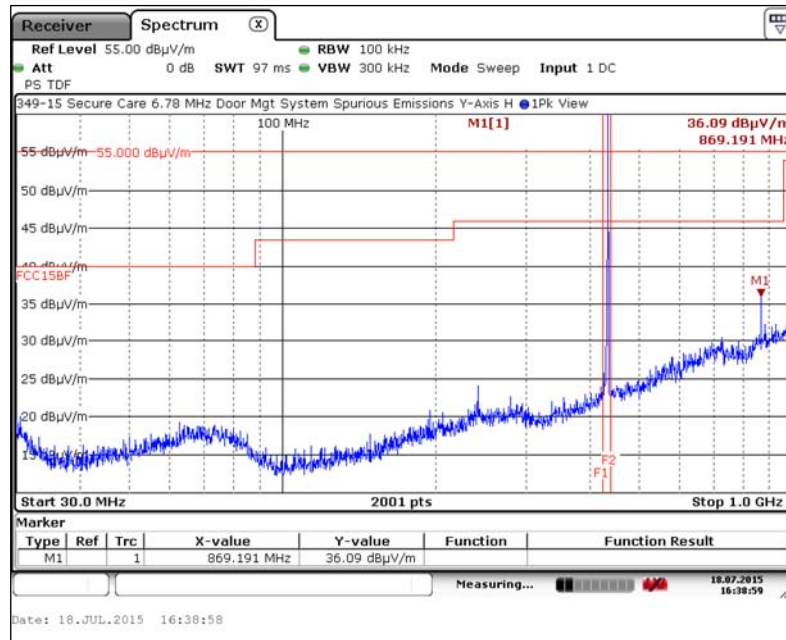

6.5.3.4. Y-Axis, Vertical Polarity

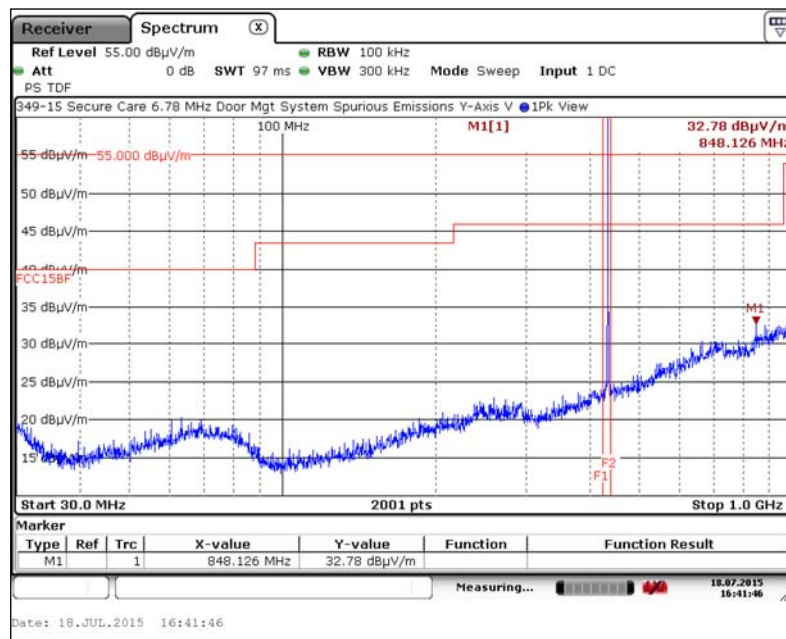


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.3. Spurious Radiated Emissions, 30 MHz to 1 GHz Test Results

6.5.3.5. Z-Axis, Horizontal Polarity

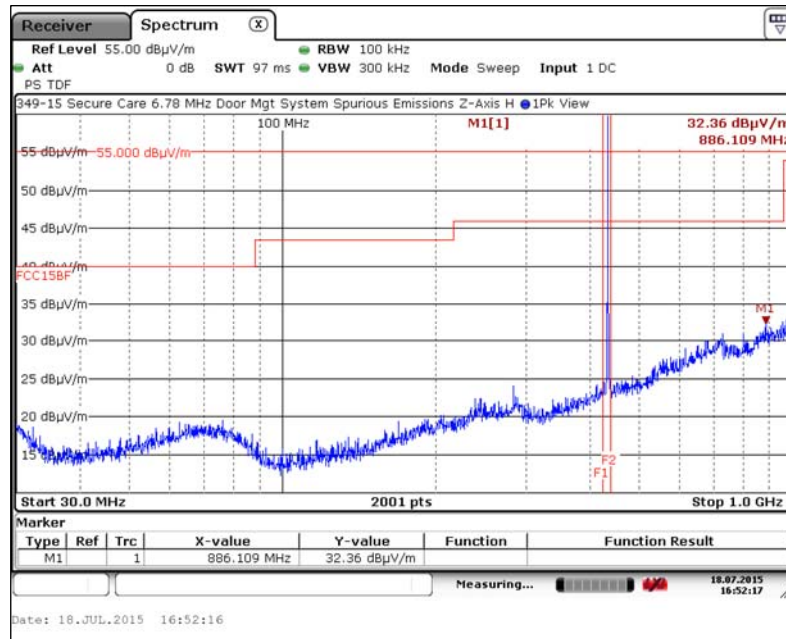

6.5.3.6. Z-Axis, Vertical Polarity

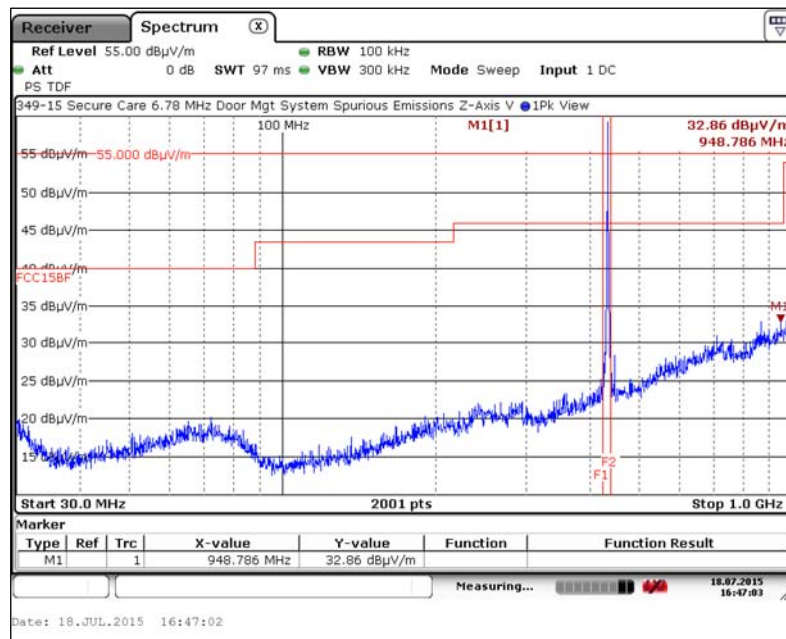


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.4. Spurious Radiated Emissions, 1 MHz to 2 GHz Test Results

6.5.4.1. X-Axis, Horizontal Polarity

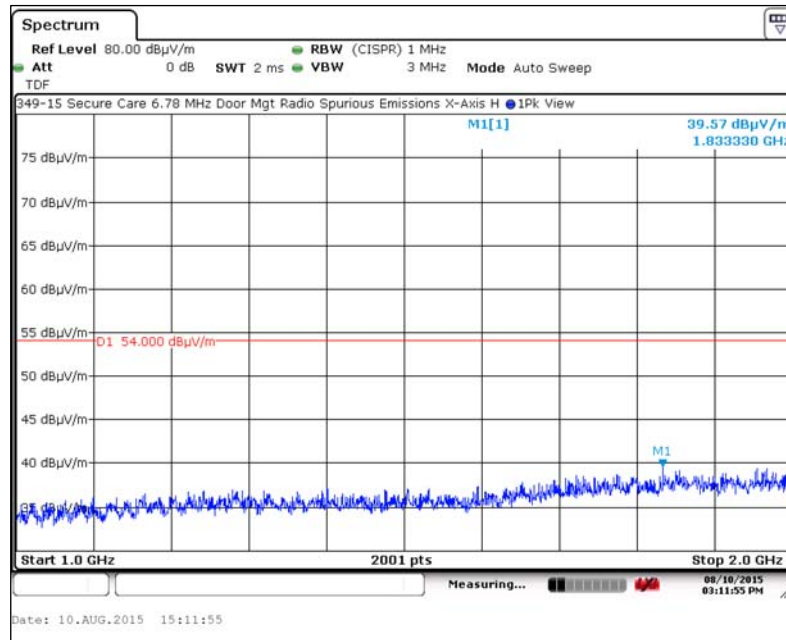

6.5.4.2. X-Axis, Vertical Polarity

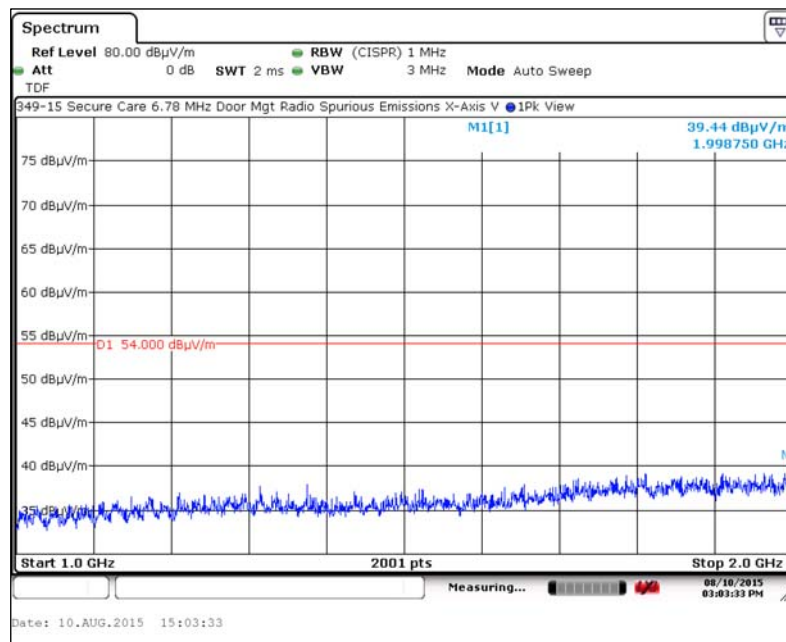


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.4. Spurious Radiated Emissions, 1 GHz to 2 GHz Test Results

6.5.4.3. Y-Axis, Horizontal Polarity

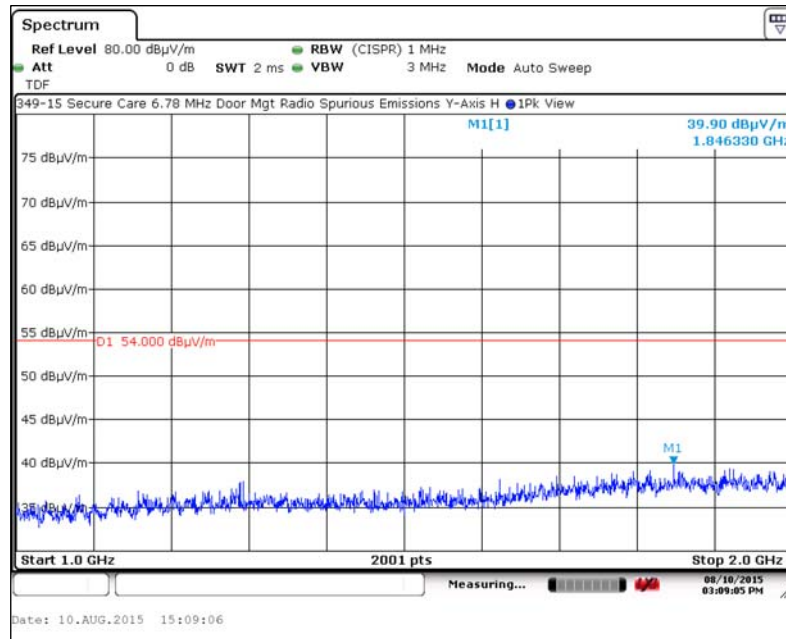

6.5.4.4. Y-Axis, Vertical Polarity

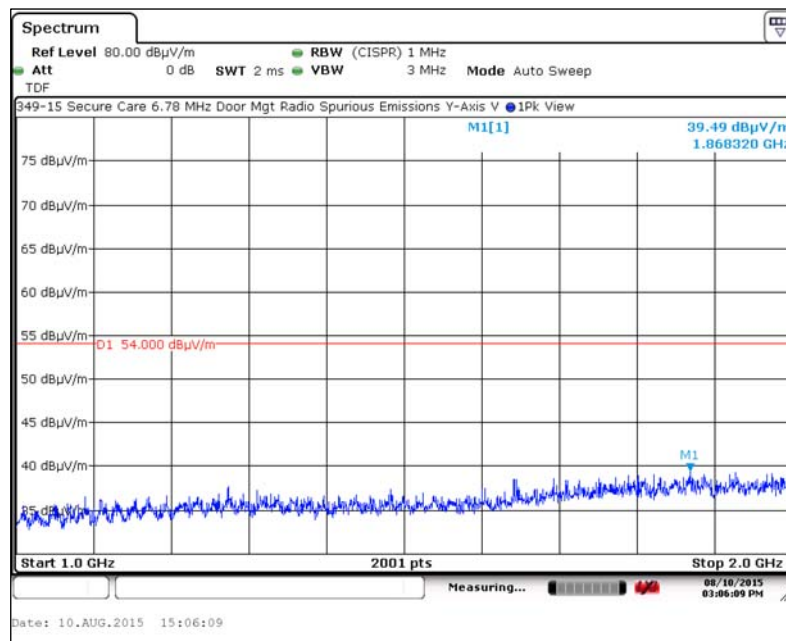


6. Measurement Data (continued)


6.5. Spurious Radiated Emissions, 30 kHz to 2.0 GHz (15.229, § (c), 15.209) (cont'd)

6.5.4. Spurious Radiated Emissions, 1 GHz to 2 GHz Test Results

6.5.4.5. Z-Axis, Horizontal Polarity

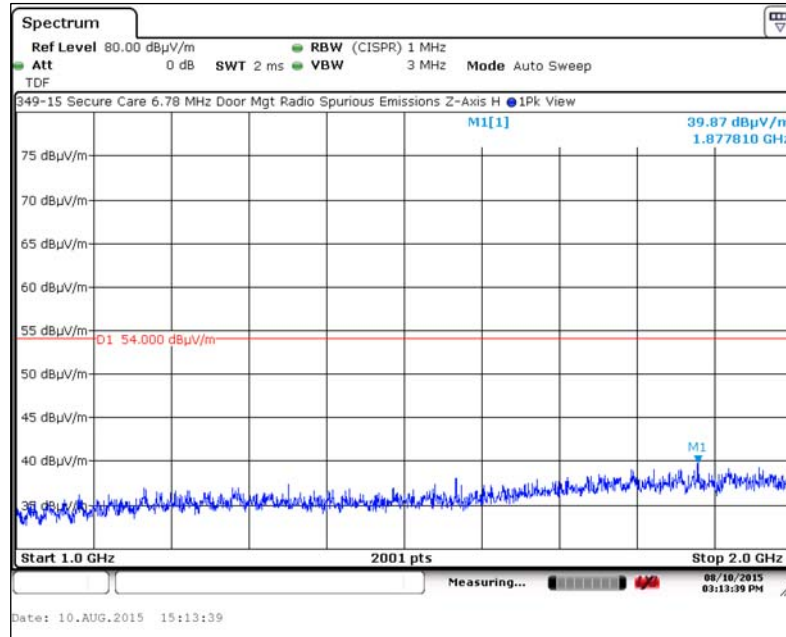

6.5.4.6. Z-Axis, Vertical Polarity

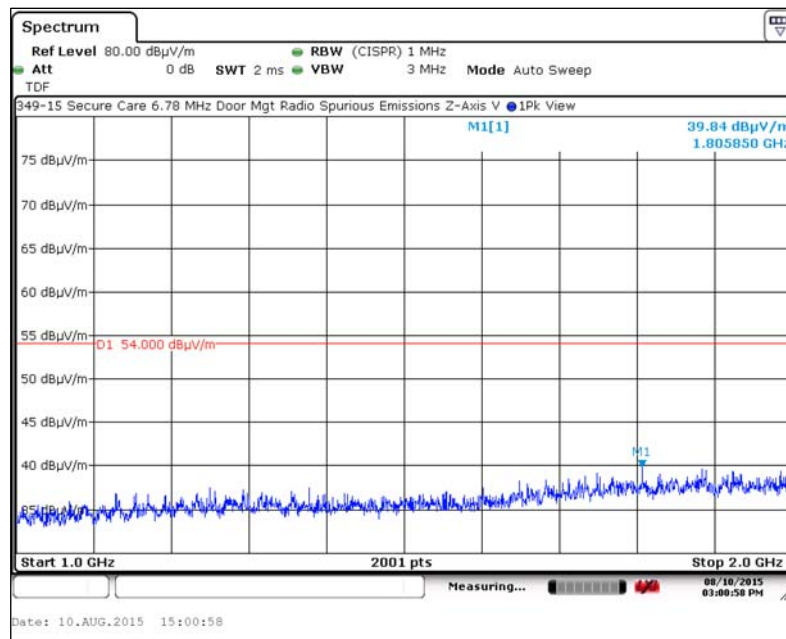

7. Test Setup Photographs

7.1. Radiated Emissions Front View



7. Test Setup Photographs

7.2. Radiated Emissions Rear View < 30 MHz



7. Test Setup Photographs

7.3. Radiated Emissions Front View 30 MHz – 1 GHz



7. Test Setup Photographs

7.4. Radiated Emissions Rear View 30 MHz – 1 GHz



7. Test Setup Photographs

7.5. Radiated Emissions Front View above 1 GHz



7. Test Setup Photographs

7.5. Radiated Emissions Rear View above 1 GHz



8. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with Federal Communications Commission (FCC) and Industry Canada standards. A description of the test sites is on file with the FCC (registration number **96392**) and Industry Canada (file number **IC 3023A-1**).

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022.

Both sites are designed to test products or systems 1.5 meter W x 1.5 meter L x 2.0 meter H, floor standing or table top.