


Serial #: 463-1668


•••○  
**FREEWAVE**

FreeWave Technologies, Inc.  
5395 Pearl Pkwy / Boulder, CO 80301 USA



Model #: LRS455C  
Config:  
Revision: C  
Input: 8-27 V   
Interface: RS232/RS485  
CAGE: 05UA3 Mfg: Feb 2023  
FCC ID: KNYLRS455C  
IC: 2329B-LRS455C  
CMIIT:

ANATEL

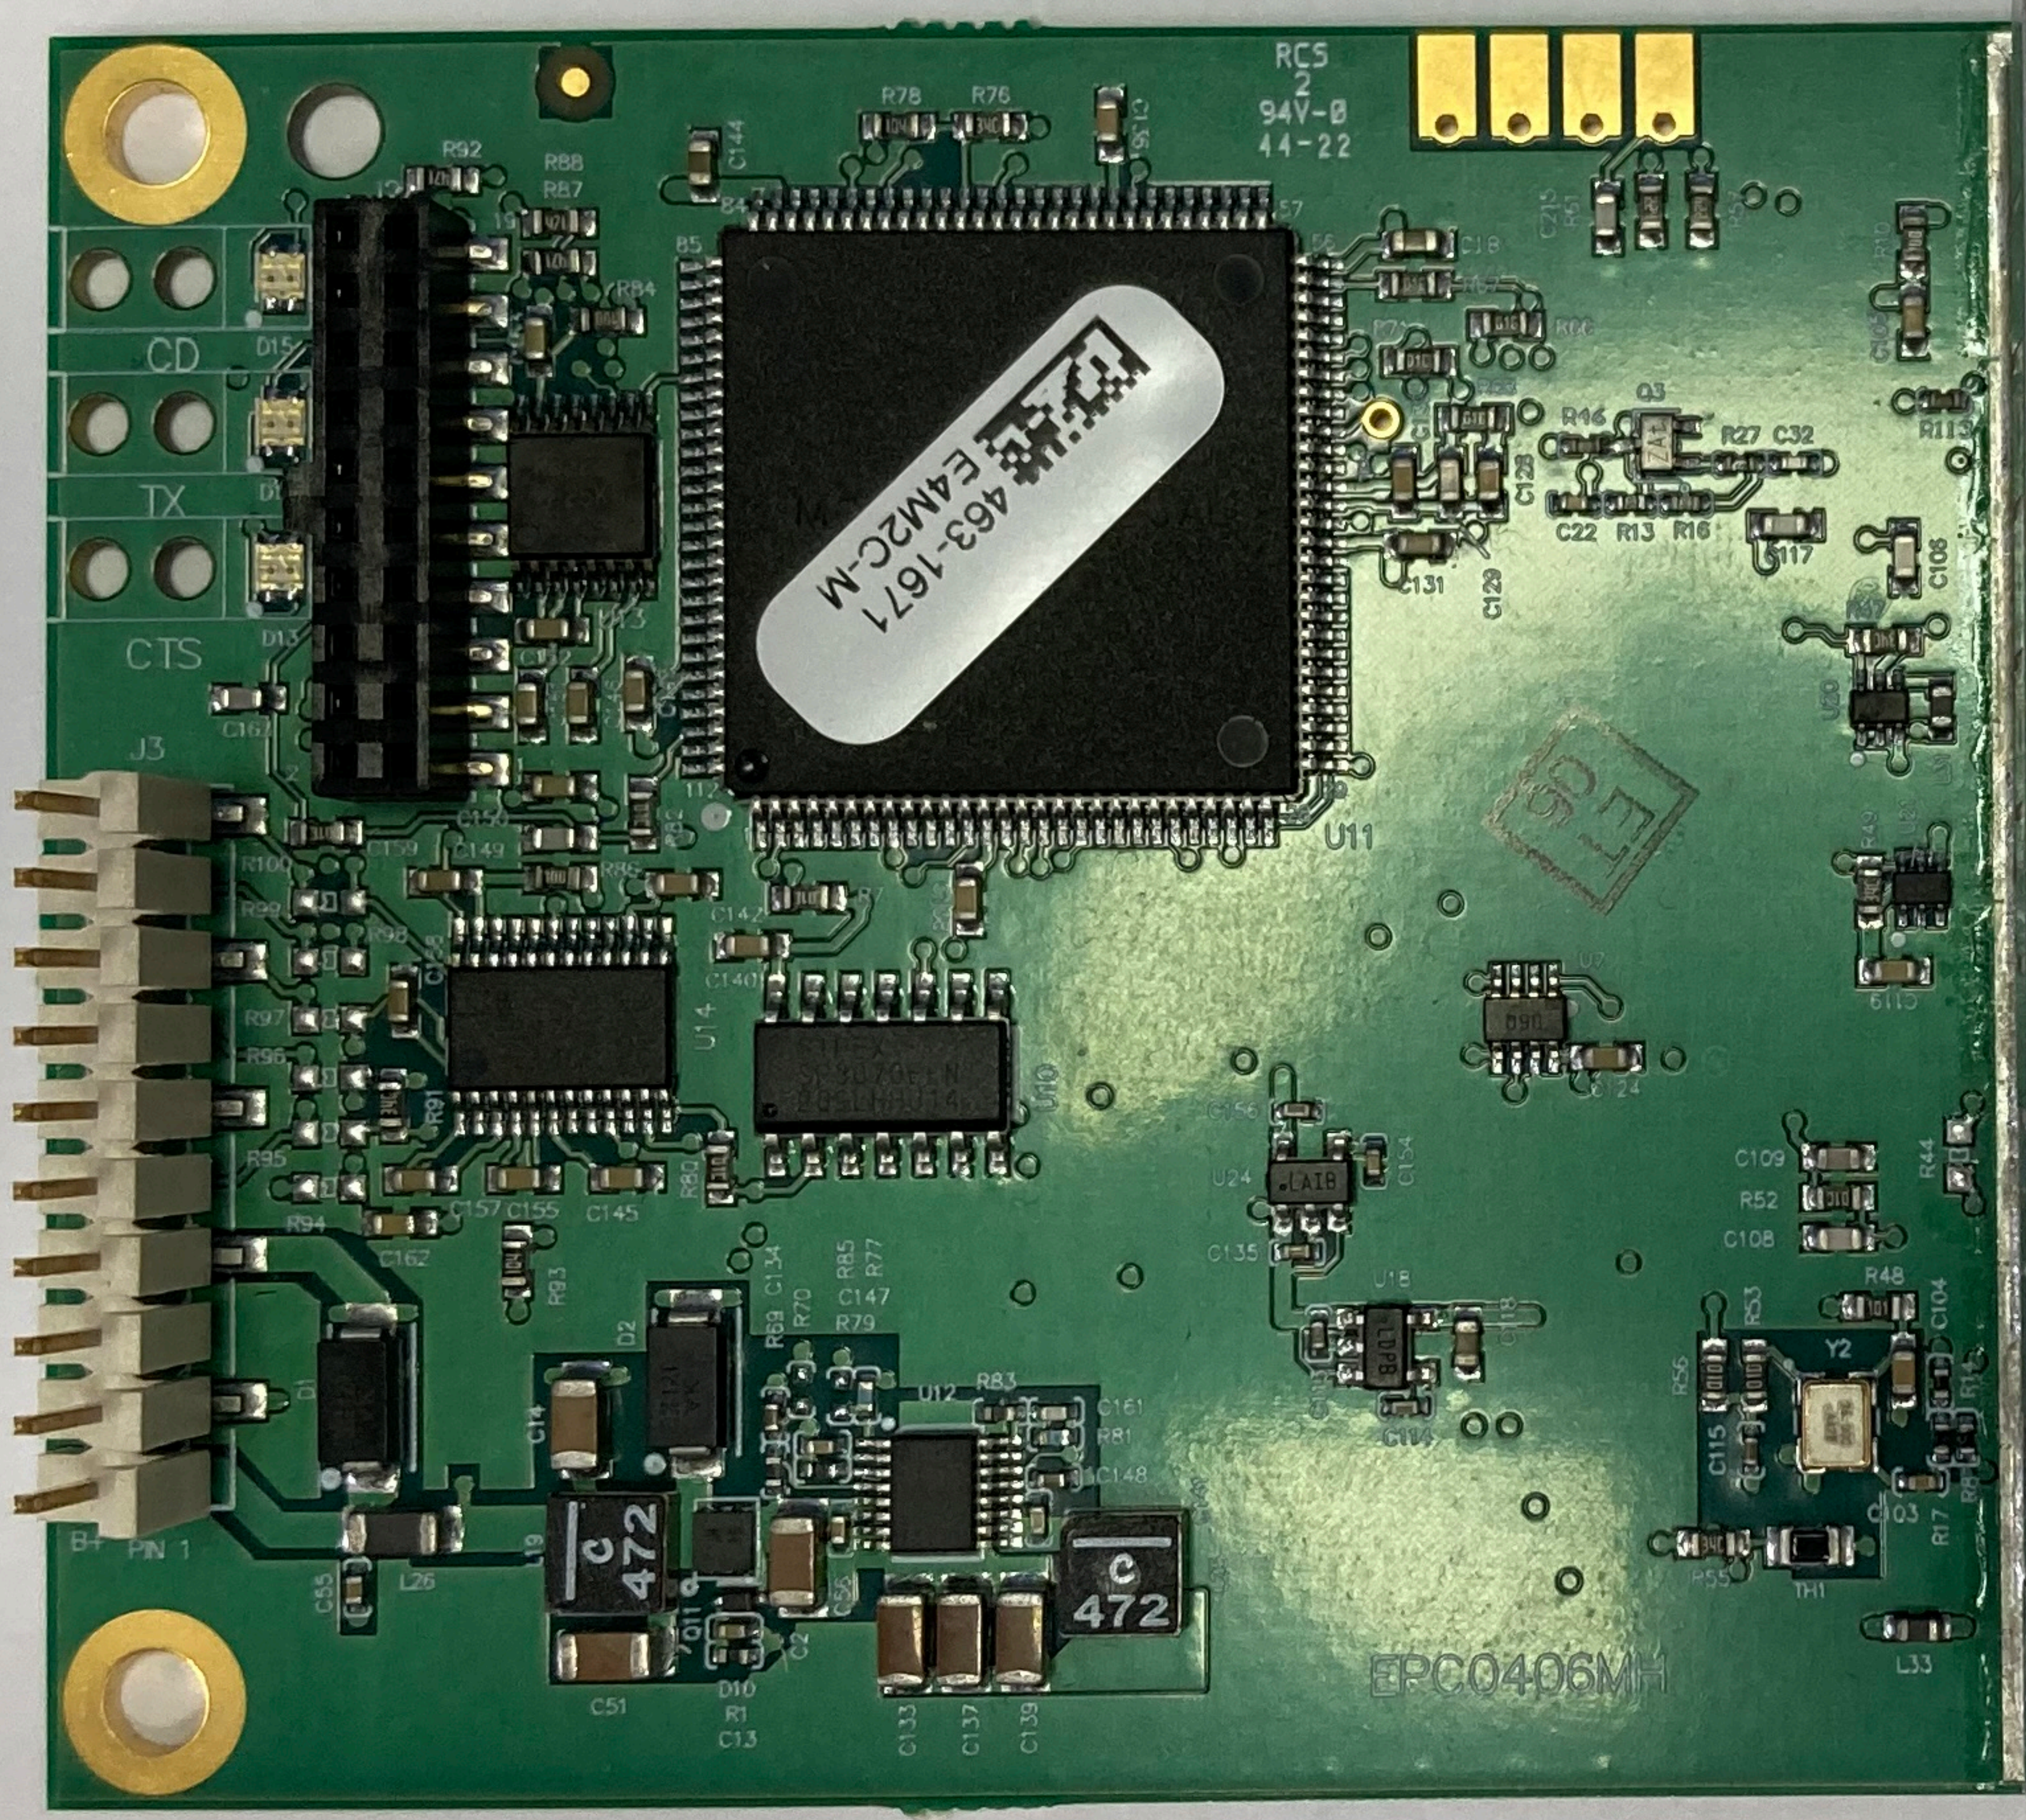

Serial #: 463-1668

**FC**

**FREEWAVE**  
FreeWave Technologies, Inc  
5305 Pearl Pkwy / Boulder, CO 80301 USA

Model #: LRS455C-JD  
Config: C  
Revision: 6-27 V  
Input: RS232/RS485  
Interface: 05UA3  
CAGE: TBD  
Contains FCC: TBD  
Contains IC: TBD  
CMI/T: TBD

Mfg. Dec 2022

ANATEL

# LTX 600 Thermal Transfer Gloss White Polyester

## Product Description

A general purpose, high performance polyester label film. **LTX 600** is UL/CSA approved, when printed with a **LABELTRONIX® 500 Plus™** ribbon under UL# MH26576. This facestock resists tearing, abrasion and heat. The gloss white surface makes label graphics easy to read.

## Facestock Description

A gloss, topcoated, thermal transfer printable, white polyester. Static dissipating properties reduce print voids in thermal transfer printing, which are due to static generated at the printhead.

Test Property .....	Typical Values
Type .....	Gloss White Polyester
Caliper (mils).....	2.0 ± 10%
Ribbon Compatibility.....	500 Plus™

## Adhesive Description

An aggressive, high performance permanent adhesive. This adhesive offers high initial tack, high shear, and high ultimate bond to a wide variety of surfaces.

Test Property .....	Typical Values
Type .....	General Purpose Acrylic
Application Temperature (Minimum).....	50°F
Service Temperature Range .....	-40°F to 302°F

## Liner Description

Test Property .....	Typical Values
Type .....	Bleached Kraft
Caliper (mils).....	3.1 ± 10%

## Recommendations

- One-year shelf life from receipt of material, if properly stored.
- Recommended storage conditions are 72°F (22°C) and 50% relative humidity.
- Good for use in: UL rating plates and nameplates, material tracking, under the hood labels, parts identification, and asset management labels.

As with all pressure-sensitive materials, **LABELTRONIX®** recommends this product be tested thoroughly under end-use conditions to make sure it meets the requirements of the specific application.

**\*Please note that the above data represents expected averages with variances following industry standards. They should not be misinterpreted as minimum or absolute values.**

This specification sheet was updated and confirmed as of 11/01/01.