



Serial # 971-2846

FREEWAVE

MM3-T



Part #: MM3-T

Config:

Input 5 V

Interface: TTL

CAGE: 05UA3

Mfg: Jul 2020

FCC ID: KNYMM3

IC ID: 2329B-MM3

ANATEL:

Made in USA

CNC ID:

LRv

FreeWave Technologies, Inc



Serial # 971 2868

FREEWAVE

MM3-T



Part #: MM3-T

Config:

Input 5 V_{DD}

Interface: TTL

CAGE 05UA3

FCC ID KNYMM3

IC ID 2329B-MM3

ANATEL

Mfg: Jul 2020


Made in USA

CNC ID:

FreeWave Technologies, Inc


1 Rv

TP4
TP3
TP2
TP1
653

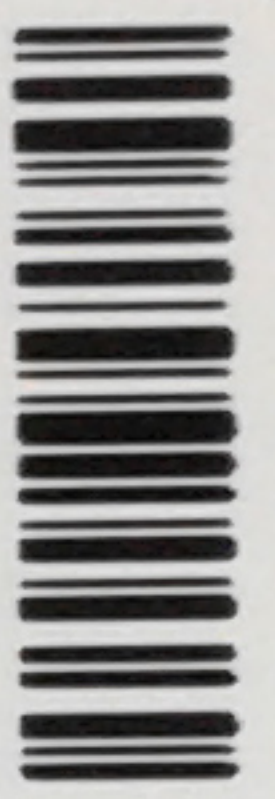

Serial # 971-2843

FREEWAVE
MM3-T

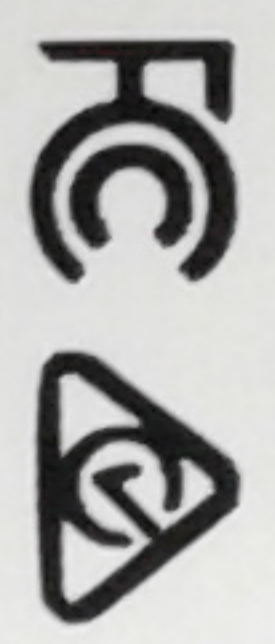

Part # MM3-T
Config 5
Input TTL
Interface: V---

CAGE 05UA3
FCC ID KNYMM3
IC ID 2329B-MM3
ANATEL
CNC ID
Mfg: Jul 2020
Made In USA

FreeWave Technologies Inc

1 Rv



J2

LTX 600 Thermal Transfer Gloss White Polyester

Product Description

A general purpose, high performance polyester label film. **LTX 600** is UL/CSA approved, when printed with a LABELTRONIX® 500 Plus™ ribbon under UL# MH26576. This facestock resists tearing, abrasion and heat. The gloss white surface makes label graphics easy to read.

Facestock Description

A gloss, topcoated, thermal transfer printable, white polyester. Static dissipating properties reduce print voids in thermal transfer printing, which are due to static generated at the printhead.

Test Property	Typical Values
Type	Gloss White Polyester
Caliper (mils)	2.0 ± 10%
Ribbon Compatibility	500 Plus™

Adhesive Description

An aggressive, high performance permanent adhesive. This adhesive offers high initial tack, high shear, and high ultimate bond to a wide variety of surfaces.

Test Property	Typical Values
Type	General Purpose Acrylic
Application Temperature (Minimum)	50°F
Service Temperature Range	-40°F to 302°F

Liner Description

Test Property	Typical Values
Type	Bleached Kraft
Caliper (mils)	3.1 ± 10%

Recommendations

- One-year shelf life from receipt of material, if properly stored.
- Recommended storage conditions are 72°F (22°C) and 50% relative humidity.
- Good for use in: UL rating plates and nameplates, material tracking, under the hood labels, parts identification, and asset management labels.

As with all pressure-sensitive materials, LABELTRONIX® recommends this product be tested thoroughly under end-use conditions to make sure it meets the requirements of the specific application.

***Please note that the above data represents expected averages with variances following industry standards. They should not be misinterpreted as minimum or absolute values.**

This specification sheet was updated and confirmed as of 11/01/01.