



# TEST REPORT

Report Number: 101503607DEN-001A  
Project Number: G101503607

Report Issue Date: 2/26/2014

**Product Designation:** Model: W5800-01 with RadioWaves SPD4-5.2S (4' Parabolic "Dish" Antenna)

**Standards:** FCC Part 15 Subpart C (15.247)  
Operation within the bands 902-928 MHz, 2400-2483.5 MHz,  
and 5725-5850 MHz  
**IC RSS-210, Issue 8: 2010**  
**IC RSS-GEN, Issue 3: 2010**

Tested by:  
Intertek Testing Services NA, Inc.  
1795 Dogwood St. Suite 200  
Louisville, CO 80027

Client:  
FreeWave Technologies, Inc.  
5395 Pearl Parkway, Suite 100  
Boulder, CO 80301

Report prepared by

Randy Thompson  
Senior EMC Project Engineer

Report reviewed by

Michael Spataro  
Engineering Team Leader

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.*

**TABLE OF CONTENTS**

**1 Introduction and Conclusion ..... 3**

**2 Test Summary ..... 4**

**3 Description of Product Under Test..... 6**

**4 System setup including cable interconnection details, support equipment and simplified block diagram ..... 9**

**5 AC Voltage Variation/ Battery Requirement ..... 14**

**6 Antenna Requirement..... 14**

**7 DTS Requirement..... 14**

**8 DTS Bandwidth (6dB Bandwidth)..... 14**

**9 RF Conducted Output Power ..... 14**

**10 RF Conducted Spurious Emissions (-20dBc) – Including Band Edge ..... 14**

**11 Transmitter Radiated Spurious Emissions – Restricted Band/ Band Edge ..... 15**

**12 Power Spectral Density – PSD ..... 65**

**13 Radiated Emissions (Digital Part of Receiver)..... 65**

**14 AC Mains Conducted Emissions - Transmitter ..... 65**

**15 RF Exposure Requirement ..... 65**

**16 Duty Cycle/ Duty Cycle Correction Factor ..... 65**

**17 Appendix A: Antenna Specifications..... 66**

**18 Measurement Uncertainty..... 67**

**19 Revision History ..... 68**

## 1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded **the product tested complies with the requirements of the standard(s) indicated**. The results obtained in this test report pertain only to the item(s) tested.

### 1.1 Test Report Scope

FCC/IC Class II Permissive Change

The scope of this report was to qualify the existing approved radio module Model: W5800-01 with new antennas. This specific report covers the following antenna:

- Model: SPD4-5.2S (4' Parabolic "Dish" antenna)

This radio operates in the following 802.11 a/n Tx Band: 5725 – 5850 MHz.

The Model: W5800-01 has previously been fully qualified and documented in the following SPORTON LAB test report:

- FCC Test Report Number: FR362203A1

Below is a summary of Intertek Test Reports associated with the Class II Permissive Change:

- **4' Parabolic "Dish" Antenna (5.8 GHz): 101503607DEN-001A (This Report)**
- Directional Panel Antenna (5.8 GHz): 101503607DEN-001B

### 1.2 Test Methodology

All measurements were performed according to the procedures in the following documents:

- ANSI C63.10: 2013 – ANSI Standard for Testing Unlicensed Wireless Devices
- FCC Publication 558074, April 9, 2013 (Guidelines for Compliance Measurements on DTS Operating Under 15.247)

Radiated emissions tests were formed at an antenna-to-product distance of 3-meters.

### 1.3 Test Facility

Intertek Denver's testing facilities are located at 1795 Dogwood St. Suite 200 Louisville, CO 80027. The testing facility is ISO17025:2005 accredited by A2LA, our lab code is 2506.02, our VCCI registration numbers are. R-1643, C-1752 and T-1558, our FCC designation no. US1121 and our IC lab no. 2042N.

Testing contained in this test report may not be covered under the laboratories scope of accreditation. A note will be placed in the specific test section for testing not covered under the laboratories scope.

## 2 Test Summary

| TEST SECTION | TESTS   | FCC/IC REFERENCE   | TEST DATE                      | RESULT   |
|--------------|---|--|--------------------------------|----------|
| 5            | AC Voltage Variation  | FCC 15.31(e)   | -----                          | N/A      |
| 6            | Antenna Requirement   | FCC 15.203   | -----                          | N/A      |
| 7            | DTS Requirement   | FCC 15.247(a)<br>RSS-210 A8.2  | -----                          | N/A      |
| 8            | 6dB Bandwidth   | FCC 15.247(a)(2)<br>RSS-210 A8.2(a)                                  | -----                          | N/A      |
| 9            | RF Conducted Output Power<br>(includes requirements for antenna gain<br>> 6dBi) | FCC 15.247(b)(3)(4)<br>FCC 15.247(c)(1)<br>RSS-210 A8.4(4)           | -----                          | N/A      |
| 10           | RF Conducted Spurious Emissions (-20dBc)<br>Includes Band Edge                  | FCC 15.247(d)<br>RSS-210 A8.5  | -----                          | N/A      |
| 11           | Transmitter Radiated Spurious Emissions<br>(Restricted Bands – Band Edge)       | FCC 15.247(d)<br>FCC 15.209/ 15.205<br>RSS-210 A8.5<br>RSS-Gen 7.2.5 | 02/12/2014<br>to<br>02/13/2014 | Complies |
| 12           | Power Spectral Density (PSD)  | FCC 15.247(e)<br>RSS-210 A8.2(b)                                     | -----                          | N/A      |
| 13           | Radiated Emissions – Digital Receiver   | FCC 15.109<br>RSS-Gen 6.1  | -----                          | N/A      |
| 14           | Tx AC Line Conducted Emissions  | FCC 15.207<br>RSS-Gen 7.2.4  | -----                          | N/A      |
| 15           | RF Exposure Requirement   | FCC 15.247(i)<br>FCC 15.1.1307(b)(1)<br>RSS 102                      | -----                          | N/A      |
| 16           | Duty Cycle/ Duty Cycle Correction Factor  | FCC 15.35(c)<br>RSS-Gen 4.5  | -----                          | N/A      |

### Notes:

- 1) All Tx Radiated Emission measurements in this report utilized the transmit channels and worst-case 802.11 a/n band(s), modulation and data rates reported in the FCC test report listed on page 3 of this report. Note HT20/HT40 and both SISO and MIMO Tx operating modes were tested.
- 2) Only selected testing required for the specific Class II Permissive change was performed.

**General Radio Test Notes:**

- ANSI C63.10, Section 4.2.3.2/ FCC 15.35: Measurement detector functions and bandwidths utilized in this testing were per the preceding guidelines.
- ANSI C63.10, Section 4.2.3.2.2/ FCC 15.35(b): When an average limit is specified, the peak emission must also be measured to ensure the emissions is less than 20dB above the average limit and/or below the peak limit specified. This report includes both average and peak test data.
- ANSI C63.10, Section 5.3/ FCC 15.31: All radiated field strength measurements taken at an antenna-to-product test distance of 3-meters.
- ANSI C63.10, Section 6.3/ FCC 15.31(m): Measurements were taken at the lowest, near the middle and highest channels of the product tested.

**3 Description of Product Under Test**

|                                     |  |
|-------------------------------------|--|
| <b>Model:</b>                       | W5800-01 (5.8 GHz)   |
| <b>Type of EUT:</b>                 | 802.11 a/n PCIe Radio Module   |
| <b>Serial Number:</b>               | DEN1402111313  |
| <b>FCC ID:</b>                      | KNYPRW1001EC   |
| <b>Industry Canada ID:</b>          | 2329B-PRW1001EC  |
| <b>Related Submittal(s) Grants:</b> | -----  |
| <b>Company:</b>                     | FreeWave Technologies, Inc.  |
| <b>Customer:</b>                    | FreeWave Technologies, Inc.  |
| <b>Address:</b>                     | 5395 Pearl Parkway, Suite 100  |
| <b>Phone:</b>                       | (303) 962-7879   |
| <b>Fax:</b>                         | -----  |
| <b>e-mail:</b>                      | dbusch@freewave.com  |
| <b>Test Standards:</b>              | <input checked="" type="checkbox"/> 47 CFR, Part 15C:§15.247 DTS<br><input checked="" type="checkbox"/> RSS-210, Issue 8, 2010<br><input checked="" type="checkbox"/> RSS-Gen, Issue 3, 2010<br><input type="checkbox"/> 47 CFR, Part 15C:§15.207<br><input type="checkbox"/> Other <span style="background-color: #cccccc; padding: 2px;">          </span> |
| <b>Type of radio:</b>               | <input type="checkbox"/> Stand -alone <input checked="" type="checkbox"/> Module <input type="checkbox"/> Hybrid   |
| <b>Date Sample Submitted:</b>       | 02/10/2014   |
| <b>Test Work Started:</b>           | 02/12/2014   |
| <b>Test Work Completed:</b>         | 02/13/2014   |
| <b>Test Sample Conditions:</b>      | <input type="checkbox"/> Damaged <input type="checkbox"/> Poor (Usable) <input checked="" type="checkbox"/> Good   |

|   |  |
|---|--|
| <b>Product Description:</b>             | Wireless router utilized in M2M industrial applications  |
| <b>Transmitter Type:</b>                | <input type="checkbox"/> FHSS <input type="checkbox"/> Digital Modulation <input checked="" type="checkbox"/> WiFi <input type="checkbox"/> Blue Tooth |
| <b>Operating Frequency Range(s):</b>    | 5725MHz to 5850MHz   |
| <b>Number of Channels:</b>              | IEEE 802.11a/n HT20 (5-Channels)<br>802.11n HT40 (2-Channels)<br>Channel Frequency Range: 5745 – 5825 MHz  |
| <b>Modulation:</b>                      | 802.11 a/n: OFDM-BPSK, QPSK, 16QAM, 64QAM  |
| <b>Antenna(s) Info:</b>                 | Antenna: Type: 5.8GHz Parabolic "Dish"<br>Gain: +34.9 dBi Connector Type: "N"<br>External Antenna(s) (Dedicated) – Point-to-Point                      |
| <b>Rated Power:</b>                     | 802.11 a/n HT20: EIRP 26.79 dBm (478 mW)<br>802.11 n/HT40 EIRP 26.10 dBm (407 mW)  |
| <b>Antenna Installation:</b>            | <input type="checkbox"/> User <input checked="" type="checkbox"/> Professional <input type="checkbox"/> Factory  |
| <b>Transmitter power configuration:</b> | <input type="checkbox"/> Internal battery <input checked="" type="checkbox"/> External power source  |
| <b>Special Test Arrangement:</b>        | Mounted on antenna tripod  |
| <b>Test Facility Accreditation:</b>     | A2LA (Certificate No. 2506.02)   |
| <b>Test Methodology:</b>                | Measurements performed according to the procedures in ANSI C63.10-2013 and FCC Guidance Publication 558074   |

### 3.1 Channel Configurations

| CHANNELS IN THE TX 5725 – 5850 MHZ BAND |                 |                |              |                           |                           |
|---|-----------------|----------------|--------------|---------------------------|---------------------------|
| Channel Number                          | Frequency (MHz) | 802.11a/n HT20 | 802.11n HT40 | SISO<br>N <sub>TX=1</sub> | MIMO<br>N <sub>TX=3</sub> |
| 149                                     | 5745            | xt             | ---          | tested                    | tested                    |
| 153                                     | 5765            | x              | xt           | tested                    | tested                    |
| 157                                     | 5785            | xt             | xt           | tested                    | tested                    |
| 161                                     | 5805            | x              | ---          | x                         | x                         |
| 165                                     | 5825            | xt             | ---          | tested                    | tested                    |

Note: x = available channels      xt = tested channels

**3.2 Product Description - Detailed**

**Description of Equipment Under Test (provided by client)**

The system tested is the Model: W5800-01 (5.8 GHz) radio module configured with:

- Model: SPD4-5.2S (4' Parabolic "Dish" antenna)

The product is a wireless router utilized in M2M industrial applications

Signal & I/O Cables: Ethernet

The product is powered from an external power source.

For the testing of this specific test report, the product supports the following data rates in the 5745 – 5825 MHz band:

- IEEE 802.11a/n HT20: 6-54 Mbps/ MCS0-MCS23
- IEEE 802.11n HT40: MCS0-MCS23

In 802.11 a/n HT20 mode, the nominal bandwidth is 20MHz.

In 802.11n HT40 mode, the nominal bandwidth is 40MHz.

The product operates in both SISO (1-transmit chain) and MIMO (3-transmit chains) modes.

| Equipment Under Test Power Configuration |               |                 |                  |
|--|---------------|-----------------|------------------|
| Rated Voltage                            | Rated Current | Rated Frequency | Number of Phases |
| AC Adapter Input: 100-240VAC             | 0.9 A         | 50/60           | 1                |
| AC Adapter Output: 12VDC                 | 3.0 A         | ---             | ---              |

| Descriptions of EUT Exercising   |
|--|
| <input type="checkbox"/> Standby/Idle Mode   |
| <input type="checkbox"/> Continuous transmission, un-modulated carrier (CW)  |
| <input checked="" type="checkbox"/> Continuous transmission, modulated carrier (CW) utilizing worst-case data rate |
| <input type="checkbox"/> Continuous Receive Mode   |

Note: The chosen mode of operation described above is dependent upon the specific test to be performed.




#### 4 System setup including cable interconnection details, support equipment and simplified block diagram

##### 4.1 Method:

Record the details of EUT cabling, document the support equipment, and show the interconnections in a block diagram.

##### 4.2 EUT Block Diagram: 4' Parabolic "Dish" Antenna (3-port)

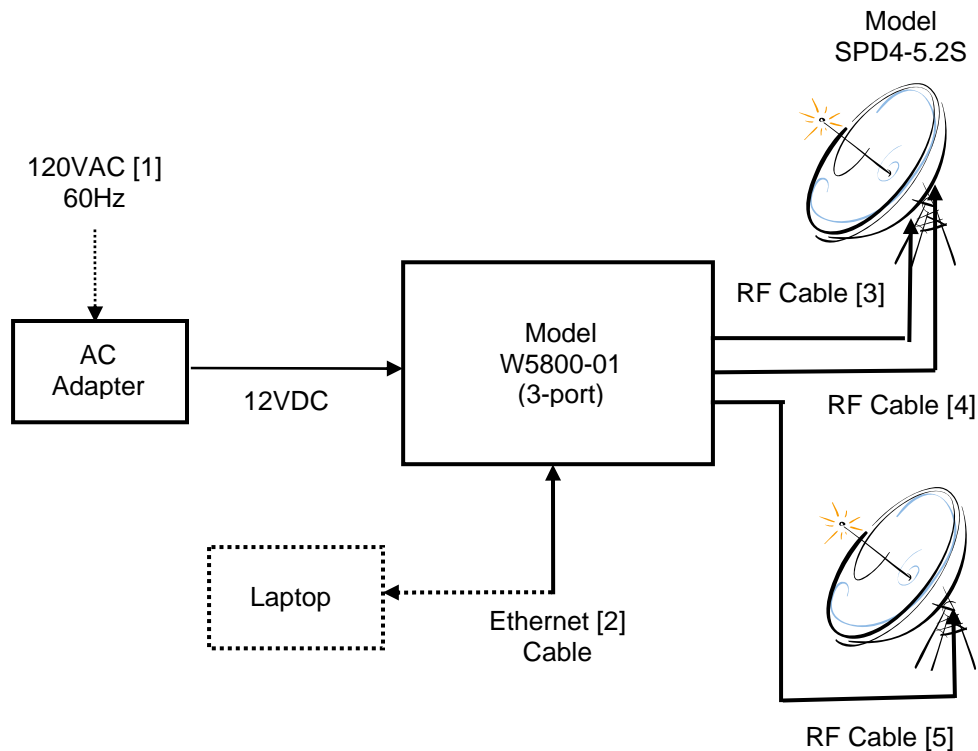

Note: Dashed lines indicate auxiliary/support equipment outside the test area. Ethernet cable was routed partially outside the test chamber with ~ 1-meter inside the test chamber – connected to the Model W5800-01 Ethernet port.

**4.3 Antenna Specifications:**

| 2.4 GHz   |                           |            |                     |              |                           |
|-----------|---------------------------|------------|---------------------|--------------|---------------------------|
| Model     | Type                      | Gain (dBi) | Beamwidth (degrees) | Polarization | Datasheet                 |
| SPD4-5.2S | 4' parabolic dish, 60 lbs | 34.9       | 3                   | Dual         | Appendix A of this report |

**4.4 Determination of RF Power supplied to antenna input for testing**

Per FCC 15.247(c)(1)(ii): Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

Antenna tested:

- Model: RadioWaves SPD4-5.2S (4' Parabolic "Dish" Antenna) Gain: 34.9dBi

=====

Maximum Peak Conducted Output Power: If antenna fixed, point-to-point and > 6dBi, then  $P_{Out} = 30\text{dBm}$  (power reduction not required)

Where:

$P_{Out}$  = maximum peak conducted output power (dBm)

=====

All Radiated measurements taken with the Model: W5800-01 transmitting at 27dBm. This represents the absolute worst-case since the actual rated maximum output power is less than the test output power.

- Actual Rated Output Power: 26.79dBm (478 mW)

**4.5 Support Data:**

| ID  | Description/ Function | Shield Type | Length    | Connector | Connection                | Ferrites |
|-----|-----------------------|-------------|-----------|-----------|---------------------------|----------|
| 1   | DC Cable (ac adapter) | none        | 0.5 meter | DC        | VDC – Model W5800-01      | none     |
| 2   | Ethernet Cable        | none        | 4-meter   | RJ45      | RJ-45 – Model W5800-01    | none     |
| 3-5 | RF Cable(s)           | Braid       | 3-meter   | SMA-to-N  | Model W5800-01 to Antenna | none     |

| Support Equipment      |               |               |               |
|------------------------|---------------|---------------|---------------|
| Description            | Manufacturer  | Model Number  | Serial Number |
| Laptop                 | HP            | ---           | ---           |
| Switching Power Supply | Sceptre Power | S036CQ1200300 | ---           |

Notes:

- 1) The laptop was utilized only to configure the product during testing (i.e. set channel, modulation, data rates, etc.).
- 2) The product has RF ports and Ethernet Cable ports.

**4.6 Photograph: Product Tested - Model W5800-01 with 4' Parabolic "Dish" Antenna**

Model W5800-01 Radio Module (3-port maximum)




4' Parabolic "Dish" Antenna (Single Antenna shown – 2-port)



**4.7 Photograph: Product Tested - Model: W5800-01 with 4' Parabolic "Dish" Antenna**

4' Parabolic "Dish" Antenna (Single Antenna shown – 2-port)

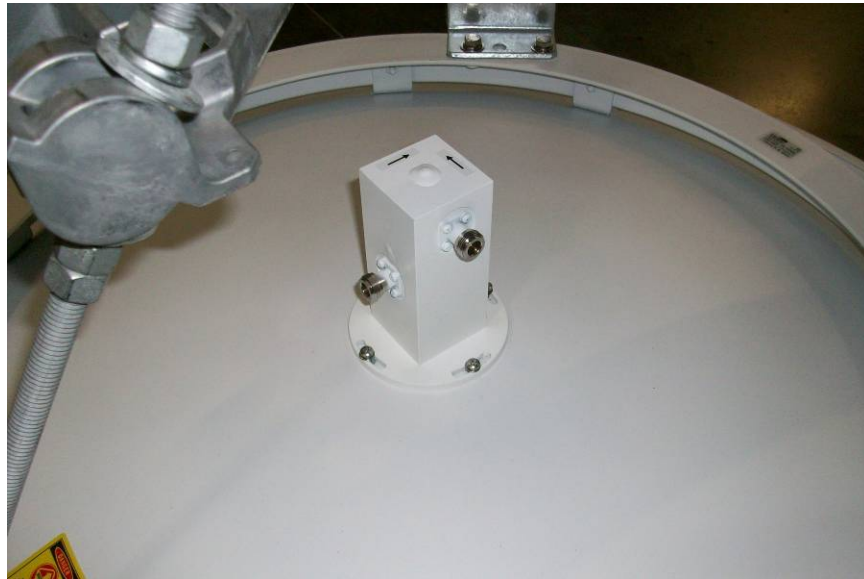

**5 AC Voltage Variation/ Battery Requirement****5.1 Results:**

Test not required for Class II Permissive Change.

**6 Antenna Requirement****6.1 Results:**

Test not required for Class II Permissive Change.

**7 DTS Requirement****7.1 Results:**

Test not required for Class II Permissive Change.

**8 DTS Bandwidth (6dB Bandwidth)****8.1 Test Results:**

Test not required for Class II Permissive Change.

**9 RF Conducted Output Power****9.1 Results:**

Not required for Class II permissive change. However, the software utility utilized to configure the radio output power supplied to the antenna(s) during testing was verified to provide at least the minimum output power selected for testing.

**10 RF Conducted Spurious Emissions (-20dBc) – Including Band Edge****10.1 Test Results:**

Test not required for Class II Permissive Change.

## 11 Transmitter Radiated Spurious Emissions – Restricted Band/ Band Edge

### 11.1 Method

Unless otherwise stated no deviations were made from FCC Part 15.209/205.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

### 11.2 Test Requirement/ Specification:

Radiated emissions which fall in the restricted bands, as defined in FCC Part 15.205(a), must also comply with the radiated emission limits specified in Part 15.209(a) and Part 15.205(c). Measurements in the restricted bands include both peak detector and average detector measurements. Measurements in non-restricted bands include peak detector measurements.

Unwanted emissions below 1GHz must comply with the general field strength limits defined in FCC Part 15.209, when measured with a quasi-peak detector.

### 11.3 Test Equipment Used:

| Asset ID | Description                                       | Manufacturer       | Model            | Serial     | Cal Date   | Cal Due    |
|----------|---|--------------------|------------------|------------|------------|------------|
| DEN-073  | EMI Receiver<br>(10Hz – 26.5GHz)                  | RHODE &<br>SCHWARZ | ESU 26           | 100265     | 01/29/2014 | 01/29/2015 |
| 18912    | 9 kHz- 1.3GHz Pre Amp                             | Hewlett-Packard    | 8447F            | 3113A05545 | 06/07/2013 | 06/07/2014 |
| 18906    | RF Pre-Amp (1-4GHz)                               | Mini-Circuits Lab  | ZHL-42           | N052792-2  | 06/10/2013 | 06/10/2014 |
| DEN-032  | 4-18GHz Preamp (LNA)                              | Narda              | DBL-<br>0618N615 | 031        | 03/07/2013 | 03/07/2014 |
| 19937    | Bilog Antenna 30MHz – 6GHz                        | Sunol Sciences     | JB6              | A050707-2  | 03/20/2013 | 03/20/2014 |
| 18887    | Horn Antenna 1-18GHz                              | EMCO               | 3115             | 9205-3886  | 03/19/2013 | 03/19/2014 |
| SW-6     | Software for Radiated and<br>Conducted emissions. | Intertek           | OATS vba         | V. 3.0     | VBU        | VBU        |

### 11.4 Test Procedure:

The Resolution Bandwidth is 120 kHz or greater for frequencies 30 MHz -1000 MHz and 1 MHz for frequencies above 1000 MHz. The Video Bandwidth was at least 3x the RBW. All measurements taken in a trace “max hold” mode.

The EUT is placed on a plastic turntable that is 80 cm in height. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables are manipulated to produce worst-case emissions. The signal is maximized by rotating the turntable through a 360° rotation. The antenna height is varied from 1-4 meters. Both vertical and horizontal antenna configurations are utilized in the testing.

Radiated emissions 30MHz to 18GHz are taken at 3-meter antenna-to-product test distance.

Radiated emissions above 18GHz are taken using a harmonic mixer antenna/pre-amp setup at 1-meter antenna-to-product test distance.

Data is included for the worst-case configuration - the configuration which resulted in the highest emission levels.

The following procedures described in FCC Publication 558074 (Guidelines for Compliance Measurements on DTS Operating Under 15.247), were used:

- 558074, Section 12.1 & 13.1
- ANSI C63.10: 2013 – General Guidance

**11.5 Test Results:**

The sample tested was found to Comply.



# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

## 11.6 Test Summary – Worst-Case Measurements

### Test Data Summary: Tx Radiated Spurious Emissions in Restricted Band

SISO Mode of Operation: 802.11a/n HT20/HT40

| Freq   | Level | Det            | Cable  | Ant      | Preamp | Atten  | Final    | Pol   | Hgt  | Az    | Delta1                   | Delta2                  | RBW   |
|--|-------|----------------|--------|----------|--------|--------|----------|-------|------|-------|--------------------------|-------------------------|-------|
| MHz  | dBuV  | Qp<br>Av<br>Pk | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m)  | (DEG) | FCC<br>15.209<br>Average | FCC<br>15.35(b)<br>Peak | (MHz) |
| <b>Measurements: 1GHz to 18GHz, Average/Peak, RBW 1MHz, VBW 3MHz, max hold</b> |       |                |        |          |        |        |          |       |      |       |                          |                         |       |
| 11570.0000   | 51.33 | Av             | 8.49   | 38.96    | 47.26  | 0.00   | 51.52    | V     | 1.53 | 8.0   | - 2.46                   | NA                      | 1.000 |
| 11570.0000   | 61.05 | Pk             | 8.49   | 38.96    | 47.26  | 0.00   | 61.24    | V     | 1.53 | 8.0   | N/A                      | - 12.76                 | 1.000 |
|  |       |                |        |          |        |        |          |       |      |       |                          |                         |       |

### Test Data Summary: Tx Spurious Emissions – Band Edge/Restricted Band

SISO Mode of Operation: 802.11a/n HT20/HT40

| Freq   | Level | Det            | Cable  | Ant      | Preamp | Atten  | Final    | Pol   | Hgt  | Az    | Delta1                   | Delta2                  | RBW   |
|--|-------|----------------|--------|----------|--------|--------|----------|-------|------|-------|--------------------------|-------------------------|-------|
| MHz  | dBuV  | Qp<br>Av<br>Pk | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m)  | (DEG) | FCC<br>15.209<br>Average | FCC<br>15.35(b)<br>Peak | (MHz) |
| <b>Measurements: Lower Band Edge, Average/Peak, RBW 1MHz, VBW 3MHz, max hold</b> |       |                |        |          |        |        |          |       |      |       |                          |                         |       |
| 5725.0000  | 55.29 | Av             | 5.64   | 34.09    | 44.10  | 0.00   | 50.92    | V     | 1.44 | 5.0   | - 3.06                   | NA                      | 0.100 |
| 5725.0000  | 63.21 | Pk             | 5.64   | 34.09    | 44.10  | 0.00   | 58.84    | V     | 1.44 | 5.0   | N/A                      | - 15.16                 | 0.100 |
|  |       |                |        |          |        |        |          |       |      |       |                          |                         |       |

### Test Data Summary: Tx Radiated Spurious Emissions in Restricted Band

MIMO Mode of Operation: 802.11a/n HT20/HT40

| Freq  | Level | Det            | Cable  | Ant      | Preamp | Atten  | Final    | Pol   | Hgt  | Az    | Delta1                   | Delta2 | RBW   |
|---|-------|----------------|--------|----------|--------|--------|----------|-------|------|-------|--------------------------|--------|-------|
| MHz   | dBuV  | Qp<br>Av<br>Pk | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m)  | (DEG) | FCC<br>15.209<br>Average | N/A    | (MHz) |
| <b>Measurements: 30MHz to 1000MHz, Quasi-peak, RBW 120kHz, VBW 300kHz, max hold</b> |       |                |        |          |        |        |          |       |      |       |                          |        |       |
| 500.0004  | 53.78 | Qp             | 1.53   | 17.80    | 28.60  | 0.00   | 44.51    | H     | 1.00 | 167.0 | - 1.51                   | NA     | 0.120 |
|   |       |                |        |          |        |        |          |       |      |       |                          |        |       |

### Test Data Summary: Tx Spurious Emissions – Band Edge/Restricted Band

MIMO Mode of Operation: 802.11a/n HT20/HT40

| Freq   | Level | Det            | Cable  | Ant      | Preamp | Atten  | Final    | Pol   | Hgt  | Az    | Delta1                   | Delta2                  | RBW   |
|--|-------|----------------|--------|----------|--------|--------|----------|-------|------|-------|--------------------------|-------------------------|-------|
| MHz  | dBuV  | Qp<br>Av<br>Pk | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m)  | (DEG) | FCC<br>15.209<br>Average | FCC<br>15.35(b)<br>Peak | (MHz) |
| <b>Measurements: Upper Band Edge, Average/Peak, RBW 1MHz, VBW 3MHz, max hold</b> |       |                |        |          |        |        |          |       |      |       |                          |                         |       |
| 5850.0000  | 54.25 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 49.69    | V     | 1.53 | 5.0   | - 4.29                   | NA                      | 1.000 |
| 5850.0000  | 63.15 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 58.59    | V     | 1.53 | 5.0   | N/A                      | - 15.41                 | 1.000 |
|  |       |                |        |          |        |        |          |       |      |       |                          |                         |       |


Note: The above represents the worst-case measurements.

### 11.7 Setup Photographs: SISO Mode of Operation

Transmitter Spurious Radiated Emissions - Test Setup (Front View)



Model W5800-01

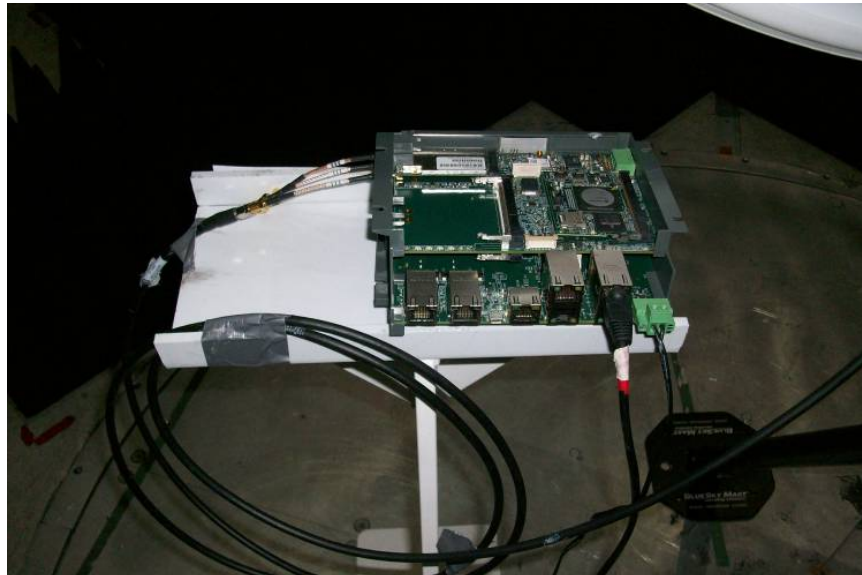

**11.8 Setup Photographs: SISO Mode of Operation**

Transmitter Spurious Radiated Emissions - Test Setup (Rear View)



Single-RF Port



### 11.9 Setup Photographs: MIMO Mode of Operation

Transmitter Spurious Radiated Emissions - Test Setup (Front View)




**11.10 Setup Photographs: MIMO Mode of Operation**

Transmitter Spurious Radiated Emissions - Test Setup (Rear View)




3-RF Port

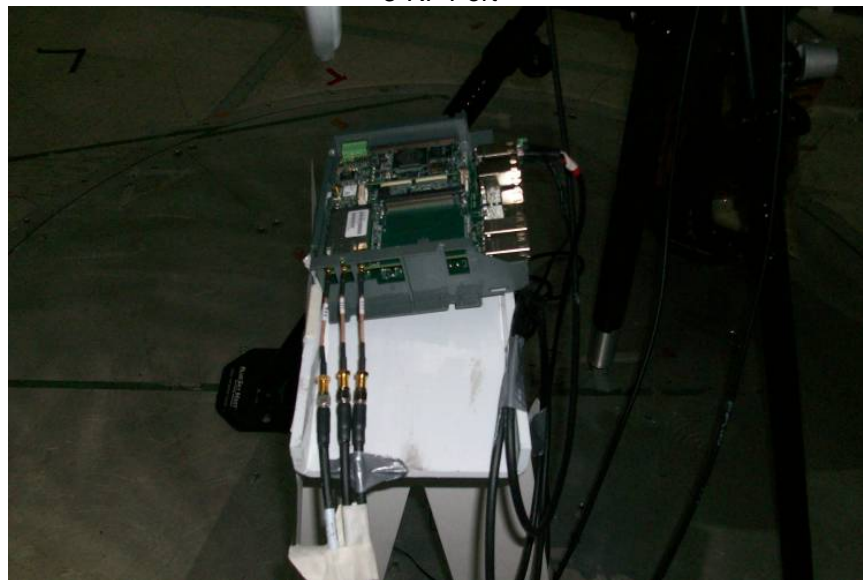

11.11 Antenna Setups:

Bilog Antenna (30MHz to 1GHz)

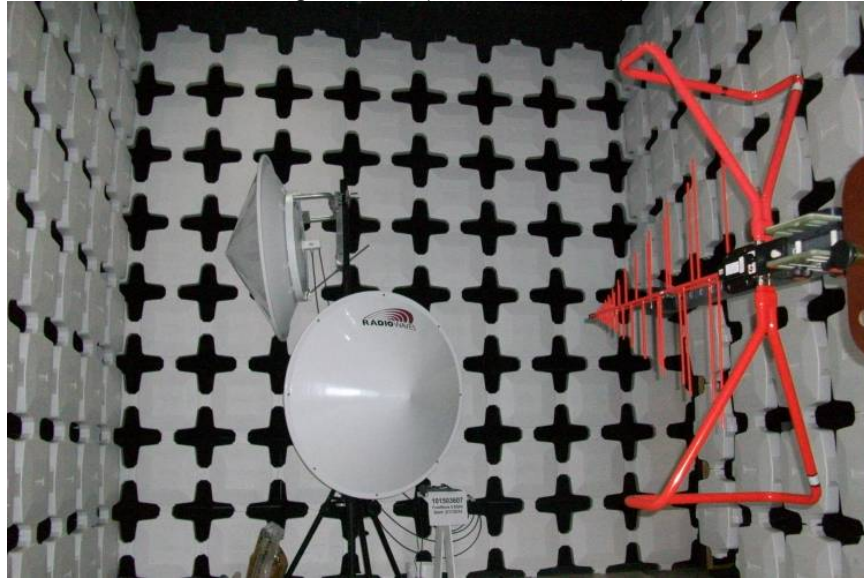


Ridge-Guide Horn Antenna (1GHz to 18GHz)




11.12 Plots: SISO Mode of Operation – HT20 Low Channel: 5745 MHz

30MHz to 1000MHz

Vertical Antenna

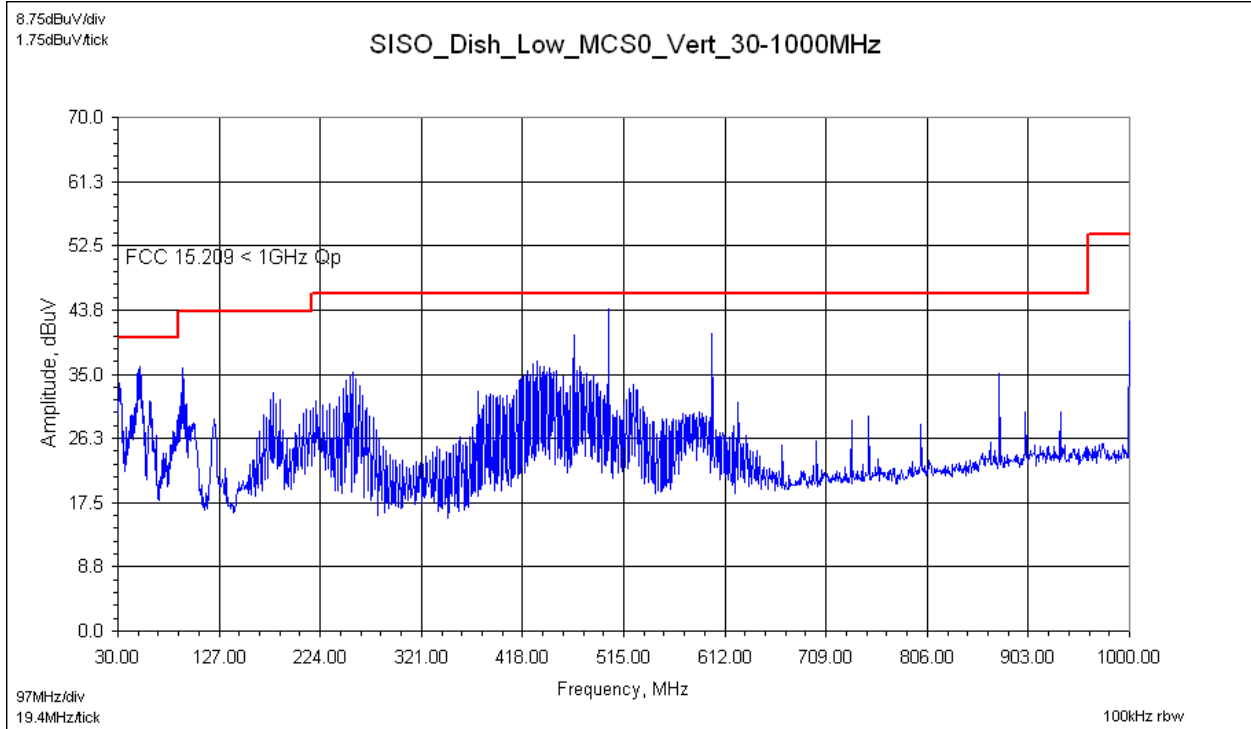

Horizontal Antenna

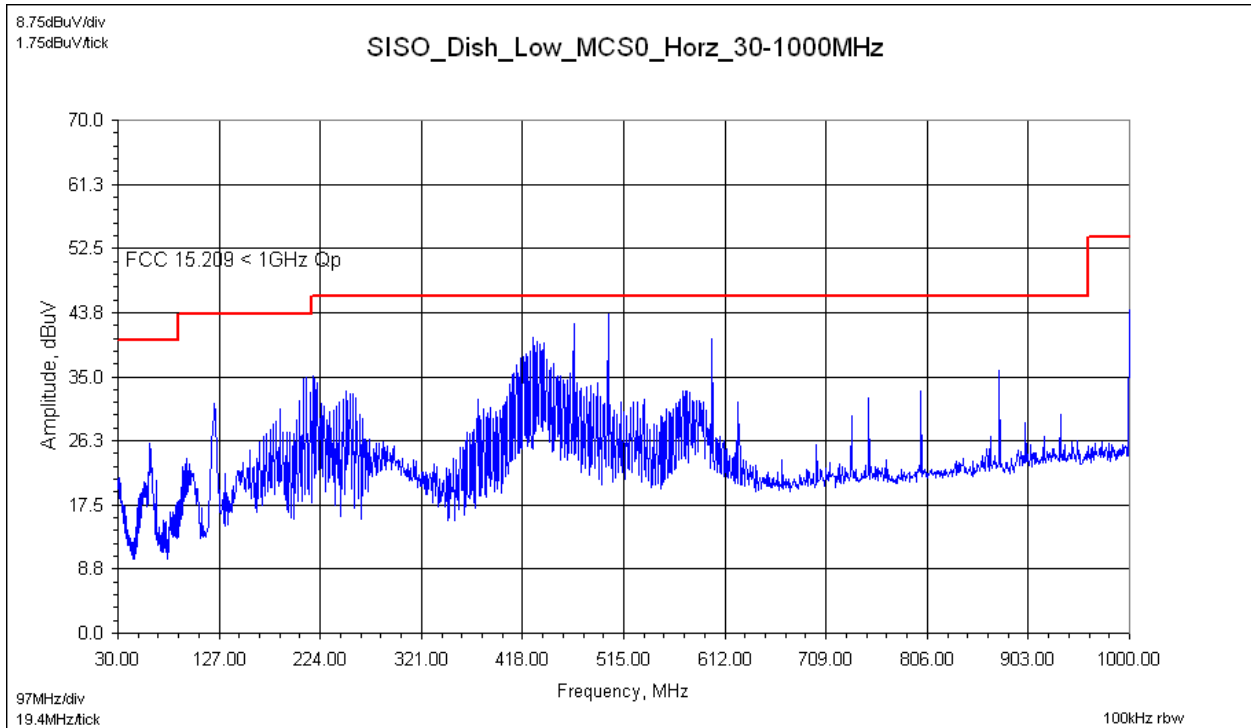


Reference only – max hold peak detector measurements referenced to quasi-peak limits


11.13 Plots: SISO Mode of Operation – HT20 Mid Channel: 5785 MHz

30MHz to 1000MHz

Vertical Antenna

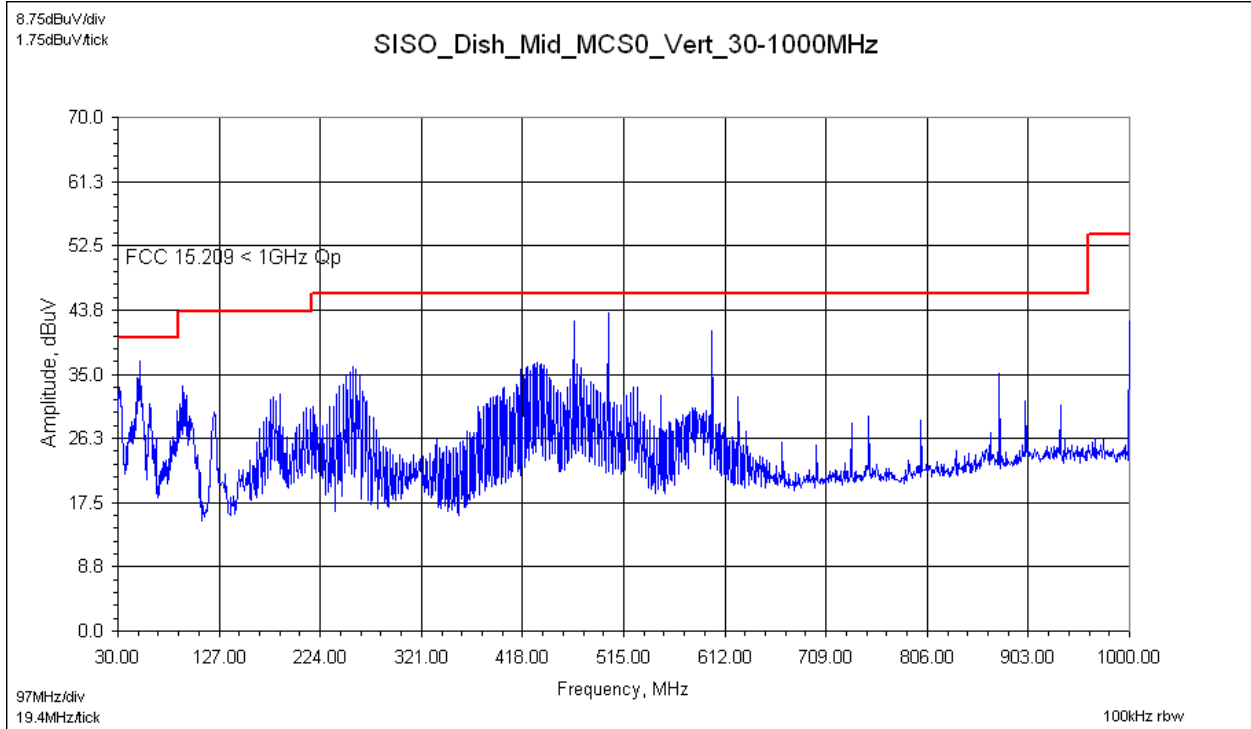

Horizontal Antenna

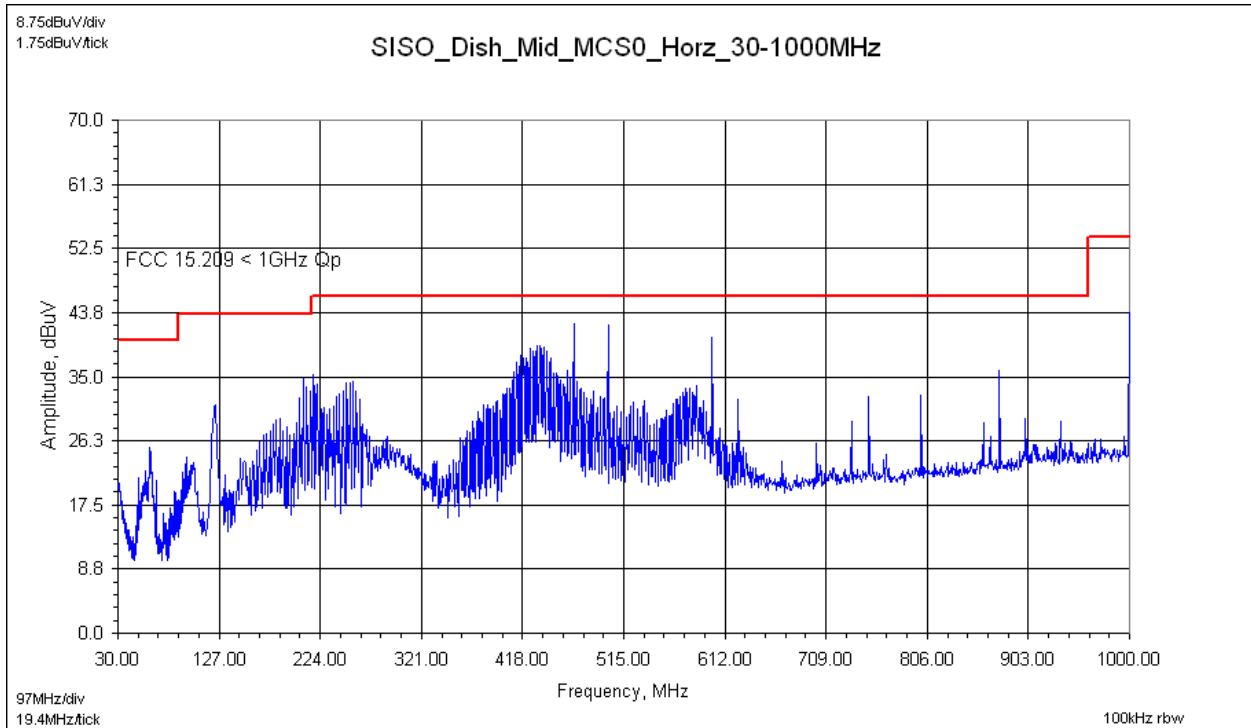


Reference only – max hold peak detector measurements referenced to quasi-peak limits




11.14 Plots: SISO Mode of Operation – HT20 High Channel: 5825 MHz

30MHz to 1000MHz

Vertical Antenna

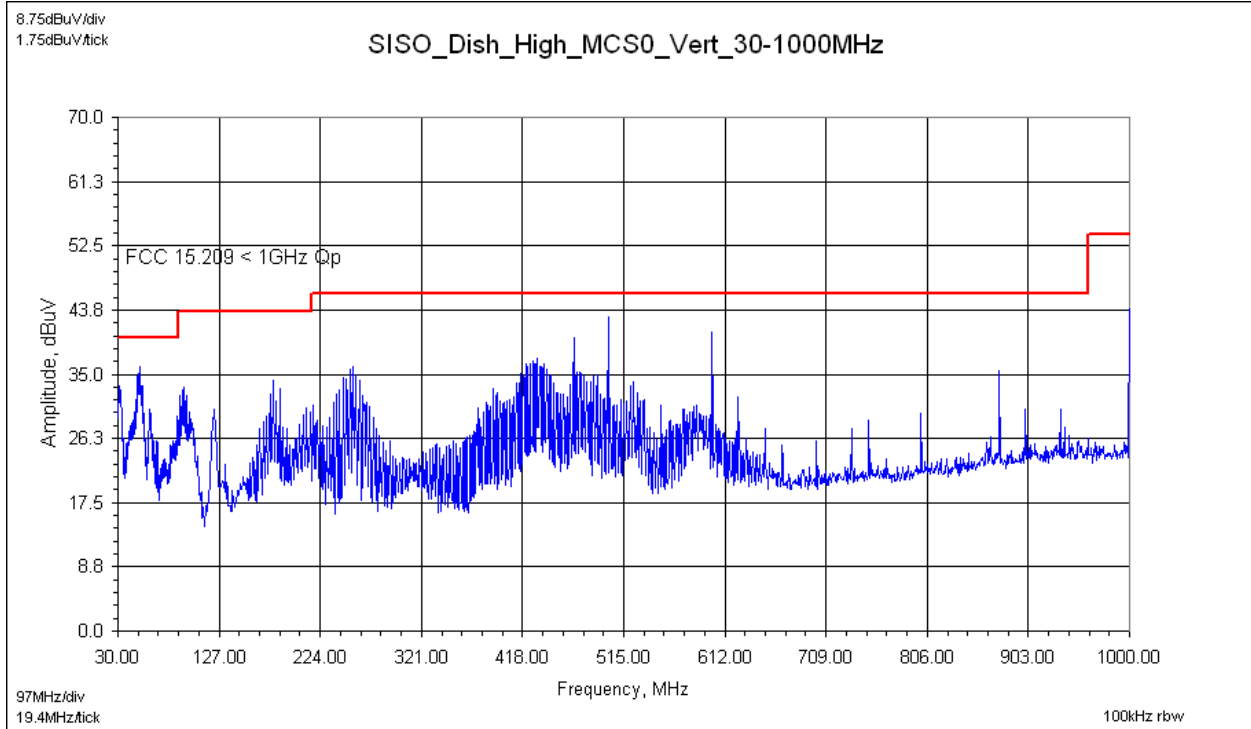

Horizontal Antenna

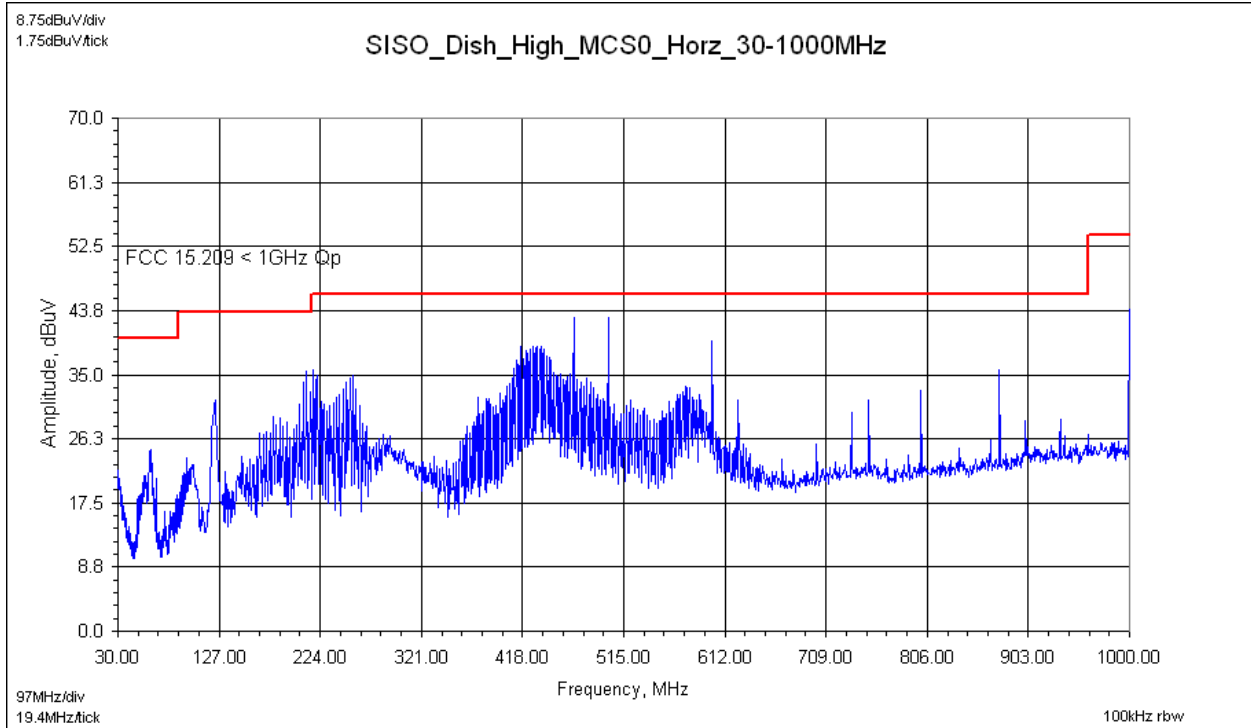


Reference only – max hold peak detector measurements referenced to quasi-peak limits


11.15 Plots: SISO Mode of Operation – HT40 Channel: 5765 MHz

30MHz to 1000MHz

Vertical Antenna

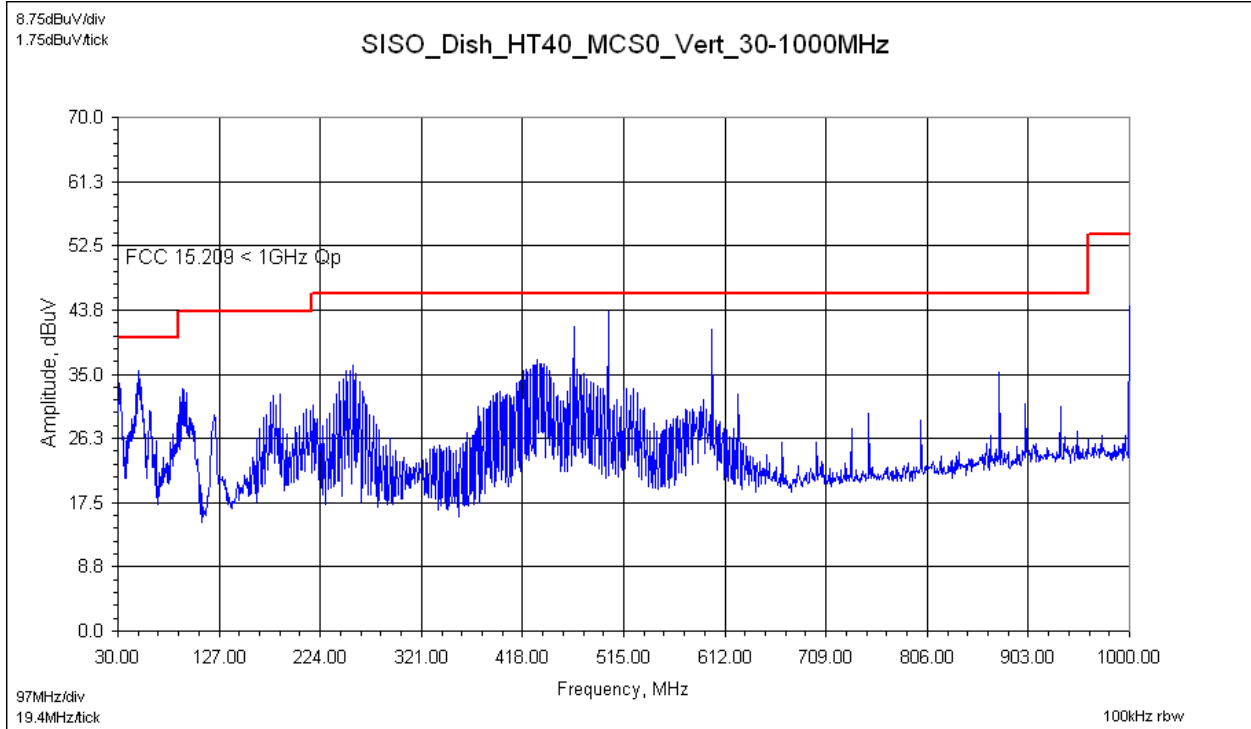

Horizontal Antenna

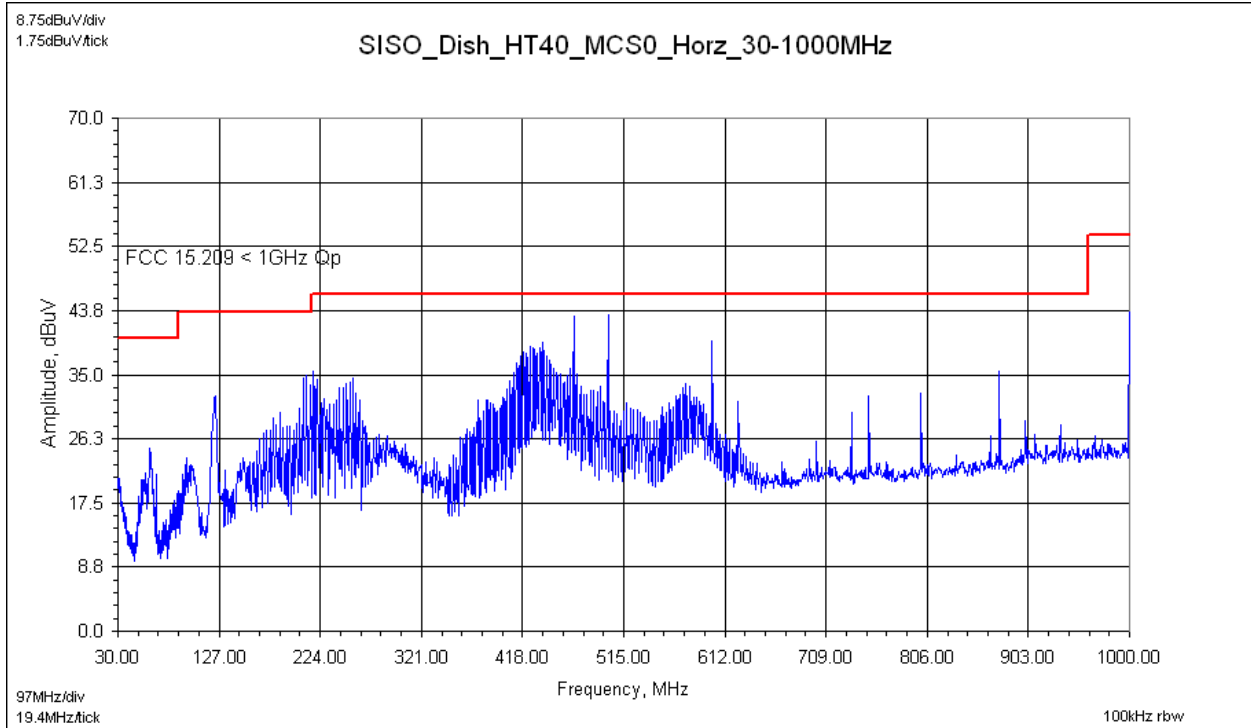


Reference only – max hold peak detector measurements referenced to quasi-peak limits


11.16 Plots: SISO Mode of Operation – HT20 Low Channel: 5745 MHz

1GHz to 18GHz

Vertical Antenna

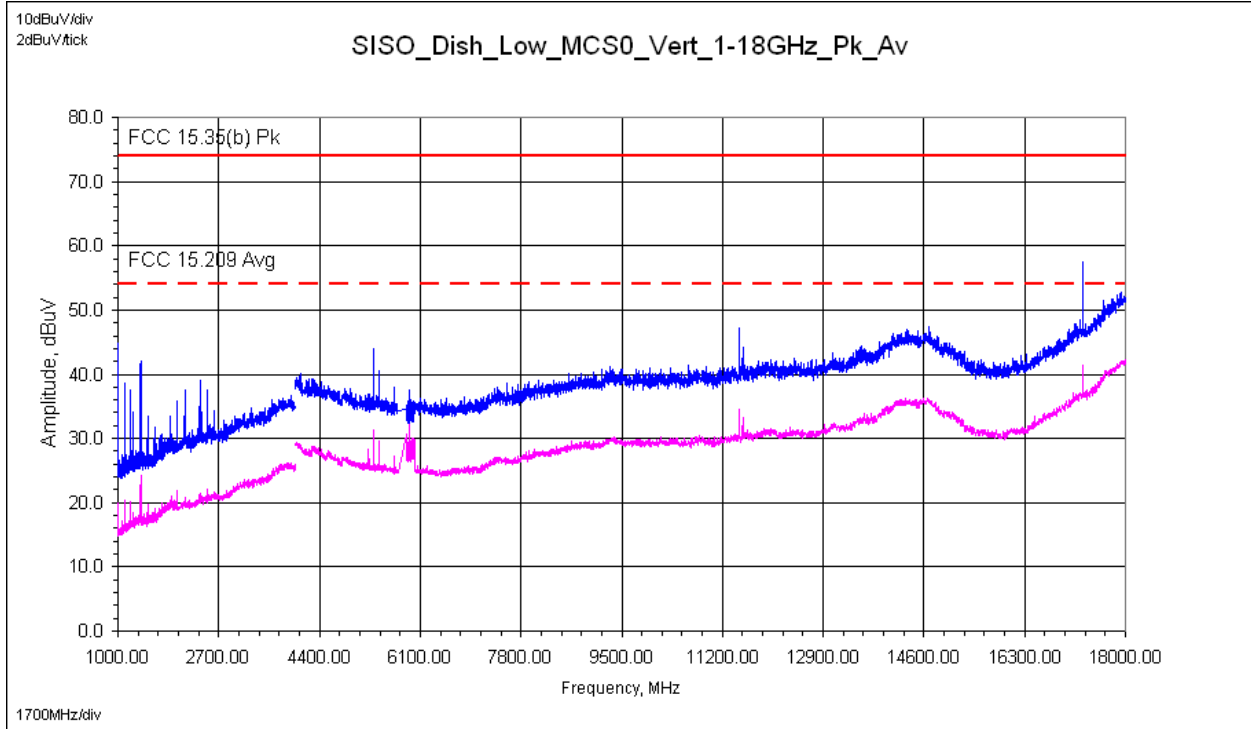

Horizontal Antenna

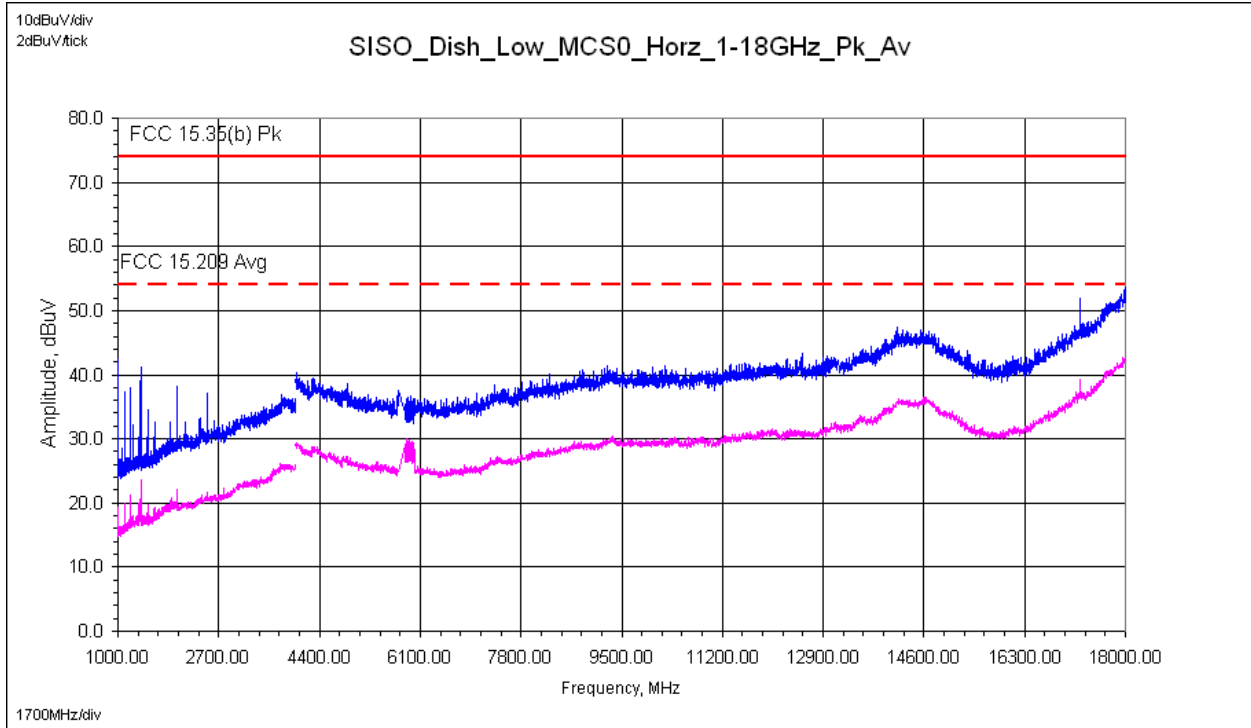


Reference only – max hold peak detector measurements referenced to average & peak limits


11.17 Plots: SISO Mode of Operation – HT20 Mid Channel: 5785 MHz

1GHz to 18GHz

Vertical Antenna

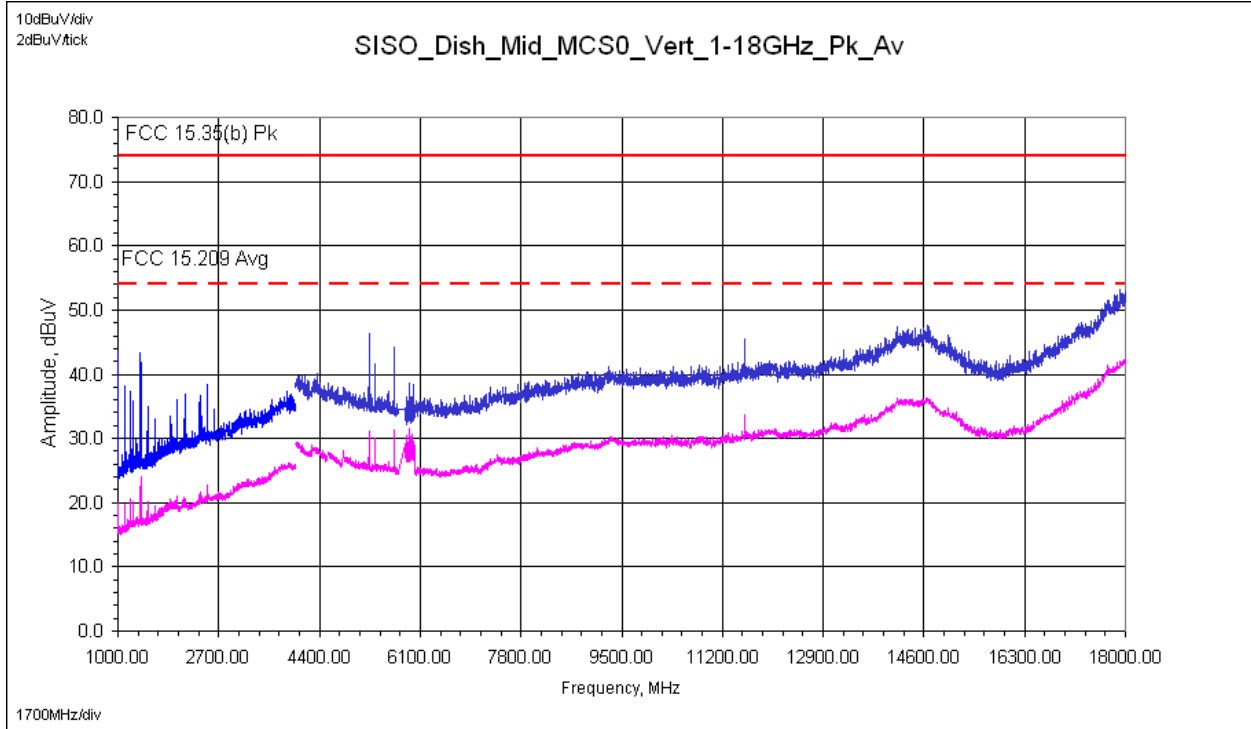

Horizontal Antenna

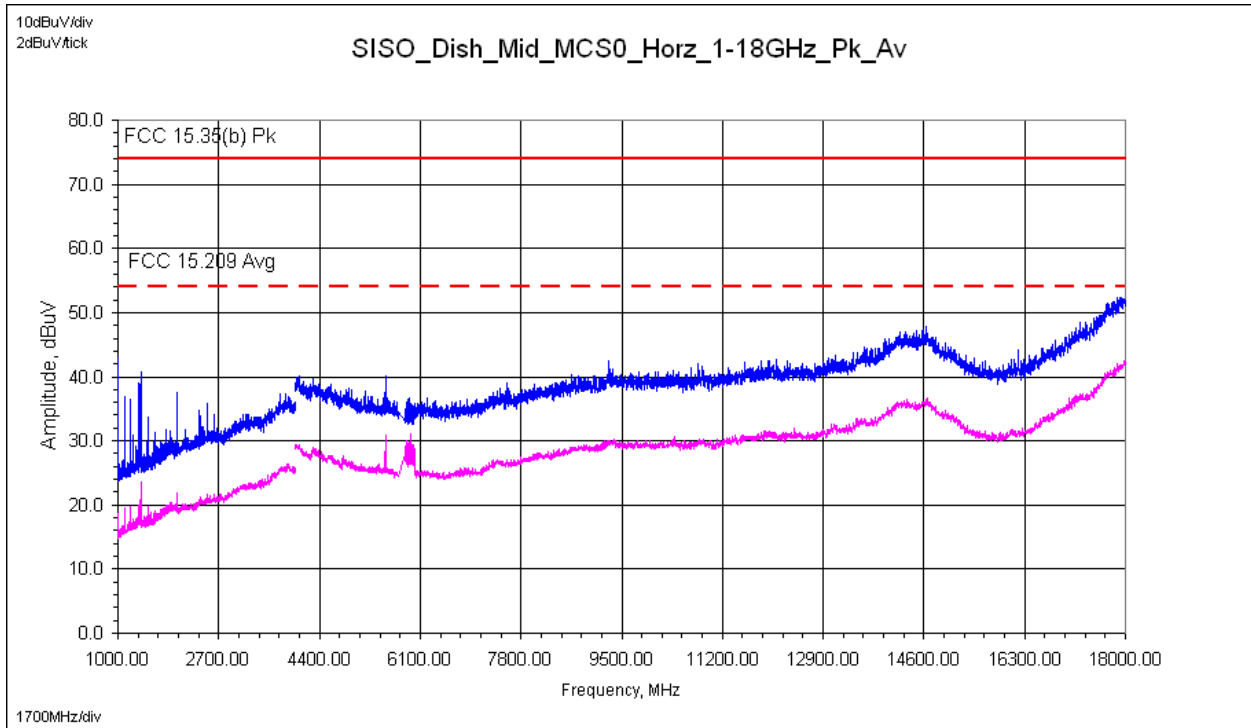


Reference only – max hold peak detector measurements referenced to average & peak limits


11.18 Plots: SISO Mode of Operation – HT20 High Channel: 5825 MHz

1GHz to 18GHz

Vertical Antenna

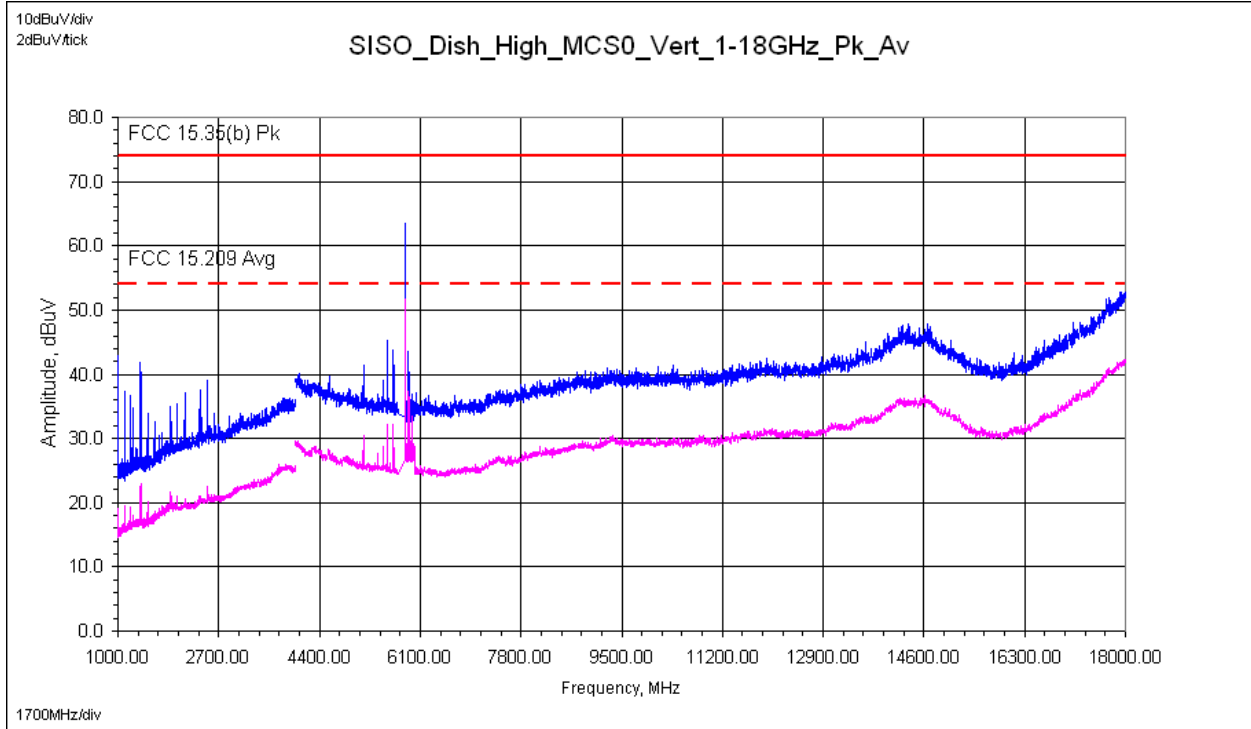

Horizontal Antenna

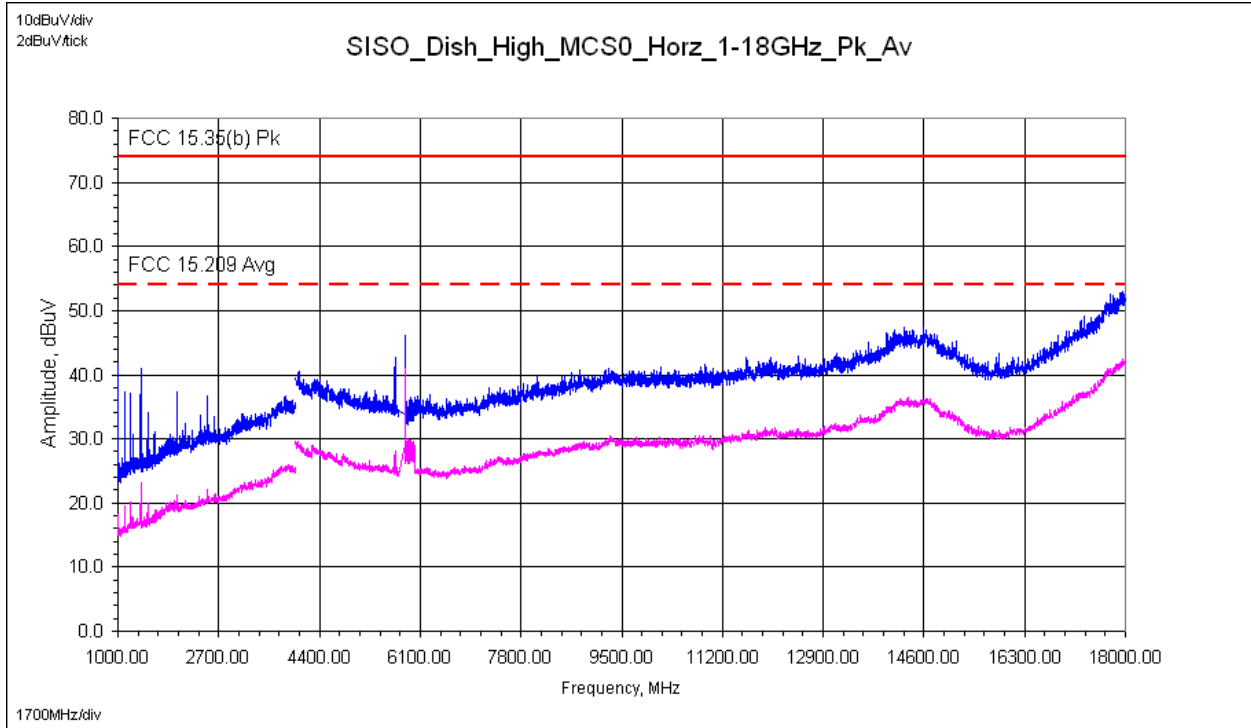


Reference only – max hold peak detector measurements referenced to average & peak limits


11.19 Plots: SISO Mode of Operation – HT40 Low Channel: 5765 MHz

1GHz to 18GHz

Vertical Antenna

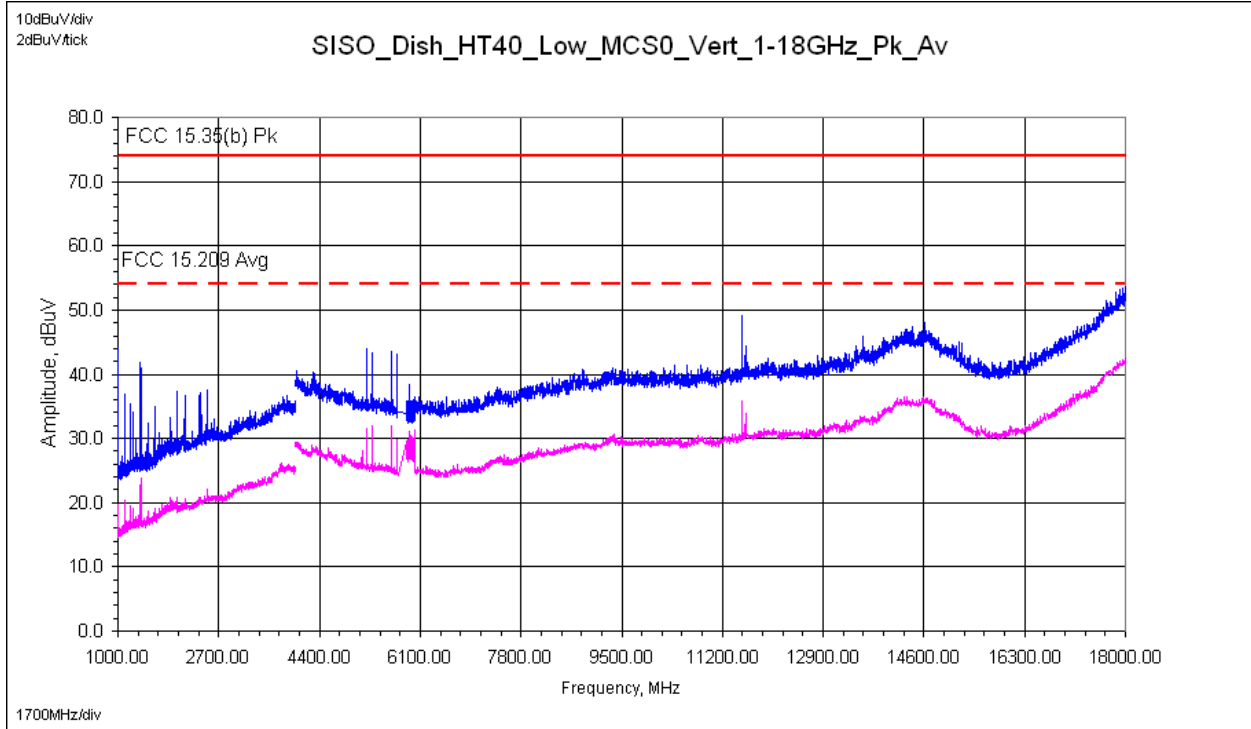

Horizontal Antenna

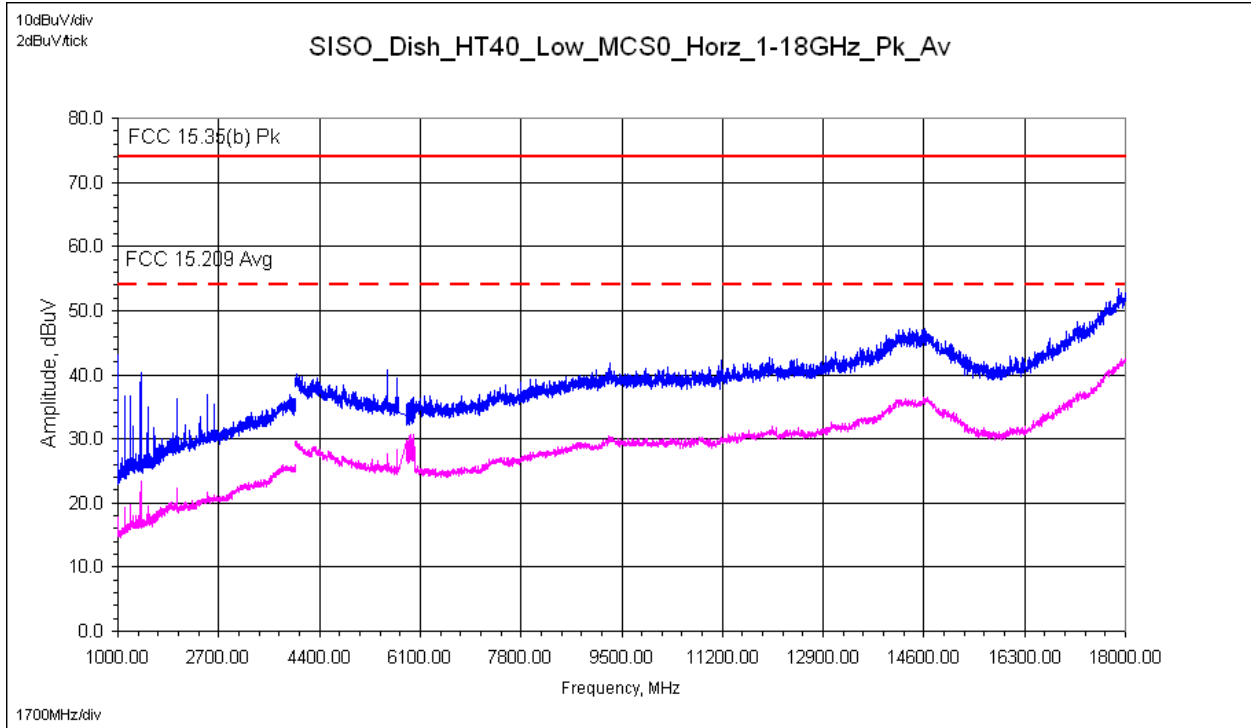


Reference only – max hold peak detector measurements referenced to average & peak limits


11.20 Plots: SISO Mode of Operation – HT40 High Channel: 5785 MHz

1GHz to 18GHz

Vertical Antenna

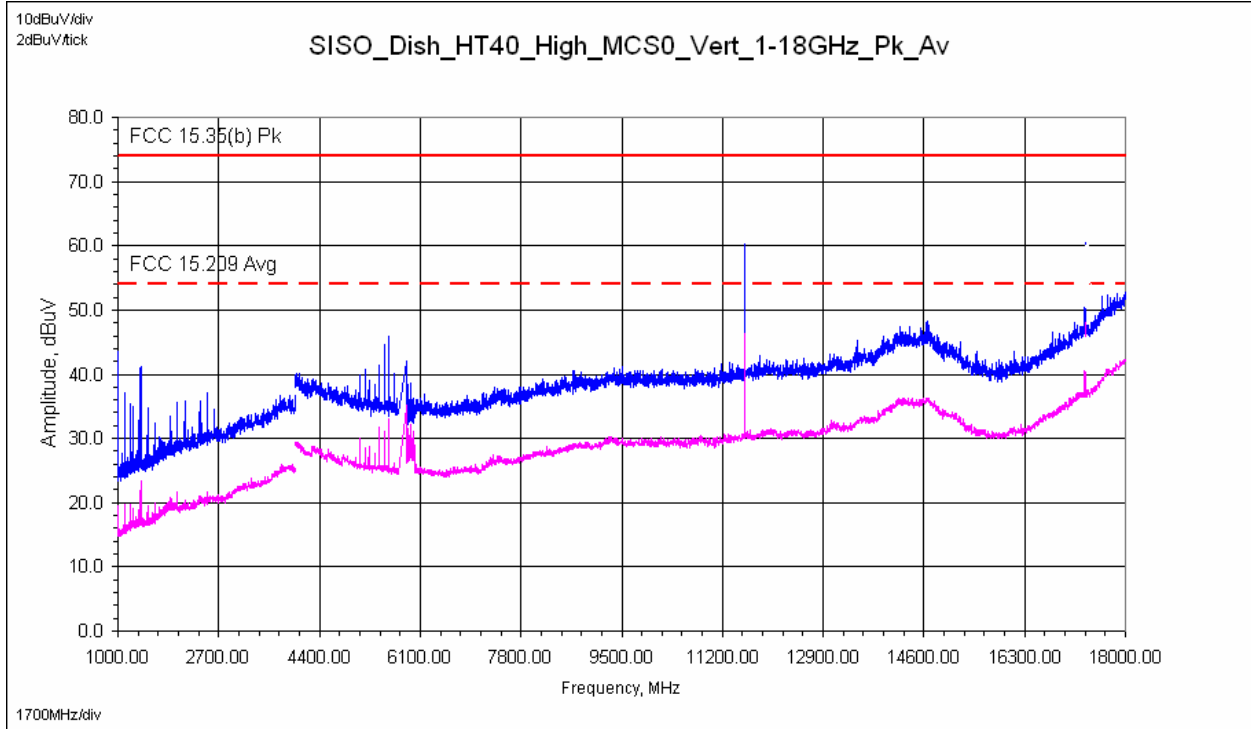

Horizontal Antenna

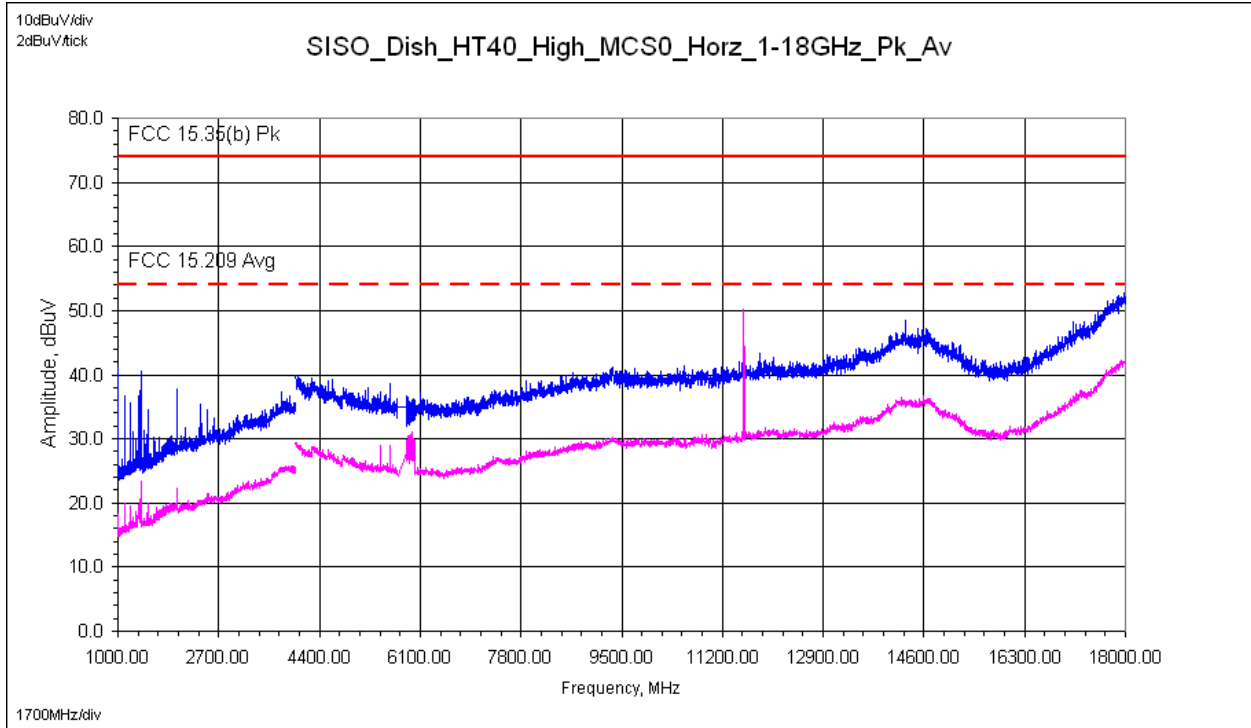

Reference only – max hold peak detector measurements referenced to average & peak limits

# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

## 11.21 Test Data: SISO Mode of Operation

### Tx Spurious Radiated Electromagnetic Emissions

|                |   |            |                          |                    |             |
|----------------|---|------------|--------------------------|--------------------|-------------|
| Test Report #: | <b>G101503607</b>   | Test Area: | CC1 Radiated             | Temperature:       | 23.5 °C     |
| Test Method:   | FCC 15.209/ 15.205/ 15.35(b)                                      | Test Date: | 02/12/2014<br>02/13/2014 | Relative Humidity: | 37.2 %      |
| EUT Model #:   | Radio Module: W5800-01<br>Parabolic "Dish" Antenna:<br>SPD4-5.2S  | EUT Power: | 120VAC/60Hz              | Air Pressure:      | kPa<br>83.1 |
| EUT Serial #:  | Radio Module: DEN1402111313<br>Parabolic Dish Antenna(s): 1018763 |            |                          |                    |             |

Manufacturer: FreeWave Technologies, Inc.

EUT Description: PCIe Radio Module

Notes: Product tested in SISO mode: single transmit chain/port – single antenna

Product continuously transmitting during all testing – worst-case modulation/data

SISO mode of Operation, MCS0 Data Rate, 27dBm power (worst-case)

| Level Key       |
|-----------------|
| Pk – Peak       |
| Qp – Quasi Peak |
| Av - Average    |

| Freq   | Level | Det            | Cable  | Ant      | Preamp | Atten  | Final    | Pol   | Hgt  | Az    | Delta1               | Delta2                | RBW   |
|--|-------|----------------|--------|----------|--------|--------|----------|-------|------|-------|----------------------|-----------------------|-------|
| MHz  | dBuV  | Qp<br>Av<br>Pk | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m)  | (DEG) | FCC<br>15.209<br>Avg | FCC<br>15.35(b)<br>Pk | (MHz) |
| <b>Radio System: Model W5800-01 Radio Module with 4' Parabolic "Dish" Antenna – SISO Mode of Operation</b> |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| <b>Measurements: 1GHz to 18GHz – 802.11a/n HT20/HT40</b>   |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 1000.0100  | 72.99 | <b>Pk</b>      | 2.21   | 23.82    | 37.13  | 0.00   | 61.89    | V     | 1.24 | 162.0 | N/A                  | - 12.11               | 1.000 |
| 1000.0100  | 52.53 | <b>Av</b>      | 2.21   | 23.82    | 37.13  | 0.00   | 41.43    | V     | 1.24 | 162.0 | - 12.55              | NA                    | 1.000 |
| 1124.9732  | 63.23 | <b>Pk</b>      | 2.36   | 24.63    | 37.26  | 0.00   | 52.96    | V     | 1.97 | 134.0 | N/A                  | - 21.04               | 1.000 |
| 1124.9732  | 53.35 | <b>Av</b>      | 2.36   | 24.63    | 37.26  | 0.00   | 43.08    | V     | 1.97 | 134.0 | - 10.90              | NA                    | 1.000 |
| 1199.9598  | 55.63 | <b>Pk</b>      | 2.44   | 25.07    | 37.18  | 0.00   | 45.95    | V     | 1.74 | 82.0  | N/A                  | - 28.05               | 1.000 |
| 1199.9598  | 47.42 | <b>Av</b>      | 2.44   | 25.07    | 37.18  | 0.00   | 37.74    | V     | 1.74 | 82.0  | - 16.24              | NA                    | 1.000 |
| 1200.0134  | 54.48 | <b>Pk</b>      | 2.44   | 25.07    | 37.18  | 0.00   | 44.80    | V     | 1.78 | 83.0  | N/A                  | - 29.20               | 1.000 |
| 1200.0134  | 47.42 | <b>Av</b>      | 2.44   | 25.07    | 37.18  | 0.00   | 37.74    | V     | 1.78 | 83.0  | - 16.24              | NA                    | 1.000 |
| 1374.9732  | 56.51 | <b>Pk</b>      | 2.61   | 25.13    | 36.76  | 0.00   | 47.49    | V     | 1.95 | 69.0  | N/A                  | - 26.51               | 1.000 |
| 1374.9732  | 50.58 | <b>Av</b>      | 2.61   | 25.13    | 36.76  | 0.00   | 41.56    | V     | 1.95 | 69.0  | - 12.42              | NA                    | 1.000 |
| 1400.0112  | 54.28 | <b>Pk</b>      | 2.63   | 25.09    | 36.71  | 0.00   | 45.29    | V     | 1.78 | 57.0  | N/A                  | - 28.71               | 1.000 |
| 1400.0112  | 49.88 | <b>Av</b>      | 2.63   | 25.09    | 36.71  | 0.00   | 40.89    | V     | 1.78 | 57.0  | - 13.09              | NA                    | 1.000 |
| 1400.0112  | 54.42 | <b>Pk</b>      | 2.63   | 25.09    | 36.71  | 0.00   | 45.43    | H     | 1.64 | 163.0 | N/A                  | - 28.57               | 1.000 |
| 1400.0112  | 49.85 | <b>Av</b>      | 2.63   | 25.09    | 36.71  | 0.00   | 40.86    | H     | 1.64 | 163.0 | - 13.12              | NA                    | 1.000 |
| 5314.8080  | 53.85 | <b>Av</b>      | 5.43   | 34.04    | 42.87  | 0.00   | 50.44    | V     | 1.49 | 5.0   | - 3.54               | NA                    | 1.000 |
| 5314.8080  | 59.29 | <b>Pk</b>      | 5.43   | 34.04    | 42.87  | 0.00   | 55.88    | V     | 1.49 | 5.0   | N/A                  | - 18.12               | 1.000 |
| 11570.0000   | 51.33 | <b>Av</b>      | 8.49   | 38.96    | 47.26  | 0.00   | 51.52    | V     | 1.53 | 8.0   | - 2.46               | NA                    | 1.000 |
| 11570.0000   | 61.05 | <b>Pk</b>      | 8.49   | 38.96    | 47.26  | 0.00   | 61.24    | V     | 1.53 | 8.0   | N/A                  | - 12.76               | 1.000 |
| 17355.0000   | 40.43 | <b>Av</b>      | 10.72  | 43.14    | 46.02  | 0.00   | 48.27    | V     | 1.44 | 7.0   | - 5.71               | NA                    | 1.000 |
| 17355.0000   | 49.81 | <b>Pk</b>      | 10.72  | 43.14    | 46.02  | 0.00   | 57.65    | V     | 1.44 | 7.0   | N/A                  | - 16.35               | 1.000 |
| 5235.6970  | 46.95 | <b>Av</b>      | 5.38   | 33.93    | 42.37  | 0.00   | 43.89    | H     | 1.43 | 6.0   | - 10.09              | NA                    | 1.000 |
| 5235.6970  | 54.19 | <b>Pk</b>      | 5.38   | 33.93    | 42.37  | 0.00   | 51.13    | H     | 1.41 | 0.0   | N/A                  | - 22.87               | 1.000 |



# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

**Note: Signals in yellow highlight – harmonics in restricted band**

Example calculation:

| Measure<br>d Level | + | Cable<br>Loss | + | Antenna<br>Factor | - | Pre-<br>Amp | + | Atten | = | Final<br>Correcte<br>d<br>Reading | Specificatio<br>n<br>Limit | - | Final<br>Correcte<br>d<br>Reading | = | Delta<br>Specificatio<br>n |
|--------------------|---|---------------|---|-------------------|---|-------------|---|-------|---|-----------------------------------|----------------------------|---|-----------------------------------|---|----------------------------|
| (dB $\mu$ V)       |   | (dB)          |   | (dB)              |   | (dB)        |   | (dB)  |   | (dB $\mu$ V/m)                    | (dB $\mu$ V/m)             |   | (dB $\mu$ V/m)                    |   |                            |
| 20.0               |   | 3.0           |   | 5.0               |   | 10.0        |   | 0.0   |   | 18.0                              | 40.0                       |   | 18.0                              |   | - 22.0                     |


**Notes:**

- 1) The highest signals – as determined from pre-scan plots – were fully-maximized and measured.
- 2) For the general pre-scan plots, a notch filter was utilized. Note the notch filter was not used during band edge plots/measurements.
- 3) 802.11 a/n HT20/HT40 included in measurements as well as both SISO/MIMO modes of Tx operation.
- 4) No significant emissions found >18GHz.


Deviations, Additions, or Exclusions: None

### 11.22 Band Edge Plots: SISO Mode of Operation – HT20 Low Channel 5745 MHz

#### Vertical Antenna – Lower Band Edge – Peak Measurements

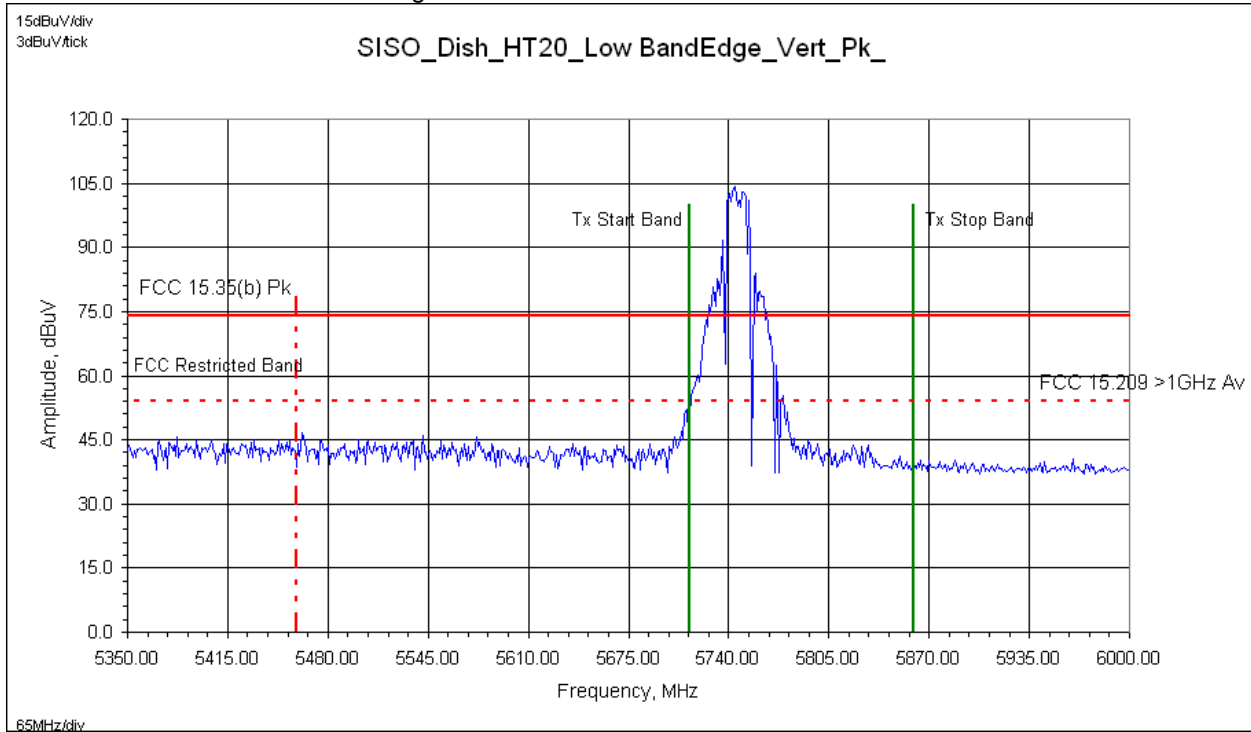

#### Horizontal Antenna – Lower Band Edge – Peak Measurements

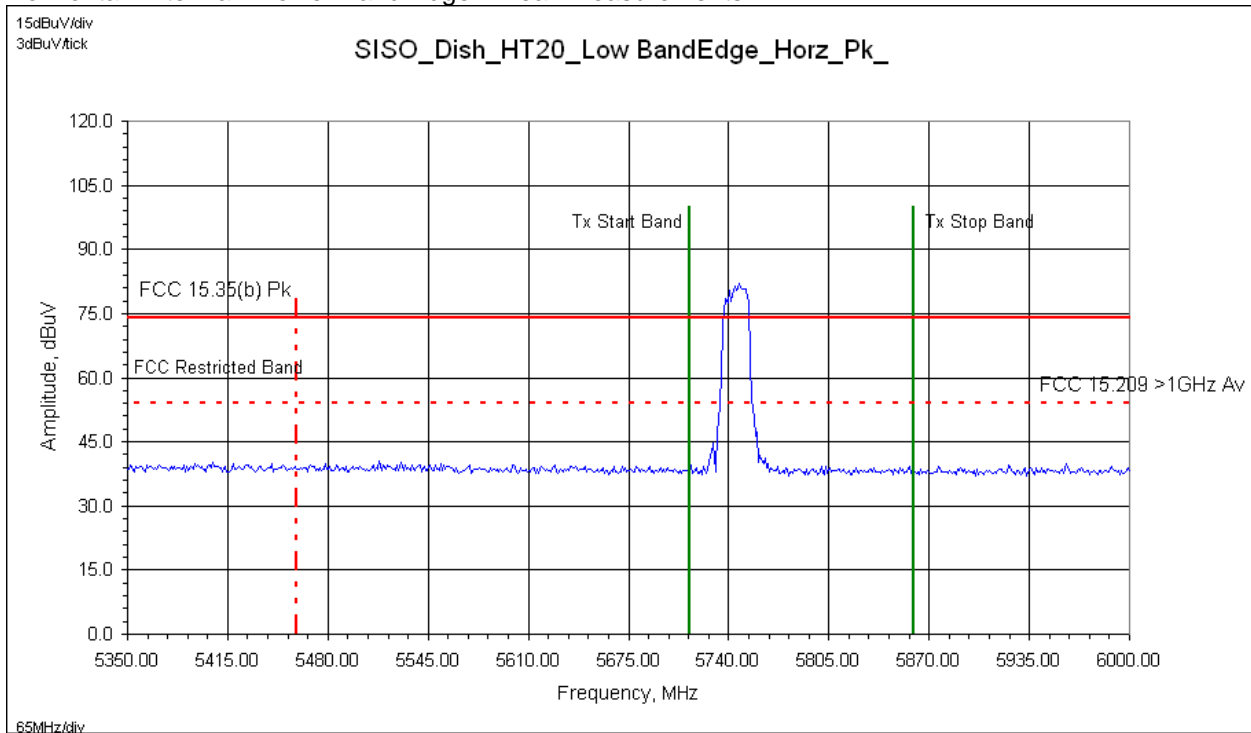


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Dashed-Lines (Restricted Band start/stop)  
Blue Trace (Peak trace line)

### 11.23 Band Edge Plots: SISO Mode of Operation – HT20 Low Channel 5745 MHz

#### Vertical Antenna – Lower Band Edge – Average Measurements

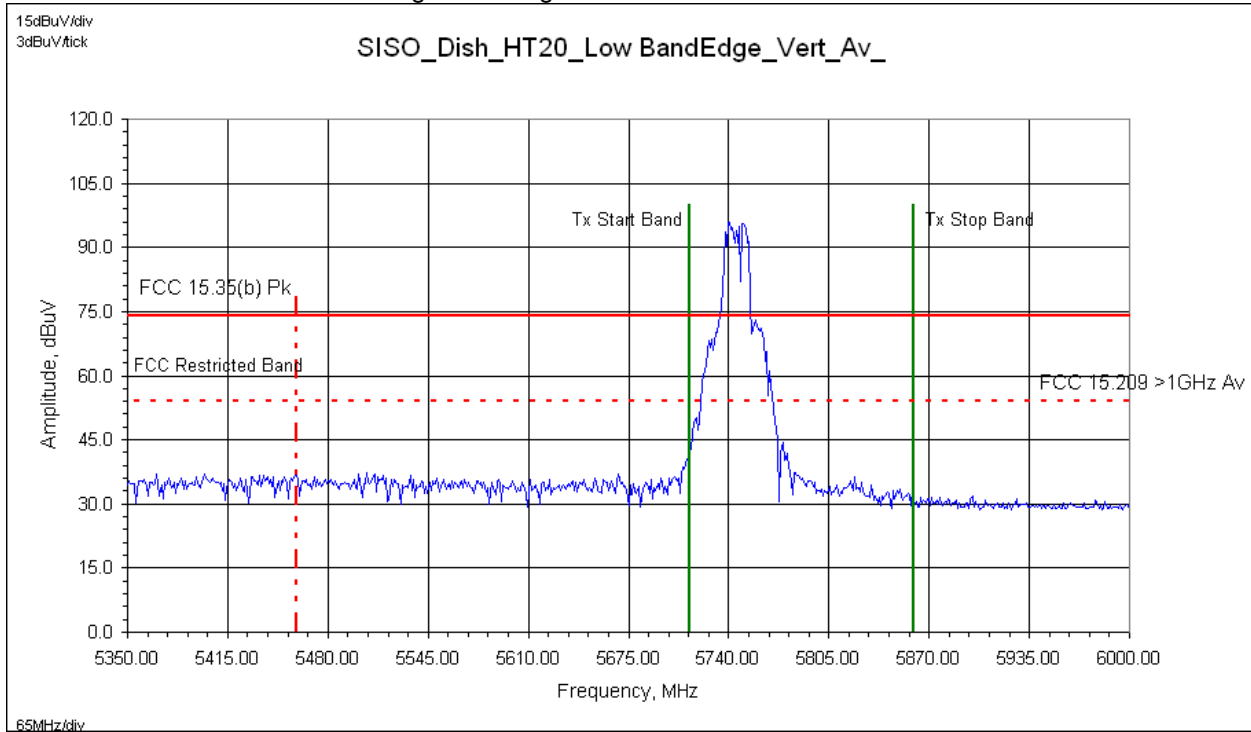

#### Horizontal Antenna – Lower Band Edge – Average Measurements

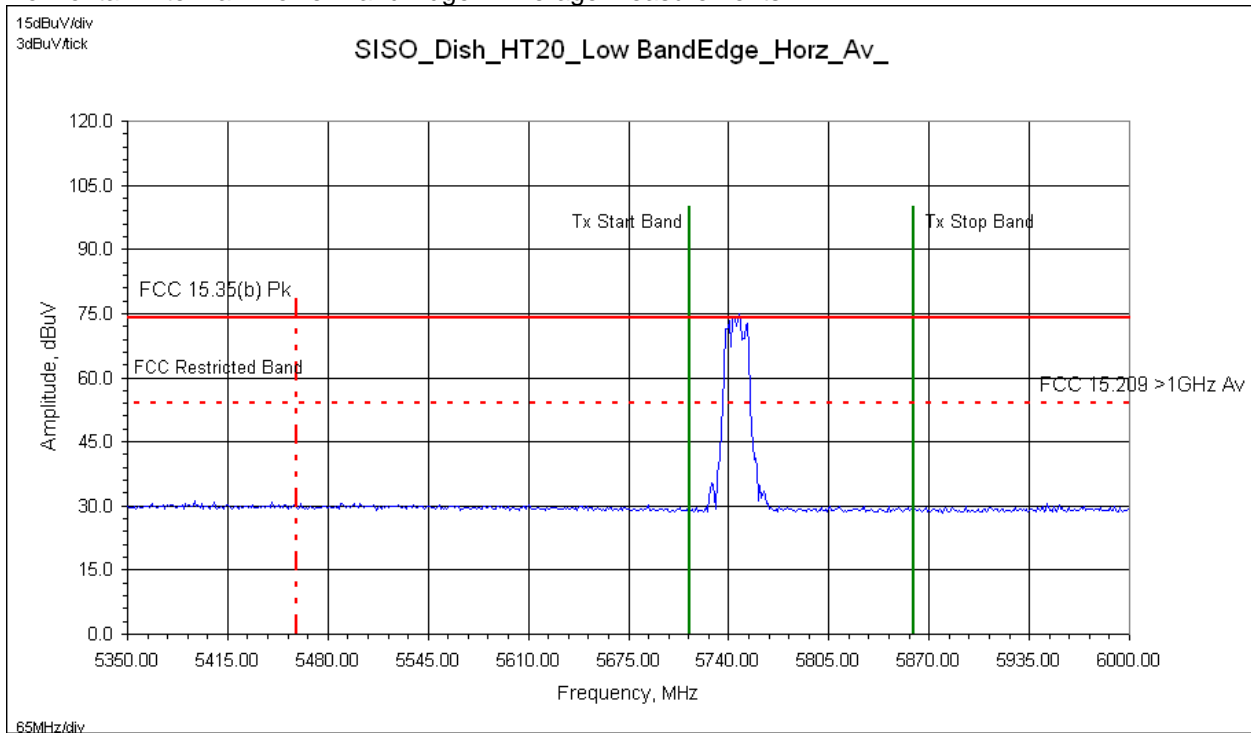


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Dashed-Lines (Restricted Band)  
Blue Trace (Average trace line)

### 11.24 Band Edge Plots: SISO Mode of Operation – HT20 High Channel 5825 MHz

#### Vertical Antenna – Upper Band Edge – Peak Measurements

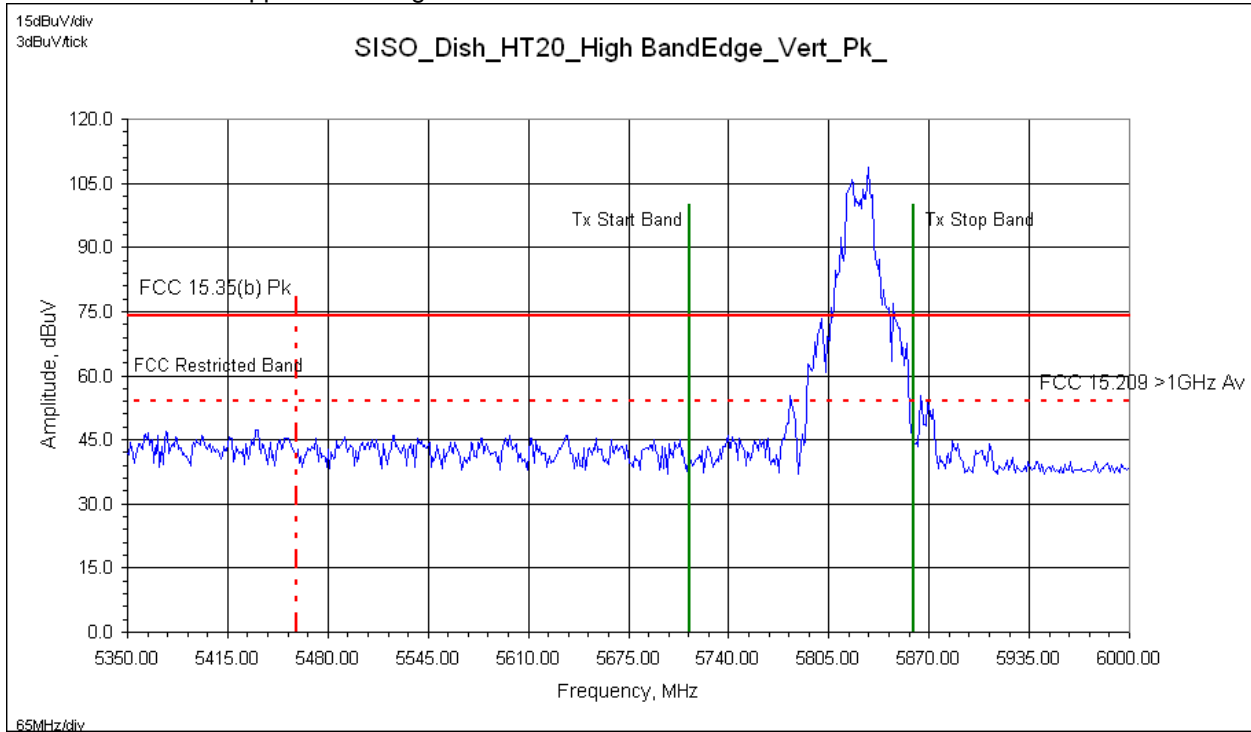

#### Horizontal Antenna – Upper Band Edge – Peak Measurements

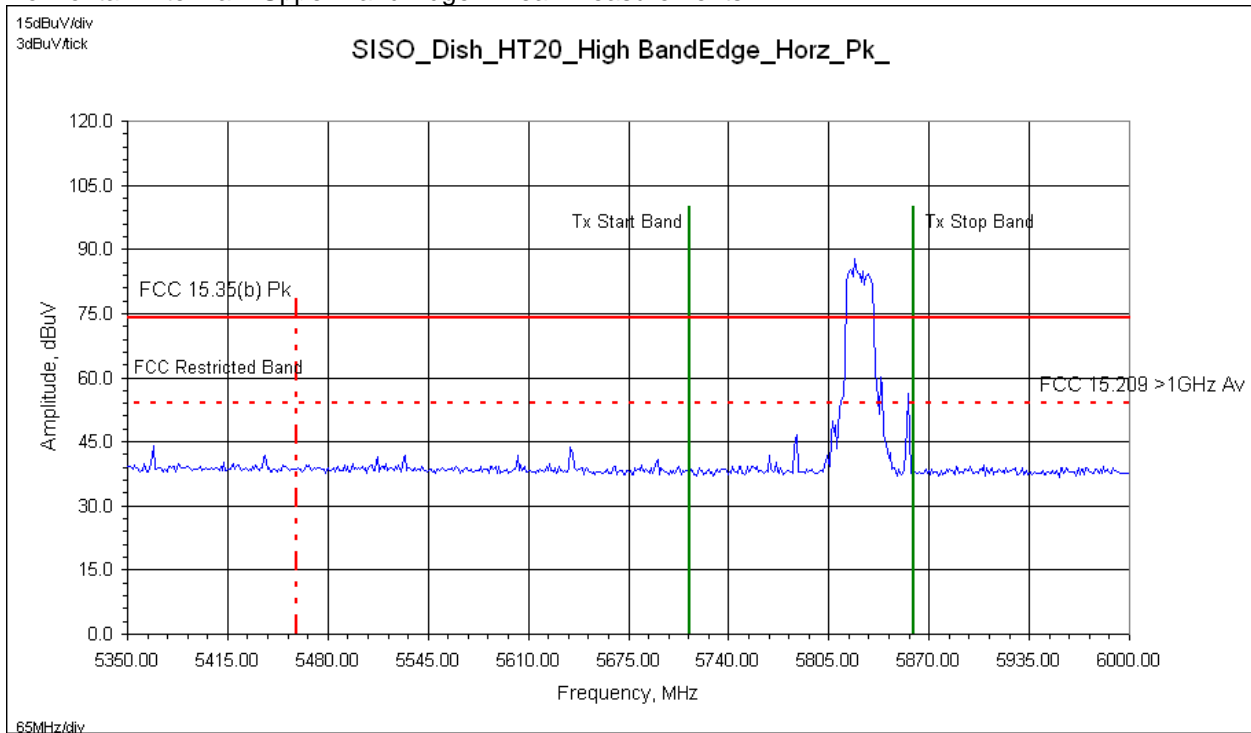


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Peak trace line)

### 11.25 Band Edge Plots: SISO Mode of Operation – HT20 High Channel 5825 MHz

#### Vertical Antenna – Upper Band Edge – Average Measurements

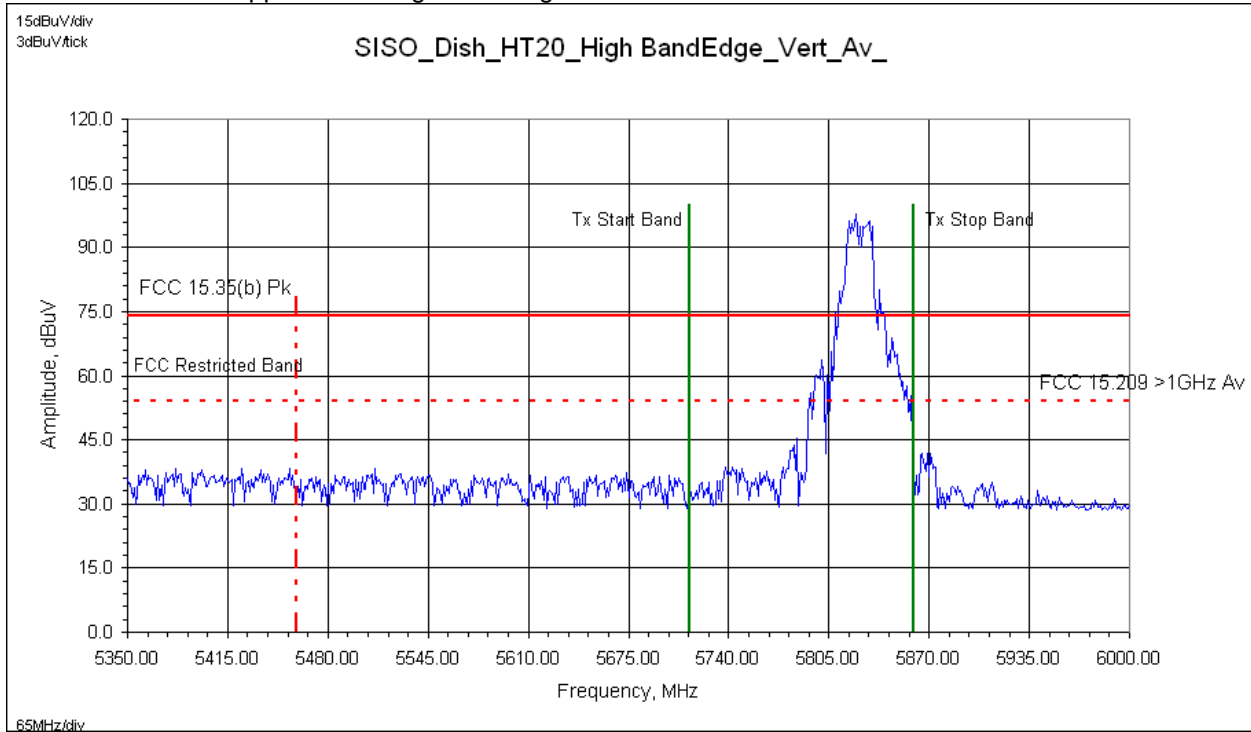

#### Horizontal Antenna – Upper Band Edge – Average Measurements

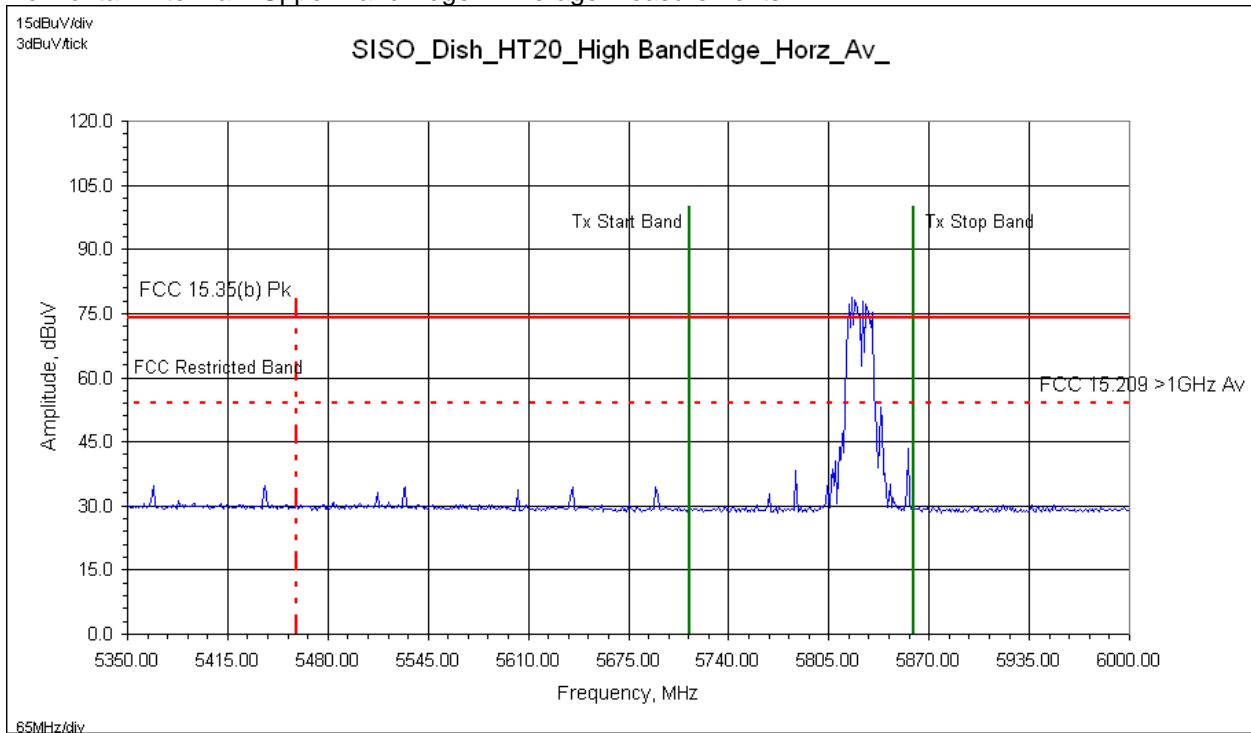


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Average trace line)

### 11.26 Band Edge Plots: SISO Mode of Operation – HT40 Low Channel 5765 MHz

#### Vertical Antenna – Lower Band Edge – Peak Measurements

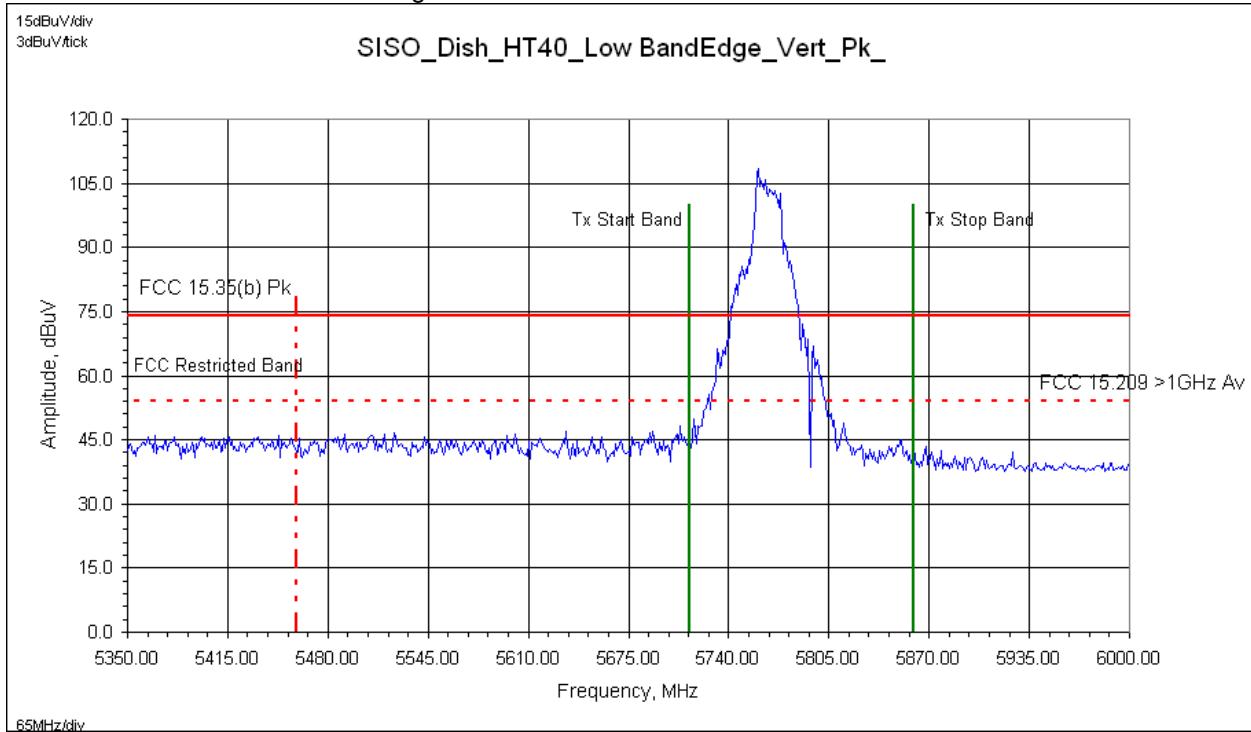

#### Horizontal Antenna – Lower Band Edge – Peak Measurements

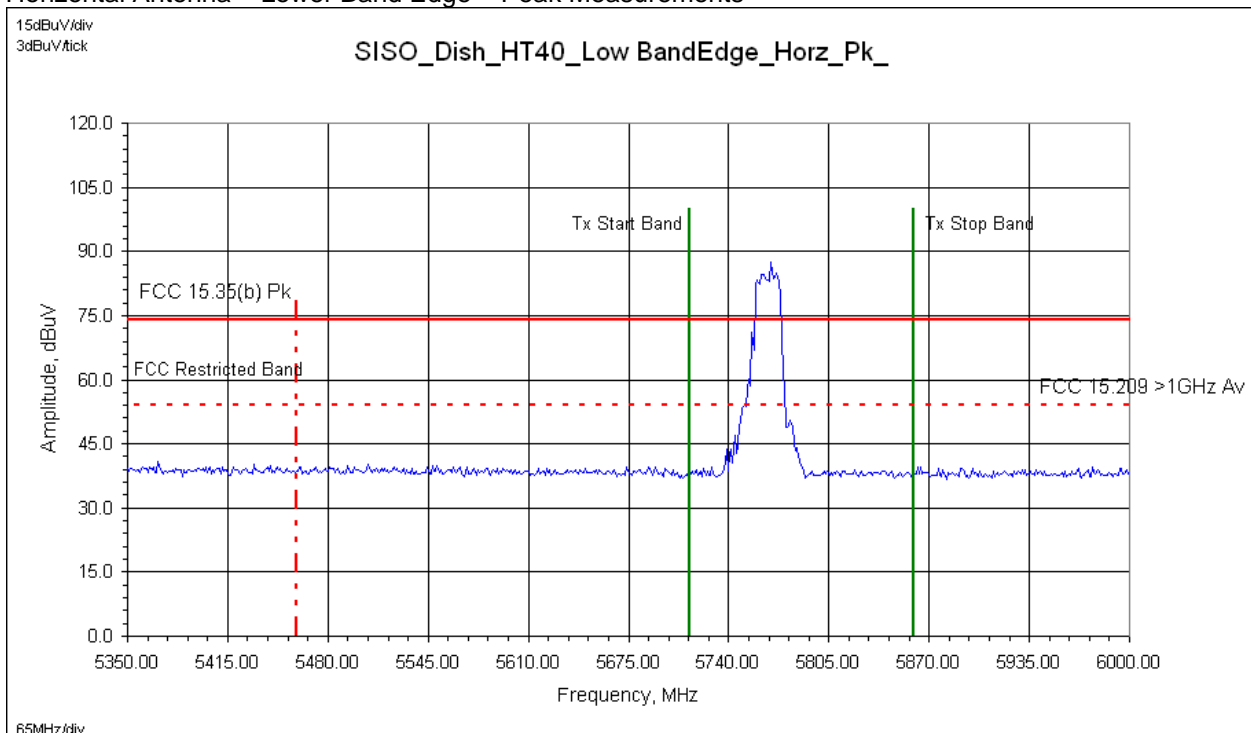


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Peak trace line)

### 11.27 Band Edge Plots: SISO Mode of Operation – HT40 Low Channel 5765 MHz

#### Vertical Antenna – Lower Band Edge – Average Measurements

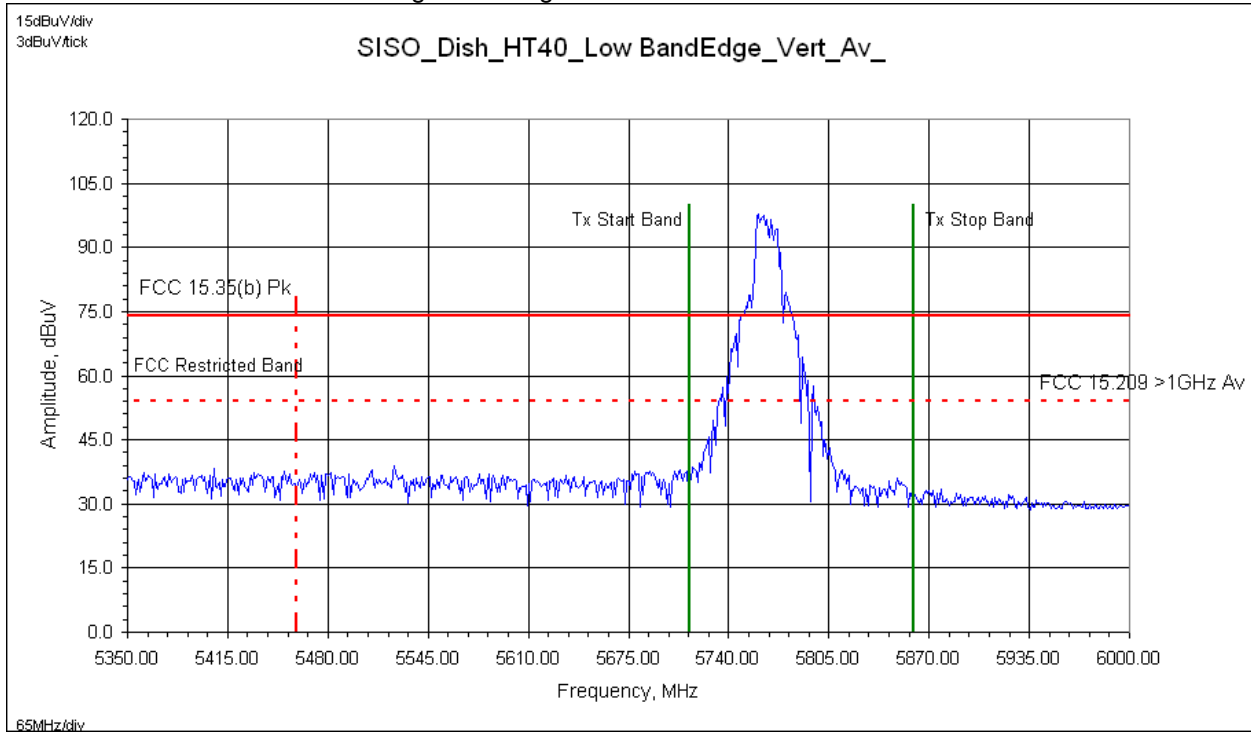

#### Horizontal Antenna – Lower Band Edge – Average Measurements

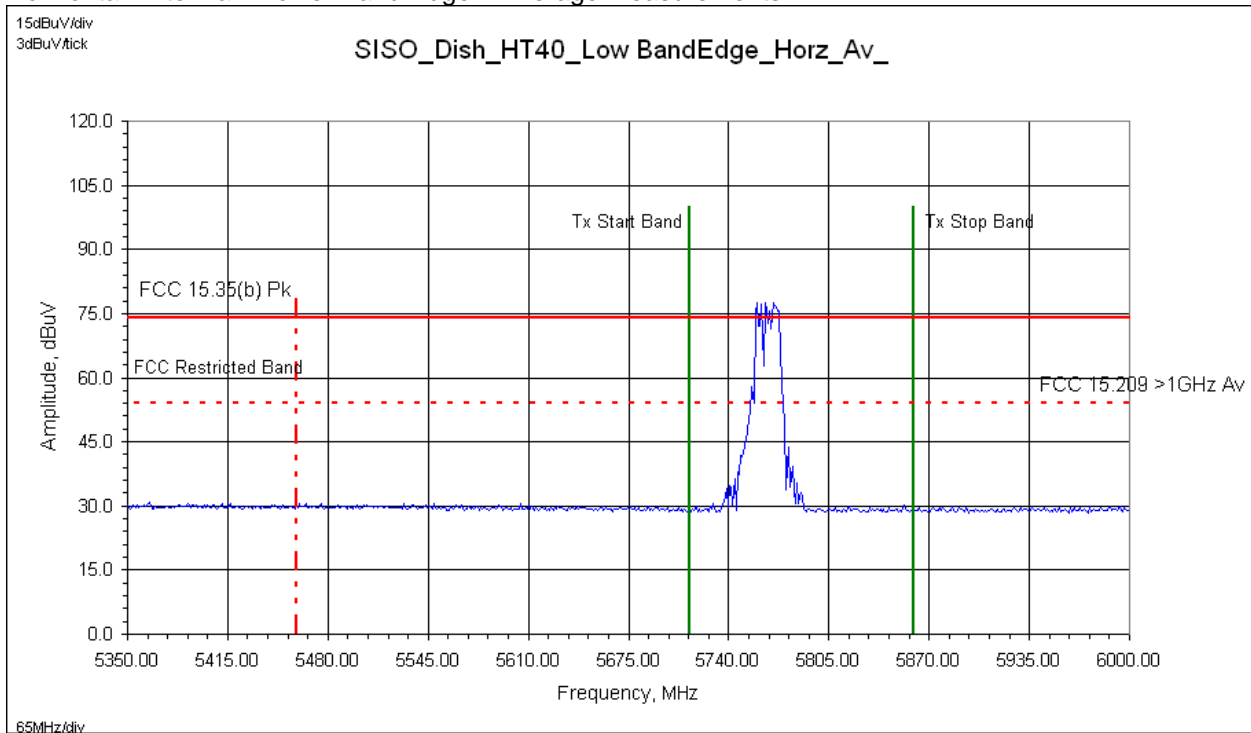


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Average trace line)

### 11.28 Band Edge Plots: SISO Mode of Operation – HT40 High Channel 5785 MHz

#### Vertical Antenna – Upper Band Edge – Peak Measurements

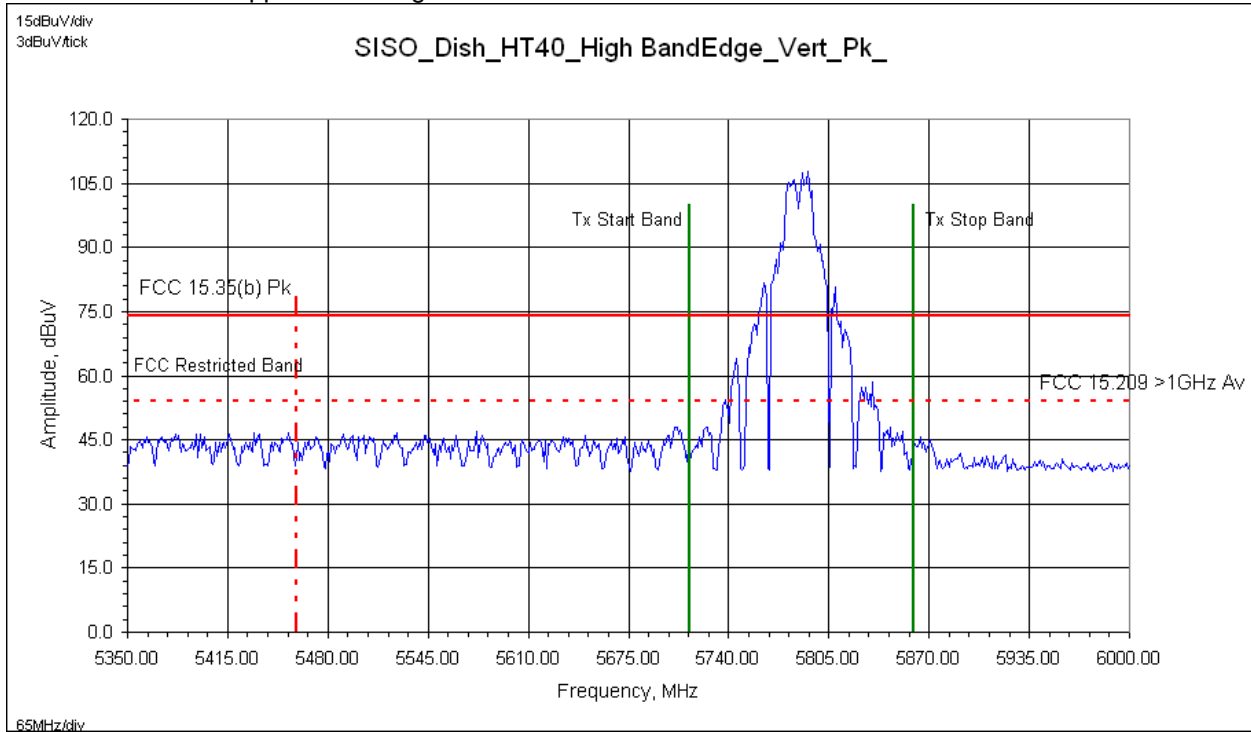

#### Horizontal Antenna – Upper Band Edge – Peak Measurements

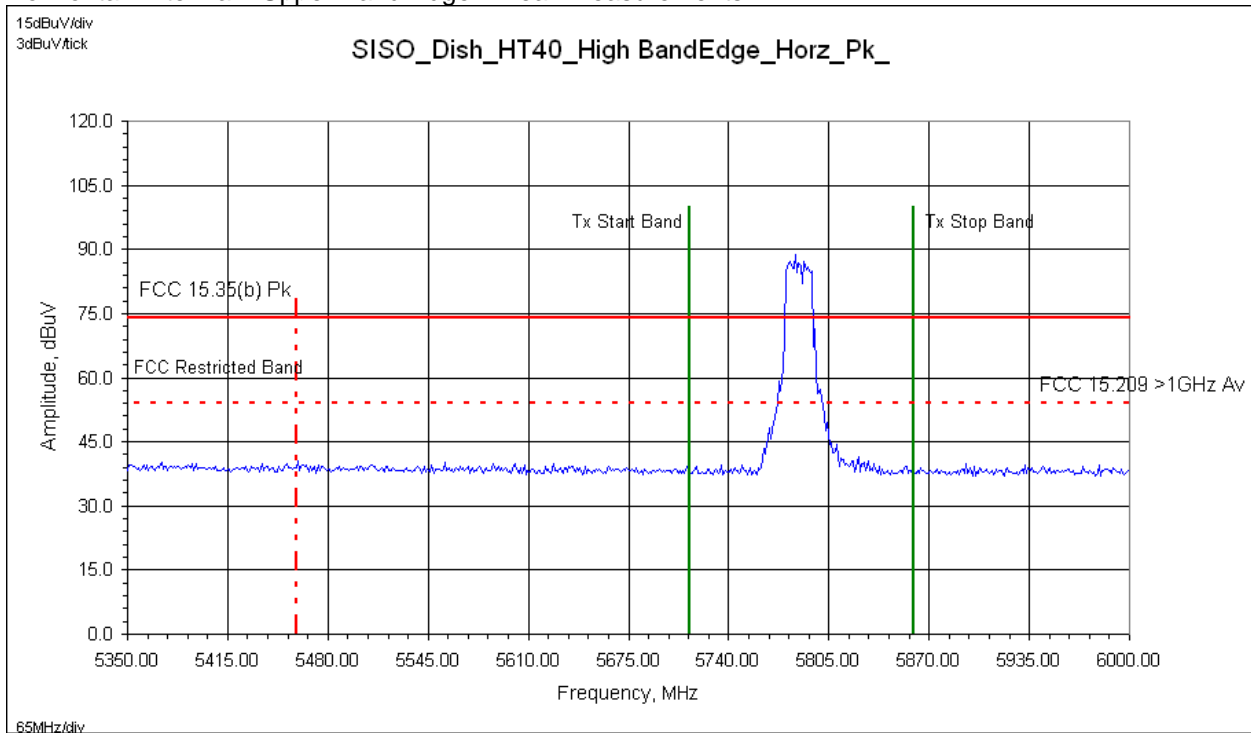


Reference only – max hold peak detector measurements referenced to average & peak limits

Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Peak trace line)




### 11.29 Band Edge Plots: SISO Mode of Operation – HT40 High Channel 5785 MHz

#### Vertical Antenna – Upper Band Edge – Average Measurements

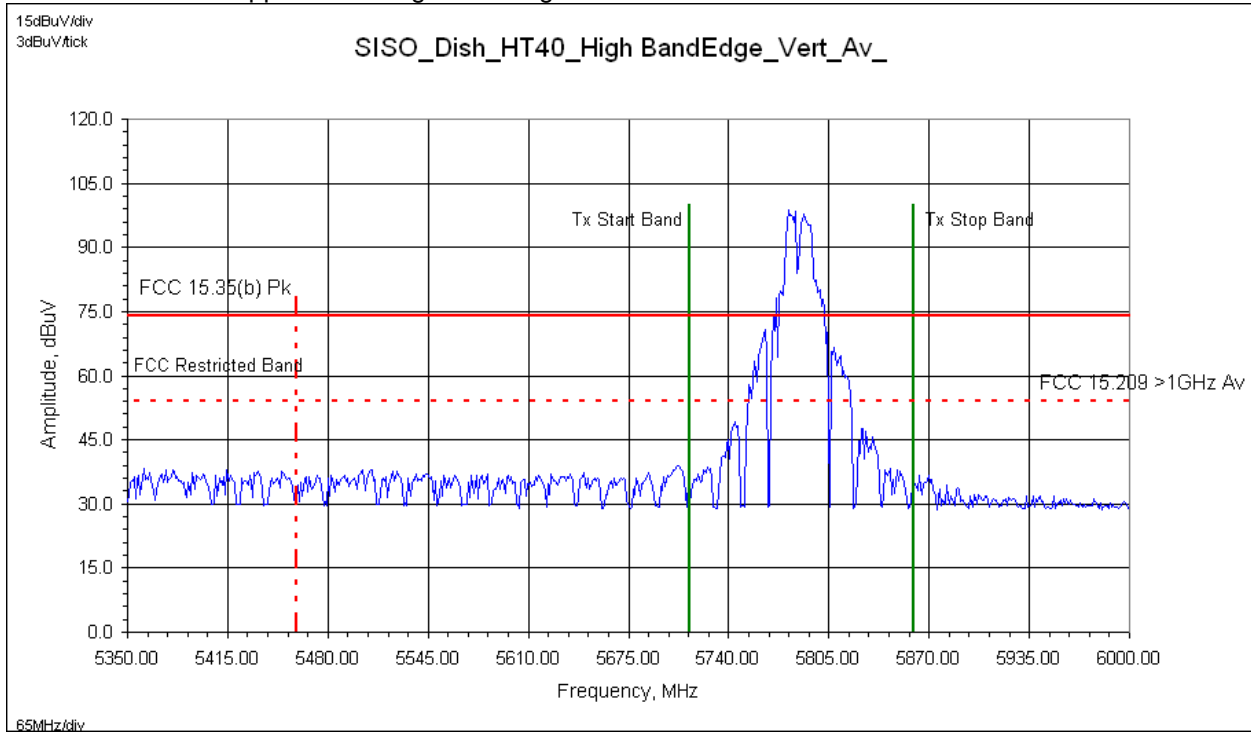

#### Horizontal Antenna – Upper Band Edge – Average Measurements

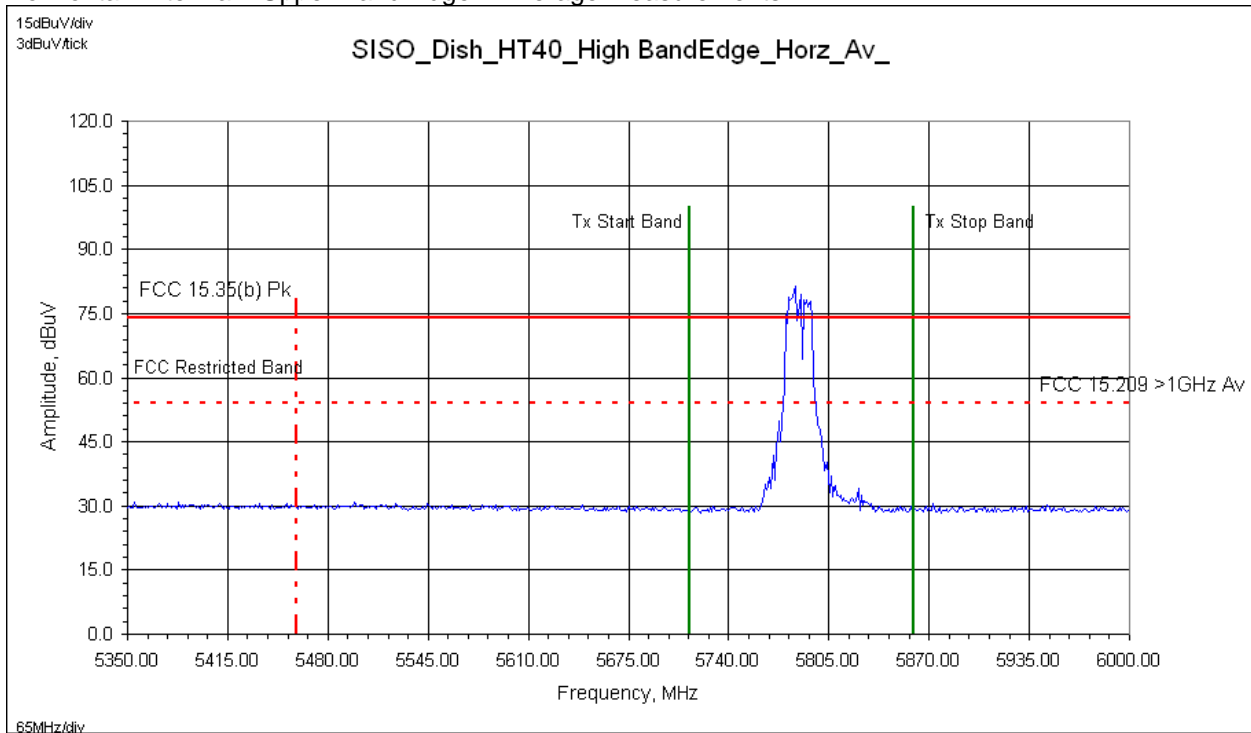

Reference only – max hold peak detector measurements referenced to average & peak limits

Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Average trace line)

# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

## 11.30 Test Data: SISO Band Edge – FCC Restricted Band

### Tx Spurious Radiated Emissions – Band Edge

|  |   |                                  |
|--|---|----------------------------------|
| Test Report #: <b>G101503607</b>   | Test Area: CC1 Radiated                           | Temperature: <u>23.7</u> °C      |
| Test Method: FCC 15.209/ 15.205/ 15.35(b)  | Test Date: <u>02/12/2014</u><br><u>02/13/2014</u> | Relative Humidity: <u>27.2</u> % |
| EUT Model #: Radio Module: W5800-01<br>4' Parabolic "Dish" Antenna:<br>SPD4-5-2S | EUT Power: <u>120VAC/60Hz</u>                     | Air Pressure: <u>83.5</u> kPa    |

EUT Serial #: Radio Module: DEN1402111313  
4' Parabolic "Dish" Antenna(s): 1018763

Manufacturer: FreeWave Technologies, Inc.

EUT Description: PCIe Radio Module

Notes: Product tested in SISO mode: single transmit chain/port – single antenna

Product continuously transmitting during all testing – worst-case modulation/data

SISO mode of Operation, MCS0 Data Rate, 27dBm power (worst-case)

| Level Key       |
|-----------------|
| Pk – Peak       |
| Qp – Quasi Peak |
| Av - Average    |

| Freq   | Level | Det            | Cable  | Ant      | Preamp | Atten  | Final    | Pol   | Hgt  | Az    | Delta1               | Delta2                | RBW   |
|--|-------|----------------|--------|----------|--------|--------|----------|-------|------|-------|----------------------|-----------------------|-------|
| MHz  | dBuV  | Qp<br>Av<br>Pk | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m)  | (DEG) | FCC<br>15.209<br>Avg | FCC<br>15.35(b)<br>Pk | (MHz) |
| <b>Radio System: Model W5800-01 Radio Module with 4' Parabolic "Dish" Antenna – SISO Mode of Operation</b> |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| <b>Measurements: 802.11a/n HT20 Lower Band Edge – FCC Restricted Band</b>                                  |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 5725.0000  | 55.29 | Av             | 5.64   | 34.09    | 44.10  | 0.00   | 50.92    | V     | 1.44 | 5.0   | - 3.06               | NA                    | 0.100 |
| 5725.0000  | 63.21 | Pk             | 5.64   | 34.09    | 44.10  | 0.00   | 58.84    | V     | 1.44 | 5.0   | N/A                  | - 15.16               | 0.100 |
| 5725.0000  | 51.47 | Av             | 5.64   | 34.09    | 44.10  | 0.00   | 47.10    | H     | 1.38 | 7.0   | - 6.88               | NA                    | 0.100 |
| 5725.0000  | 56.66 | Pk             | 5.64   | 34.09    | 44.10  | 0.00   | 52.29    | H     | 1.38 | 7.0   | N/A                  | - 21.71               | 0.100 |
| <b>Measurements: 802.11a/n HT20 Upper Band Edge – FCC Restricted Band</b>                                  |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 5850.0000  | 55.20 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 50.64    | V     | 1.30 | 6.0   | - 3.34               | NA                    | 0.100 |
| 5850.0000  | 68.01 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 63.45    | V     | 1.30 | 6.0   | N/A                  | - 10.55               | 0.100 |
| 5850.0000  | 37.64 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 33.08    | H     | 1.52 | 0.0   | - 20.90              | NA                    | 0.100 |
| 5850.0000  | 42.77 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 38.21    | H     | 1.52 | 0.0   | N/A                  | - 35.79               | 0.100 |
| <b>Measurements: 802.11n HT40 Lower Band Edge – FCC Restricted Band</b>                                    |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 5850.0000  | 39.44 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 34.88    | V     | 1.36 | 6.0   | - 19.10              | NA                    | 0.100 |
| 5850.0000  | 41.54 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 36.98    | V     | 1.36 | 6.0   | N/A                  | - 37.02               | 0.100 |
| 5850.0000  | 36.46 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 31.90    | H     | 1.49 | 15.0  | - 22.08              | NA                    | 0.100 |
| 5850.0000  | 41.28 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 36.72    | H     | 1.49 | 15.0  | N/A                  | - 37.28               | 0.100 |
| <b>Measurements: 802.11n HT40 Upper Band Edge – FCC Restricted Band</b>                                    |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 5850.0000  | 41.18 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 36.62    | V     | 1.28 | 5.0   | - 17.36              | NA                    | 0.100 |
| 5850.0000  | 46.89 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 42.33    | V     | 1.28 | 5.0   | N/A                  | - 31.67               | 0.100 |
| 5850.0000  | 37.59 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 33.03    | H     | 1.45 | 7.0   | - 20.95              | NA                    | 0.100 |
| 5850.0000  | 42.17 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 37.61    | H     | 1.45 | 7.0   | N/A                  | - 36.39               | 0.100 |

# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

|  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|--|--|--|--|

Example calculation:

| Measure<br>d Level | + | Cable<br>Loss | + | Antenna<br>Factor | - | Pre-<br>Amp | + | Atten | = | Final<br>Correcte<br>d<br>Reading | Specificatio<br>n<br>Limit | - | Final<br>Correcte<br>d<br>Reading | = | Delta<br>Specificatio<br>n |
|--------------------|---|---------------|---|-------------------|---|-------------|---|-------|---|-----------------------------------|----------------------------|---|-----------------------------------|---|----------------------------|
| (dB $\mu$ V)       |   | (dB)          |   | (dB)              |   | (dB)        |   | (dB)  |   | (dB $\mu$ V/m)                    | (dB $\mu$ V/m)             |   | (dB $\mu$ V/m)                    |   |                            |
| 20.0               |   | 3.0           |   | 5.0               |   | 10.0        |   | 0.0   |   | 18.0                              | 40.0                       |   | 18.0                              |   | - 22.0                     |

Notes:


- 1) The highest signals – as determined from pre-scan plots – were fully-maximized and measured.
- 2) A notch filter was not used during band edge plots/measurements.
- 3) 802.11 a/n HT20/HT40 included in measurements as well as both SISO/MIMO modes of Tx operation.

Deviations, Additions, or Exclusions: None


11.31 Plots: MIMO Mode of Operation – HT20 Low Channel: 5745MHz

30MHz to 1000MHz

Vertical Antenna

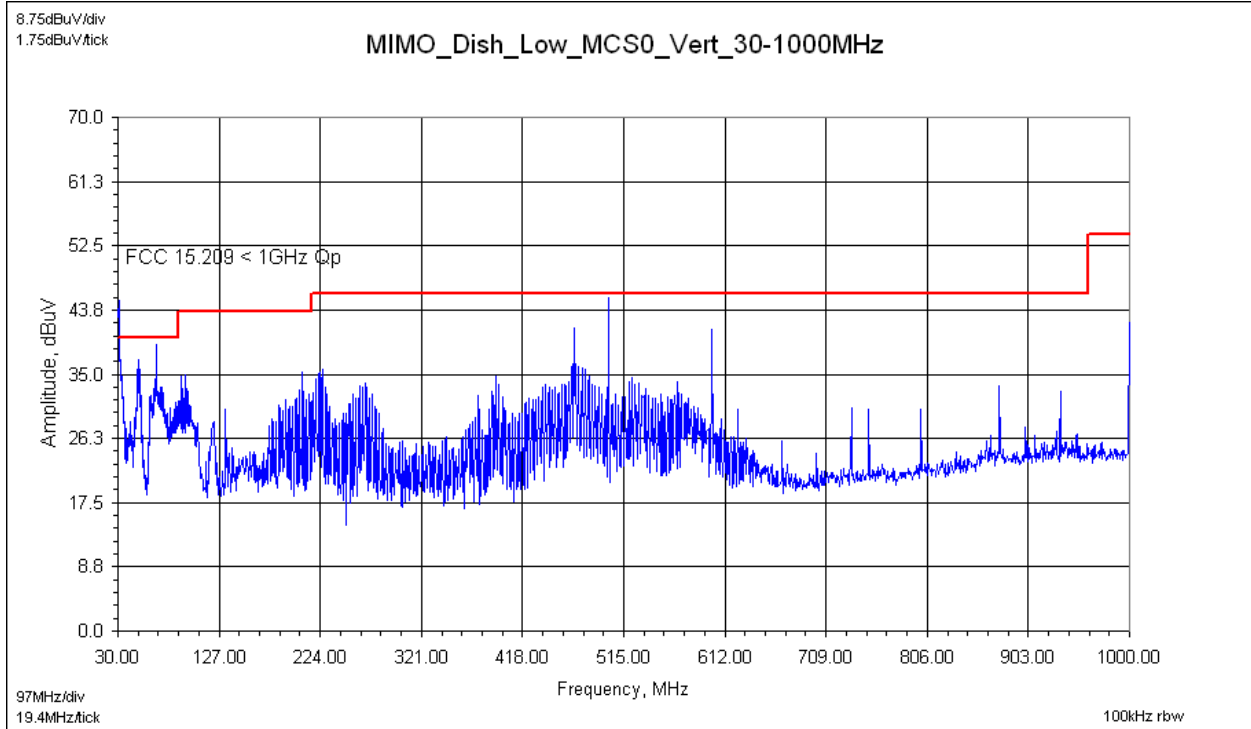

Horizontal Antenna

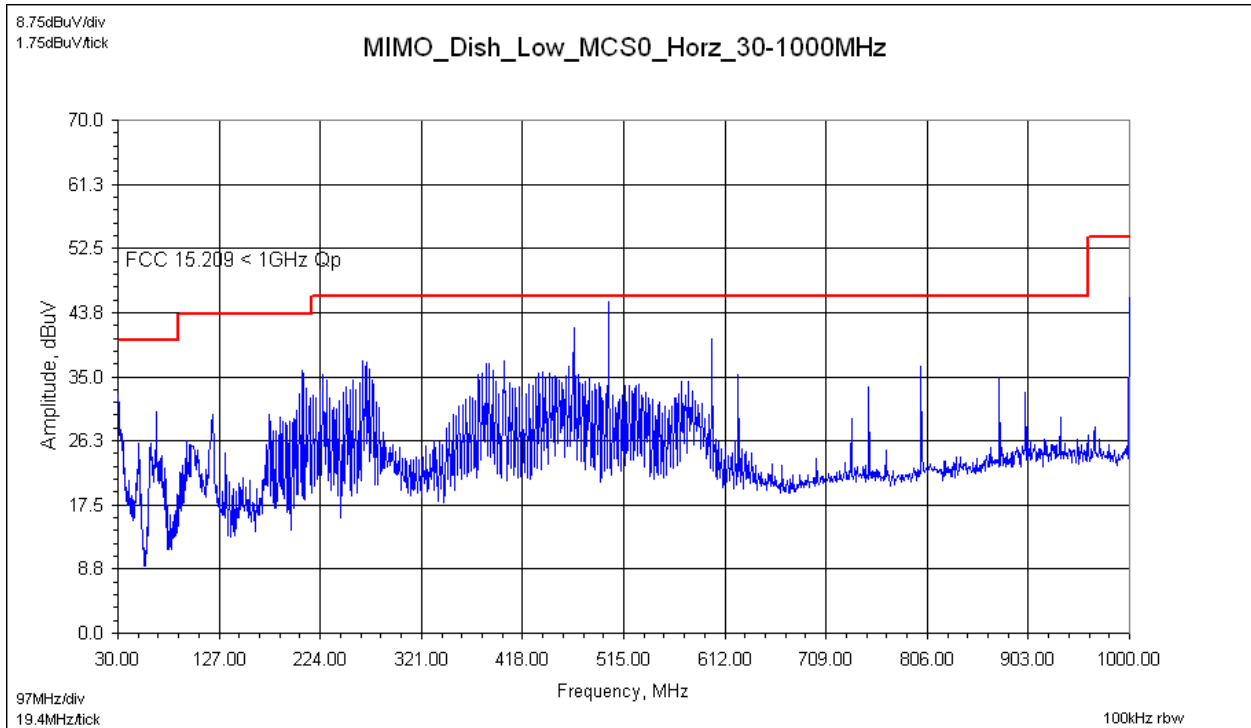


Reference only – max hold peak detector measurements referenced to quasi-peak limit


11.32 MIMO Mode of Operation – HT20 Mid Channel: 5785MHz

30MHz to 1000MHz

Vertical Antenna

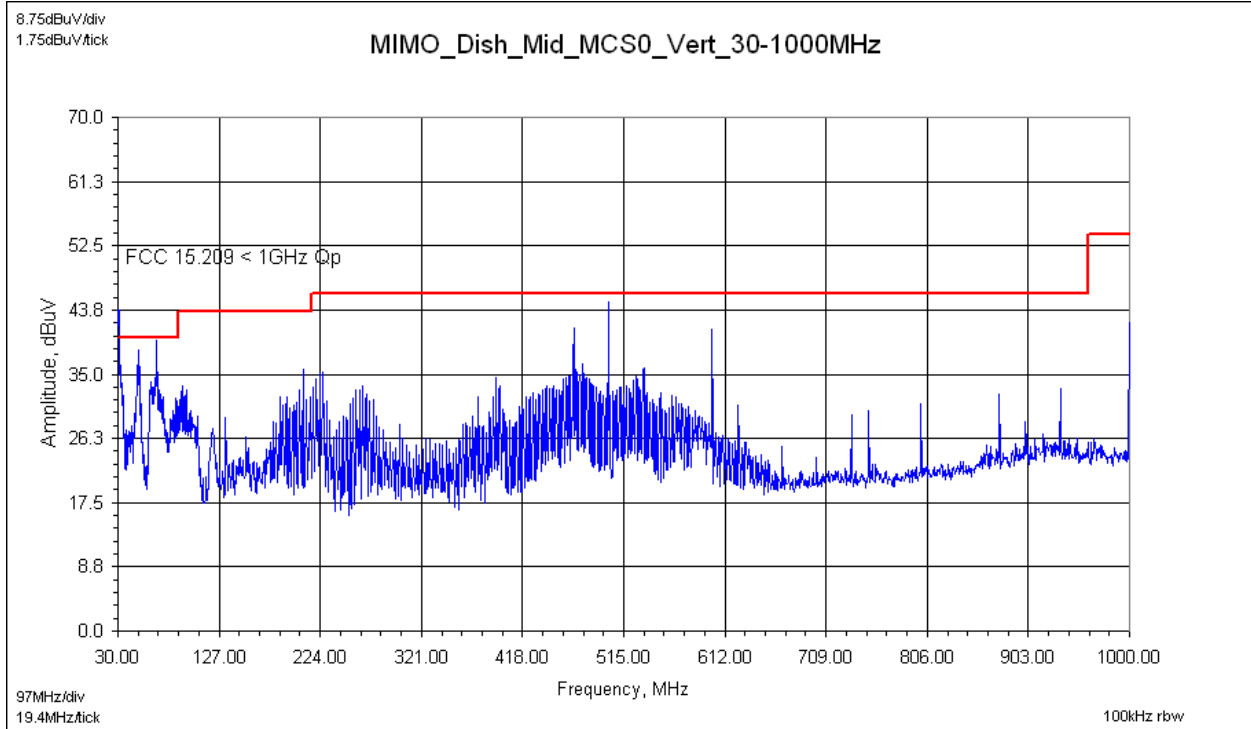

Horizontal Antenna

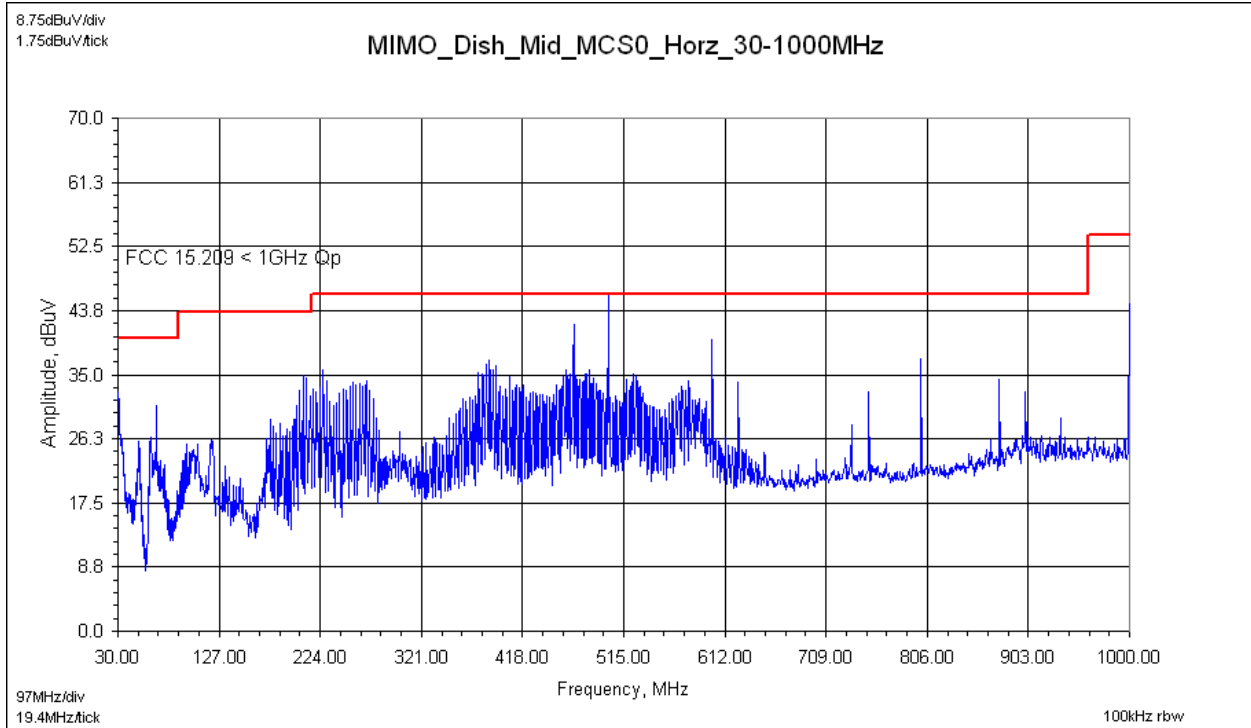


Reference only – max hold peak detector measurements referenced to quasi-peak limit


### 11.33 MIMO Mode of Operation – HT20 High Channel: 5825MHz

30MHz to 1000MHz

#### Vertical Antenna

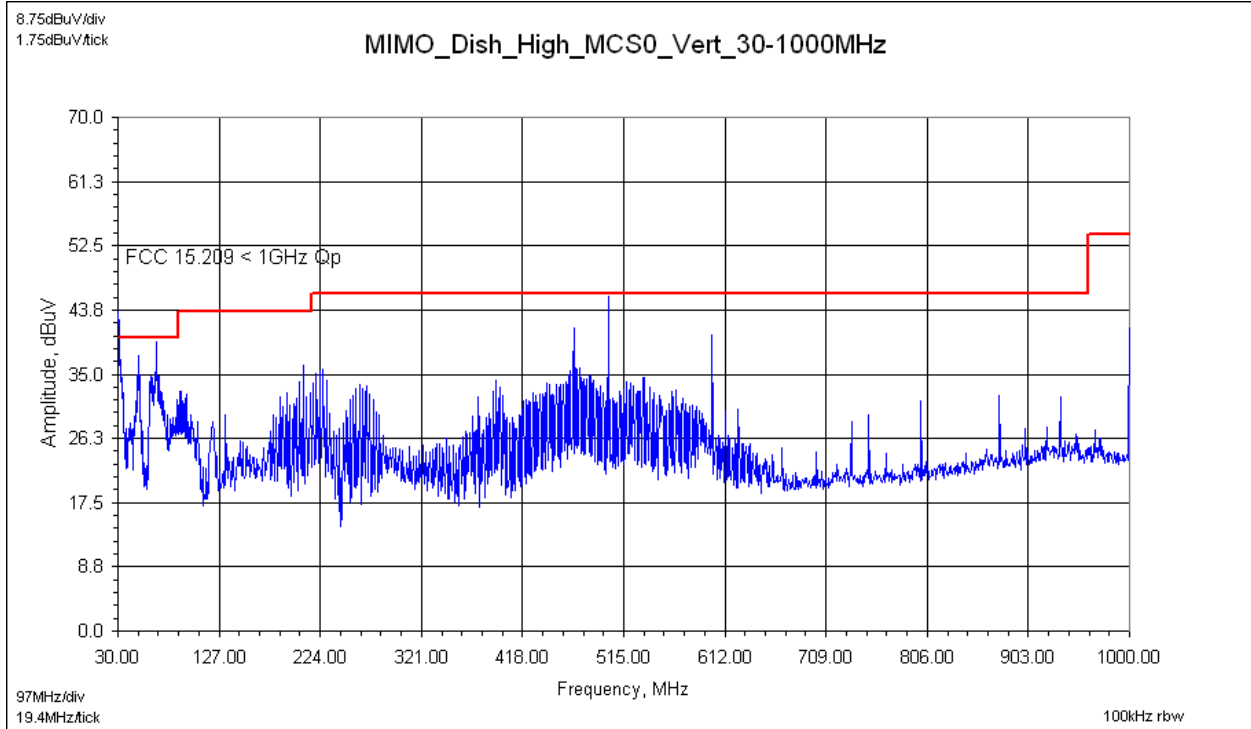

#### Horizontal Antenna

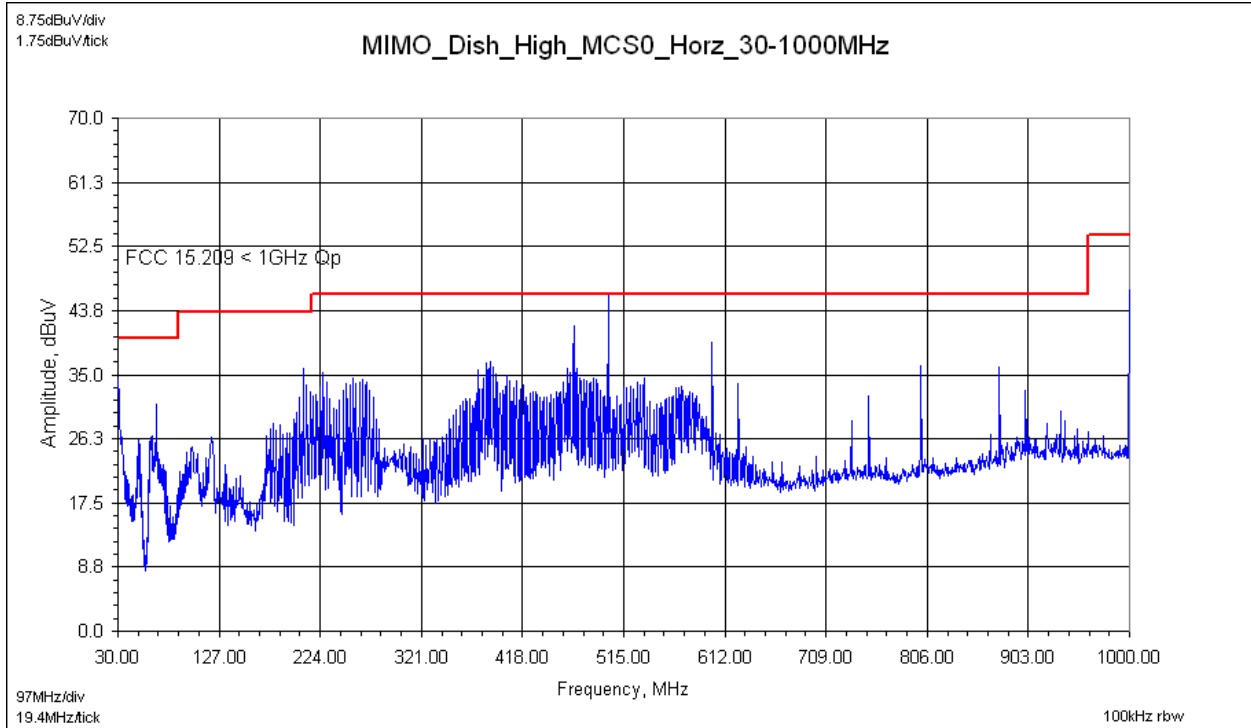


Reference only – max hold peak detector measurements referenced to quasi-peak limit


### 11.34 MIMO Mode of Operation – HT40 Channel: 5765MHz

30MHz to 1000MHz

Vertical Antenna

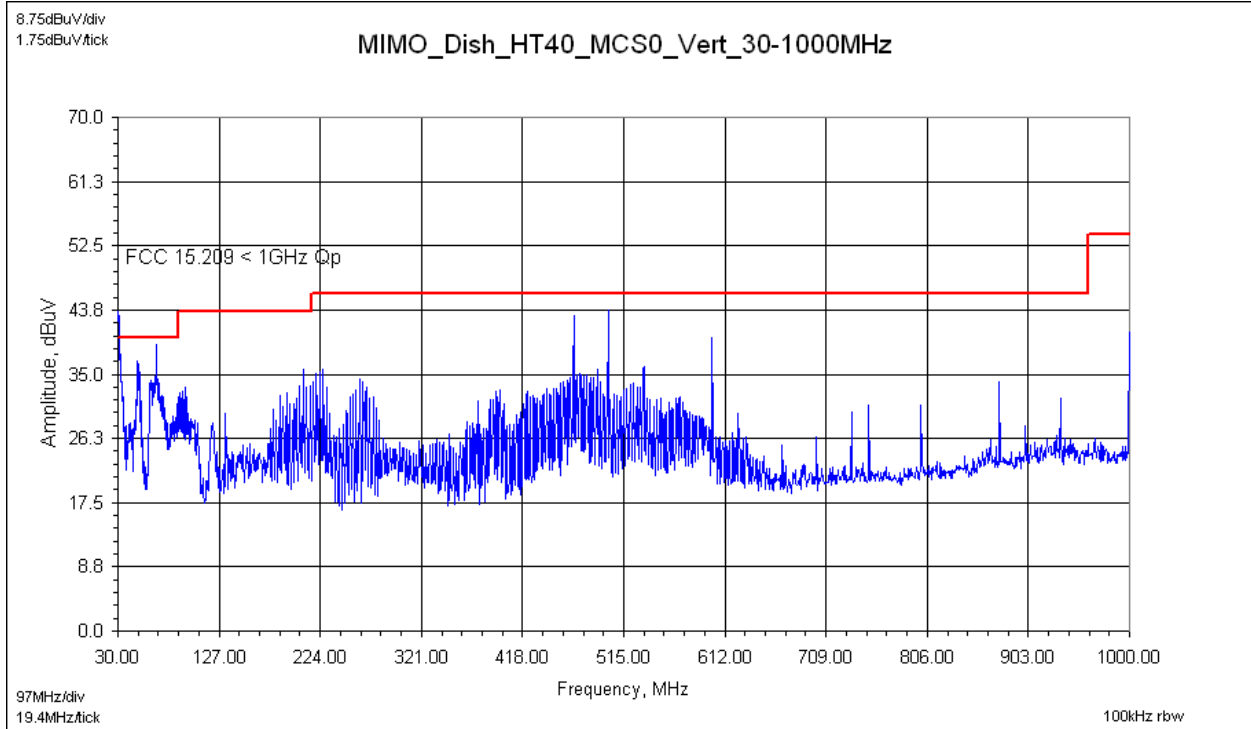

Horizontal Antenna

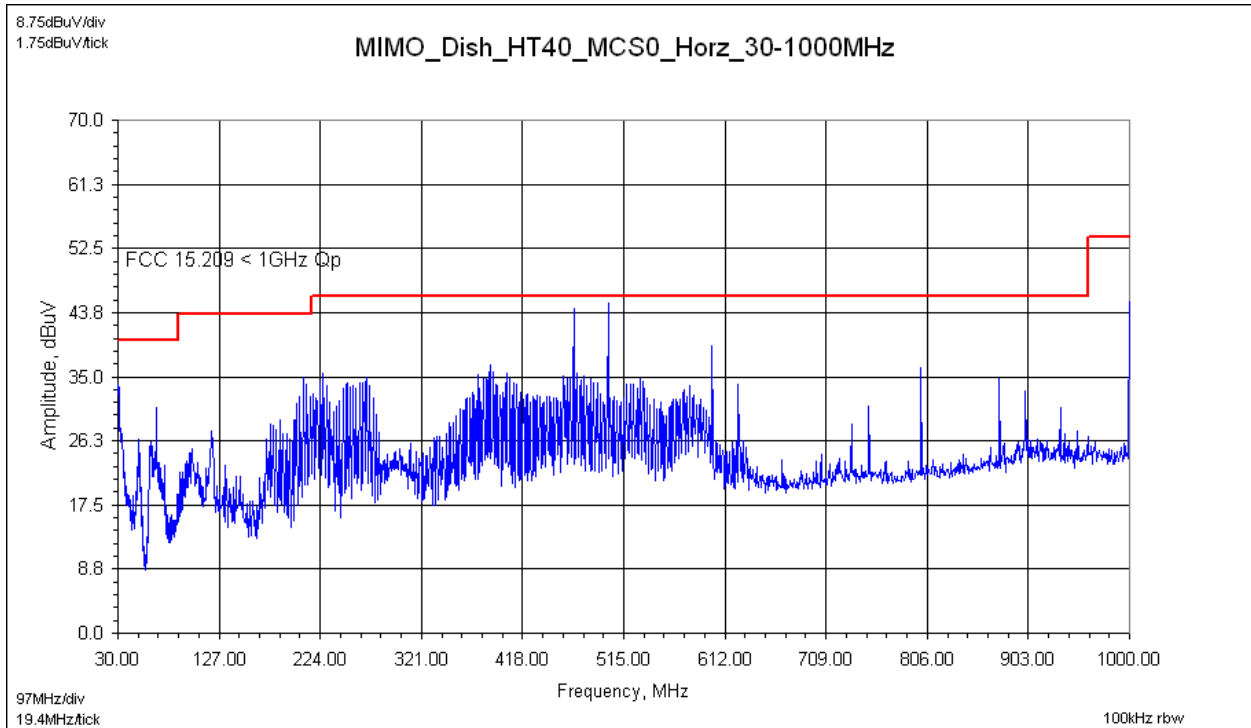


Reference only – max hold peak detector measurements referenced to quasi-peak limit


11.35 Plots: MIMO Mode of Operation – HT20 Low Channel: 5745 MHz

1GHz to 18GHz

Vertical Antenna

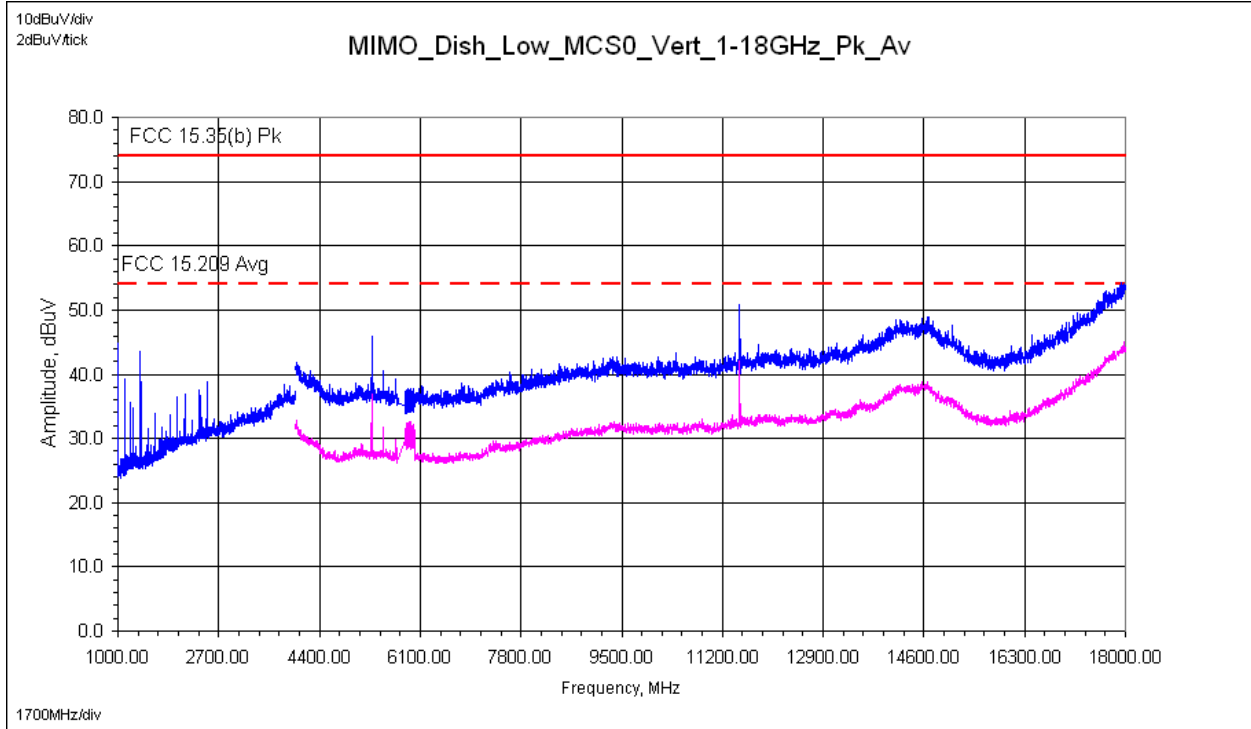

Horizontal Antenna

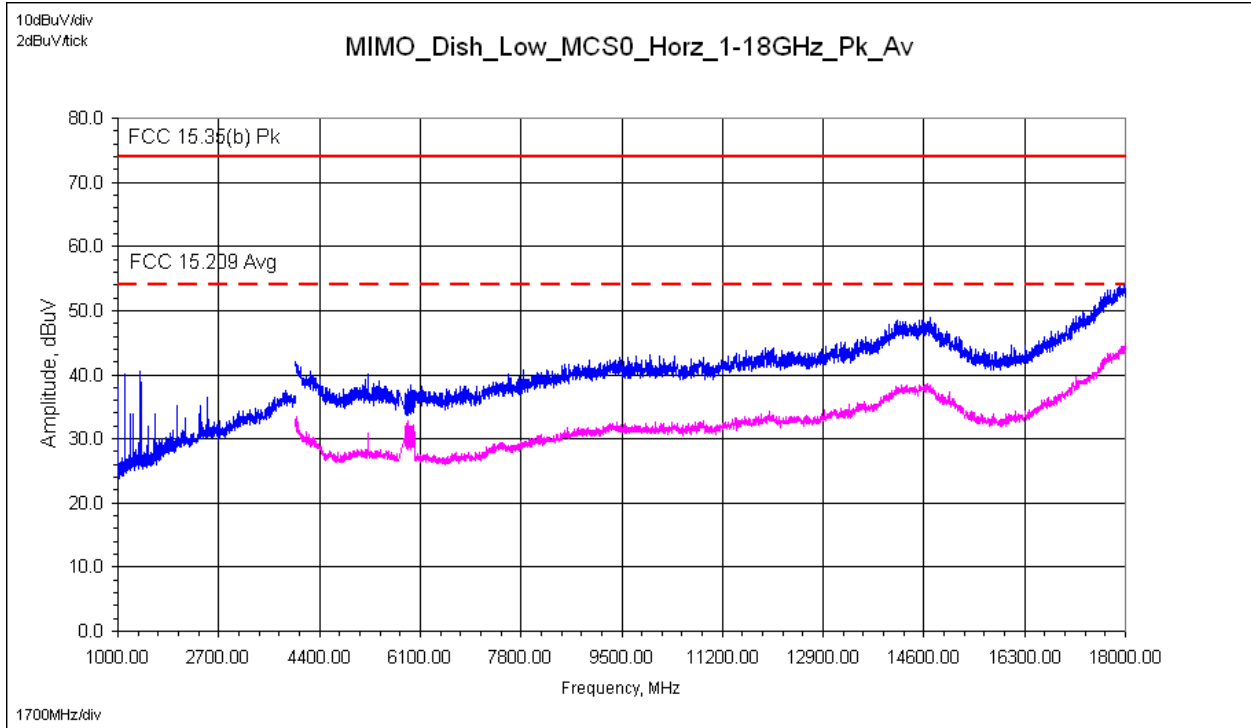


Reference only – max hold peak detector measurements referenced to average & peak limits




11.36 Plots: MIMO Mode of Operation – HT20 Mid Channel: 5785 MHz

1GHz to 18GHz

Vertical Antenna

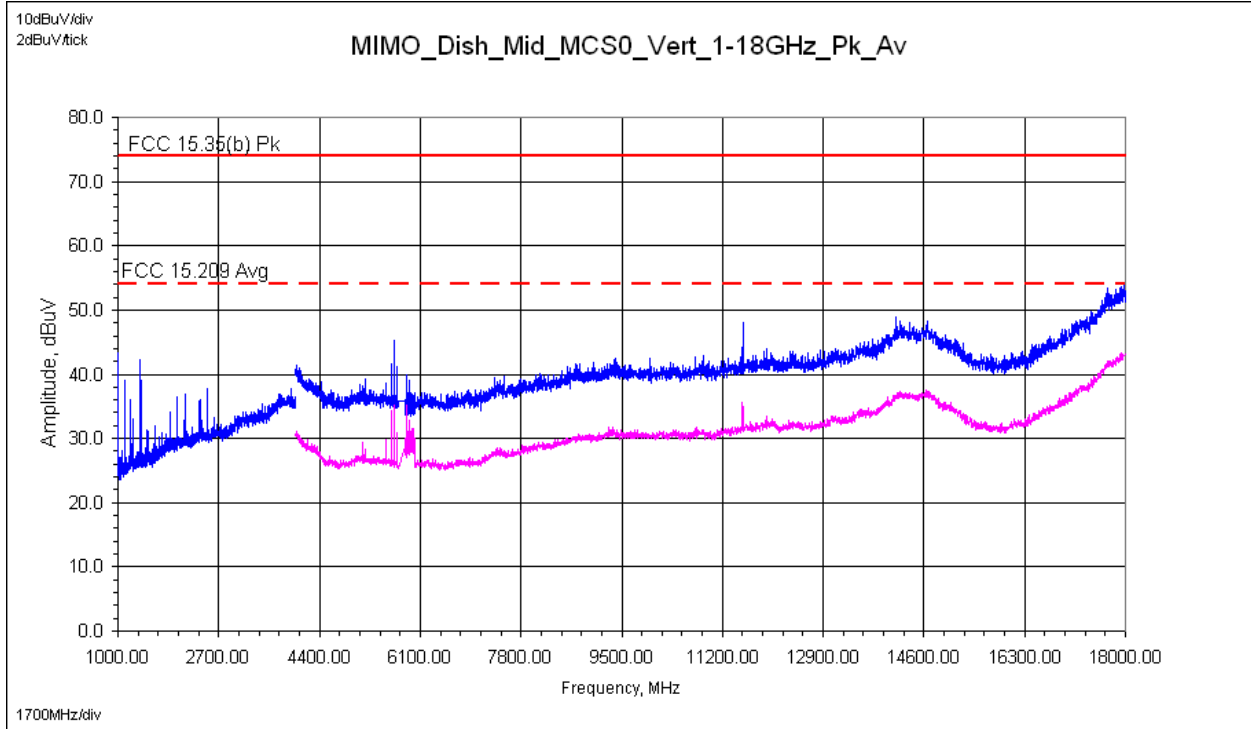

Horizontal Antenna

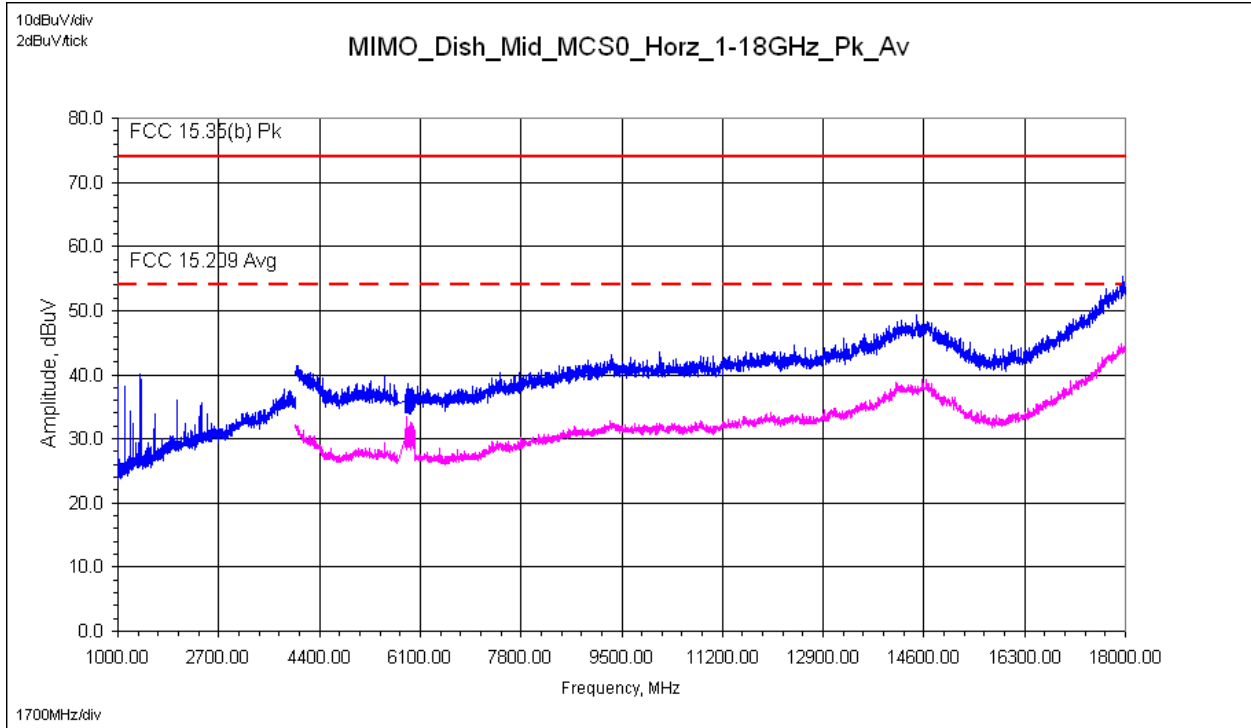


Reference only – max hold peak detector measurements referenced to average & peak limits


11.37 Plots: MIMO Mode of Operation – HT20 High Channel: 5825 MHz

1GHz to 18GHz

Vertical Antenna

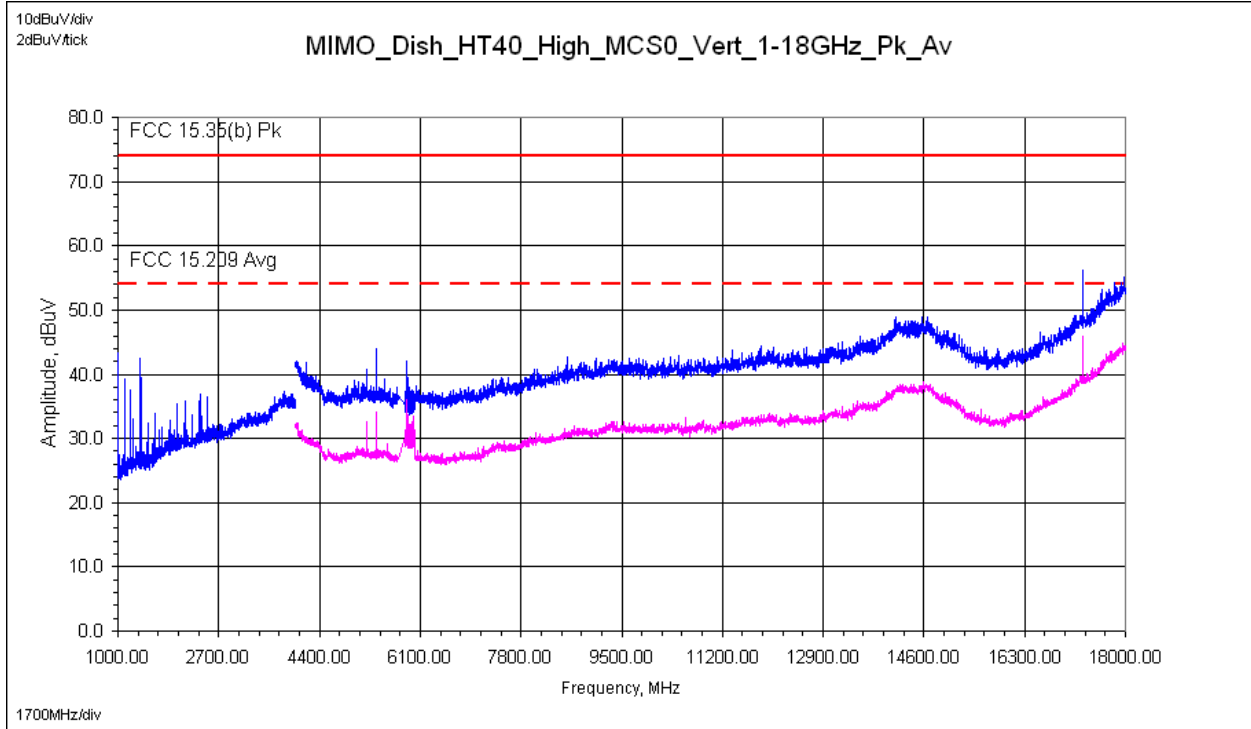

Horizontal Antenna

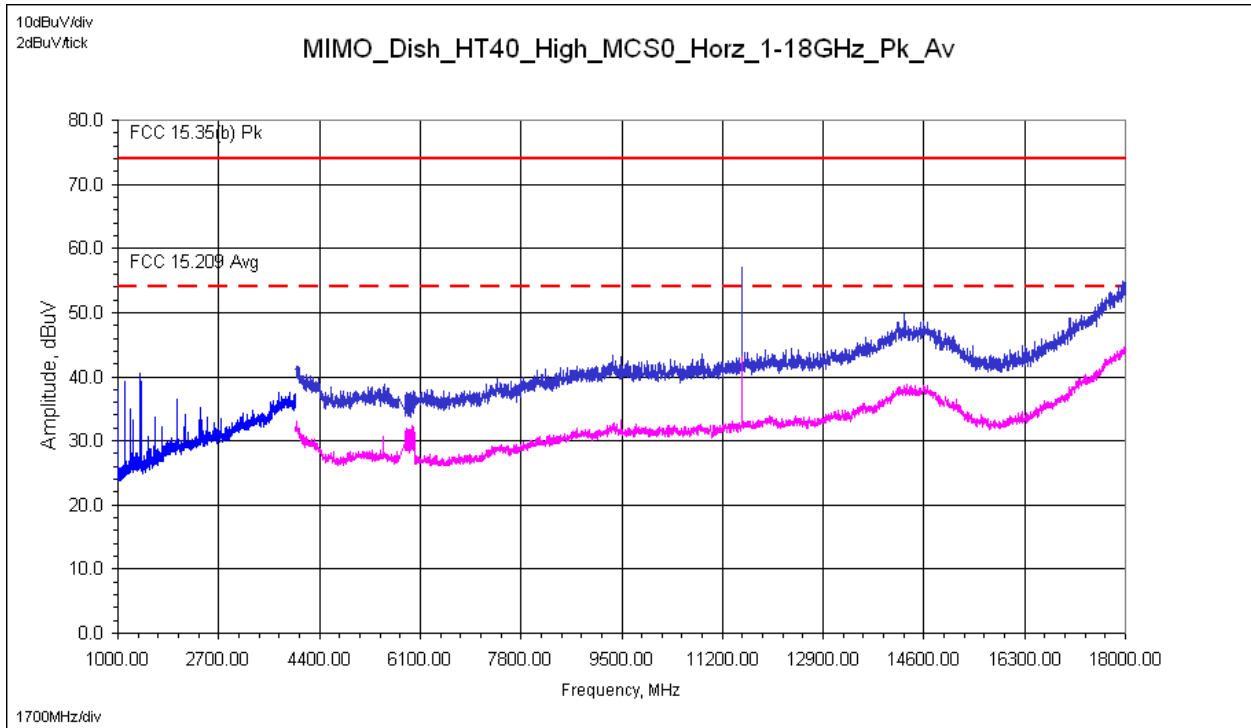


Reference only – max hold peak detector measurements referenced to average & peak limits


11.38 Plots: MIMO Mode of Operation – HT40 Low Channel: 5765 MHz

1GHz to 18GHz

Vertical Antenna

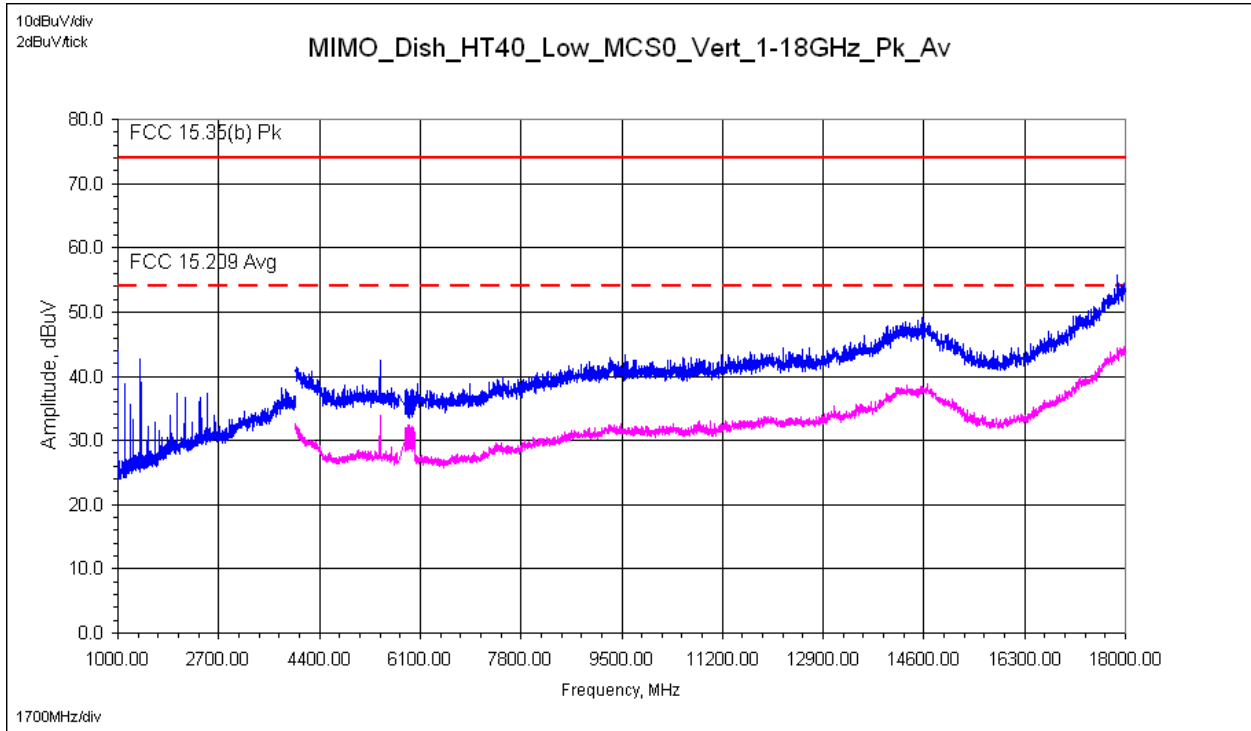

Horizontal Antenna

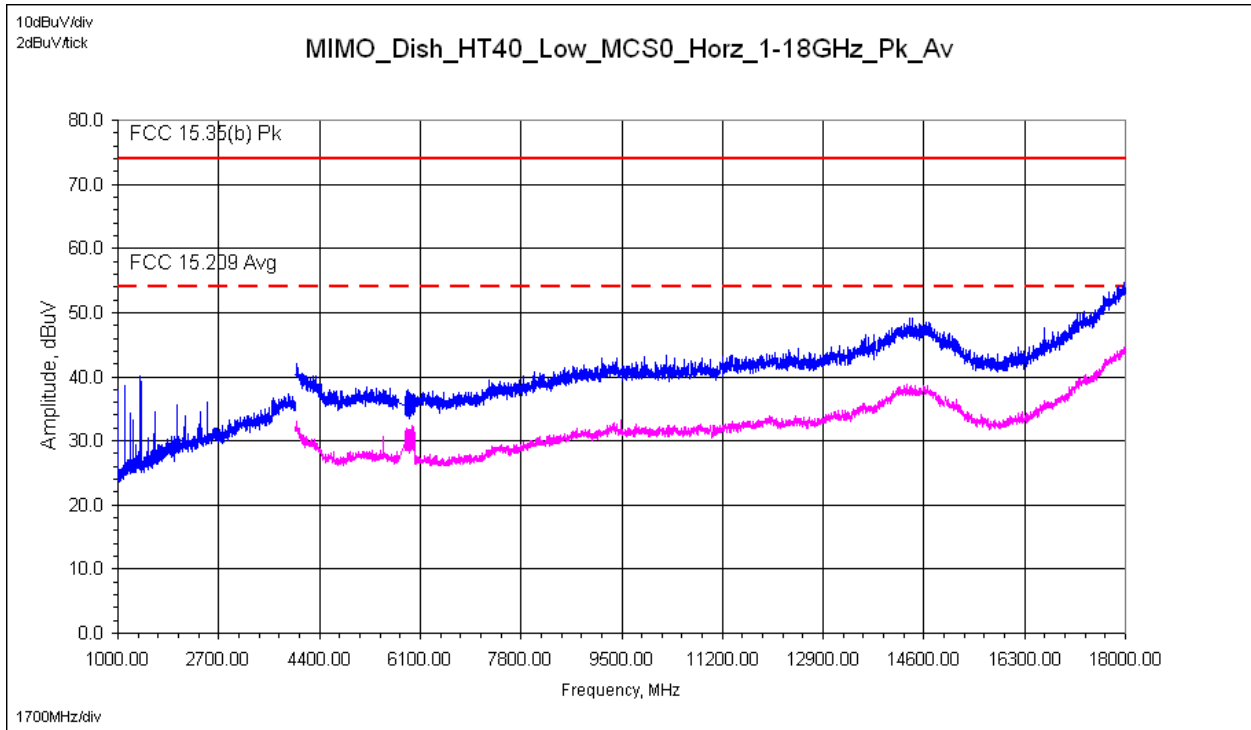


Reference only – max hold peak detector measurements referenced to average & peak limits


11.39 Plots: MIMO Mode of Operation – HT40 High Channel: 5785 MHz

1GHz to 18GHz

Vertical Antenna

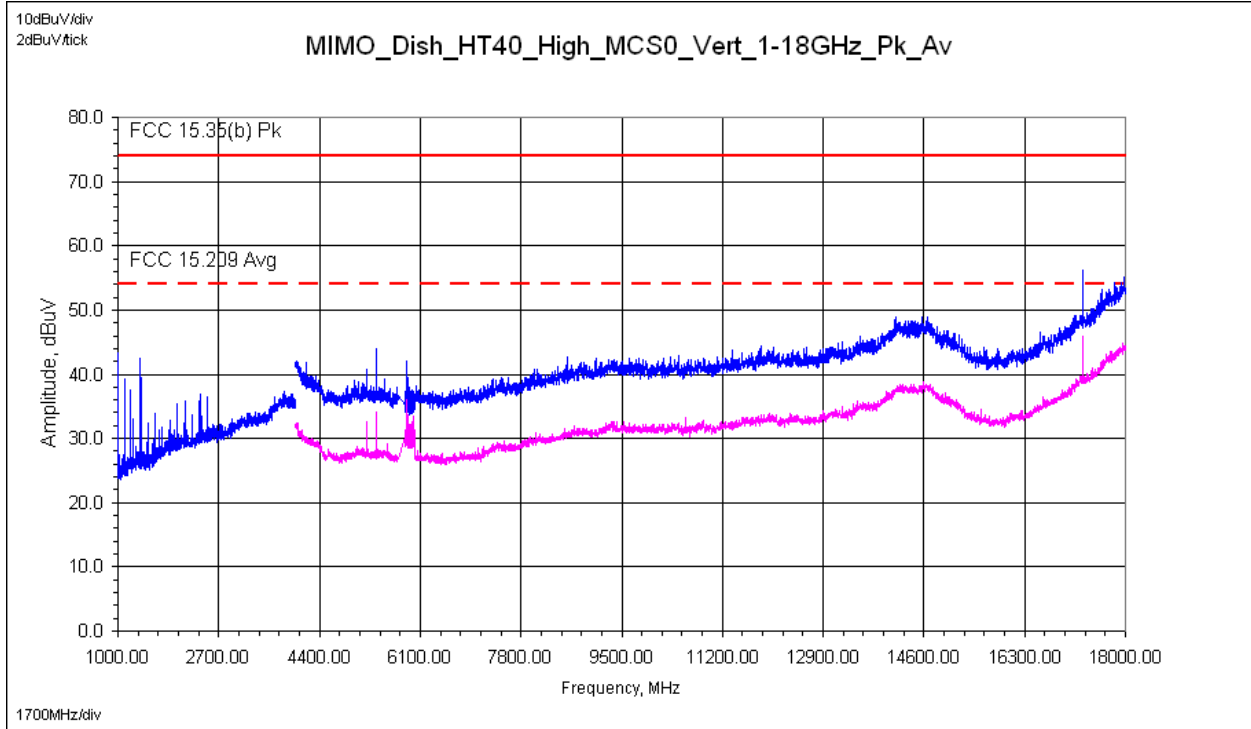

Horizontal Antenna

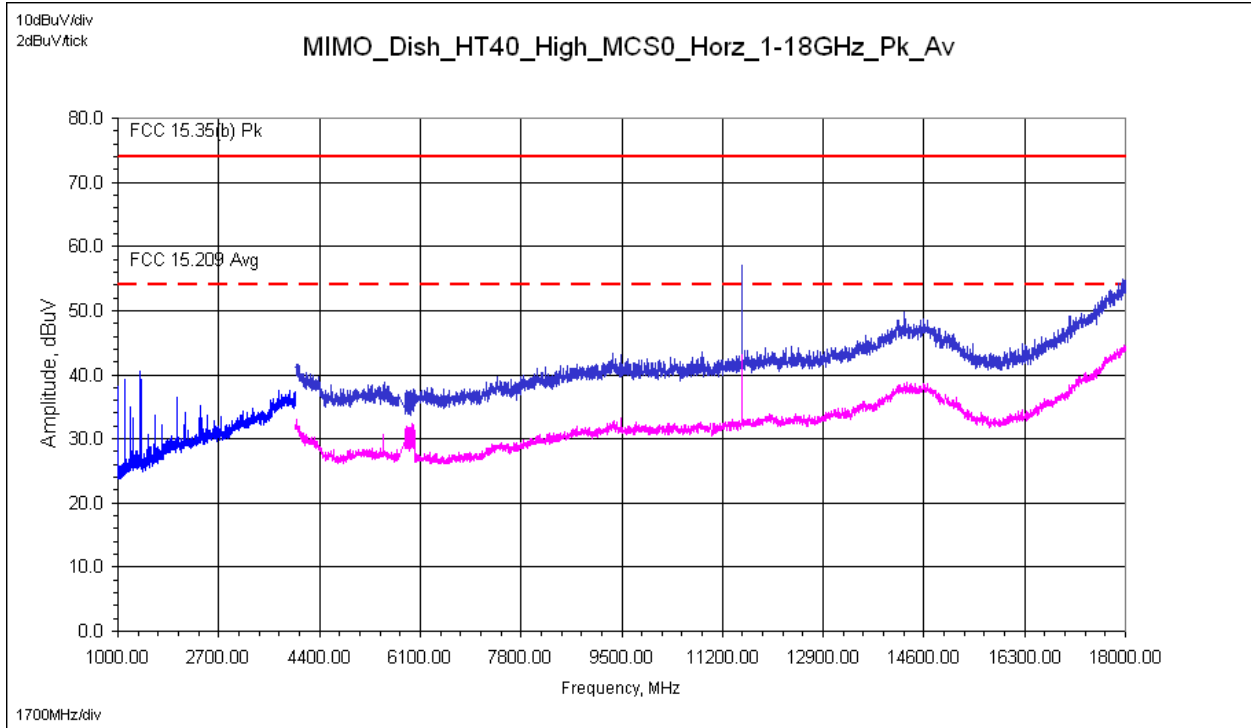

Reference only – max hold peak detector measurements referenced to average & peak limits

# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

## 11.40 Test Data: MIMO Mode of Operation

### Tx Spurious Radiated Electromagnetic Emissions

|                |  |            |                          |                    |             |
|----------------|--|------------|--------------------------|--------------------|-------------|
| Test Report #: | <b>G101503607</b>  | Test Area: | CC1 Radiated             | Temperature:       | 23.7 °C     |
| Test Method:   | FCC 15.209/ 15.205/ 15.35(b)   | Test Date: | 02/12/2014<br>02/13/2014 | Relative Humidity: | 28.2 %      |
| EUT Model #:   | Radio Module: W5800-01<br>Parabolic "Dish" Antenna:<br>SPD4-5.2S         | EUT Power: | 120VAC/60Hz              | Air Pressure:      | kPa<br>83.5 |
| EUT Serial #:  | Radio Module: DEN1402111313<br>Parabolic Dish Antennas: 1018763/ 1018764 |            |                          |                    |             |

Manufacturer: FreeWave Technologies

EUT Description: PCIe Radio Module

Notes: Product tested in MIMO mode: 3 transmit chains/ports – dual antennas

Product continuously transmitting during all testing – worst-case modulation/data

MIMO mode of Operation, MCS0 Data Rate, 27dBm power, 22.23 dBm/port (worst-case power)

| Level Key       |
|-----------------|
| Pk – Peak       |
| Qp – Quasi Peak |
| Av - Average    |

| Freq   | Level        | Det            | Cable       | Ant          | Preamp       | Atten       | Final        | Pol      | Hgt         | Az           | Delta1              | Delta2    | RBW          |
|--|--------------|----------------|-------------|--------------|--------------|-------------|--------------|----------|-------------|--------------|---------------------|-----------|--------------|
| MHz  | dBuV         | Qp<br>Av<br>Pk | + [dB]      | + [dB/m]     | - [dB]       | + [dB]      | = [dBuV]     | (V/H)    | (m)         | (DEG)        | FCC<br>15.209<br>Qp | N/A       | (MHz)        |
| <b>Radio System: Model W5800-01 Radio Module with 4' Parabolic "Dish" Antenna – MIMO Mode of Operation</b> |              |                |             |              |              |             |              |          |             |              |                     |           |              |
| <b>Measurements: 30MHz to 1000MHz – 802.11a/n HT20/HT40</b>  |              |                |             |              |              |             |              |          |             |              |                     |           |              |
| 31.2000  | 46.33        | Qp             | 0.40        | 20.18        | 28.30        | 0.00        | 38.61        | V        | 1.00        | 40.0         | - 1.59              | NA        | 0.120        |
| 50.0000  | 50.15        | Qp             | 0.77        | 8.20         | 28.24        | 0.00        | 30.88        | V        | 1.00        | 116.0        | - 9.12              | NA        | 0.120        |
| 50.0000  | 51.27        | Qp             | 0.77        | 8.20         | 28.24        | 0.00        | 32.00        | V        | 1.00        | 82.0         | - 8.00              | NA        | 0.120        |
| 66.6627  | 57.16        | Qp             | 0.77        | 8.03         | 28.19        | 0.00        | 37.77        | V        | 1.14        | 187.0        | - 2.23              | NA        | 0.120        |
| 226.8219   | 49.12        | Qp             | 1.01        | 11.11        | 27.46        | 0.00        | 33.78        | V        | 1.66        | 136.0        | - 12.24             | NA        | 0.120        |
| 466.6873   | 53.16        | Qp             | 1.48        | 17.03        | 28.36        | 0.00        | 43.31        | V        | 1.43        | 27.0         | - 2.71              | NA        | 0.120        |
| 500.0004   | 52.60        | Qp             | 1.53        | 17.80        | 28.60        | 0.00        | 43.33        | V        | 1.62        | 112.0        | - 2.69              | NA        | 0.120        |
| 599.9996   | 48.35        | Qp             | 1.70        | 18.80        | 28.70        | 0.00        | 40.14        | V        | 1.12        | 21.0         | - 5.88              | NA        | 0.120        |
| 999.9600   | 49.45        | Qp             | 2.21        | 22.80        | 27.59        | 0.00        | 46.88        | V        | 1.28        | 167.0        | - 7.10              | NA        | 0.120        |
|  |              |                |             |              |              |             |              |          |             |              |                     |           |              |
| <b>500.0004</b>  | <b>53.78</b> | <b>Qp</b>      | <b>1.53</b> | <b>17.80</b> | <b>28.60</b> | <b>0.00</b> | <b>44.51</b> | <b>H</b> | <b>1.00</b> | <b>167.0</b> | <b>- 1.51</b>       | <b>NA</b> | <b>0.120</b> |
| 999.9800   | 48.82        | Qp             | 2.21        | 22.80        | 27.59        | 0.00        | 46.25        | H        | 1.43        | 112.0        | - 7.73              | NA        | 0.120        |
|  |              |                |             |              |              |             |              |          |             |              |                     |           |              |

| Freq  | Level | Det            | Cable  | Ant      | Preamp | Atten  | Final    | Pol   | Hgt  | Az    | Delta1               | Delta2                | RBW   |
|---|-------|----------------|--------|----------|--------|--------|----------|-------|------|-------|----------------------|-----------------------|-------|
| MHz   | dBuV  | Qp<br>Av<br>Pk | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m)  | (DEG) | FCC<br>15.209<br>Avg | FCC<br>15.35(b)<br>Pk | (MHz) |
| <b>Measurements: 1GHz to 18GHz – 802.11a/n HT20/ HT40</b> |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 1000.0100   | 58.74 | PK             | 2.21   | 23.82    | 37.13  | 0.00   | 47.64    | V     | 2.17 | 84.0  | N/A                  | - 26.36               | 1.000 |
| 1000.0100   | 51.58 | Av             | 2.21   | 23.82    | 37.13  | 0.00   | 40.48    | V     | 2.17 | 84.0  | - 13.50              | NA                    | 1.000 |
| 1125.0000   | 57.06 | PK             | 2.36   | 24.63    | 37.26  | 0.00   | 46.79    | V     | 1.99 | 177.0 | N/A                  | - 27.21               | 1.000 |
| 1125.0000   | 47.39 | Av             | 2.36   | 24.63    | 37.26  | 0.00   | 37.12    | V     | 1.99 | 177.0 | - 16.86              | NA                    | 1.000 |
| 1375.0000   | 55.06 | PK             | 2.61   | 25.13    | 36.76  | 0.00   | 46.04    | V     | 2.02 | 58.0  | N/A                  | - 27.96               | 1.000 |
| 1375.0000   | 49.60 | Av             | 2.61   | 25.13    | 36.76  | 0.00   | 40.58    | V     | 2.02 | 58.0  | - 13.40              | NA                    | 1.000 |
|   |       |                |        |          |        |        |          |       |      |       |                      |                       |       |

# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

|            |       |           |       |       |       |      |       |   |      |       |         |         |       |
|------------|-------|-----------|-------|-------|-------|------|-------|---|------|-------|---------|---------|-------|
| 1125.0000  | 54.27 | <b>Pk</b> | 2.36  | 24.63 | 37.26 | 0.00 | 44.00 | H | 1.21 | 118.0 | N/A     | - 30.00 | 1.000 |
| 1125.0000  | 48.13 | <b>Av</b> | 2.36  | 24.63 | 37.26 | 0.00 | 37.86 | H | 1.21 | 118.0 | - 16.12 | NA      | 1.000 |
| 1375.0000  | 56.01 | <b>Pk</b> | 2.61  | 25.13 | 36.76 | 0.00 | 46.99 | H | 1.52 | 188.0 | N/A     | - 27.01 | 1.000 |
| 1375.0000  | 46.78 | <b>Av</b> | 2.61  | 25.13 | 36.76 | 0.00 | 37.76 | H | 1.52 | 188.0 | - 16.22 | NA      | 1.000 |
|            |       |           |       |       |       |      |       |   |      |       |         |         |       |
| 5288.2210  | 57.29 | <b>Pk</b> | 5.41  | 33.99 | 42.71 | 0.00 | 53.98 | V | 1.25 | 24.0  | N/A     | - 20.02 | 1.000 |
| 5288.2210  | 53.34 | <b>Av</b> | 5.41  | 33.99 | 42.71 | 0.00 | 50.03 | V | 1.25 | 24.0  | - 3.95  | NA      | 1.000 |
| 5851.4420  | 53.91 | <b>Pk</b> | 5.70  | 34.15 | 44.41 | 0.00 | 49.35 | V | 1.44 | 10.0  | N/A     | - 24.65 | 1.000 |
| 5851.4420  | 43.58 | <b>Av</b> | 5.70  | 34.15 | 44.41 | 0.00 | 39.02 | V | 1.44 | 10.0  | - 14.96 | NA      | 1.000 |
| 11510.0000 | 58.80 | <b>Pk</b> | 8.47  | 38.85 | 47.26 | 0.00 | 58.85 | V | 1.70 | 17.0  | N/A     | - 15.15 | 1.000 |
| 11510.0000 | 49.58 | <b>Av</b> | 8.47  | 38.85 | 47.26 | 0.00 | 49.63 | V | 1.70 | 17.0  | - 4.35  | NA      | 1.000 |
| 11570.0000 | 62.27 | <b>Pk</b> | 8.49  | 38.96 | 47.26 | 0.00 | 62.46 | V | 1.76 | 16.0  | N/A     | - 11.54 | 1.000 |
| 11570.0000 | 49.47 | <b>Av</b> | 8.49  | 38.96 | 47.26 | 0.00 | 49.66 | V | 1.76 | 16.0  | - 4.32  | NA      | 1.000 |
| 11650.0000 | 64.12 | <b>Pk</b> | 8.53  | 39.11 | 47.26 | 0.00 | 64.49 | V | 1.36 | 16.0  | N/A     | - 9.51  | 1.000 |
| 11650.0000 | 48.71 | <b>Av</b> | 8.53  | 39.11 | 47.26 | 0.00 | 49.08 | V | 1.36 | 16.0  | - 4.90  | NA      | 1.000 |
| 17475.0000 | 56.66 | <b>Pk</b> | 10.77 | 43.76 | 46.01 | 0.00 | 65.18 | V | 1.70 | 35.0  | N/A     | - 8.82  | 1.000 |
| 17475.0000 | 41.88 | <b>Av</b> | 10.77 | 43.76 | 46.01 | 0.00 | 50.40 | V | 1.70 | 35.0  | - 3.58  | NA      | 1.000 |
|            |       |           |       |       |       |      |       |   |      |       |         |         |       |
| 11510.0000 | 50.32 | <b>Pk</b> | 8.47  | 38.85 | 47.26 | 0.00 | 50.37 | H | 1.76 | 17.0  | N/A     | - 23.63 | 1.000 |
| 11510.0000 | 44.54 | <b>Av</b> | 8.47  | 38.85 | 47.26 | 0.00 | 44.59 | H | 1.76 | 17.0  | - 9.39  | NA      | 1.000 |
|            |       |           |       |       |       |      |       |   |      |       |         |         |       |
|            |       |           |       |       |       |      |       |   |      |       |         |         |       |

Note: Signals in yellow highlight – harmonics in restricted band

Example calculation:

| Measure<br>d Level | + | Cable<br>Loss | + | Antenna<br>Factor | - | Pre-<br>Amp | + | Atten | = | Final<br>Correcte<br>d<br>Reading | Specificatio<br>n<br>Limit | - | Final<br>Correcte<br>d<br>Reading | = | Delta<br>Specificatio<br>n |
|--------------------|---|---------------|---|-------------------|---|-------------|---|-------|---|-----------------------------------|----------------------------|---|-----------------------------------|---|----------------------------|
| (dB $\mu$ V)       |   | (dB)          |   | (dB)              |   | (dB)        |   | (dB)  |   | (dB $\mu$ V/m)                    | (dB $\mu$ V/m)             |   | (dB $\mu$ V/m)                    |   |                            |
| 20.0               |   | 3.0           |   | 5.0               |   | 10.0        |   | 0.0   |   | 18.0                              | 40.0                       |   | 18.0                              |   | - 22.0                     |


Notes:

- 1) The highest signals – as determined from pre-scan plots – were fully-maximized and measured.
- 2) For the general pre-scan plots, a notch filter was utilized. Note the notch filter was not used during band edge plots/measurements.
- 3) 802.11 a/n HT20/HT40 included in measurements as well as both SISO/MIMO modes of Tx operation.
- 4) No significant emissions found >18GHz.


Deviations, Additions, or Exclusions: None

### 11.41 Band Edge Plots: MIMO Mode of Operation – HT20 Low Channel 5745 MHz

#### Vertical Antenna – Lower Band Edge – Peak Measurements

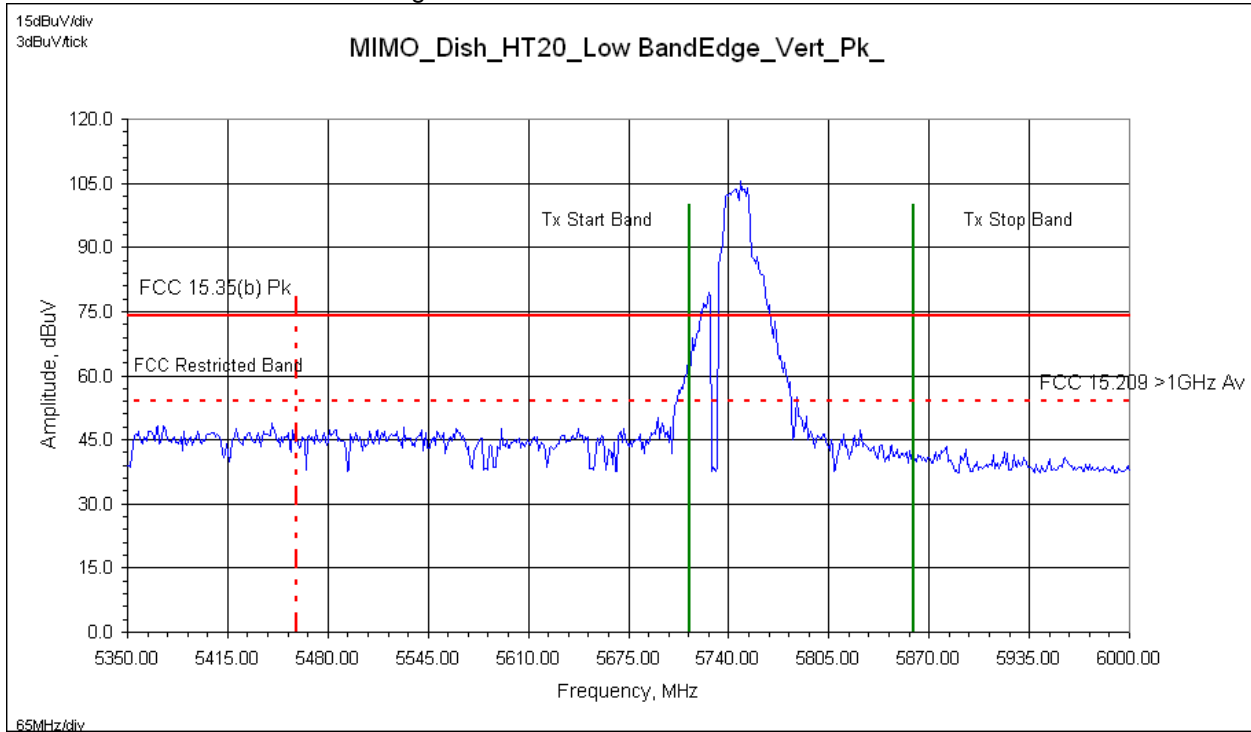

#### Horizontal Antenna – Lower Band Edge – Peak Measurements

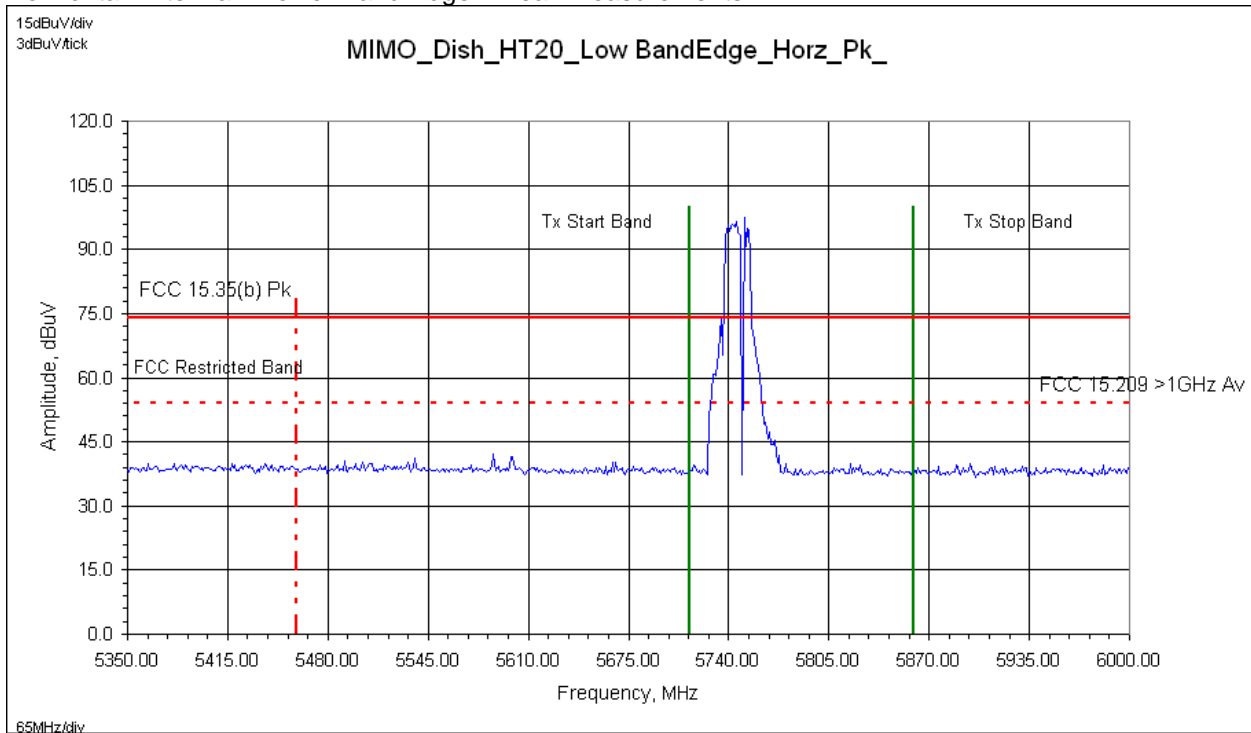


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Dashed-Lines (Restricted Band start/stop)  
Blue Trace (Peak trace line)

### 11.42 Band Edge Plots: MIMO Mode of Operation – HT20 Low Channel 5745 MHz

#### Vertical Antenna – Lower Band Edge – Average Measurements

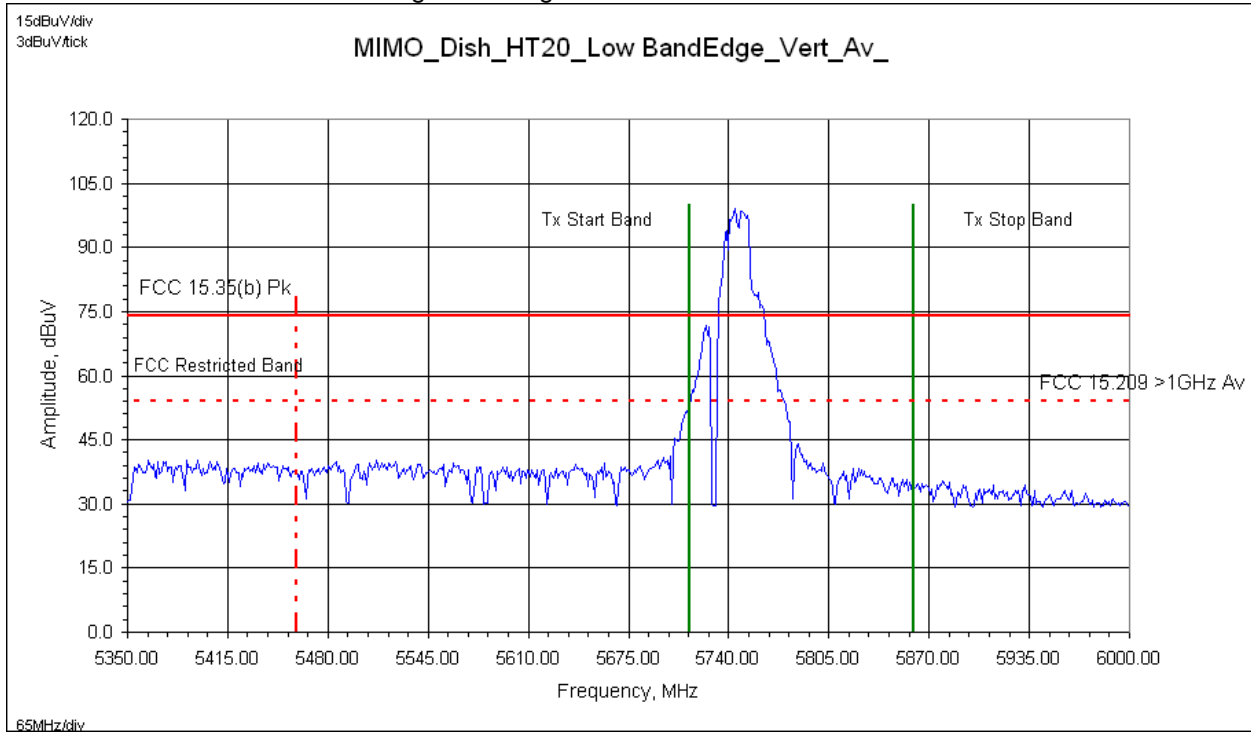

#### Horizontal Antenna – Lower Band Edge – Average Measurements

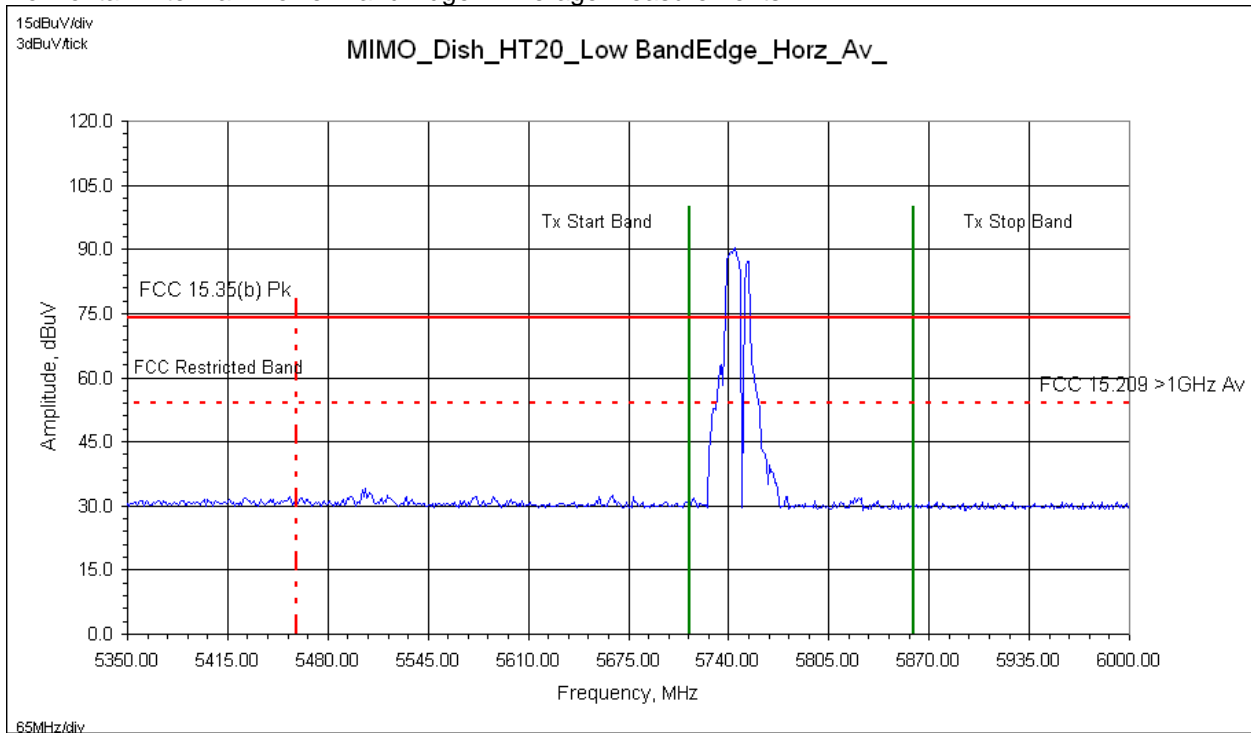


Reference only – max hold peak detector measurements referenced to average & peak limits

Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Dashed-Lines (Restricted Band)  
Blue Trace (Average trace line)




### 11.43 Band Edge Plots: MIMO Mode of Operation – HT20 High Channel 5825 MHz

#### Vertical Antenna – Upper Band Edge – Peak Measurements

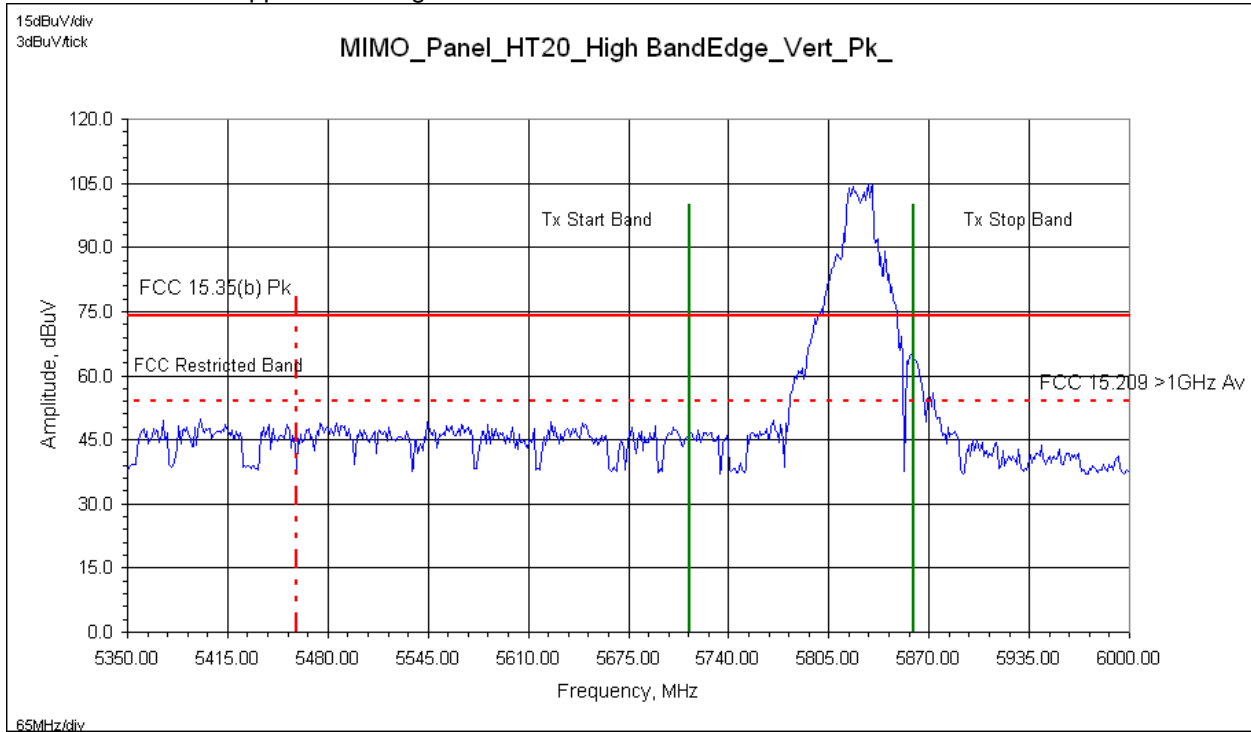

#### Horizontal Antenna – Upper Band Edge – Peak Measurements

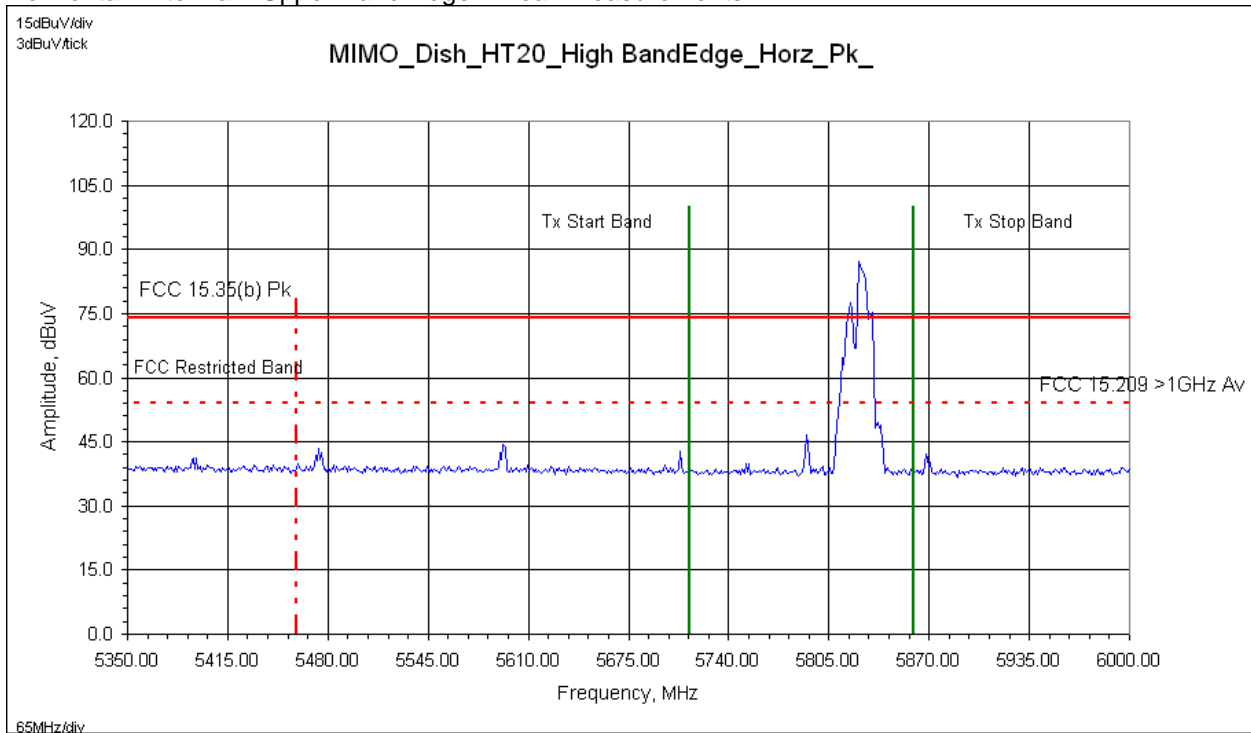


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Peak trace line)

### 11.44 Band Edge Plots: MIMO Mode of Operation – HT20 High Channel 5825 MHz

#### Vertical Antenna – Upper Band Edge – Average Measurements

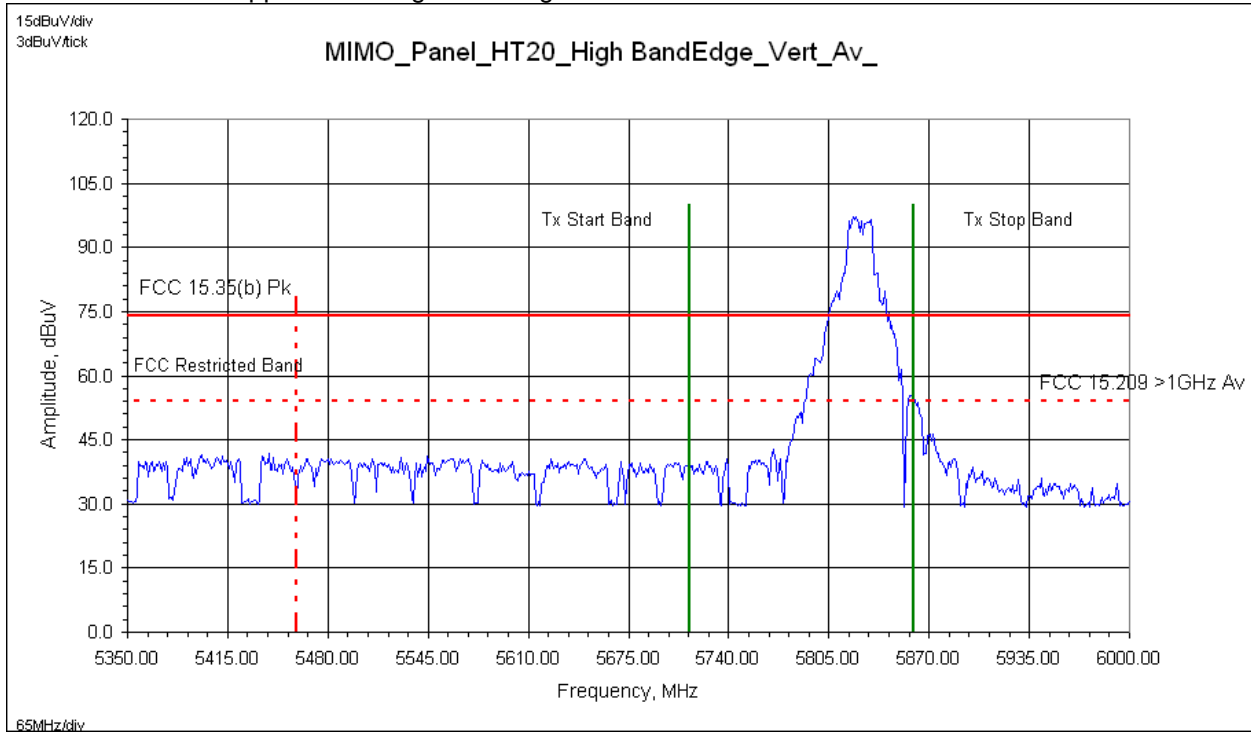

#### Horizontal Antenna – Upper Band Edge – Average Measurements

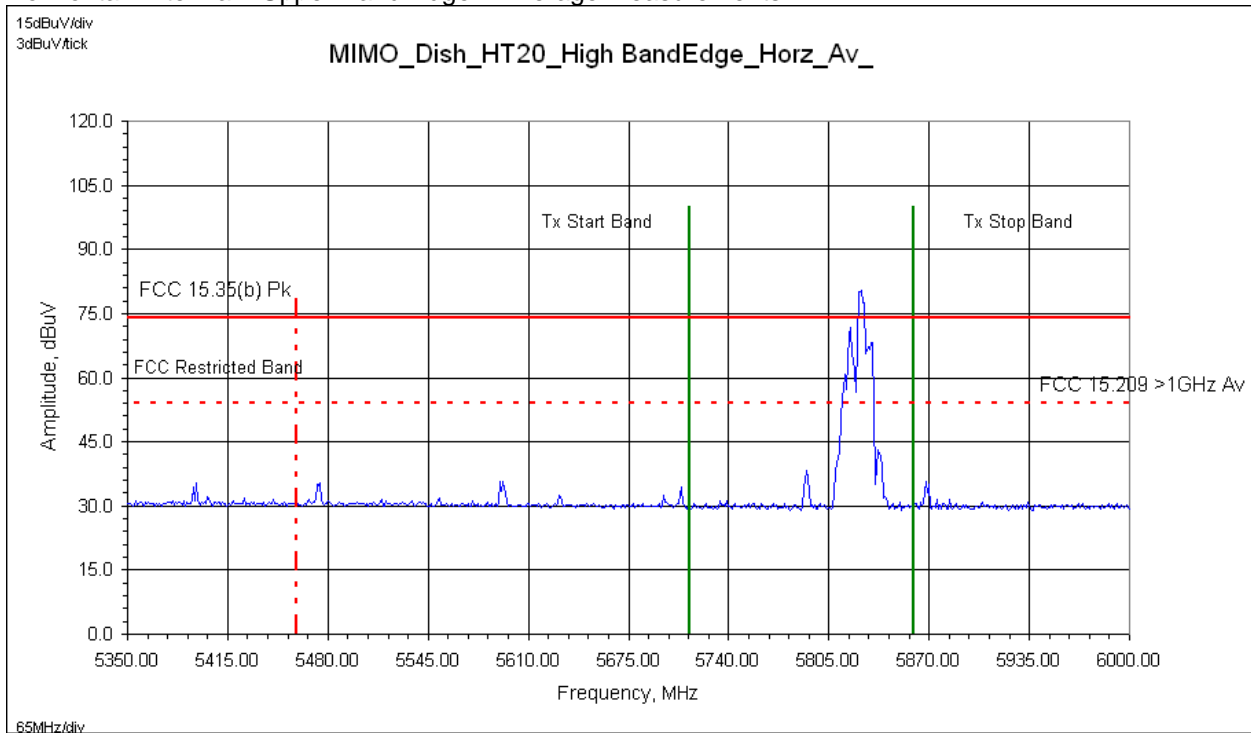


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Average trace line)

### 11.45 Band Edge Plots: MIMO Mode of Operation – HT40 Low Channel 5765 MHz

#### Vertical Antenna – Lower Band Edge – Peak Measurements

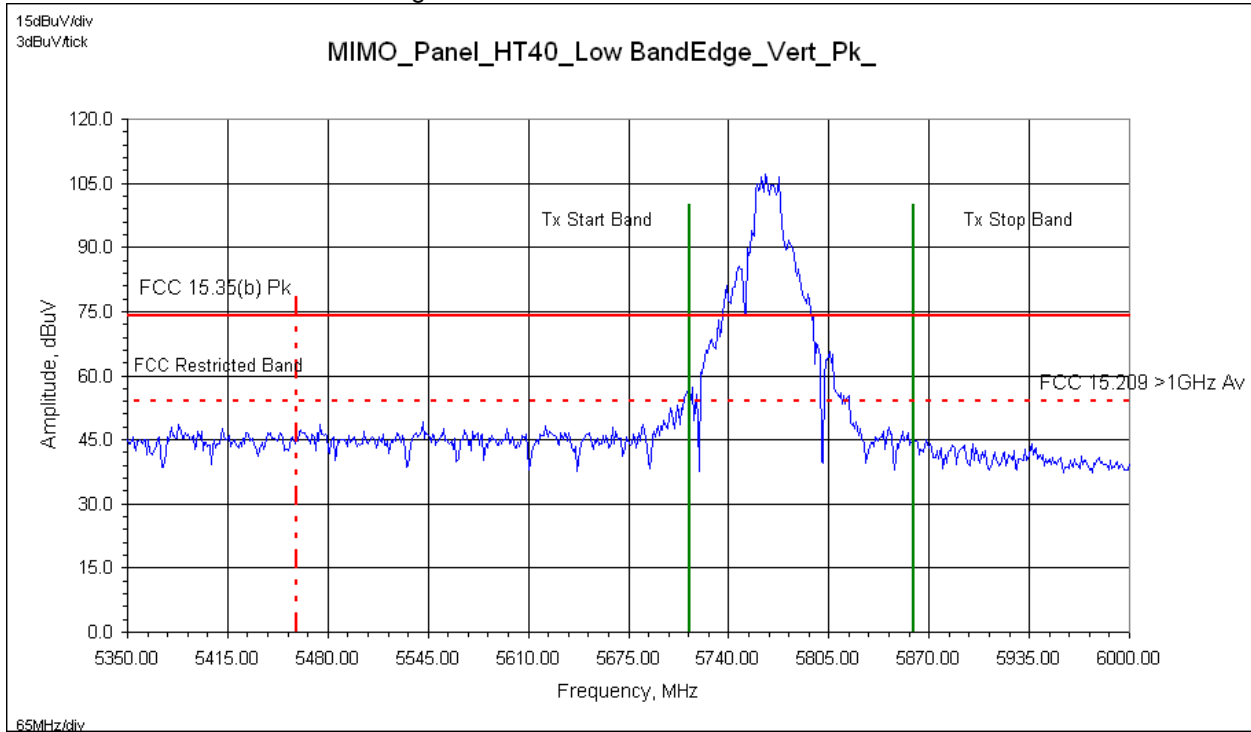

#### Horizontal Antenna – Lower Band Edge – Peak Measurements

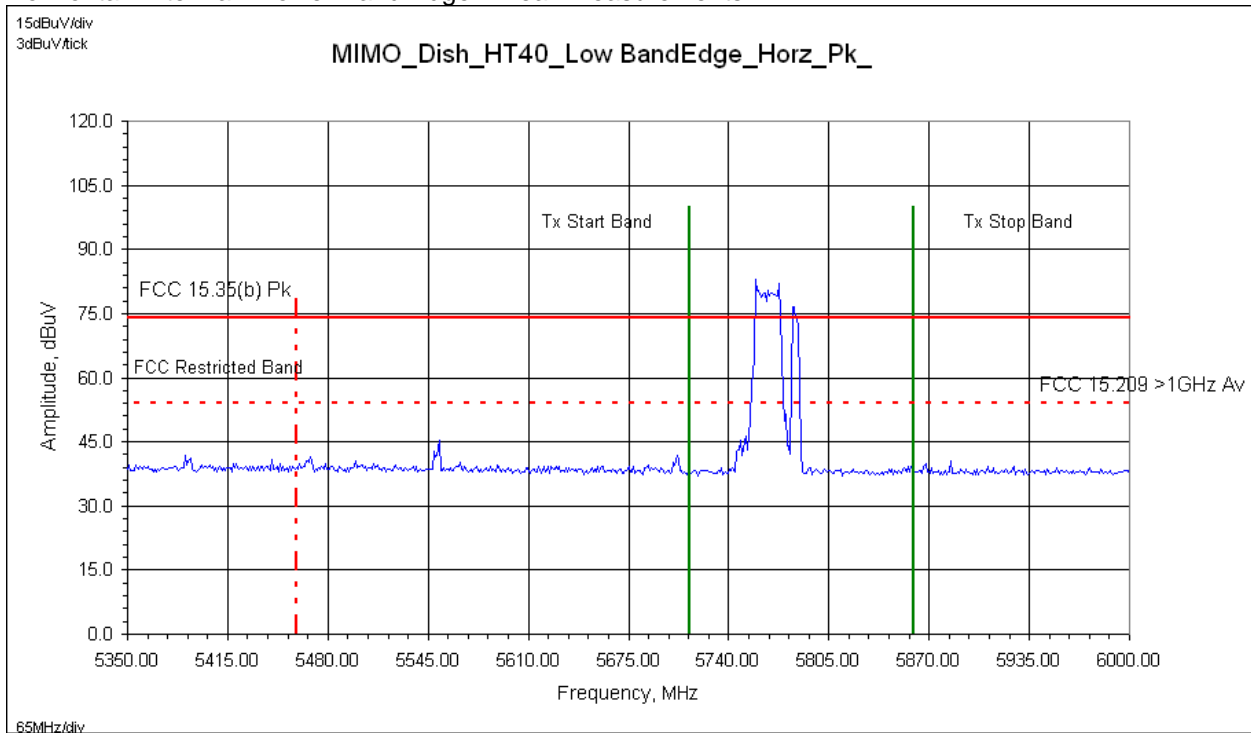


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Peak trace line)

### 11.46 Band Edge Plots: MIMO Mode of Operation – HT40 Low Channel 5765 MHz

#### Vertical Antenna – Lower Band Edge – Average Measurements

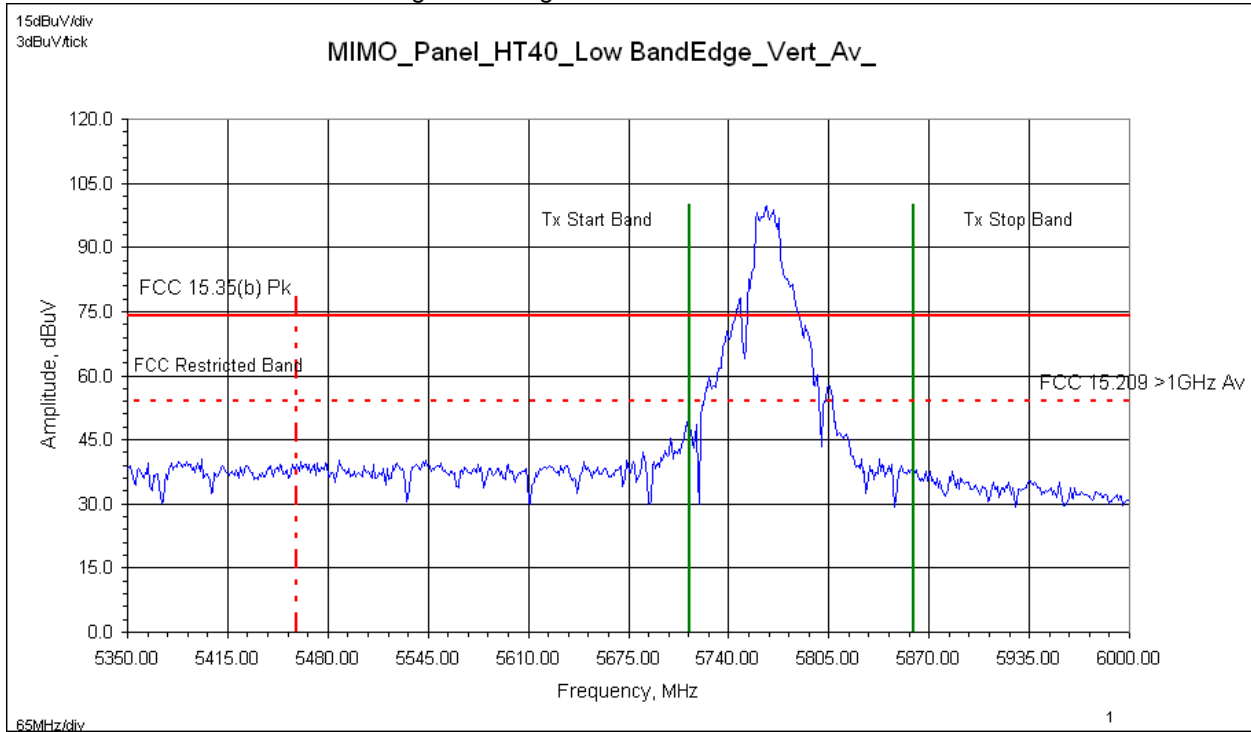

#### Horizontal Antenna – Lower Band Edge – Average Measurements

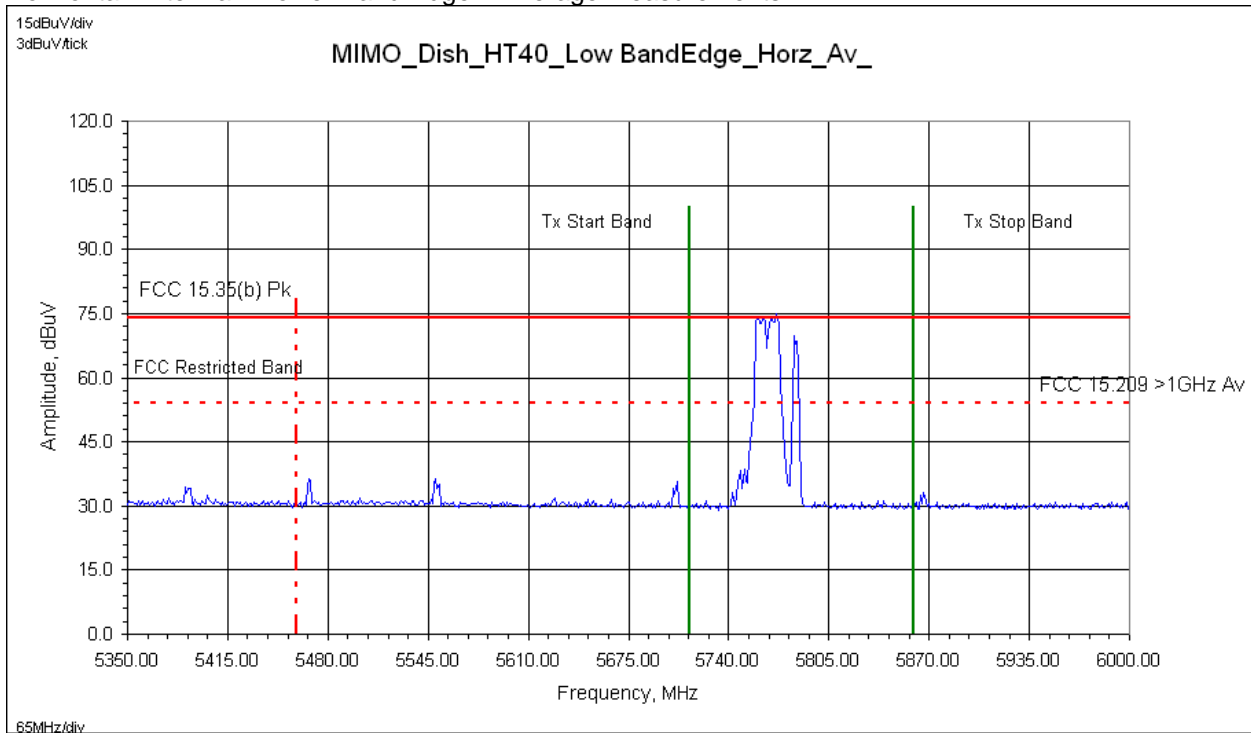


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Average trace line)

### 11.47 Band Edge Plots: MIMO Mode of Operation – HT40 High Channel 5785 MHz

#### Vertical Antenna – Upper Band Edge – Peak Measurements

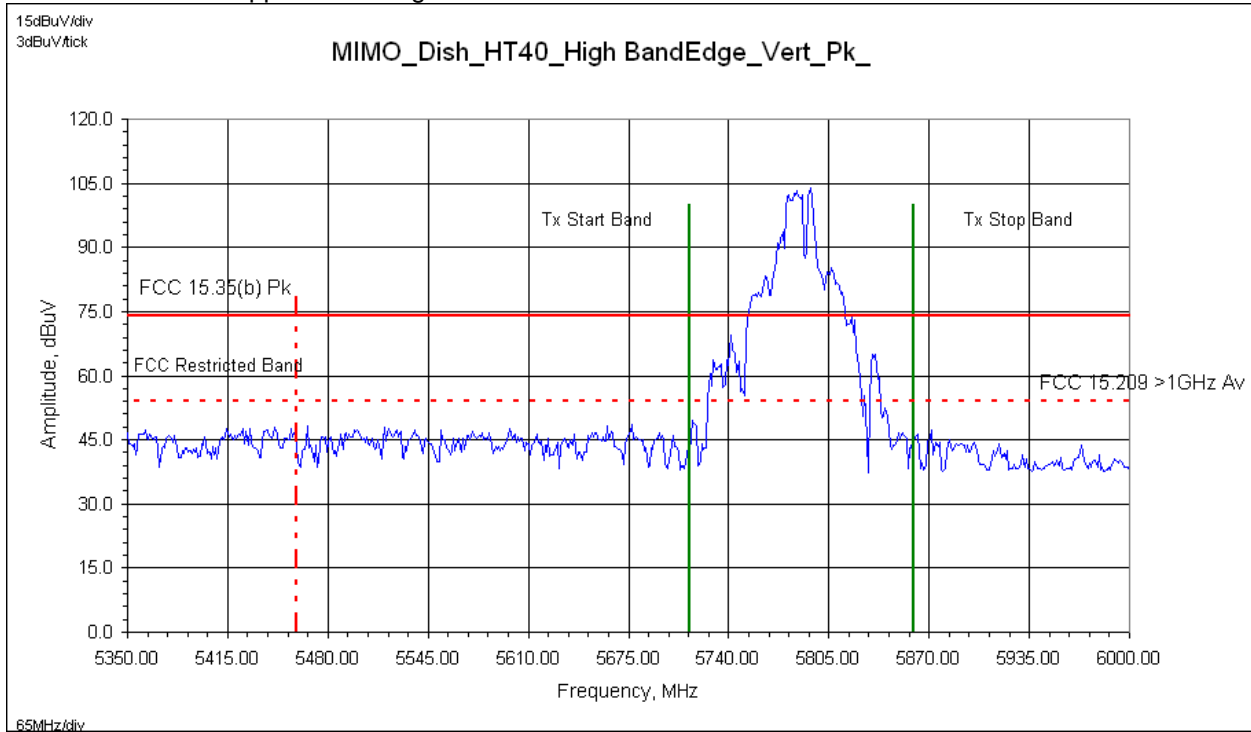

#### Horizontal Antenna – Upper Band Edge – Peak Measurements

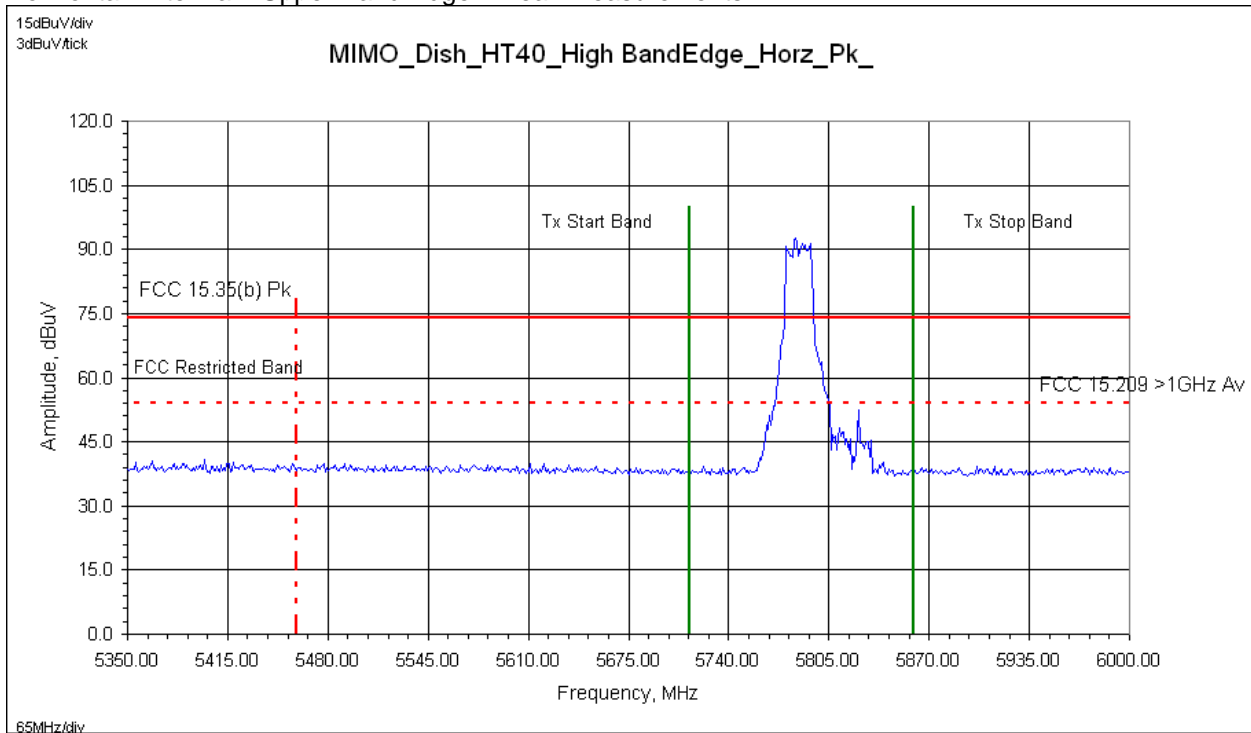


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Peak trace line)

### 11.48 Band Edge Plots: MIMO Mode of Operation – HT40 High Channel 5785 MHz

#### Vertical Antenna – Upper Band Edge – Average Measurements

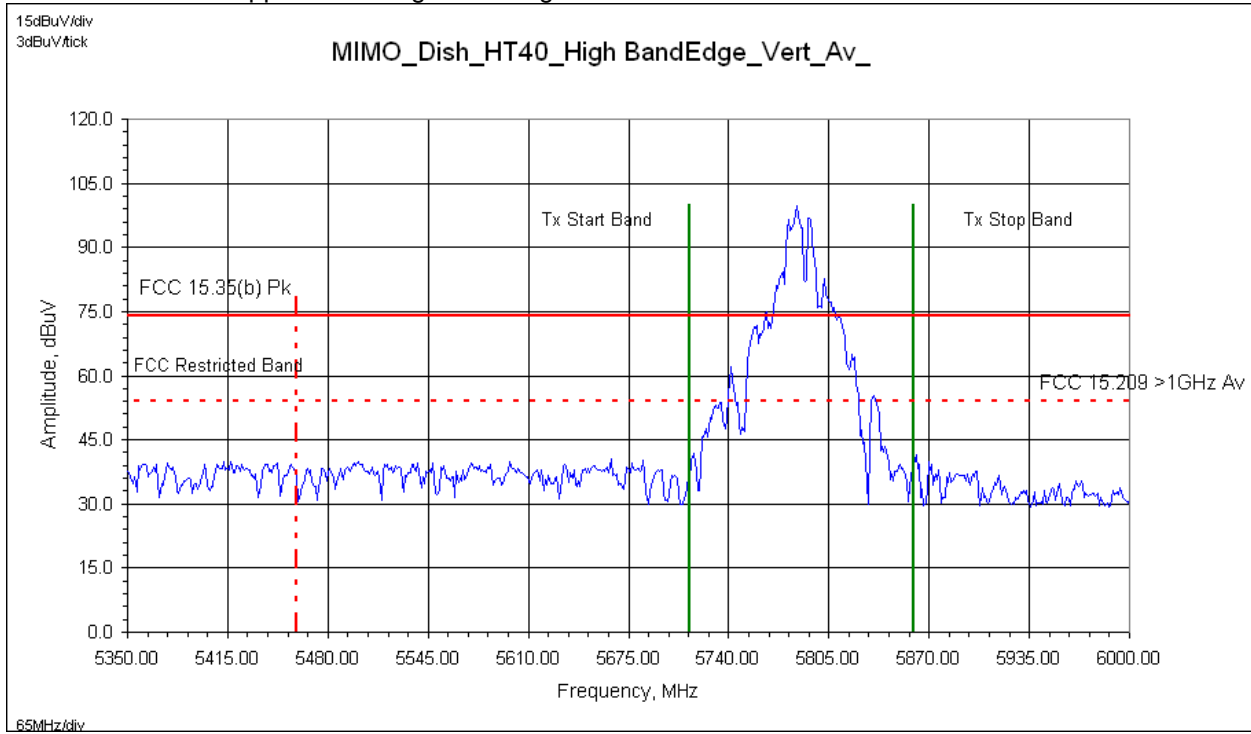

#### Horizontal Antenna – Upper Band Edge – Average Measurements

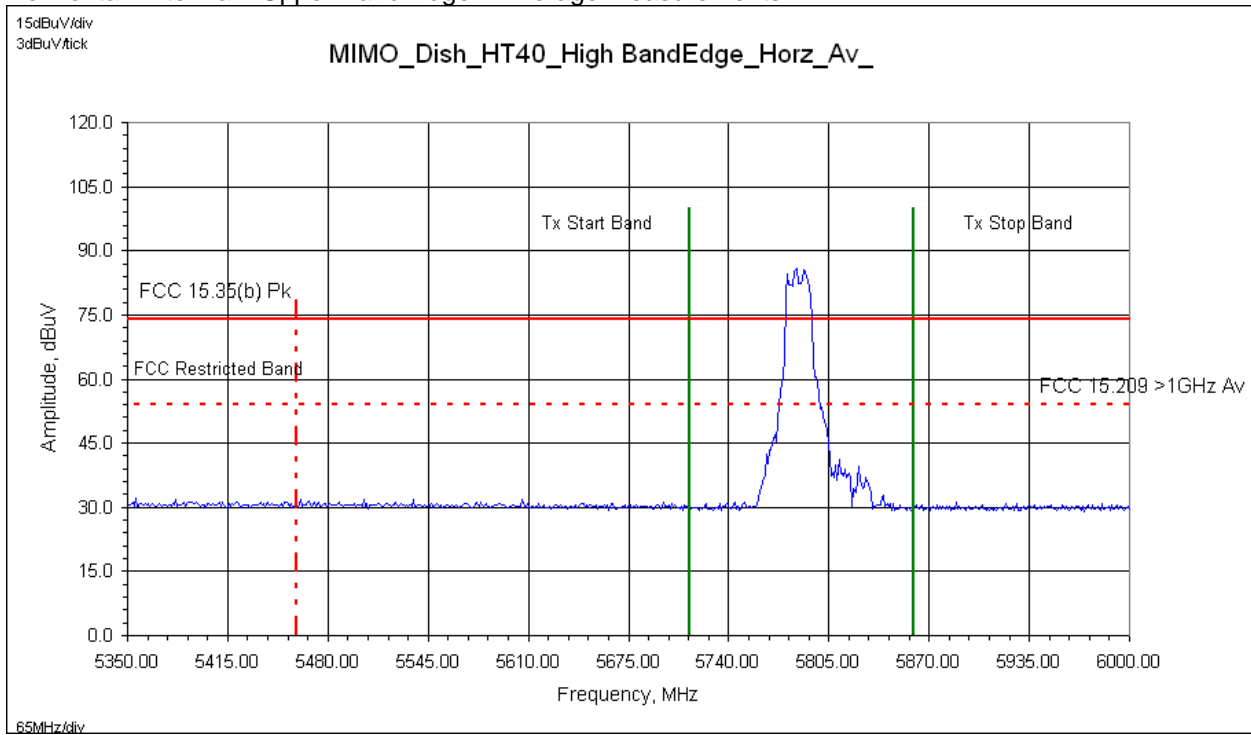

Reference only – max hold peak detector measurements referenced to average & peak limits

Legend: Green Vertical Lines (Tx allowable start/stop band)  
Red Vertical Lines (Restricted Band)  
Blue Trace (Average trace line)

# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

## 11.49 Test Data: MIMO Band Edge – FCC Restricted Band

### Tx Spurious Radiated Emissions – Band Edge

|                |   |            |                          |                    |             |
|----------------|---|------------|--------------------------|--------------------|-------------|
| Test Report #: | <b>G101503607</b>   | Test Area: | CC1 Radiated             | Temperature:       | 23.7 °C     |
| Test Method:   | FCC 15.209/ 15.205/ 15.35(b)  | Test Date: | 02/12/2014<br>02/13/2014 | Relative Humidity: | 27.2 %      |
| EUT Model #:   | Radio Module: W5800-01<br>4' Parabolic "Dish" Antenna:<br>SPD4-5-2S | EUT Power: | 120VAC/60Hz              | Air Pressure:      | kPa<br>83.5 |

EUT Serial #: Radio Module: DEN1402111313  
4' Parabolic "Dish" Antenna(s): 1018763/ 1018764

Manufacturer: FreeWave Technologies

EUT Description: PCIe Radio Module

Notes: Product tested in MIMO mode: 3 transmit chains/ports – dual antennas

Product continuously transmitting during all testing – worst-case modulation/data

MIMO mode of Operation, MCS0 Data Rate, 27dBm power, 22.23 dBm/port (worst-case power)

| Level Key       |
|-----------------|
| Pk – Peak       |
| Qp – Quasi Peak |
| Av - Average    |

| Freq  | Level | Det            | Cable  | Ant      | Preamp | Atten  | Final    | Pol   | Hgt  | Az    | Delta1               | Delta2                | RBW   |
|---|-------|----------------|--------|----------|--------|--------|----------|-------|------|-------|----------------------|-----------------------|-------|
| MHz   | dBuV  | Qp<br>Av<br>Pk | + [dB] | + [dB/m] | - [dB] | + [dB] | = [dBuV] | (V/H) | (m)  | (DEG) | FCC<br>15.209<br>Avg | FCC<br>15.35(b)<br>Pk | (MHz) |
| <b>Measurements: 802.11a/n HT20 Lower Band Edge – FCC Restricted Band</b> |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 5725.0000   | 49.48 | Av             | 5.64   | 34.09    | 44.10  | 0.00   | 45.11    | V     | 1.47 | 3.0   | - 8.87               | NA                    | 1.000 |
| 5725.0000   | 64.93 | Pk             | 5.64   | 34.09    | 44.10  | 0.00   | 60.56    | V     | 1.47 | 3.0   | N/A                  | - 13.44               | 1.000 |
| 5725.0000   | 32.29 | Av             | 5.64   | 34.09    | 44.10  | 0.00   | 27.92    | H     | 1.54 | 11.0  | - 26.06              | NA                    | 1.000 |
| 5725.0000   | 35.50 | Pk             | 5.64   | 34.09    | 44.10  | 0.00   | 31.13    | H     | 1.54 | 11.0  | N/A                  | - 42.87               | 1.000 |
| <b>Measurements: 802.11a/n HT20 Upper Band Edge – FCC Restricted Band</b> |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 5850.0000   | 54.25 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 49.69    | V     | 1.53 | 5.0   | - 4.29               | NA                    | 1.000 |
| 5850.0000   | 63.15 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 58.59    | V     | 1.53 | 5.0   | N/A                  | - 15.41               | 1.000 |
| 5850.0000   | 38.23 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 33.67    | H     | 1.55 | 36.0  | - 20.31              | NA                    | 1.000 |
| 5850.0000   | 46.33 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 41.77    | H     | 1.55 | 36.0  | N/A                  | - 32.23               | 1.000 |
| <b>Measurements: 802.11n HT40 Lower Band Edge – FCC Restricted Band</b>   |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 5725.0000   | 65.49 | Pk             | 5.64   | 34.09    | 44.10  | 0.00   | 61.12    | V     | 1.52 | 5.0   | N/A                  | - 12.88               | 1.000 |
| 5725.0000   | 35.82 | Av             | 5.64   | 34.09    | 44.10  | 0.00   | 31.45    | V     | 1.52 | 5.0   | - 22.53              | NA                    | 1.000 |
| 5725.0000   | 48.43 | Pk             | 5.64   | 34.09    | 44.10  | 0.00   | 44.06    | H     | 1.51 | 12.0  | N/A                  | - 29.94               | 1.000 |
| 5725.0000   | 35.63 | Av             | 5.64   | 34.09    | 44.10  | 0.00   | 31.26    | H     | 1.51 | 12.0  | - 22.72              | NA                    | 1.000 |
| <b>Measurements: 802.11n HT40 Upper Band Edge – FCC Restricted Band</b>   |       |                |        |          |        |        |          |       |      |       |                      |                       |       |
| 5850.0000   | 51.28 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 46.72    | V     | 1.58 | 4.0   | N/A                  | - 27.28               | 1.000 |
| 5850.0000   | 35.71 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 31.15    | V     | 1.58 | 4.0   | - 22.83              | NA                    | 1.000 |
| 5850.0000   | 47.99 | Pk             | 5.70   | 34.15    | 44.41  | 0.00   | 43.43    | H     | 1.65 | 12.0  | N/A                  | - 30.57               | 1.000 |
| 5850.0000   | 35.69 | Av             | 5.70   | 34.15    | 44.41  | 0.00   | 31.13    | H     | 1.65 | 12.0  | - 22.85              | NA                    | 1.000 |

# Intertek

Report Number: 101503607DEN-001A

Issued: 2/26/2014

Example calculation:

| Measure<br>d Level | + | Cable<br>Loss | + | Antenna<br>Factor | - | Pre-<br>Amp | + | Atten      | = | Final<br>Correcte<br>d<br>Reading | Specificatio<br>n<br>Limit | - | Final<br>Correcte<br>d<br>Reading | = | Delta<br>Specificatio<br>n |
|--------------------|---|---------------|---|-------------------|---|-------------|---|------------|---|-----------------------------------|----------------------------|---|-----------------------------------|---|----------------------------|
| (dB $\mu$ V)       |   | (dB)          |   | (dB)              |   | (dB)        |   | (dB)       |   | (dB $\mu$ V/m)                    | (dB $\mu$ V/m)             |   | (dB $\mu$ V/m)                    |   |                            |
| <b>20.0</b>        |   | <b>3.0</b>    |   | <b>5.0</b>        |   | <b>10.0</b> |   | <b>0.0</b> |   | <b>18.0</b>                       | <b>40.0</b>                |   | <b>18.0</b>                       |   | <b>- 22.0</b>              |

Notes:

- 1) The highest signals – as determined from pre-scan plots – were fully-maximized and measured.
- 2) The notch filter was not used during band edge plots/measurements.
- 3) 802.11 a/n HT20/HT40 included in measurements as well as both SISO/MIMO modes of Tx operation.

Deviations, Additions, or Exclusions: None



**12 Power Spectral Density – PSD****12.1 Test Results:**

Test not required for Class II Permissive Change.

**13 Radiated Emissions (Digital Part of Receiver)****13.1 Test Results:**

Test not required for Class II Permissive Change.

**14 AC Mains Conducted Emissions - Transmitter****14.1 Test Results:**

Test not required for Class II Permissive Change.

**15 RF Exposure Requirement****15.1 Test Results:**

To be supplied by the customer.

**16 Duty Cycle/ Duty Cycle Correction Factor****16.1 Results:**

Test not required for Class II Permissive Change.

**17 Appendix A: Antenna Specifications**



**5.250 - 5.850 GHz  
PARABOLIC SUBSCRIBER ANTENNAS**

**FEATURES**

- **Antenna diameters:**
  - 1' (30 cm)
  - 1.5' (45 cm)
  - 2' (60 cm)
  - 3' (90 cm)
  - 4' (120 cm)
  - 6' (180 cm)
- **Antenna weights:**
  - 1' 15 lbs. (6.8kg)
  - 1.5' 18 lbs. (8.3kg)
  - 2' 22 lbs. (9.9kg)
  - 3' 35 lbs. (15.8kg)
  - 4' 60 lbs. (27.0kg)
  - 6' 90 lbs. (40.5kg)
- **Lightweight and rugged design**
- **Easily installed**
- **RF Connector Interface:** Type "N" female
- **Standard color white;** other colors available on request
- **Radome standard on 1' and 1.5' models, optional for all other models**
- **Dual polarity models also available**



**ELECTRICAL SPECIFICATIONS (typical performance)\***

| Model Number | Frequency, GHz | Polarization | Gain dBi (nominal) | Beamwidth ° -3dB | X-Pol. Rejection, dB | F/B Ratio dB | VSWR, Max (R.L., dB) |
|--------------|----------------|--------------|--------------------|------------------|----------------------|--------------|----------------------|
| SP1-5.2      | 5.250 - 5.850  | Single       | 22.0               | 12.0             | 17                   | 30           | 1.5:1 (14.0)         |
| SP1.5-5.2    | 5.250 - 5.850  | Single       | 25.3               | 8.5              | 20                   | 32           | 1.5:1 (14.0)         |
| SP2-5.2      | 5.250 - 5.850  | Single       | 28.0               | 6.2              | 28                   | 36           | 1.5:1 (14.0)         |
| SP3-5.2      | 5.250 - 5.850  | Single       | 31.2               | 4.2              | 30                   | 38           | 1.5:1 (14.0)         |
| SP4-5.2      | 5.250 - 5.850  | Single       | 34.8               | 3.4              | 30                   | 42           | 1.5:1 (14.0)         |
| SP6-5.2      | 5.250 - 5.850  | Single       | 37.8               | 2.2              | 30                   | 44           | 1.5:1 (14.0)         |

\* All specifications subject to change without notice.

**Radio Waves, Inc.**  
<http://www.radiowavesinc.com>

**18 Measurement Uncertainty**

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of  $k = 2$ , providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

| Parameter                                    | Uncertainty $\pm$ | Notes |
|--|-------------------|-------|
| Radiated emissions, 10kHz to 30 MHz          | 3.4 dB            |       |
| Radiated emissions, 30 to 200 MHz HP         | 2.2 dB            |       |
| Radiated emissions, 30 to 200 MHz VP         | 3.8 dB            |       |
| Radiated emissions, 200 to 1000 MHz HP       | 2.8 dB            |       |
| Radiated emissions, 200 to 1000 MHz VP       | 2.7 dB            |       |
| Radiated emissions, 1 to 18 GHz              | 5.2 dB            |       |
| Conducted port emissions 10kHz to 1000 MHz   | 1.0 dB            |       |
| Conducted port emissions 1 – 26.5 GHz        | 1.6 dB            |       |
| AC mains Conducted emissions, 9kHz to 30 MHz | 3.14 dB           |       |

**19 Revision History**

| <b>Revision Level</b> | <b>Date</b> | <b>Report Number</b> | <b>Notes</b>   |
|-----------------------|-------------|----------------------|----------------|
| 0                     | 2/26/2014   | 101503607DEN-001A    | Original Issue |
|                       |             |                      |                |
|                       |             |                      |                |
|                       |             |                      |                |
|                       |             |                      |                |
|                       |             |                      |                |