



The University of Michigan
Radiation Laboratory
3228 EECS Building
Ann Arbor, MI 48109-2122
Tel: (734) 764-0500

Measured Radio Frequency Emissions
From

Lear Corporation Receiver
Model(s): L0026911, L0066931

Report No. 415031-271
January 23, 2006

Copyright © 2006


For:
Lear Corporation
5200 Auto Club Dr.
Dearborn, MI 48126-9982

Contact:
Tom Tang
Tel: 313-593 - 9934
Fax: 313-593-9526
PO: Verbal

Measurements made by:

Valdis V. Liepa

Tests supervised by:
Report approved by:

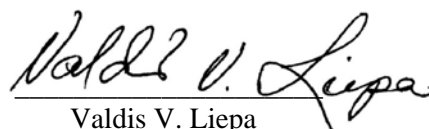
Valdis V. Liepa
Research Scientist

Summary

Tests for compliance with FCC Regulations Part 15, Subpart B, and Industry Canada RSS-210/Gen, were performed on Lear Corporation model(s) L0026911, L0066931. This device is subject to the Rules and Regulations as a Receiver. As a Digital Device it is exempt, but such measurements were made to assess the receiver's overall emissions.

In testing completed on November 25, 2005, the device tested in the worst case met the allowed FCC (Class B) specifications for radiated emissions by 16.2 dB (see p. 6). The conducted emissions tests do not apply, since the device is powered from a 12 VDC system.

University of Michigan Radiation Laboratory
FCC Part 15, IC RSS-210/Gen - Test Report No. 415031-271

1. Introduction

Lear Corporation model L0026911, L0066931 was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989, and with Industry Canada RSS-210, Issue 6 and RSS-Gen, Issue 1, September, 2005. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-2003 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057).

2. Test Procedure and Equipment Used

The pertinent test equipment commonly used in our facility for measurements is listed in Table 2.1 below. The middle column identifies the specific equipment used in these tests.

Table 2.1 Test Equipment.

Test Instrument	Eqpt. Used	Manufacturer/Model
Spectrum Analyzer (0.1-1500 MHz)		Hewlett-Packard, 182T/8558B
Spectrum Analyzer (9kHz-22GHz)	X	Hewlett-Packard 8593A SN: 3107A01358
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E, SN: 3412A01131
Spectrum Analyzer (9kHz-26GHz)		Hewlett-Packard 8563E, SN: 3310A01174
Spectrum Analyzer (9kHz-40GHz)		Hewlett-Packard 8564E, SN: 3745A01031
Power Meter		Hewlett-Packard, 432A
Power Meter		Anritsu, ML4803A/MP
Harmonic Mixer (26-40 GHz)		Hewlett-Packard 11970A, SN: 3003A08327
Harmonic Mixer (40-60 GHz)		Hewlett-Packard 11970U, SN: 2332A00500
Harmonic Mixer (75-110 GHz)		Hewlett-Packard 11970W, SN: 2521A00179
Harmonic Mixer (140-220 GHz)		Pacific Millimeter Prod., GMA, SN: 26
S-Band Std. Gain Horn		S/A, Model SGH-2.6
C-Band Std. Gain Horn		University of Michigan, NRL design
XN-Band Std. Gain Horn		University of Michigan, NRL design
X-Band Std. Gain Horn		S/A, Model 12-8.2
X-band horn (8.2- 12.4 GHz)		Narda 640
X-band horn (8.2- 12.4 GHz)		Scientific Atlanta , 12-8.2, SN: 730
K-band horn (18-26.5 GHz)		FXR, Inc., K638KF
Ka-band horn (26.5-40 GHz)		FXR, Inc., U638A
U-band horn (40-60 GHz)		Custom Microwave, HO19
W-band horn(75-110 GHz)		Custom Microwave, HO10
G-band horn (140-220 GHz)		Custom Microwave, HO5R
Bicone Antenna (30-250 MHz)	X	University of Michigan, RLBC-1
Bicone Antenna (200-1000 MHz)	X	University of Michigan, RLBC-2
Dipole Antenna Set (30-1000 MHz)	X	University of Michigan, RLDP-1,-2,-3
Dipole Antenna Set (30-1000 MHz)		EMCO 2131C, SN: 992
Active Rod Antenna (30 Hz-50 MHz)		EMCO 3301B, SN: 3223
Active Loop Antenna (30 Hz-50 MHz)		EMCO 6502, SN:2855
Ridge-horn Antenna (300-5000 MHz)	X	University of Michigan
Amplifier (5-1000 MHz)	X	Avantak, A11-1, A25-1S
Amplifier (5-4500 MHz)	X	Avantak
Amplifier (4.5-13 GHz)		Avantek, AFT-12665
Amplifier (6-16 GHz)		Trek
Amplifier (16-26 GHz)		Avantek
LISN Box		University of Michigan
Signal Generator	X	Hewlett-Packard 8657B

3. Configuration and Identification of Device Under Test

The DUT is a WCM (Wireless Control Module) 315 MHz ASK/FSK receiver contained in the same case with a 125 kHz Immobilizer. This report deals only with the receiver, which is intended to receive RKE and TPM signals. When testing for radiated emissions, a 3-meter harness was used. The receiver is IC based, having a synthesized VCO with reference crystal frequency of 10.178 MHz. The VCO frequency is 651.4 MHz. It was powered by a 12-volt laboratory power supply.

The DUT was designed by Lear Corporation, 5200 Auto Club Dr., Dearborn, MI 48126-9982. It is identified as:

Lear Corporation Receiver
Model(s): L0026911, L0066931
FCC ID: KOBDR05A
IC: 3521A-R05B

The two models listed use the same PCB with LF coils at slightly different angles. There are two active receive antennas that may be used with this receiver. One is manufactured by Lear and the other is manufactured by Tenatronics. Both have been tested and results with both are reported herein. Measurements of the 125 kHz immobilizer demonstrated no measurable change in emissions from the original filing, thus no new test report is provided.

3.1 Modifications Made

There were no modifications made to the DUT by this laboratory.

4. Emission Limits

The DUT tested falls under Part 15, Subpart B, "Unintentional Radiators". The pertinent test frequencies, with corresponding emission limits, are given in Tables 4.1 and 4.2 below.

4.1 Radiated Emission Limits

Table 4.1. Radiated Emission Limits (Ref: FCC 15.33, 15.35, and 15.109; IC RSS-210, 2.6 Table 2).

Freq. (MHz)	Elim (3m) $\mu\text{V/m}$	Elim (3m) dB($\mu\text{V/m}$)
30-88	100	40.0
88-216	150 $\mu\text{V/m}$	43.5
216-960	200 $\mu\text{V/m}$	46.0
960-2000	500 $\mu\text{V/m}$	54.0

Note: Quasi-Peak readings apply to 1000 MHz (120 kHz BW)
Average readings apply above 1000 MHz (1 MHz BW)

4.2 Conducted Emission Limits

Table 4.3 Conducted Emission Limits (FCC:15.107 (CISPR); IC: RSS-Gen, 7.2.2 Table 2).

Frequency MHz	Class A (dB μV)		Class B (dB μV)	
	Quasi-peak	Average	Quasi-peak	Average
.150 - 0.50	79	66	66 - 56*	56 - 46*
0.50 – 5.0	73	60	56	46
5.0 – 30.0	73	60	60	50

Notes:

1. The lower limit shall apply at the transition frequency
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15-0.50 MHz:
*Class B Quasi-peak: $\text{dB}\mu\text{V} = 50.25 - 19.12 \cdot \log(f)$
*Class B Average: $\text{dB}\mu\text{V} = 40.25 - 19.12 \cdot \log(f)$
3. 9 kHz RBW

4.3 Antenna Power Conduction Limits

Ref: FCC 15.111(a). $P_{\text{max}} = 2 \text{ nW}$; for frequency range see Table 4.1.

5. Emission Tests and Results

NOTE: Even though the FCC and/or Industry Canada specify that both the radiated and conductive emissions be measured using the Quasi-Peak and/or average detection schemes, we normally use peak detection since Quasi-Peak is cumbersome to use with our instrumentation. In case the measurement fails to meet the limits, or the measurement is near the limit, it is re-measured using appropriate detection. We note that since the peak detected signal is always higher or equal to the Quasi-Peak or average detected signal, the margin of compliance may be better, but not worse, than indicated in this report. The type of detection used is indicated in the data table, Table 5.1.

5.1 Anechoic Chamber Radiated Emission Tests

To familiarize with the radiated emission behavior of the DUT, it was studied and measured in the shielded anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with turntable, antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

To study and test for radiated emissions, the DUT was powered by a laboratory power supply at 12 VDC. A MHz CW signal was injected (radiated) from a nearby signal generator using a short wire antenna. The DUT was taped to a Styrofoam block and placed on the test table on each of the three axis. At each orientation, the table was rotated to obtain maximum signal for vertical and horizontal emission polarizations. This sequence was repeated throughout the required frequency range.

In the chamber we studied and recorded all the emissions using a ridge-horn antenna, which covers 200 MHz to 5000 MHz, up to 2 GHz. In scanning from 30 MHz to 2.0 GHz, there were no spurious emissions observed other than the LO and injection signal (MHz), and the LO harmonics. Figures 5.1 and 5.2 show emissions measured 0-1000 MHz and 1000-2000 MHz, respectively. These measurements are made with a ridge-horn antenna at 3m, with spectrum analyzer in peak hold mode and the receiver rotated in all orientations. The measurements up to 1000 MHz (Fig. 5.1) are used for initial evaluation only, while those above 1000 MHz (Fig. 5.2) are used in final assessment for compliance.

5.2 Open Area Test Site Radiated Emission Tests

The DUT was then moved to the 3 meter Open Area Test Site where measurements were repeated up to 1000 MHz using a small Bicone, or dipoles when the measurement is near the limit. The DUT was exercised as described in Sec. 5.1 above. The measurements were made with a spectrum analyzer using 120 kHz IF bandwidth and peak detection mode, and, when appropriate, using Quasi-Peak or average detection (see 5.0). Sometimes lower IF bandwidth is used to help bring signals out of noise and this is noted in the data table. Photographs included in this filing show the DUT on the Open Area Test Site (OATS).

The emissions from digital circuitry were measured using a standard Bicone. These results are also presented in Table 5.1.

5.3 Computations and Results for Radiated Emissions

To convert the dBm's measured on the spectrum analyzer to dB(μ V/m), we use expression

$$E_3(\text{dB}\mu\text{V/m}) = 107 + P_R + K_A - K_G$$

where P_R = power recorded on spectrum analyzer, dB, measured at 3m
 K_A = antenna factor, dB/m
 K_G = pre-amplifier gain, including cable loss, dB

When presenting the data, at each frequency the highest measured emission under all of the possible orientations is given. Computations and results are given in Table 5.1. There we see that the DUT meets the limit by 16.2 dB.

5.4 Conducted Emission Tests

These tests do not apply, since the DUT is powered from a 12 VDC system.

6. Other Measurements

6.1 Emission Spectrum Near Fundamental

Near operating frequency the emission spectrum is measured typically over 50 MHz span with and without injection signal. These data are taken with the DUT close to antenna and hence amplitudes are relative. The plots are shown in Figure 6.1.

6.2 Effect of Supply Voltage Variation

The DUT has been designed to operate from 12 VDC power. Using a spectrum analyzer, relative radiated emissions were recorded at the LO (651.38 MHz) as voltage was varied from 6.0 to 18.0 VDC. Figure 6.2 shows the emission variation.

6.3 Operating Voltage and Current

$V = 12 \text{ Vdc}$
 $I = 40 \text{ mAdc}$

The University of Michigan
Radiation Laboratory
3228 EECS Building
Ann Arbor, Michigan 48109-2122
(734) 764-0500

Table 5.1 Highest Emissions Measured

Radiated Emission - RF											Lear WCM /w Ant; FCC/IC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3 dBμV/m	E3lim dBμV/m	Pass dB	Comments
1	Lear Ext. Antenna										
2	325.7	Sbic	H	-85.0	Pk	19.2	21.8	19.4	46.0	26.6	max. of all, noise
3	325.7	Sbic	V	-87.0	Pk	19.2	21.8	17.4	46.0	28.6	max. of all, noise
4	651.4	Sbic	H	-86.2	Pk	25.5	18.7	27.6	46.0	18.4	max. of all, noise
5	651.4	Sbic	V	-85.9	Pk	25.5	18.7	27.9	46.0	18.1	max. of all, noise
6	977.1	Sbic	H	-84.8	Pk	29.2	16.8	34.6	54.0	19.4	max. of all, noise
7	977.1	Sbic	V	-86.2	Pk	29.2	16.8	33.2	54.0	20.8	max. of all, noise
8	1000.0	Horn	H	-62.0	Pk	20.6	28.0	37.6	54.0	16.4	max. of all, noise
9	1200.0	Horn	H	-63.2	Pk	21.0	28.1	36.7	54.0	17.3	max. of all, noise
10	1400.0	Horn	H	-62.9	Pk	21.3	28.3	37.1	54.0	16.9	max. of all, noise
11	1600.0	Horn	H	-62.9	Pk	21.4	28.2	37.3	54.0	16.7	max. of all, noise
12	1800.0	Horn	H	-63.5	Pk	21.8	27.9	37.4	54.0	16.6	max. of all, noise
13	2000.0	Horn	H	-63.7	Pk	22.2	28.2	37.3	54.0	16.7	max. of all, noise
14											
15	Tenatronics Ext. Antenna										
16	325.7	Sbic	H	-85.2	Pk	19.2	21.8	19.2	46.0	26.8	max. of all, noise
17	325.7	Sbic	V	-85.1	Pk	19.2	21.8	19.3	46.0	26.7	max. of all, noise
18	651.4	Sbic	H	-86.3	Pk	25.5	18.7	27.5	46.0	18.5	max. of all, noise
19	651.4	Sbic	V	-86.0	Pk	25.5	18.7	27.8	46.0	18.2	max. of all, noise
20	977.1	Sbic	H	-83.9	Pk	29.2	16.8	35.5	54.0	18.5	max. of all, noise
21	977.1	Sbic	V	-85.8	Pk	29.2	16.8	33.6	54.0	20.4	max. of all, noise
22	1000.0	Horn	H	-62.0	Pk	20.6	28.0	37.6	54.0	16.4	max. of all, noise
23	1200.0	Horn	H	-63.2	Pk	21.0	28.1	36.7	54.0	17.3	max. of all, noise
24	1400.0	Horn	H	-62.9	Pk	21.3	28.3	37.1	54.0	16.9	max. of all, noise
25	1600.0	Horn	H	-62.9	Pk	21.4	28.2	37.3	54.0	16.7	max. of all, noise
26	1800.0	Horn	H	-63.5	Pk	21.8	27.9	37.4	54.0	16.6	max. of all, noise
27	2000.0	Horn	H	-63.7	Pk	22.2	28.2	37.3	54.0	16.7	max. of all, noise
Digital emissions more than 20 dB below FCC/IC Class B Limit.											
Conducted Emissions											
#	Freq. MHz	Line Side	Det. Used	Vtest dBμV	Vlim dBμV	Pass dB	Comments				
							Not applicable				

Meas. 11/25/2005; U of Mich.

University of Michigan Radiation Laboratory
FCC Part 15, IC RSS-210/Gen - Test Report No. 415031-271

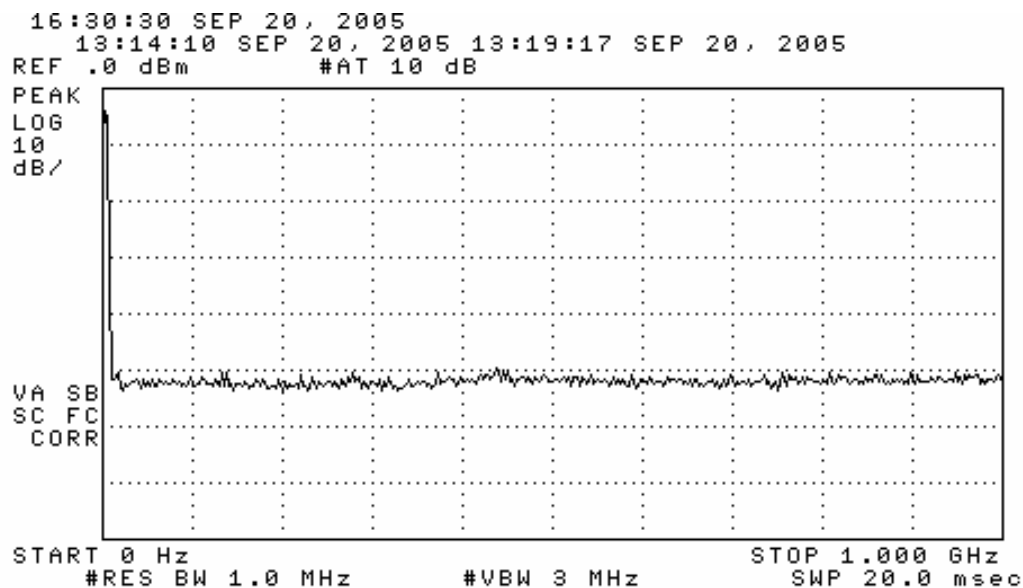


Figure 5.1. Emissions measured at 3 meters in chamber, 0-1000 MHz.

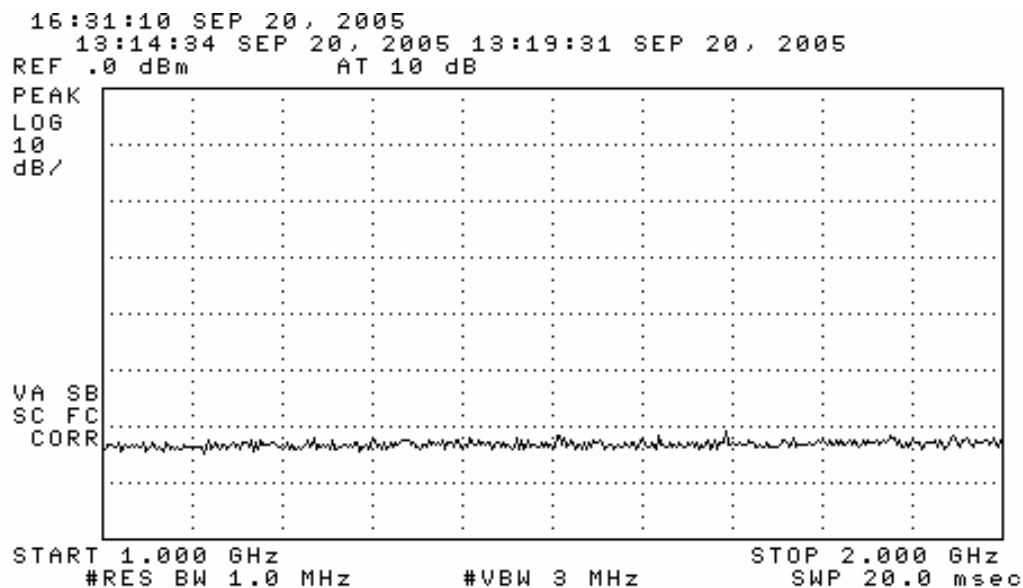


Figure 5.2. Emissions measured at 3 meters in chamber, 1000-2000 MHz.

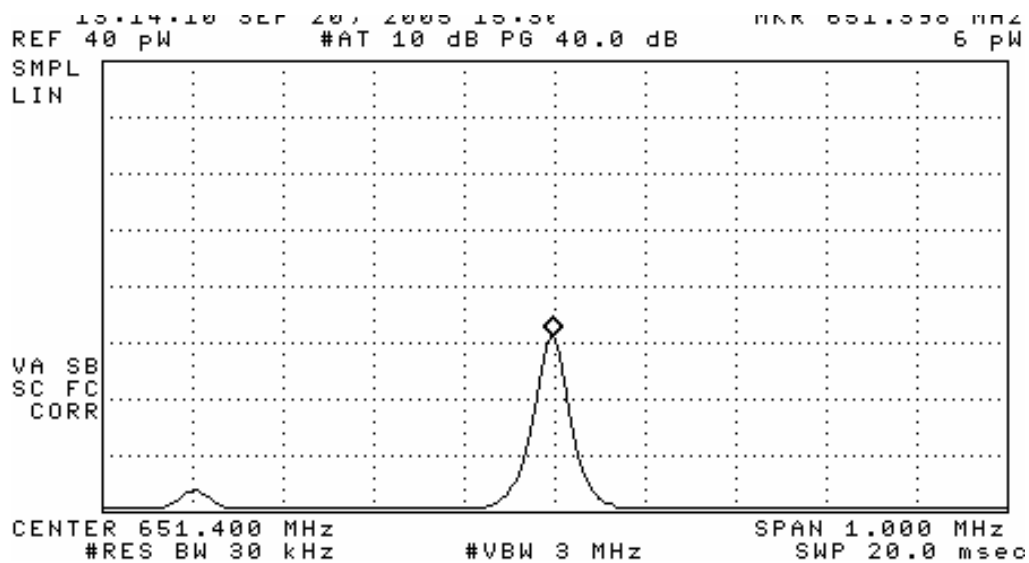


Figure 6.1. Relative receiver emissions (Antenna-Conducted).


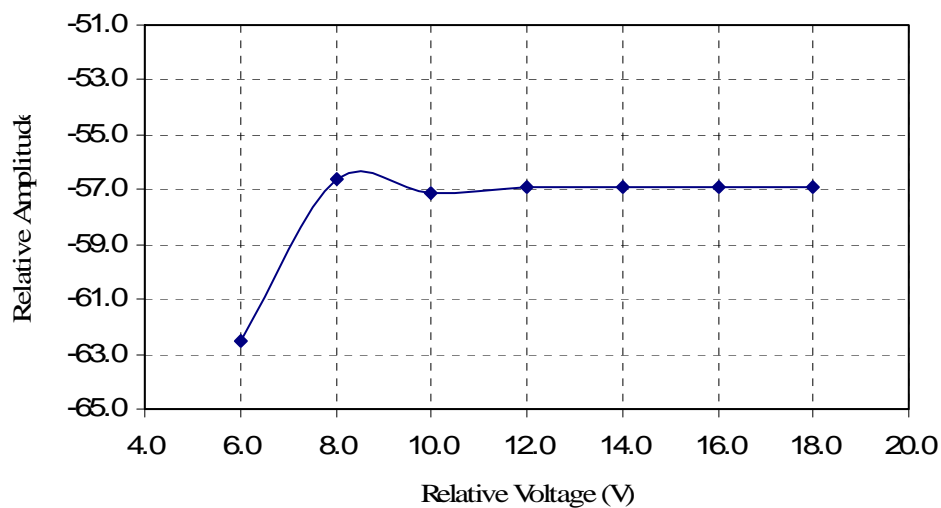


Figure 6.2. Relative emission at vs. supply voltage.



DUT on OATS

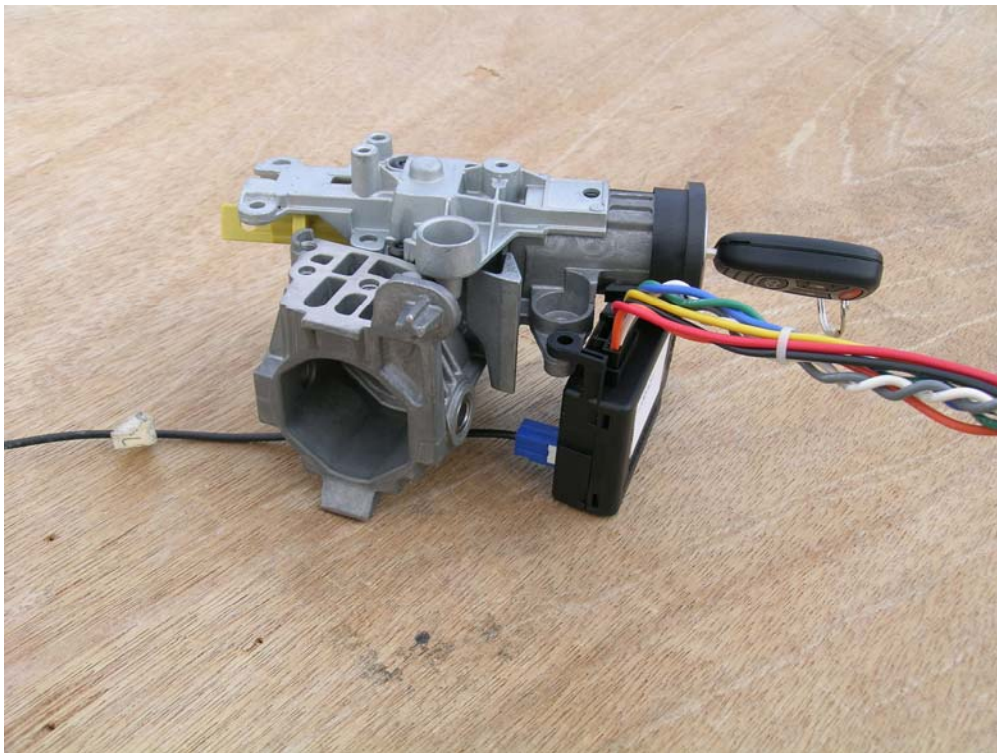

DUT on OATS (close-up)