


AC MAINS CONDUCTED

Diagram No.: 1.02

EUT: Neo Chat 10 + Cincon Charger Sampel 2 (4Ts01d01)
Manufacturer: PT Solecron Technology
Operating Condition: Charging
Test Site: 7 layers Ratingen
Operator: Groe
Test Specification: ANSI C63.4; FCC 15.107 / 15.207
Comment:
Start of Test: 01.04.04 / 13:12:09

SCAN TABLE: "FCC"

Short Description:			FCC			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

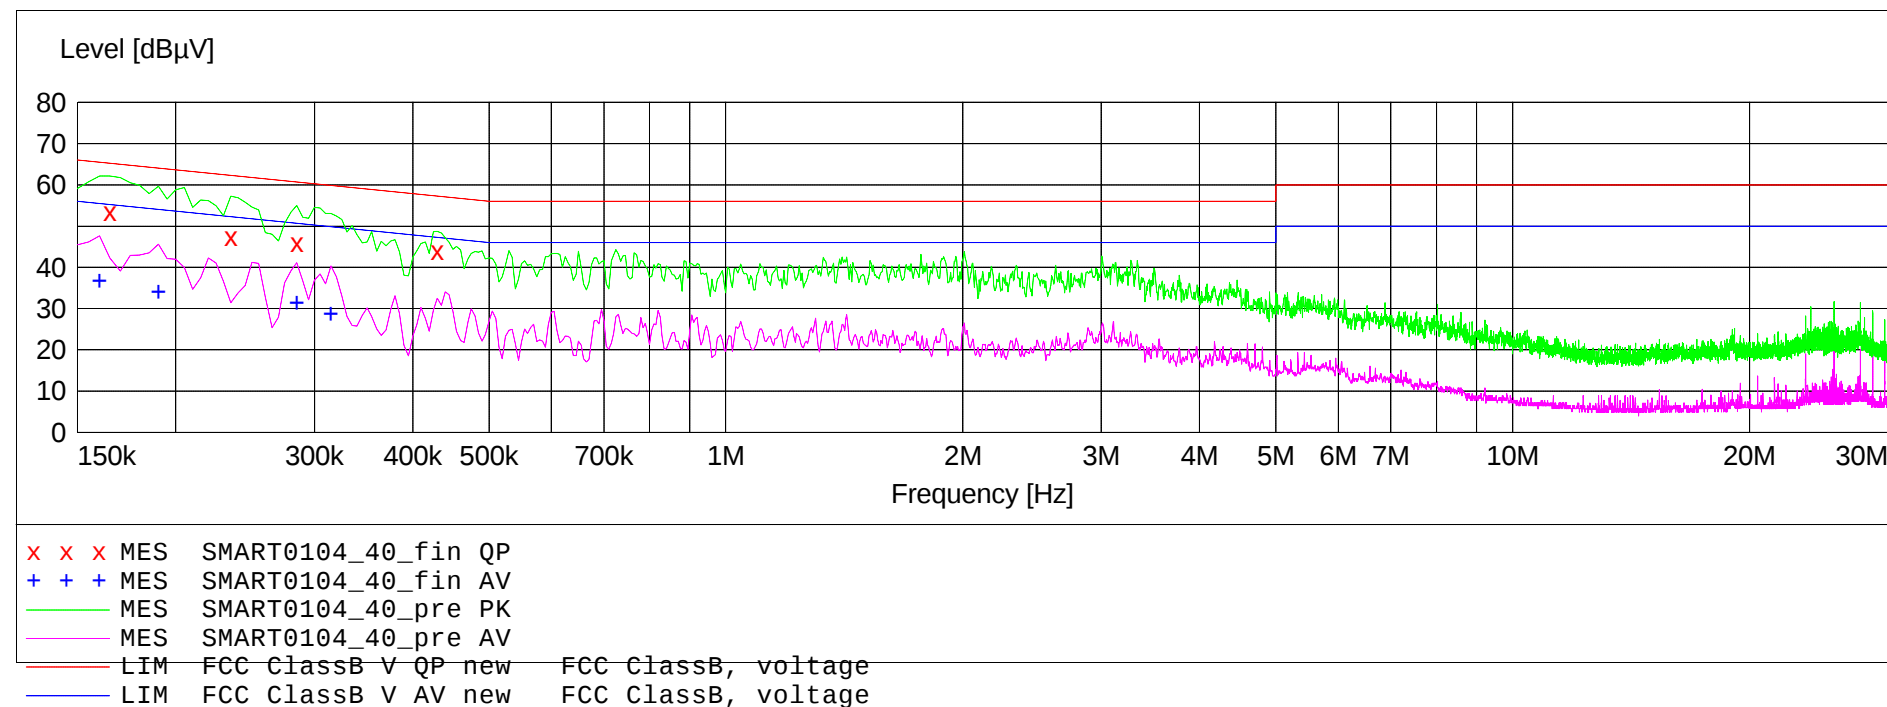

MEASUREMENT RESULT: "SMART0104_40_fin QP"

01.04.04 13:17

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.165000	53.40	10.0	65	11.8	L1	FLO
0.235000	47.40	10.0	62	14.9	L1	GND
0.285000	45.90	9.9	61	14.8	L1	GND
0.430000	44.00	10.0	57	13.2	L1	FLO

MEASUREMENT RESULT: "SMART0104_40_fin AV"

01.04.04 13:17

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.160000	36.90	10.0	56	18.5	N	GND
0.190000	34.10	10.0	54	20.0	N	FLO
0.285000	31.50	9.9	51	19.2	N	GND
0.315000	28.80	9.9	50	21.0	N	FLO