


AC MAINS CONDUCTED

Diagram No.: 1.01

EUT: Neo Chat 10 + PI Charger (4Ts01b01)
Manufacturer: PT Soletron Technology
Operating Condition: Charging
Test Site: 7 layers Ratingen
Operator: Groe
Test Specification: ANSI C63.4; FCC 15.107 / 15.207
Comment:
Start of Test: 01.04.04 / 13:01:31

SCAN TABLE: "FCC"

Short Description:			FCC			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

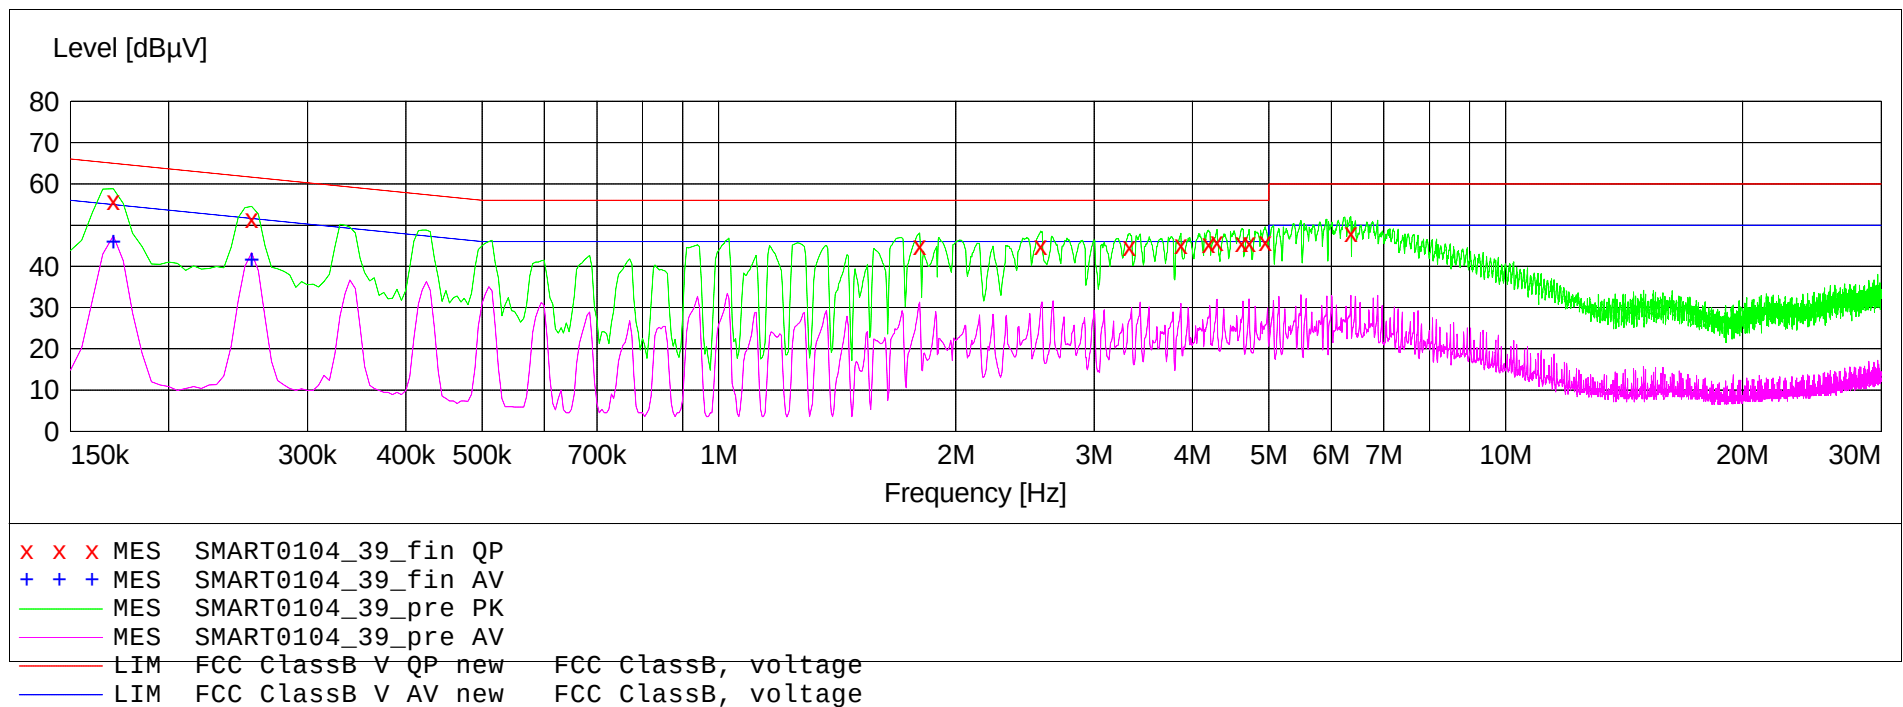

MEASUREMENT RESULT: "SMART0104_39_fin QP"

01.04.04 13:06

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.170000	56.00	10.0	65	9.0	N	GND
0.255000	51.50	10.0	62	10.0	N	GND
1.800000	45.00	10.1	56	11.0	N	FLO
2.565000	44.90	10.1	56	11.1	N	FLO
3.325000	44.70	10.2	56	11.3	N	GND
3.865000	45.20	10.2	56	10.8	N	FLO
4.190000	45.40	10.3	56	10.6	N	GND
4.295000	46.00	10.3	56	10.0	N	GND
4.620000	45.80	10.3	56	10.2	N	FLO
4.720000	45.80	10.3	56	10.2	N	GND
4.950000	45.90	10.3	56	10.1	N	GND
6.355000	48.20	10.3	60	11.8	N	FLO

MEASUREMENT RESULT: "SMART0104_39_fin AV"

01.04.04 13:06

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.170000	45.90	10.0	55	9.1	N	GND
0.255000	41.60	10.0	52	10.0	N	FLO