

CETECOM Inc.



CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

www.cetecom.com

Issued test report consists of 62 Pages

Page 1 (62)

<p>FCC LISTED, REG. NO.: 101450 & RECOGNIZED BY INDUSTRY CANADA IC – 3925</p>

Test report no.: EMC_347_FCC15.247_2002
FCC Part 15.247 for FHSS systems / CANADA RSS-210
(Blue Opal USB Adapter, Model: 90137)
FCC ID: KOC-90137

Table of Contents

1	General information
1.1	Notes
1.2	Testing laboratory
1.3	Details of applicant
1.4	Application details
1.5	Test item
1.6	Test standards
2	Technical test
2.1	Summary of test results
2.2	Test report
1	General information
1.1	Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

TEST REPORT PREPARED BY:**EMC Engineer: Harpreet Sidhu****1.2 Testing laboratory****CETECOM Inc.****411 Dixon Landing Road, Milpitas, CA-95035, USA****Phone: +1 408 586 6200 Fax: +1 408 586 6299****E-mail: lothar.schmidt@cetecomusa.com****Internet: www.cetecom.com**

1.3 Details of applicant

Name : Smart Modular Technologies, Inc.
Street : 4211 Starboard Drive
City / Zip Code : Fremont, CA 94538
Country : USA
Contact : Lubos Honzik
Telephone : +1 210 824 4873
Tele-fax : +1 210 822 1095
e-mail : lhonzik@attglobal.net

1.4 Application details

Date of receipt of application : 2002-09-13
Date of receipt test item : 2002-10-02
Date of test : 2002-10-02/03

1.5 Test item

Manufacturer : Smart Modular Technologies, Sdn Bhd
Street Address : Plot 18, Lorong Jelawat 4,
Kawasan Perindustrian Seberang Jaya
City / Zip Code : 13700 Perai, Penang
Country : Malaysia
Marketing Name : Blue Opal USB Adapter
Model No. : 90137
Description : USB 1.1 to Bluetooth Adapter
HW & SW : HW: rev. B1, SW: CSR ver. 14.7
FCC-ID : KOC-90137

Additional information

Frequency : 2402MHz – 2480MHz
Type of modulation : GFSK
Number of channels : 79
Antenna : Polarization
Power supply : +5.0VDC
Output power : 3.13dBm (2.06mW) max. EIRP
Extreme vol. Limits : 5.0VDC +/-5%
Extreme temp. Tolerance : -20 C to +85 C

1.6 Test standards: FCC Part 15 §15.247 (DA00-705) / CANADA RSS-210

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

2 Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests
Performed

Final Verdict:
(only “passed” if all single measurements are “passed”)

Passed

Technical responsibility for area of testing:

2002-10-16 EMC & Radio

Siegfried Lehmann
(Technical Manager)



Date

Section

Name

Signature

Responsible for test report and project leader:

2002-10-16 EMC & Radio

Harpreet Sidhu (EMC Engineer)



Date

Section

Name

Signature

2.2 Test report

TEST REPORT

Test report no. : EMC_331_FCC15.247_2002
(Blue Opal USB Adapter, Model: 90137)
FCC ID: KOC-90137

TEST REPORT REFERENCE

LIST OF MEASUREMENTS		PAGE
ANTENNA GAIN	§ 15.204	7
CARRIER FREQUENCY SEPERATION	§15.247(a)	8
NUMBER OF HOPPING CHANNELS	§15.247(a)	9
TIME OF OCCUPANCY (DWELL TIME)	§15.247(a)	13
SPECTRUM BANDWIDTH OF FHSS SYSTEM	§15.247(a)	16
POWER SPECTRAL DENSITY	§15.247 (d)	20
MAXIMUM PEAK OUTPUT POWER	§ 15.247 (b) (1)	24
BAND EDGE COMPLIANCE	§15.247 (c)	32
EMISSION LIMITATIONS	§ 15.247 (c) (1)	40
CONDUCTED EMISSIONS	§ 15.107/207	54
RECEIVER SPURIOUS RADIATION	§ 15.209	55
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		60
BLOCK DIAGRAMS		61


ANTENNA GAIN**§ 15.204**

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.

	Low channel	Mid channel	High channel
Conducted Power	0.01dBm	-0.09dBm	-0.66dBm
Raidated Power (EIRP)	3.13dBm	2.79dBm	0.31dBm
Antenna Gain	2.89dBi	2.88dBi	0.97dBi

The calculated antenna gain is between 0.97dBi and 2.89dBi.

CARRIER FREQUENCY SEPERATION §15.247(a)

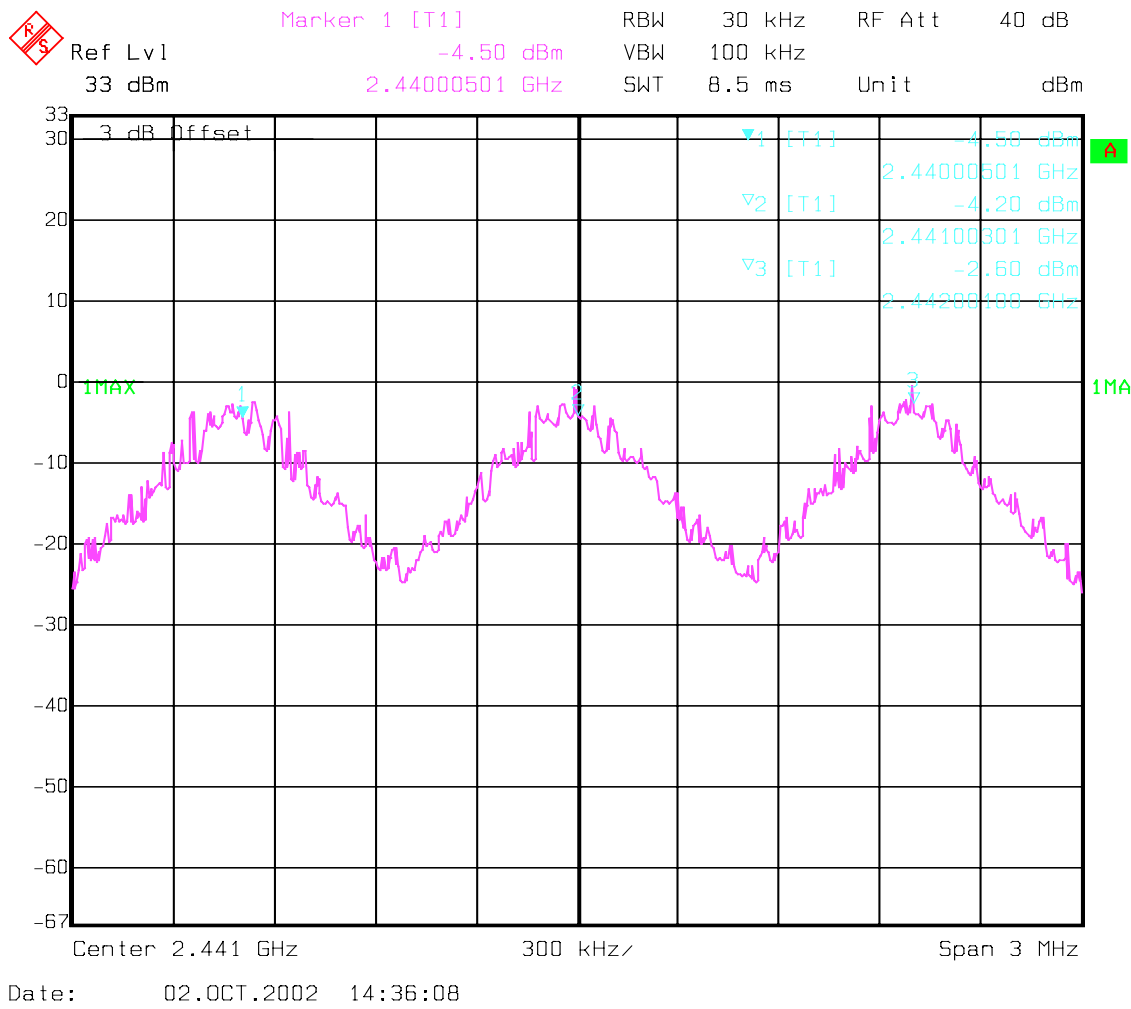


NUMBER OF HOPPING CHANNELS

§15.247(a)

The number of hopping channels is 79 (see next 4 plots)


The right red line corresponds to the left red line from the next plot.

Plot 1: Total 23

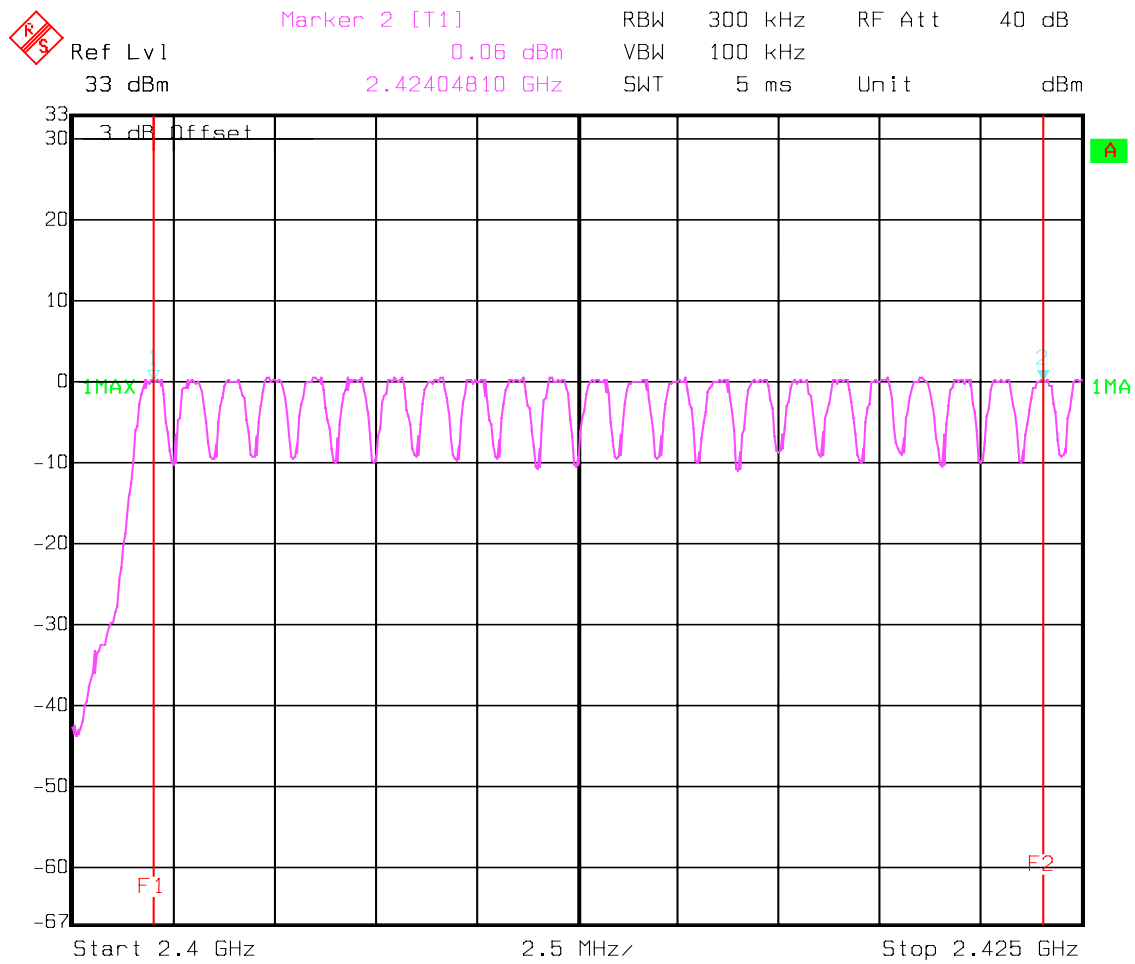


Date: 02.OCT.2002 14:38:46


Plot 2: Total 24

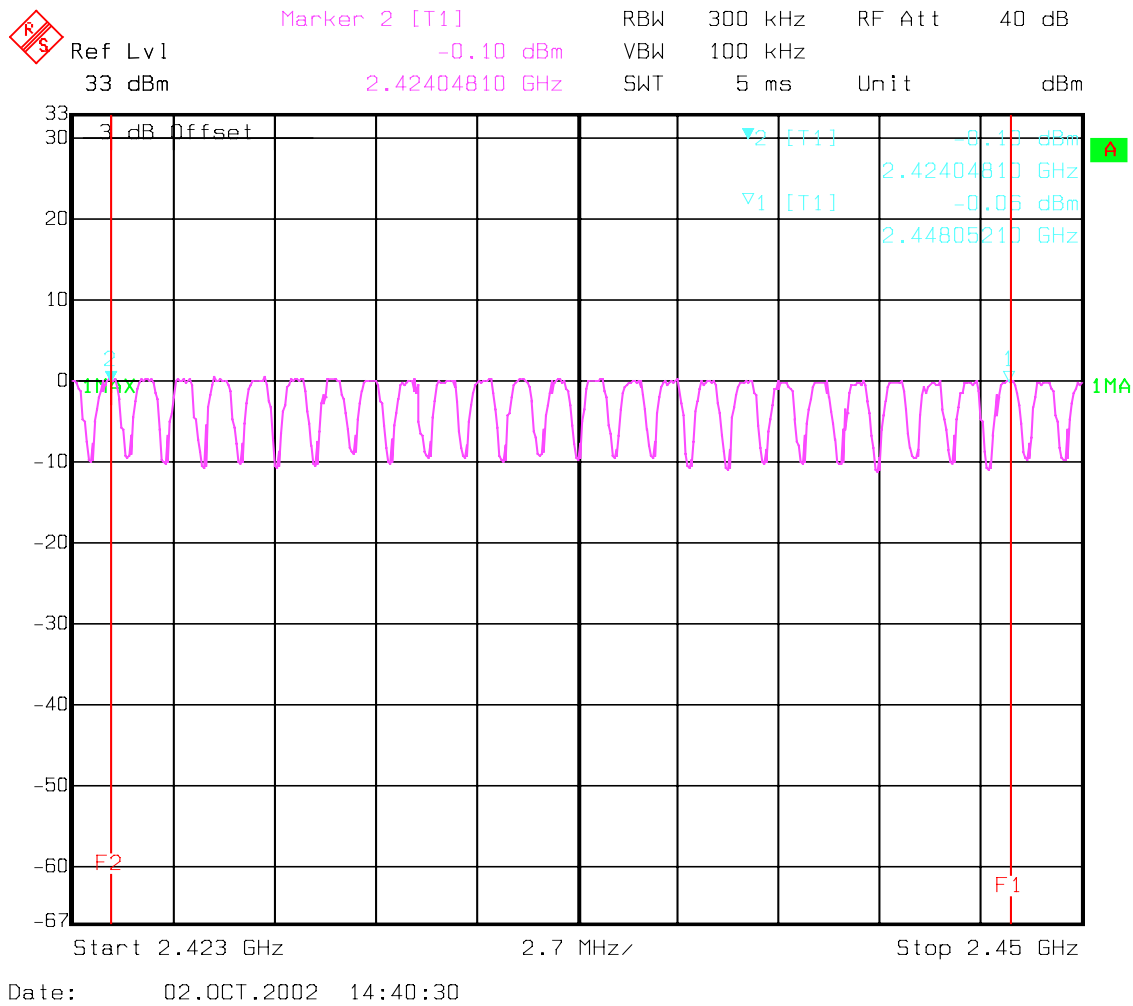

Plot 3: Total 20

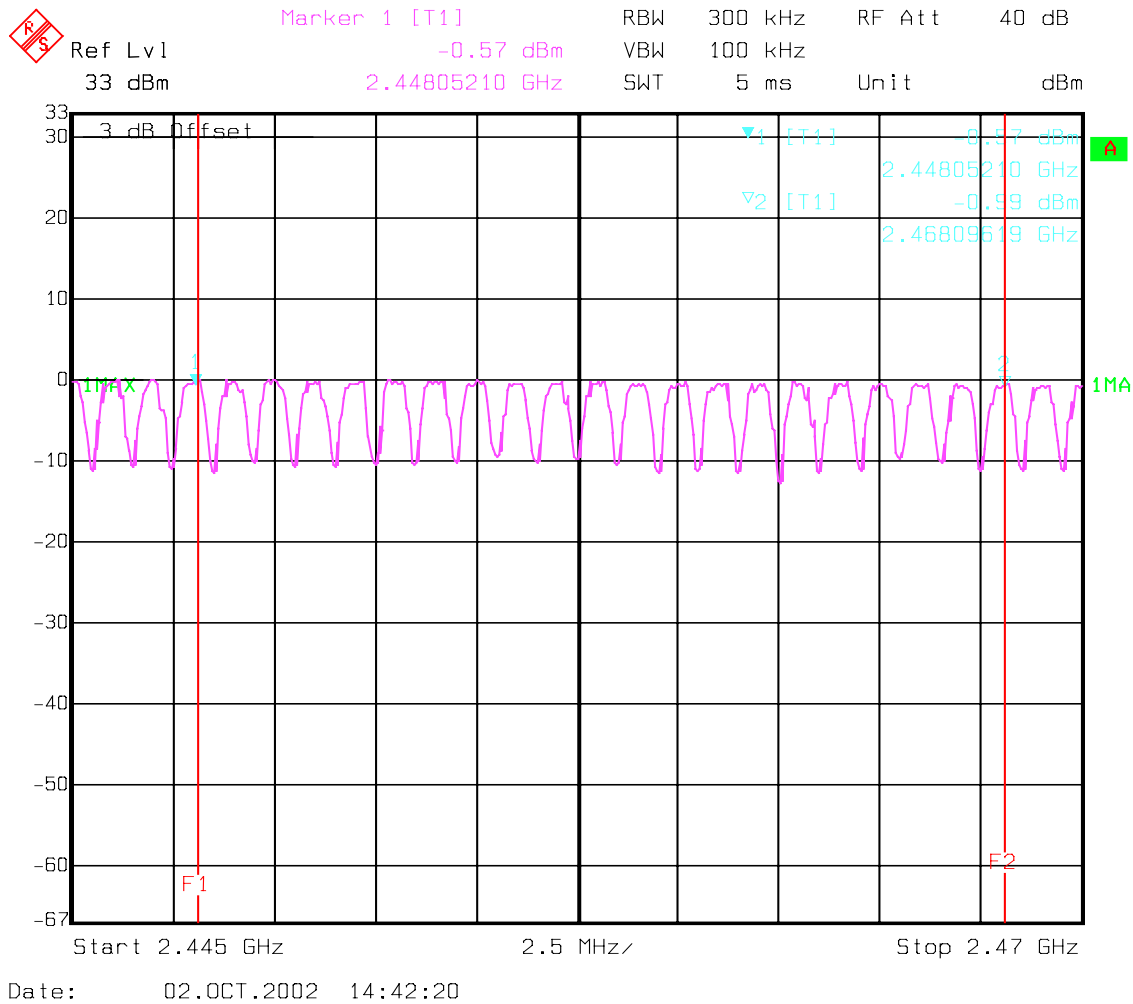


Plot 4: Total 12

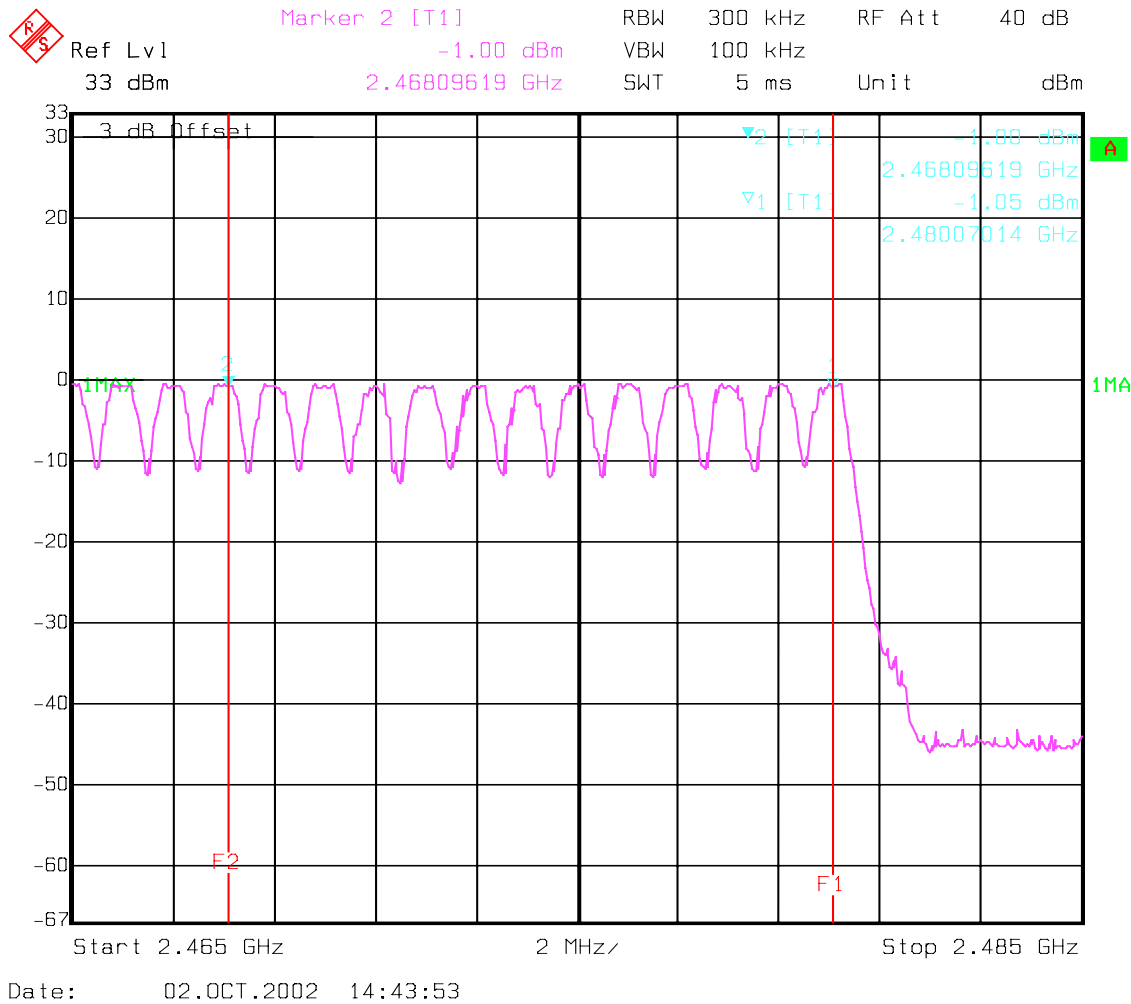

DH1 – Packet

So we have $303.9 * 422.04 \mu s = 128.25 \text{ ms}$ per 30 seconds.

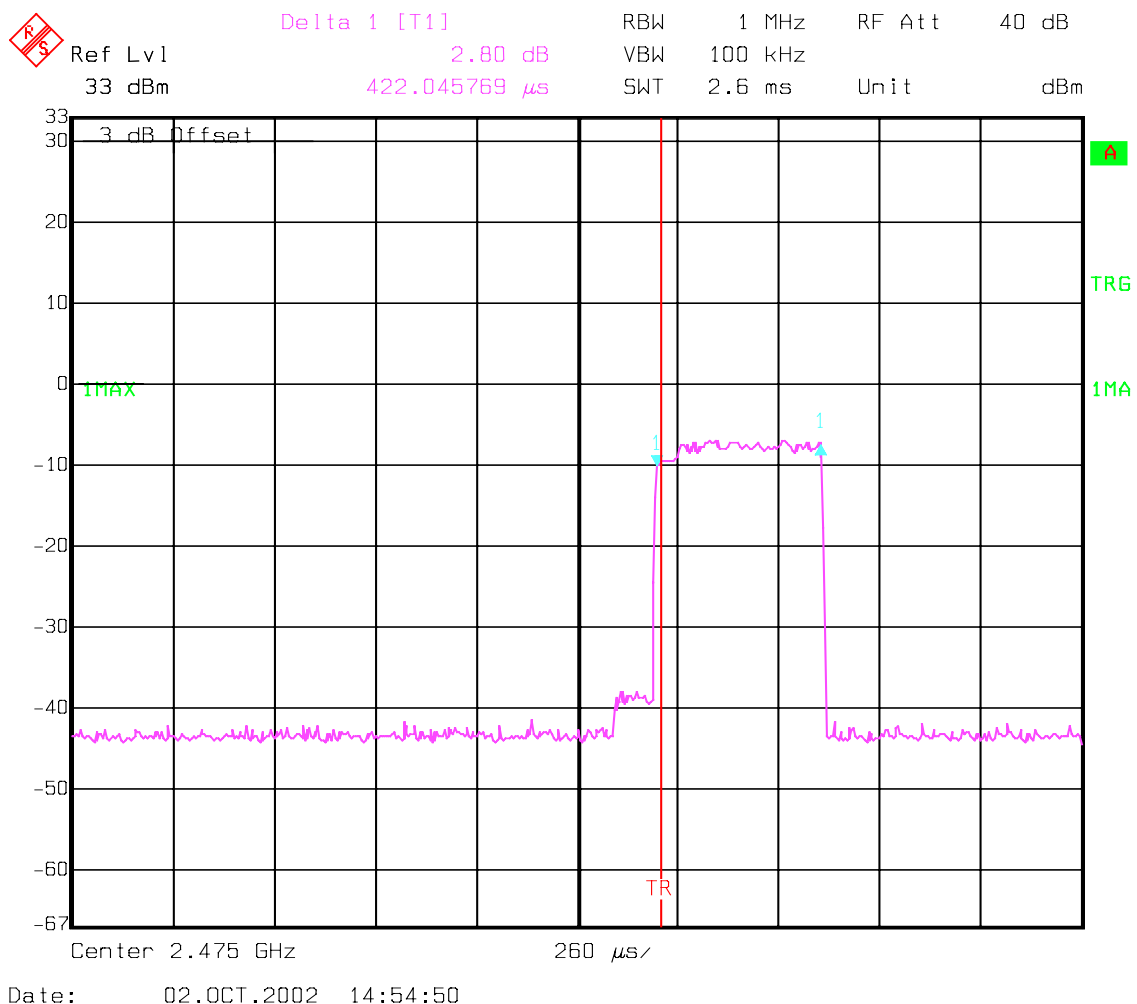

TIME OF OCCUPANCY (DWELL TIME)


§15.247(a)

DH3 – Packet

A DH3 Packets need 3 time slots for transmit and 1 for receiving, then the system makes worst case 400 hops per second with 79 channels. So you have each channel 5.1 times per second and so for 30 seconds you have 153 times of appearance .

Each Tx-time per appearance is 1.68 ms.

So we have $153 * 1.68 \text{ ms} = 257.04 \text{ ms}$ per 30 seconds.

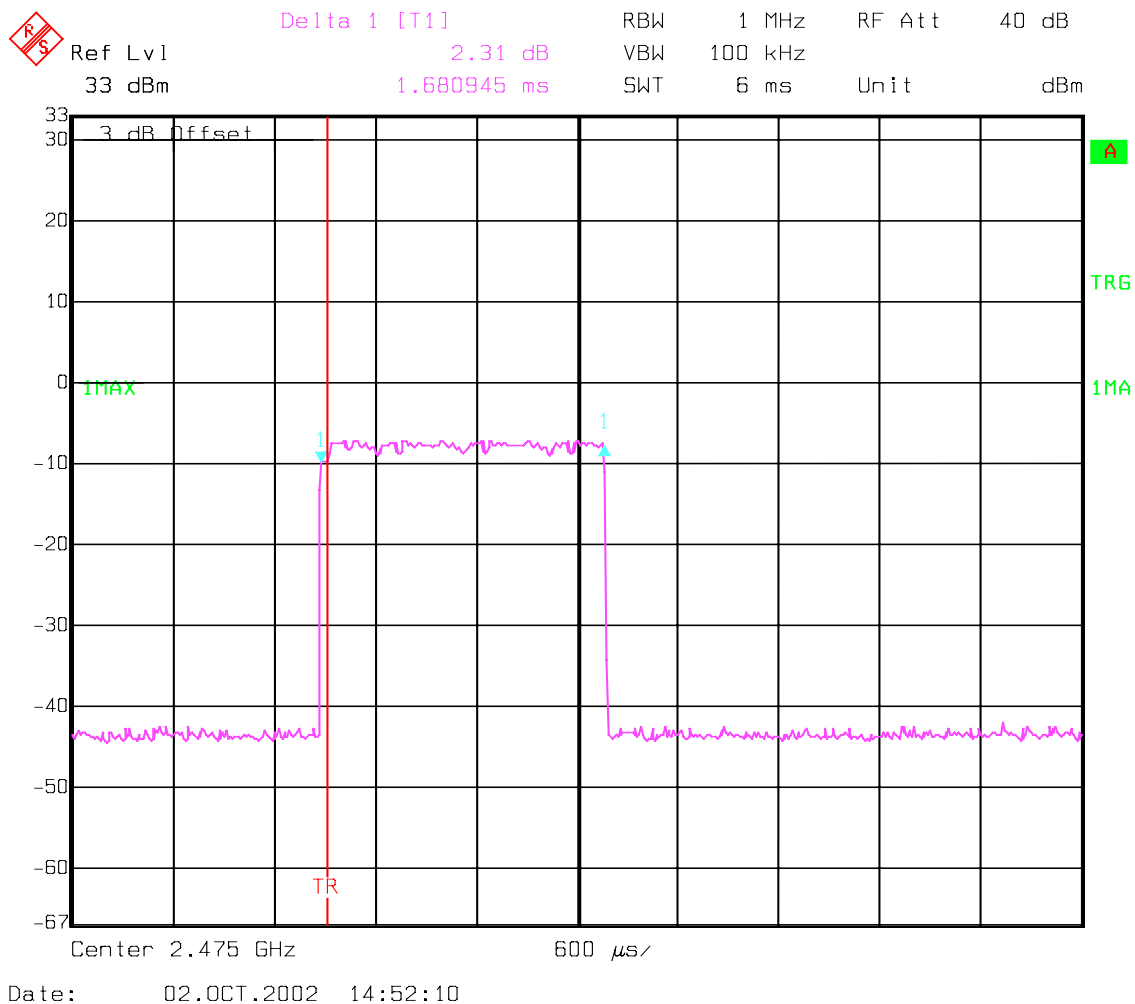

TIME OF OCCUPANCY (DWELL TIME)


§15.247(a)

DH5 – Packet

At DH5 Packets you need 5 time slots for transmit and 1 for receicing,then the system makes worst case 266,7 hops per second with 79 channels. So you have each channel 3.36 times per second and so for 30 seconds you have 100.8 times of appearance .

Each tx-time per appearance is 2.94 ms.

So we have $100.8 * 2.94\text{ms} = 296.35\text{ ms}$ per 30 seconds.

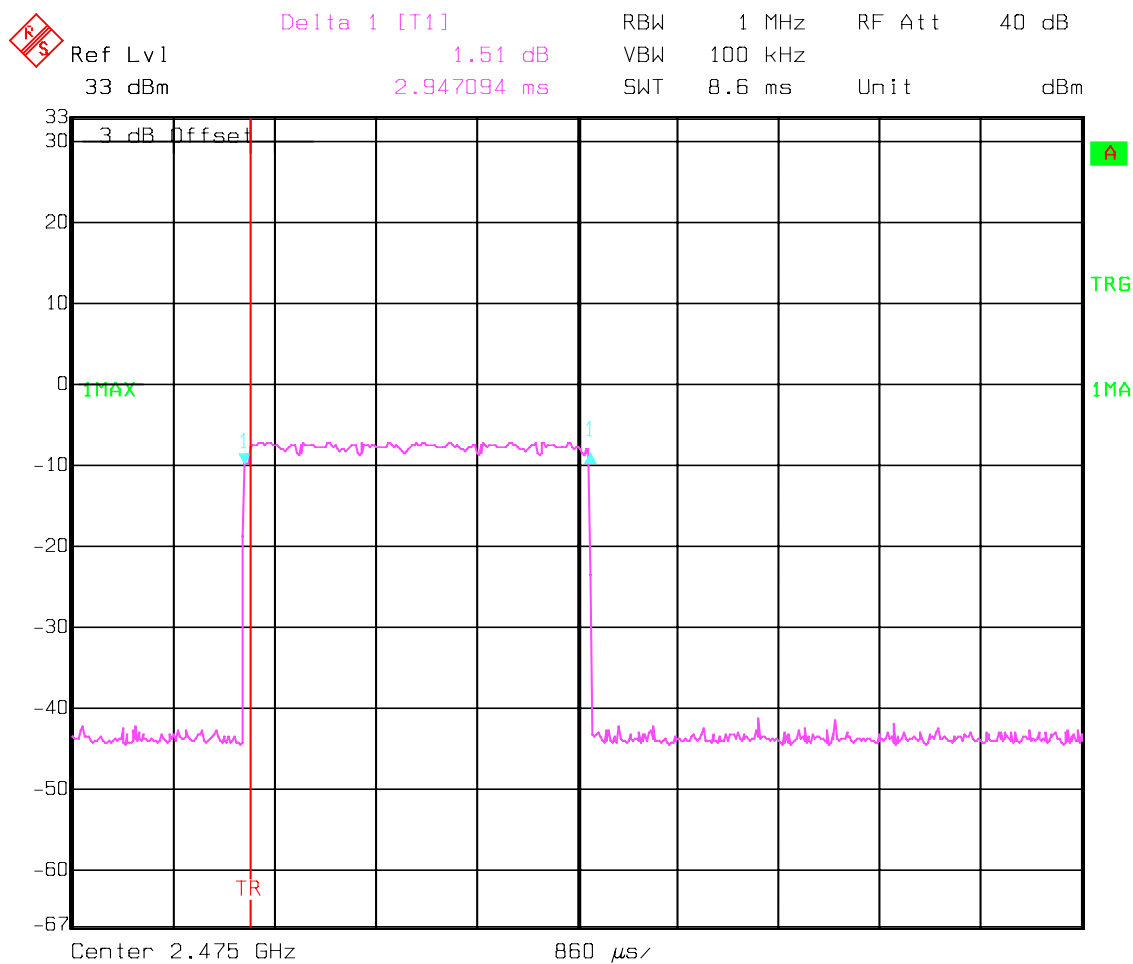

Date: 02.OCT.2002 14:48:46

SPECTRUM BANDWIDTH OF FHSS SYSTEM
20 dB bandwidth**§15.247(a)**

TEST CONDITIONS		20 dB BANDWIDTH (kHz)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} (5.0)VDC	877.85	873.74	877.75


RBW / VBW as provided in the "Measurement Guidelines" (DA 00-705, March 30, 2000)

LIMIT**SUBCLAUSE §15.247(a) (1)****The maximum 20dB bandwidth shall be at maximum 1000 KHz**

SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth

§15.247(a)


Lowest Channel: 2402MHz

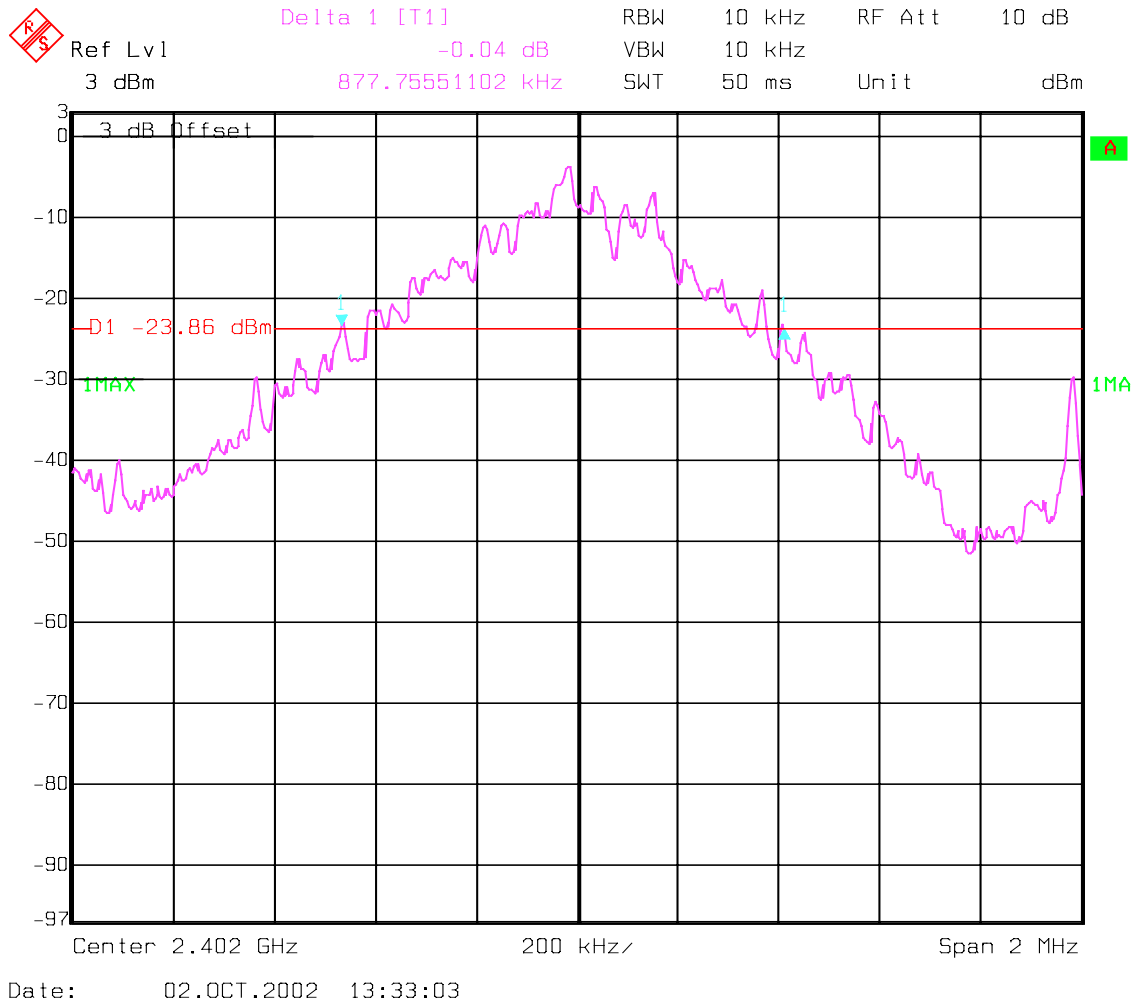

SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth

§15.247(a)


Mid Channel: 2441MHz

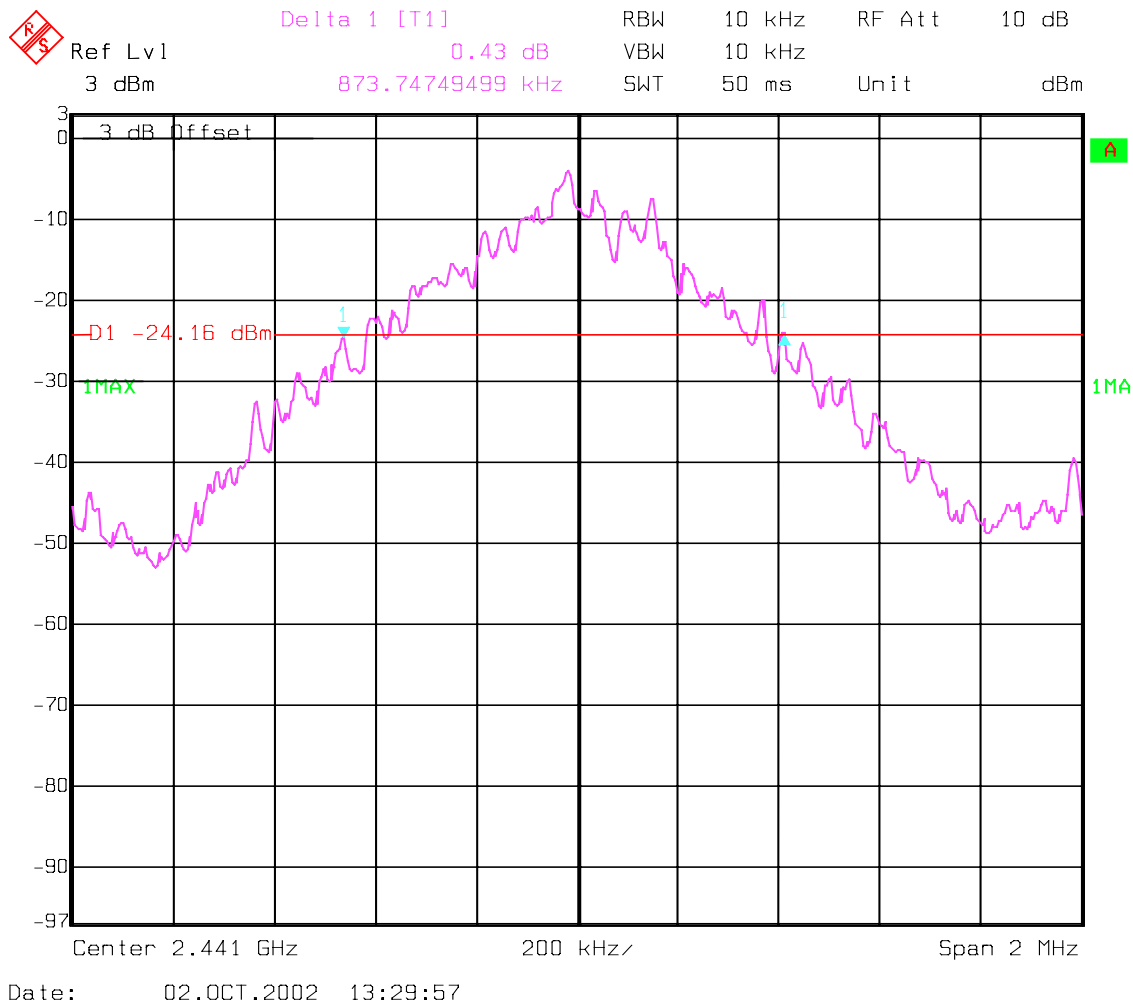

SPECTRUM BANDWIDTH OF FHSS SYSTEM 20 dB bandwidth

§15.247(a)

Highest Channel: 2480MHz

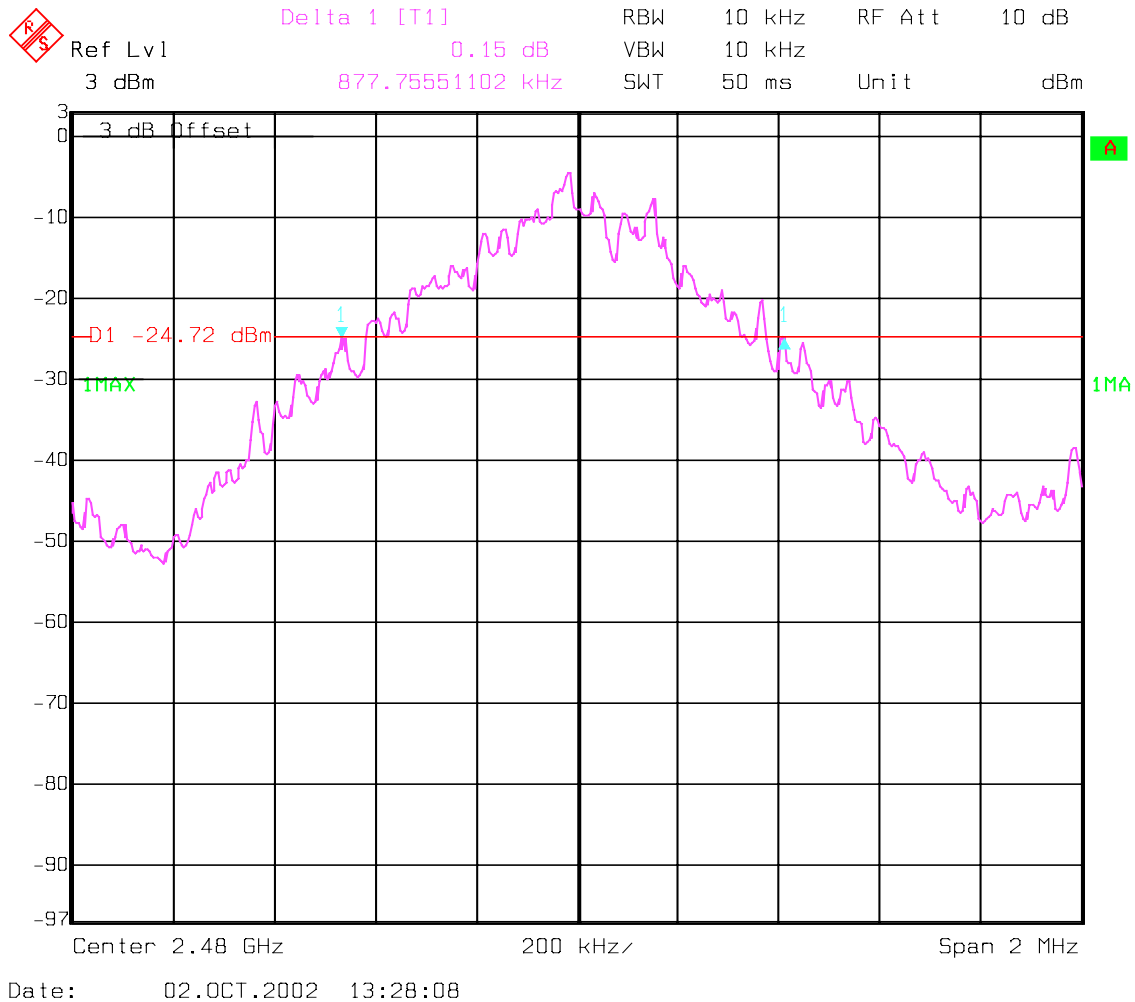

POWER SPECTRAL DENSITY**§15.247 (d)**

TEST CONDITIONS		POWER SPECTRAL DENSITY (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} (5.0)VDC	-11.67	-11.78	-12.32


LIMIT**SUBCLAUSE §15.247(d)**

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

ANALYZER SETTINGS: RBW=3KHz , VBW=3KHz

POWER SPECTRAL DENSITY §15.247(d)


Lowest Channel: 2402MHz

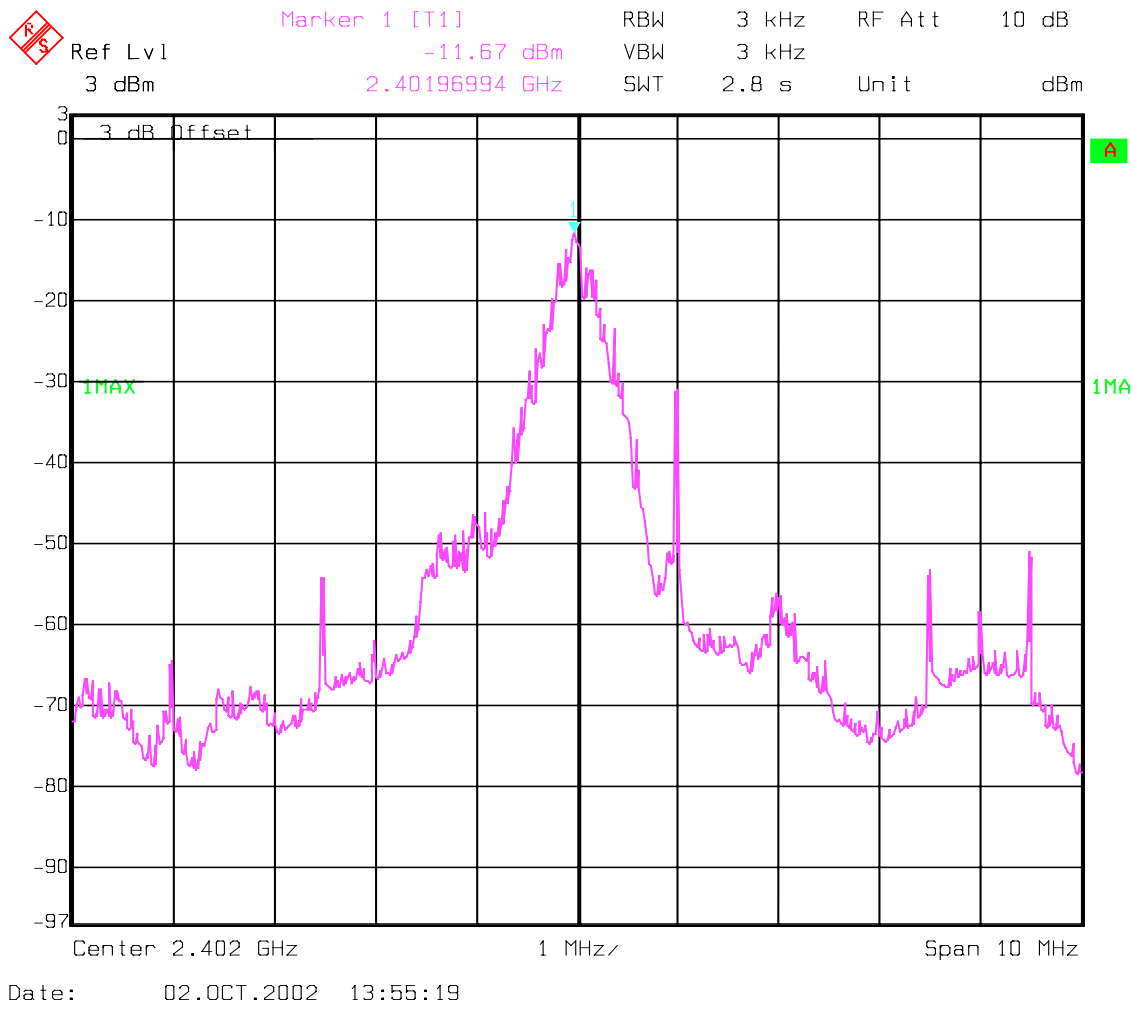

POWER SPECTRAL DENSITY

§15.247(d)


Middle Channel: 2441MHz

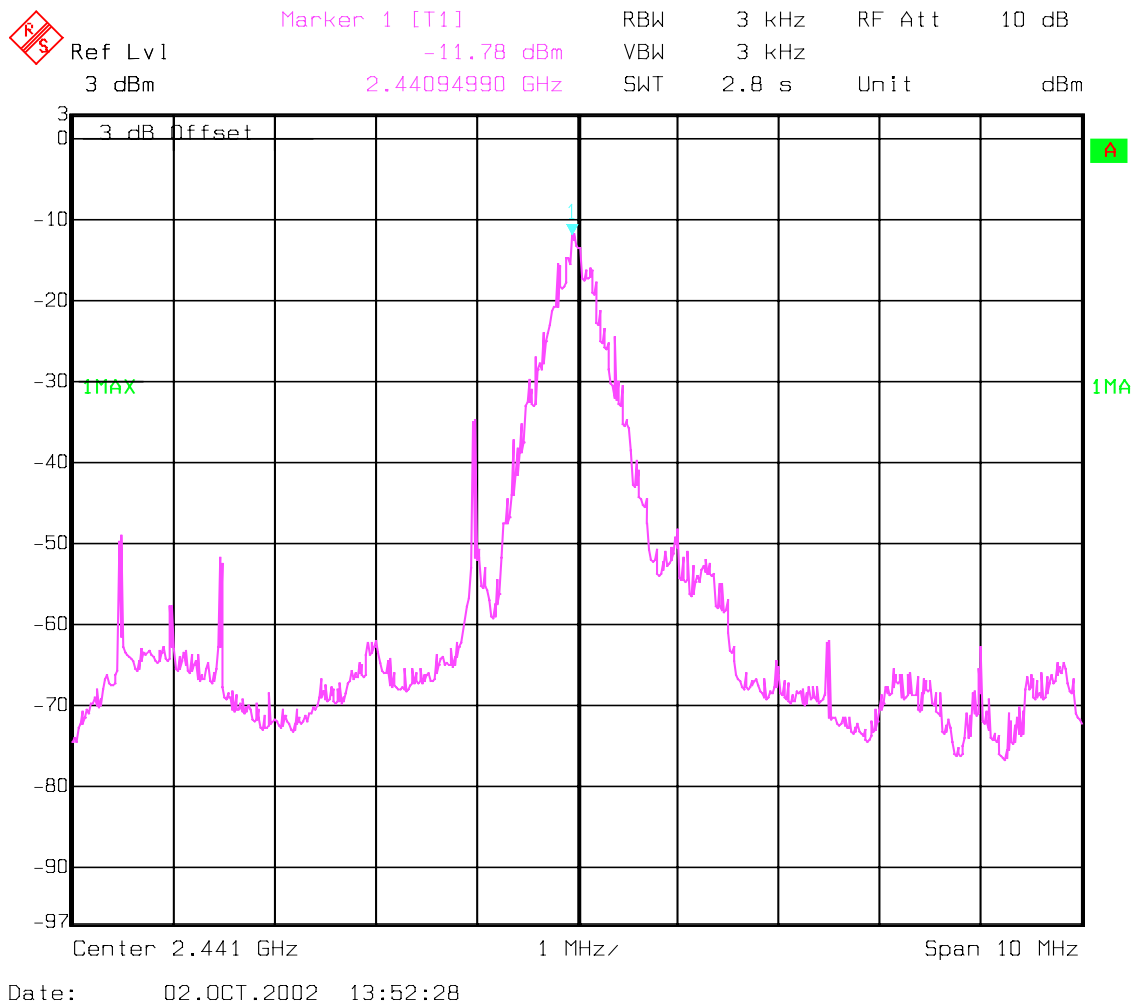

POWER SPECTRAL DENSITY

§15.247(d)

Highest Channel: 2480MHz

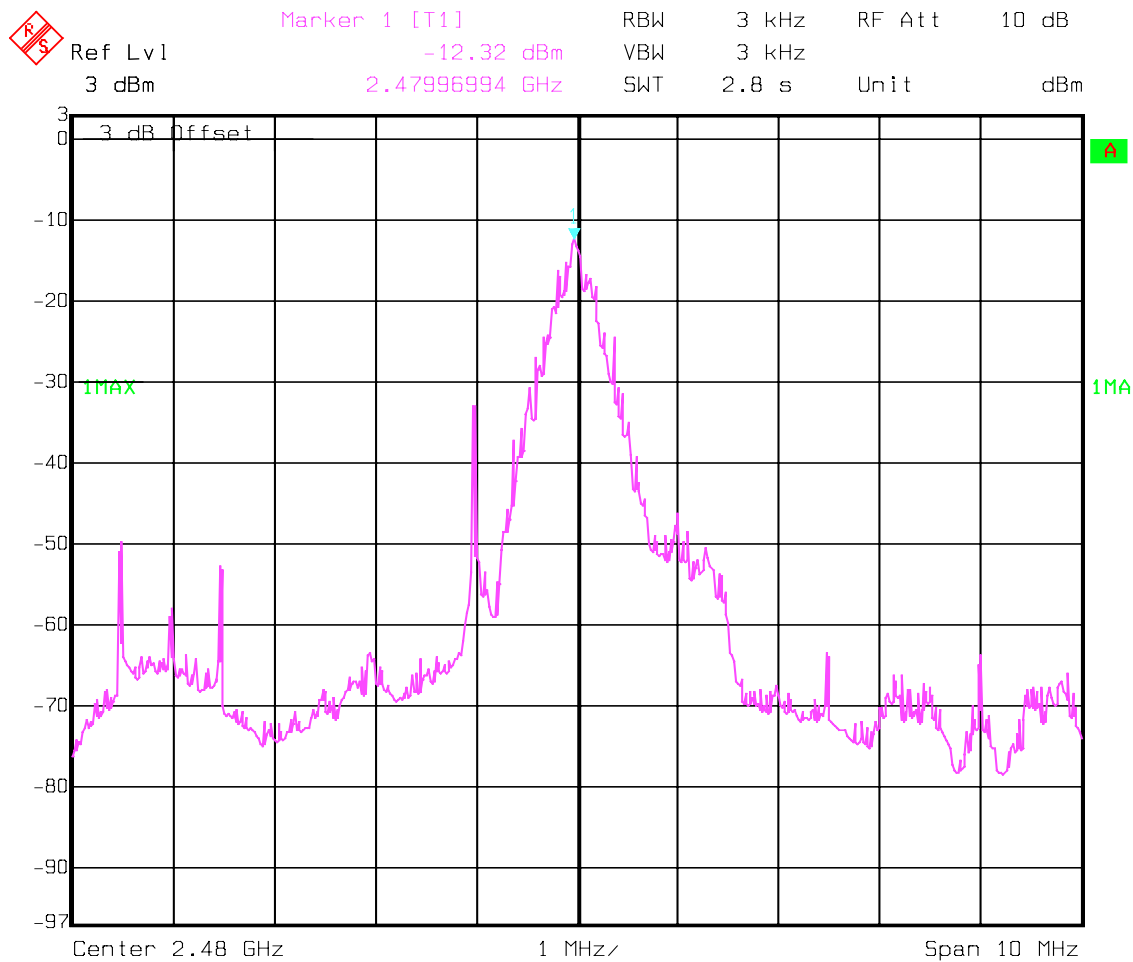

Date: 02.OCT.2002 13:57:08

**MAXIMUM PEAK OUTPUT POWER
(conducted)****§ 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} (5.0)VDC	0.01	-0.09	-0.66
Measurement uncertainty		±0.5dBm		

RBW / VBW : 3 MHz


LIMIT**SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Lowest Channel: 2402MHz

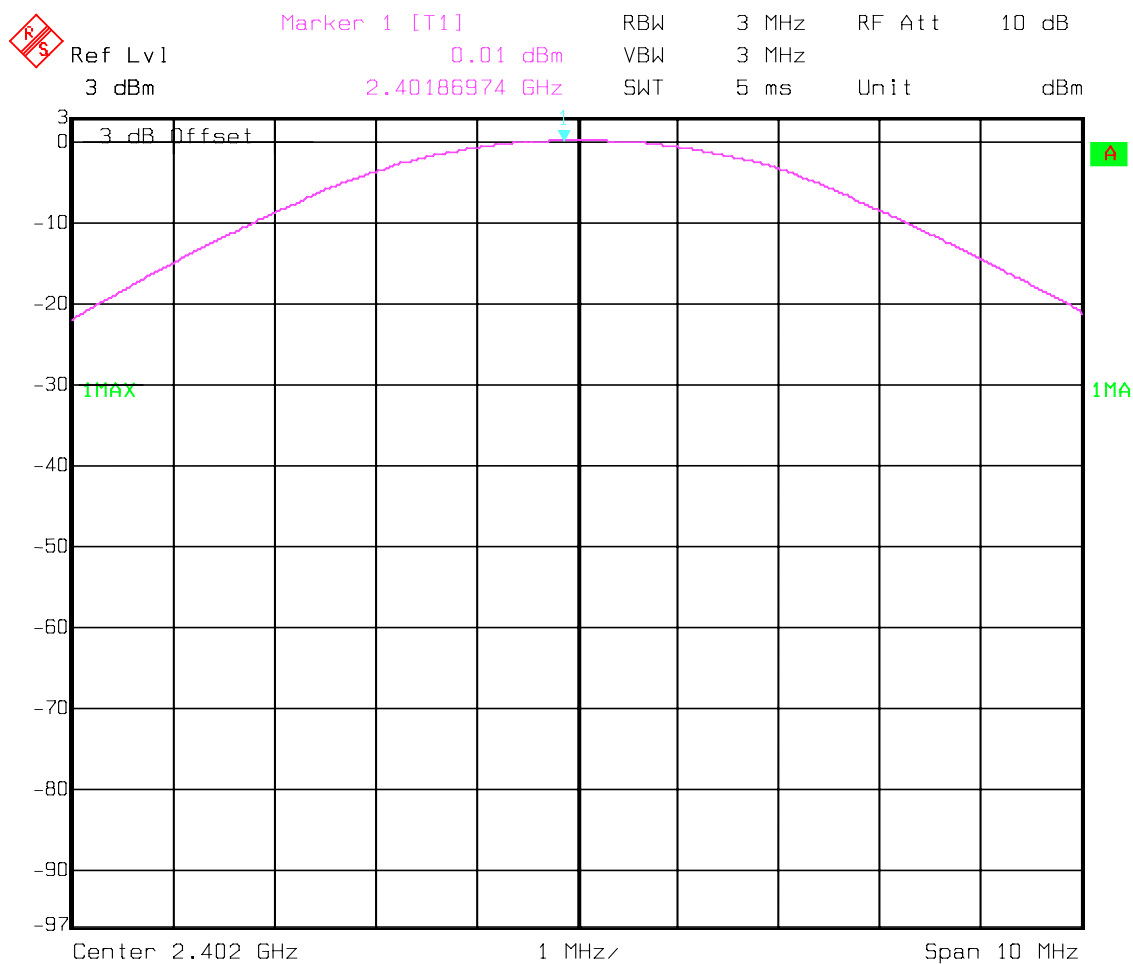


Date: 02.OCT.2002 13:20:55

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)


Mid Channel: 2441MHz

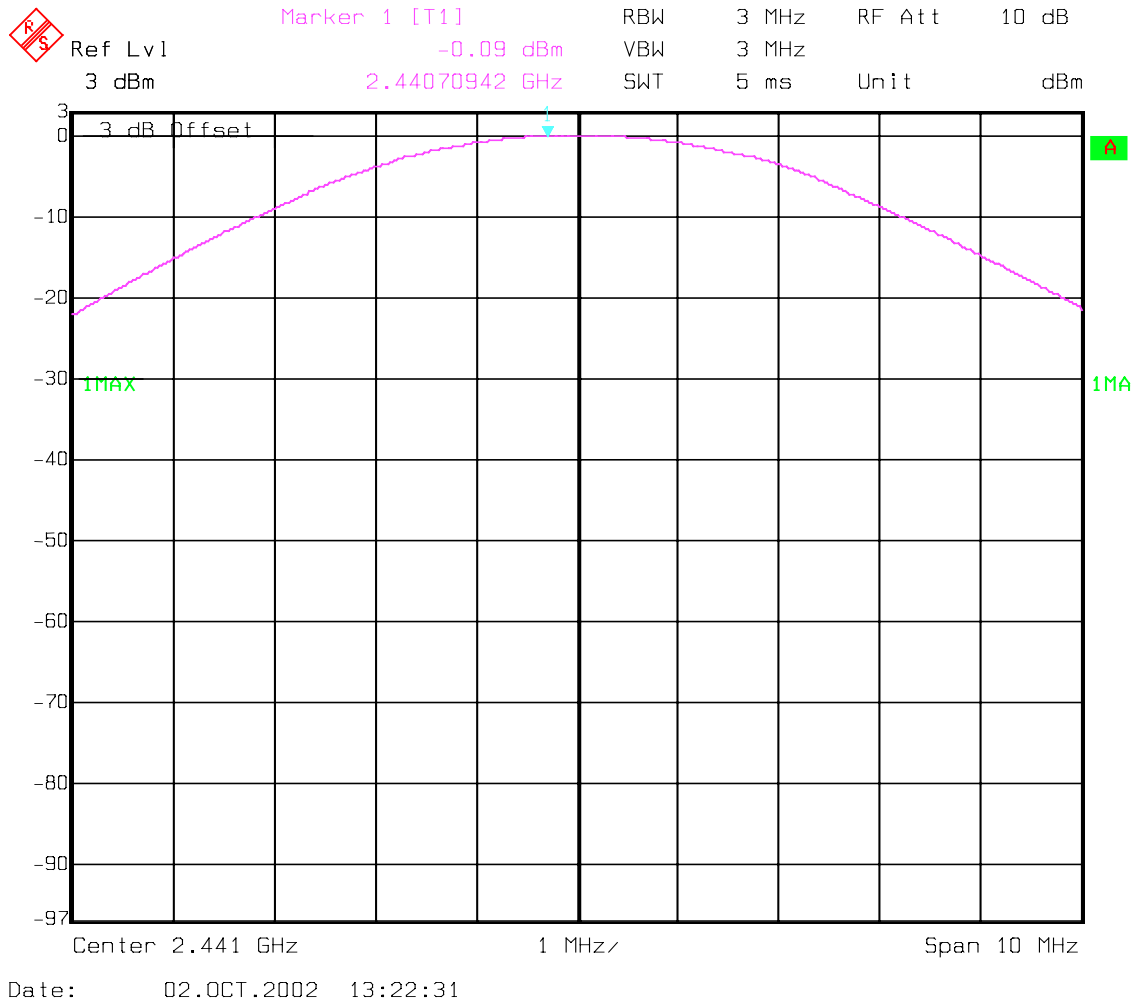

PEAK OUTPUT POWER (CONDUCTED)

§15.247 (b)

Highest Channel: 2480MHz

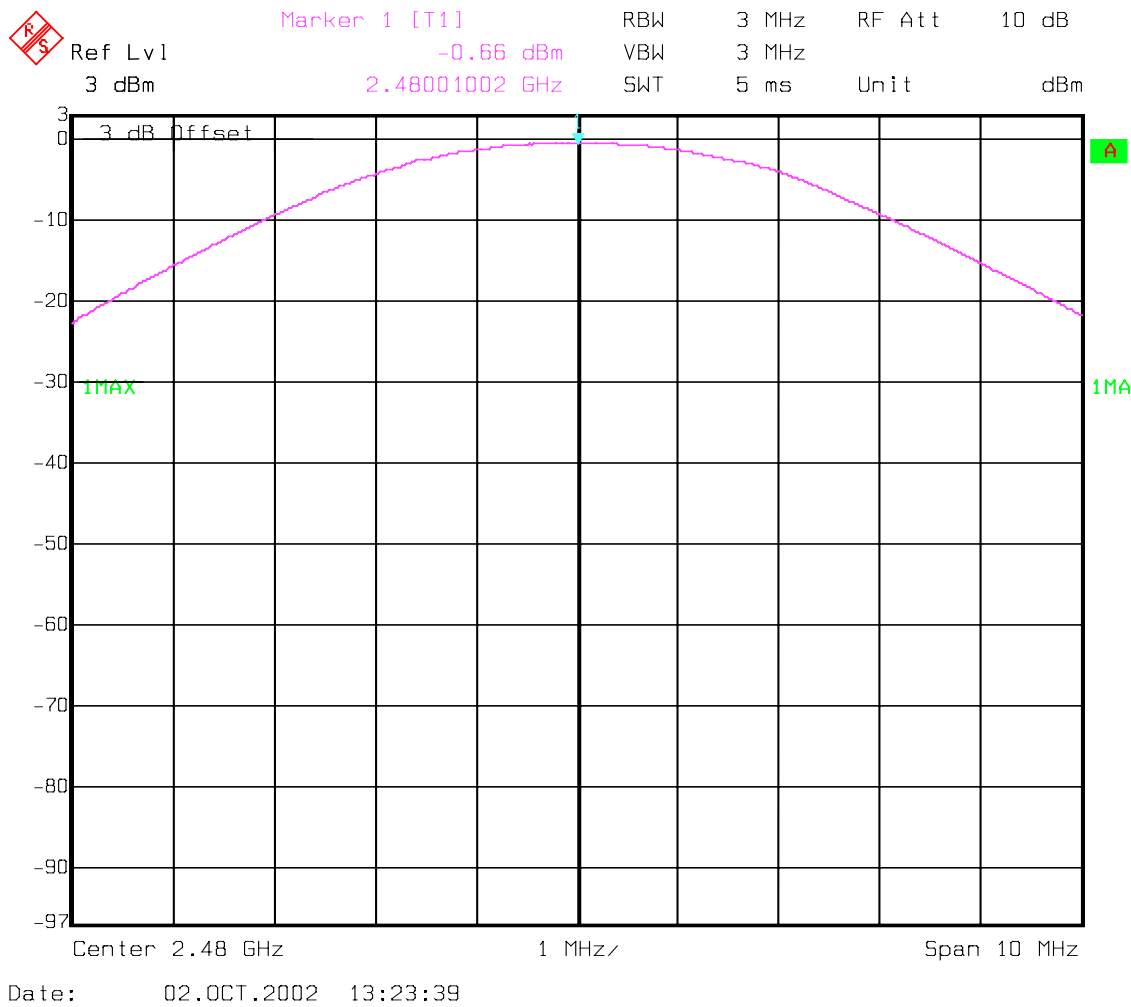

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)****§ 15.247 (b) (1)****EIRP:**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} (5.0)VDC	3.13	2.79	0.31
Measurement uncertainty		±0.5dBm		

RBW/VBW : 3 MHz

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

LIMIT**SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt


PEAK OUTPUT POWER (RADIATED)

§15.247 (b) (1)

Lowest Channel: 2402MHz

SWEEP TABLE: "EIRP BT low channel"

Short Description:		EIRP Bluetooth channel-2402MHz		
Start	Stop	Detector	Meas.	IF
Frequency	Frequency	Time	BW	
2.397GHz	2.407GHz	MaxPeak	Coupled	3 MHz

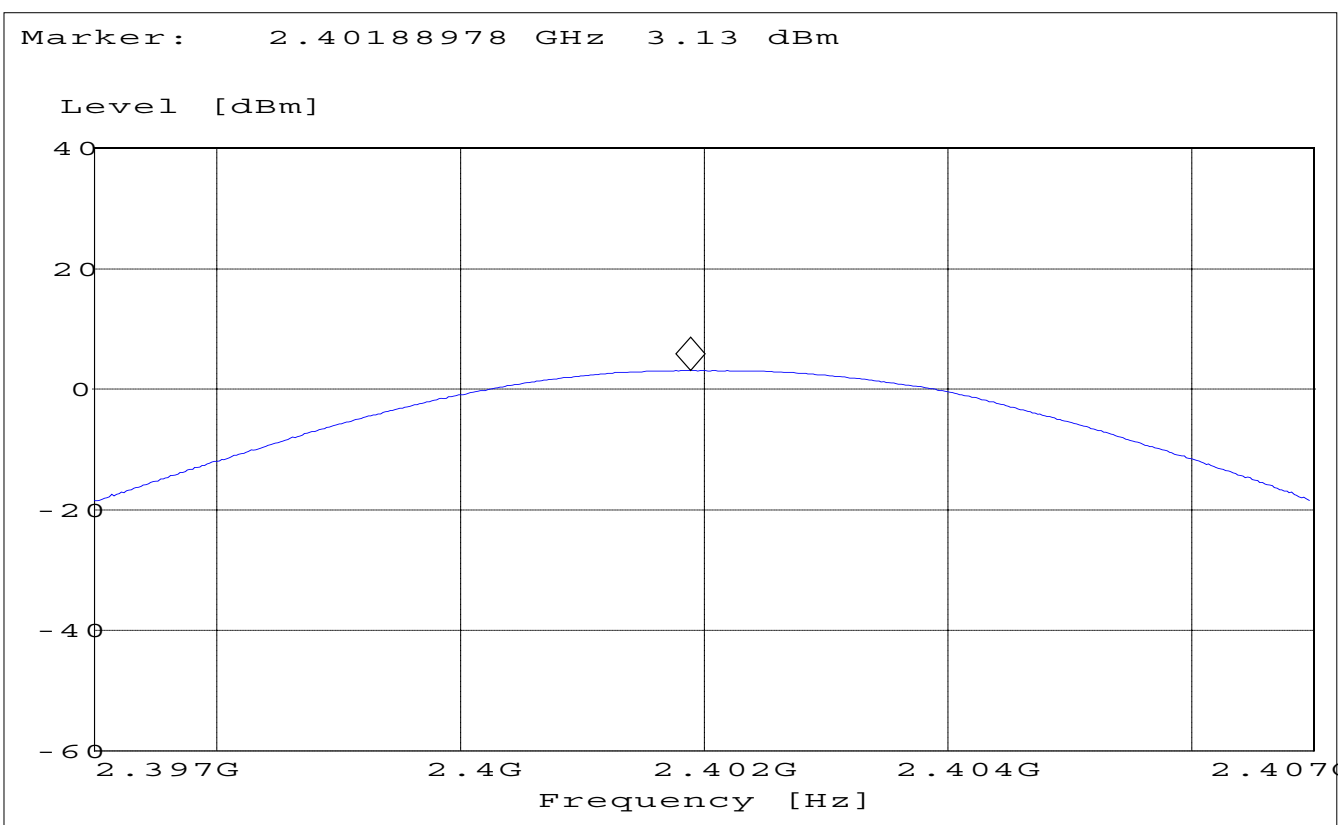

PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

Mid Channel: 2441MHz

SWEEP TABLE: "EIRP BT Mid channel"

Short Description: EIRP Bluetooth channel-2441MHz

Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.435GHz	2.445GHz	MaxPeak	Coupled	3 MHz

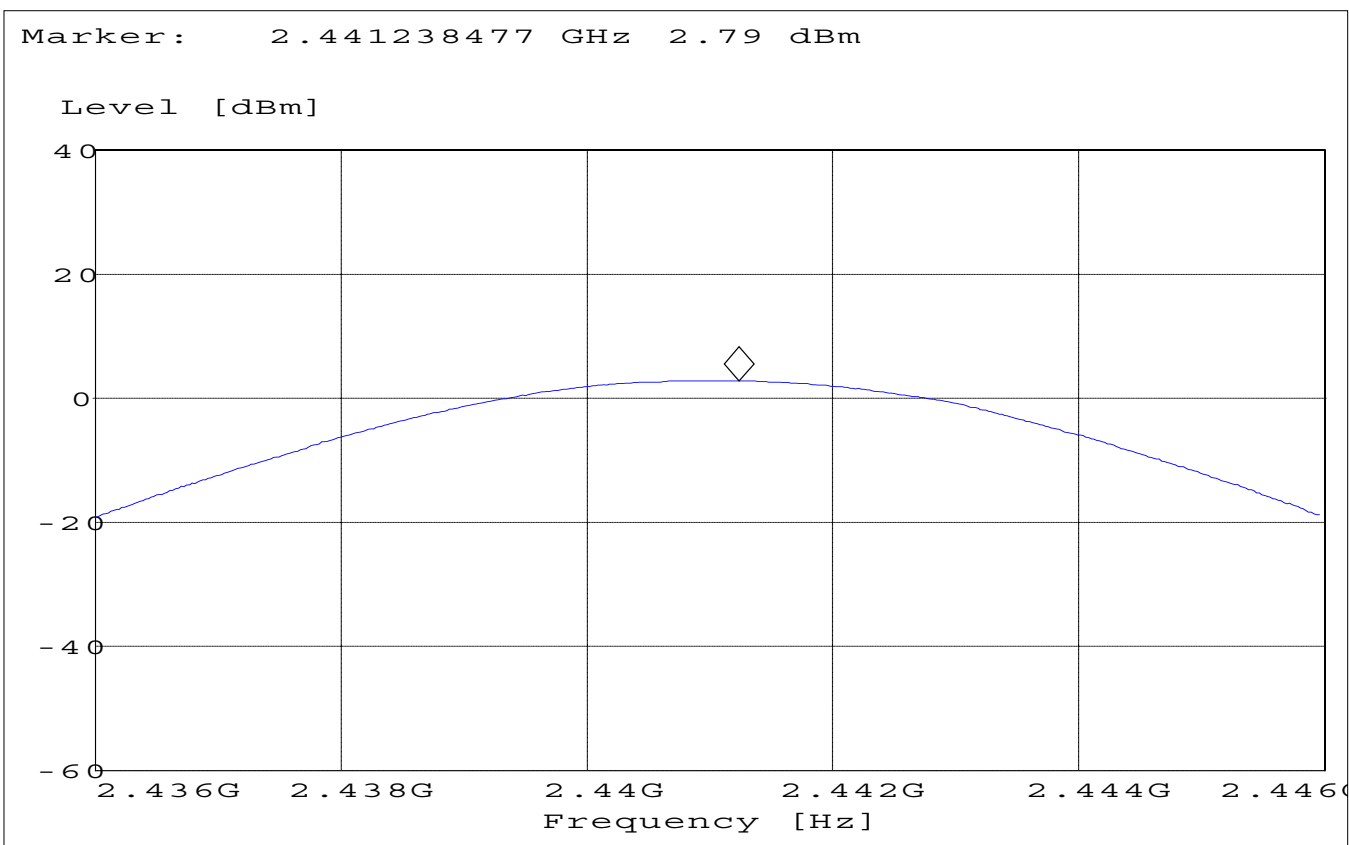

PEAK OUTPUT POWER (RADIATED)


§15.247 (b) (1)

Highest Channel: 2480MHz

SWEEP TABLE: "EIRP BT High channel"

Short Description: EIRP Bluetooth channel-2480MHz

Start	Stop	Detector	Meas.	IF
Frequency	Frequency		Time	BW
2.475GHz	2.485GHz	MaxPeak	Coupled	3 MHz

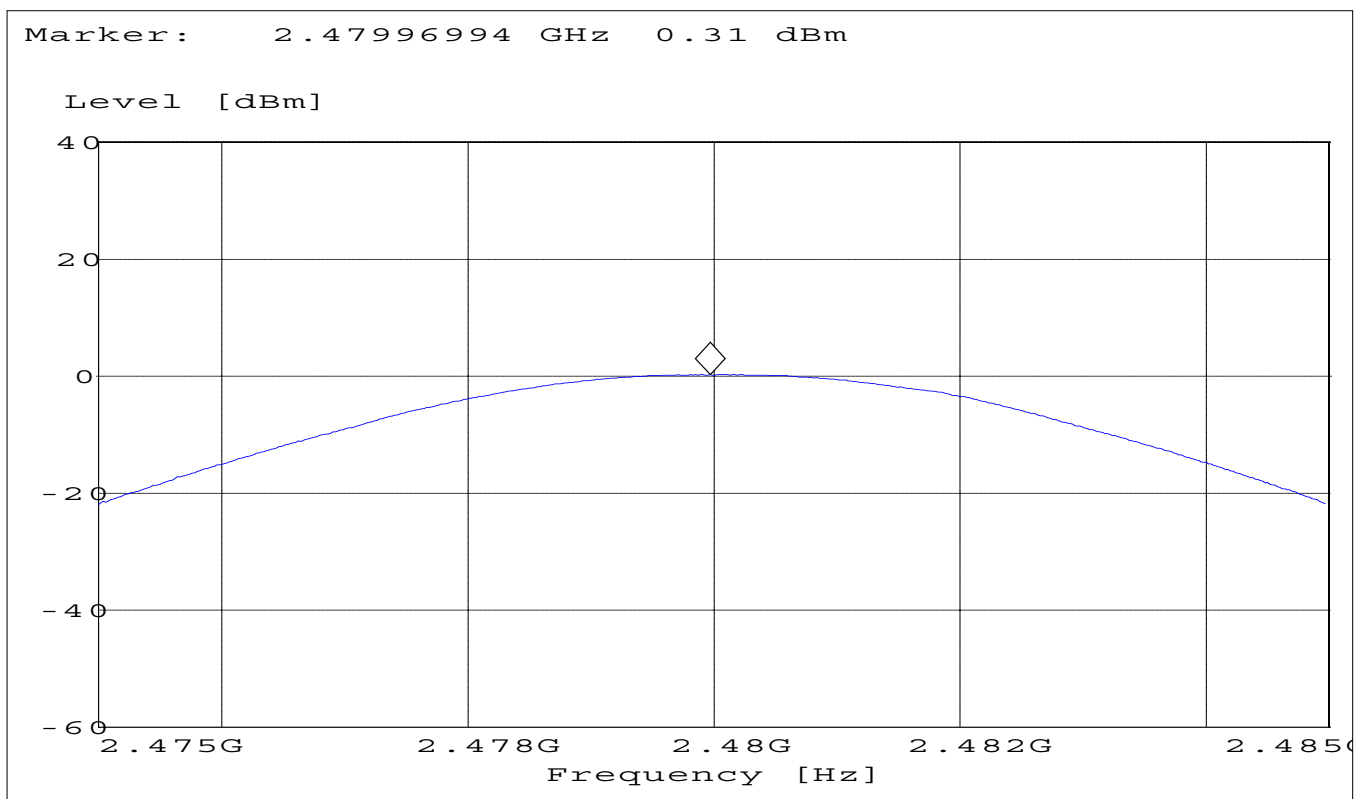

BAND EDGE COMPLIANCE


§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

(Hopping – OFF, Average measurement)

Operating condition : Tx at 2402MHz
 SWEEP TABLE : "FCC15.247 LBE_AVG"
 Short Description : FCC15.247 BT Low-band-edge
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

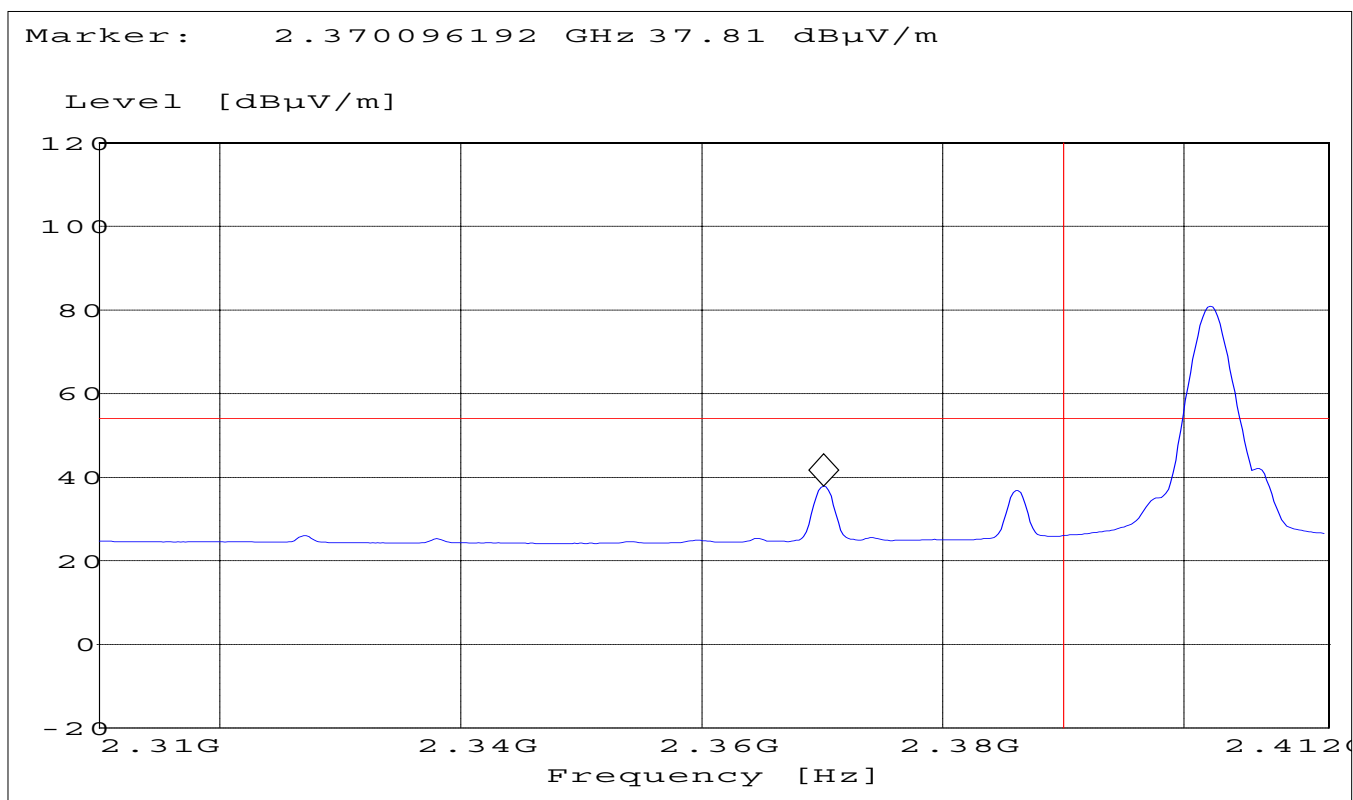

BAND EDGE COMPLIANCE


§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

(Hopping – OFF, Peak measurement)

Operating condition : Tx at 2402MHz
 SWEEP TABLE : "FCC15.247 LBE_Pk"
 Short Description : FCC15.247 BT Low-band-edge
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

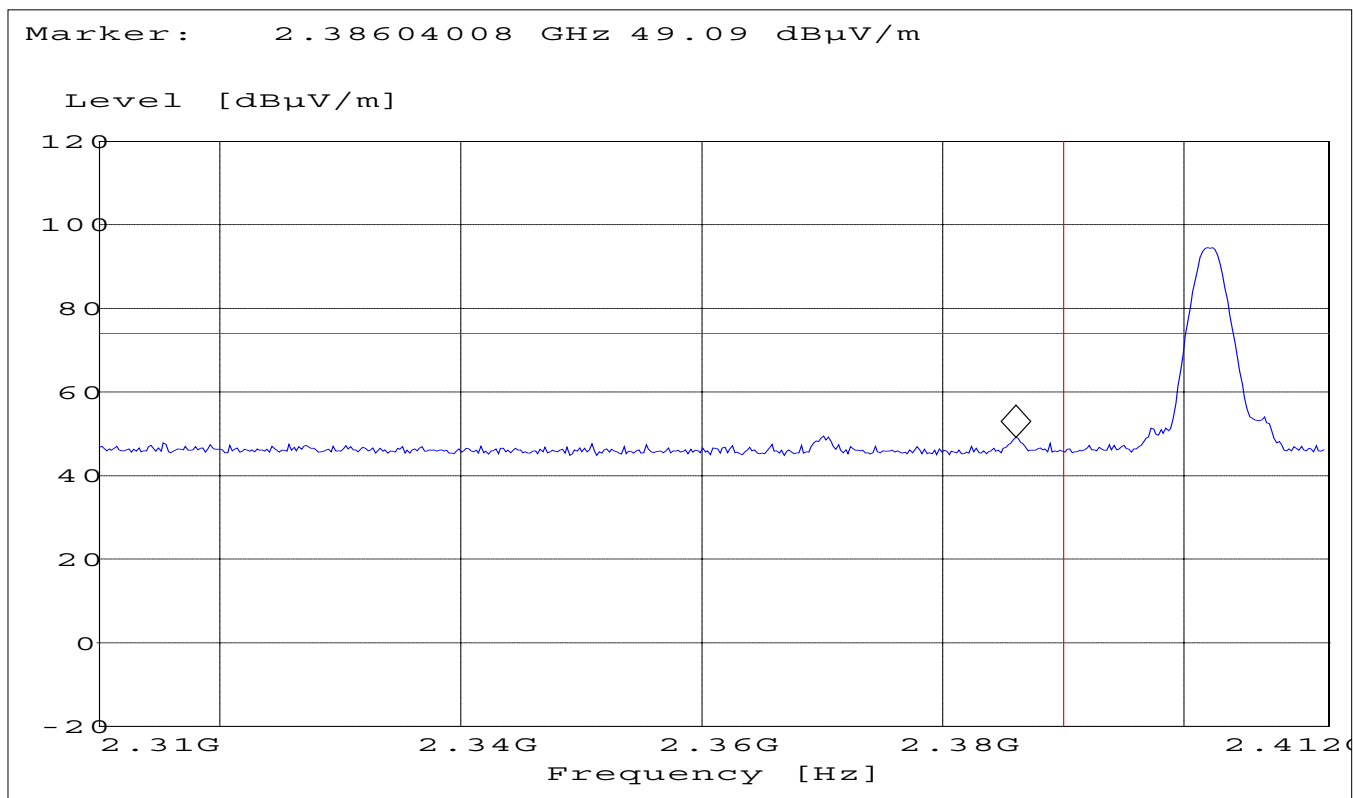

BAND EDGE COMPLIANCE


§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

(Hopping – ON, Average measurement)

Operating condition : Tx at 2402MHz
 SWEEP TABLE : "FCC15.247 LBE_AVG"
 Short Description : FCC15.247 BT Low-band-edge
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

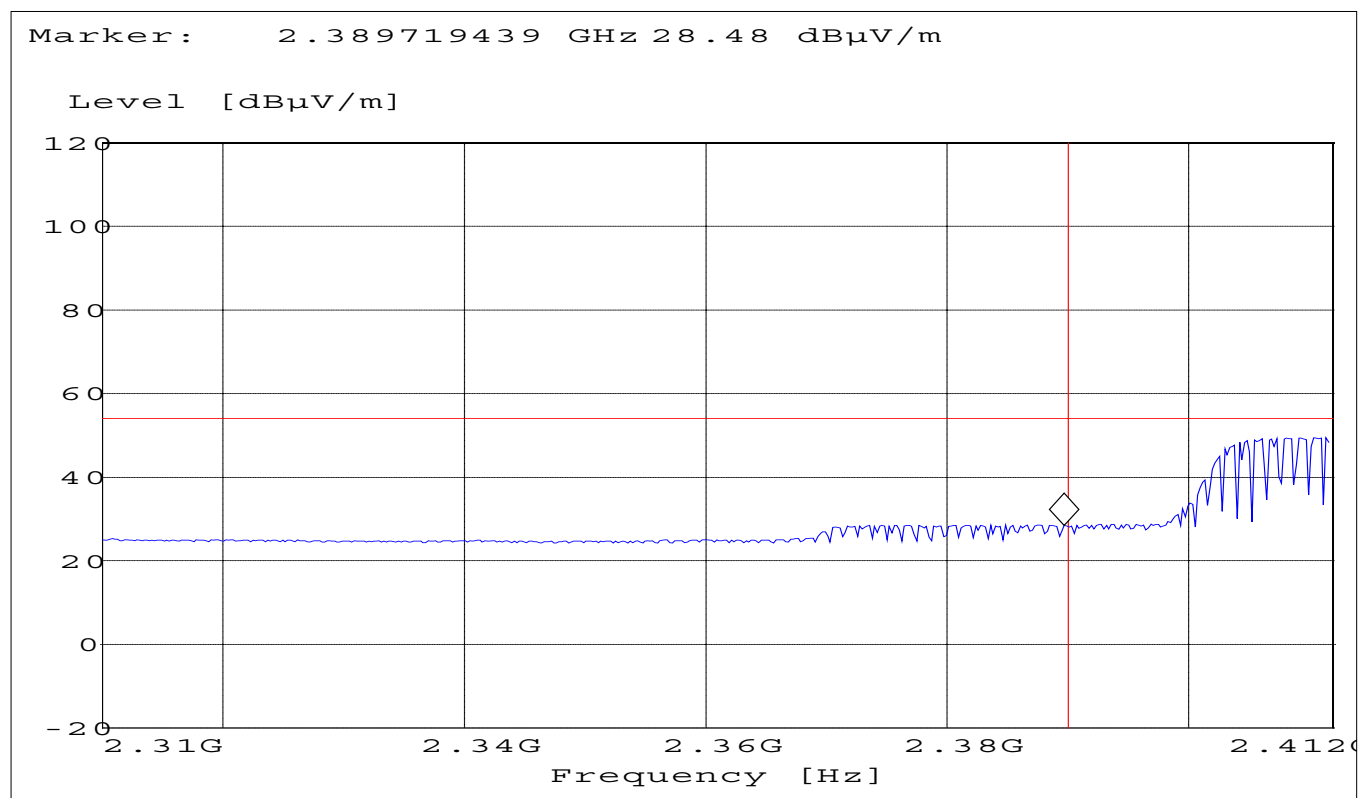

BAND EDGE COMPLIANCE


§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz)

(Hopping – ON, Peak measurement)

Operating condition : Tx at 2402MHz
 SWEEP TABLE : "FCC15.247 LBE_Pk"
 Short Description : FCC15.247 BT Low-band-edge
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

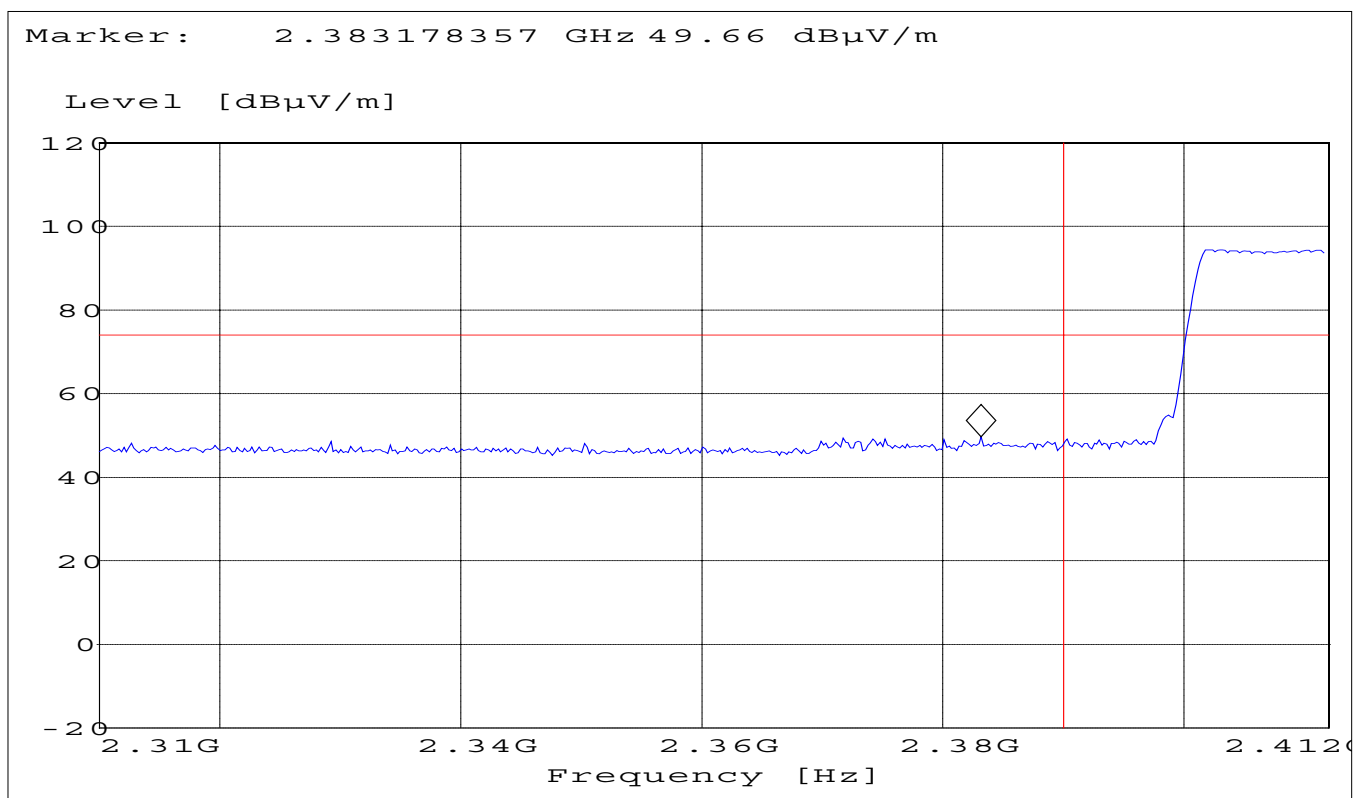

BAND EDGE COMPLIANCE


§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

(Hopping – OFF, Average measurement)

Operating condition : Tx at 2480MHz
 SWEEP TABLE : "FCC15.247 HBE_AVG"
 Short Description : FCC15.247 BT High-band-edge
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

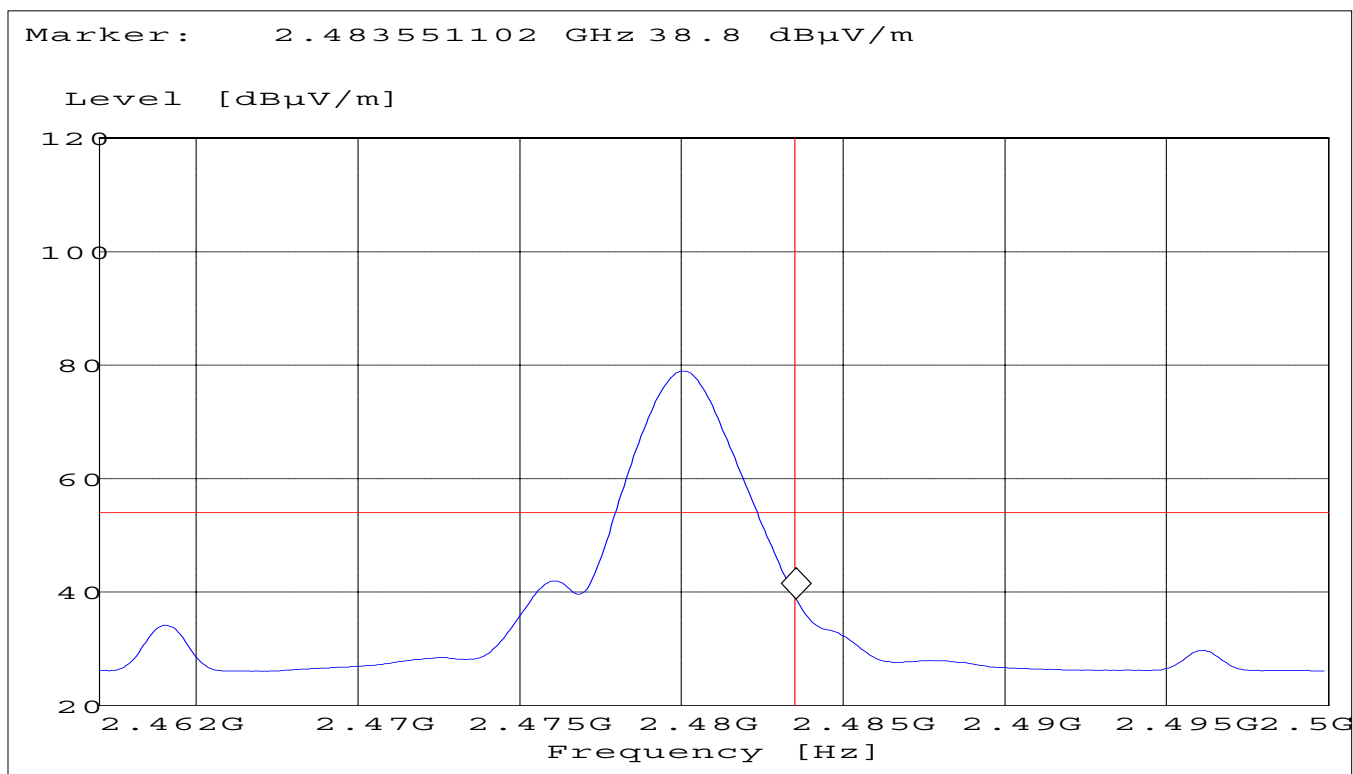

BAND EDGE COMPLIANCE


§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

(Hopping – OFF, Peak measurement)

Operating condition : Tx at 2480MHz
 SWEEP TABLE : "FCC15.247 HBE_PK"
 Short Description : FCC15.247 BT High-band-edge
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

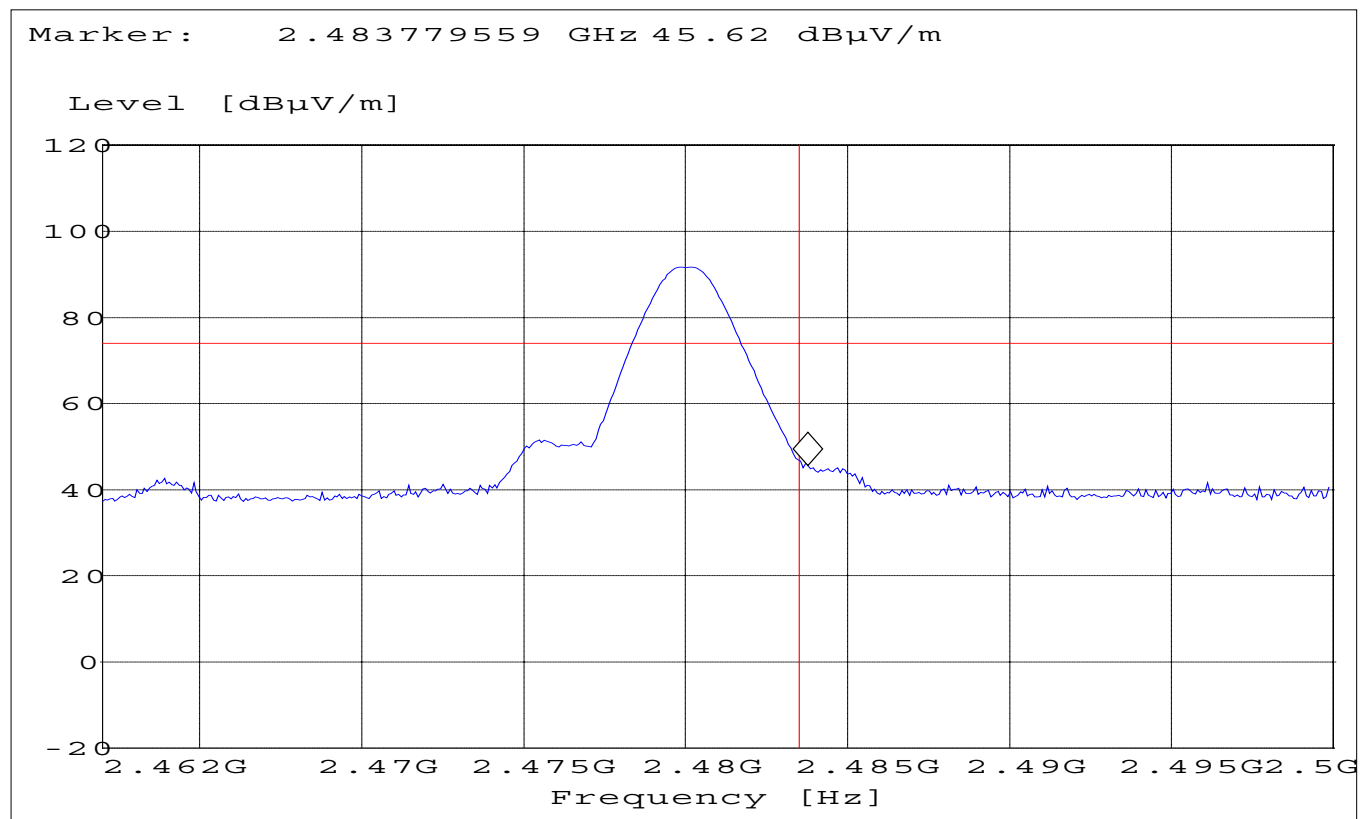

BAND EDGE COMPLIANCE


§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

(Hopping – ON, Average measurement)

Operating condition : Tx at 2480MHz
 SWEEP TABLE : "FCC15.247 HBE_AVG"
 Short Description : FCC15.247 BT High-band-edge
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

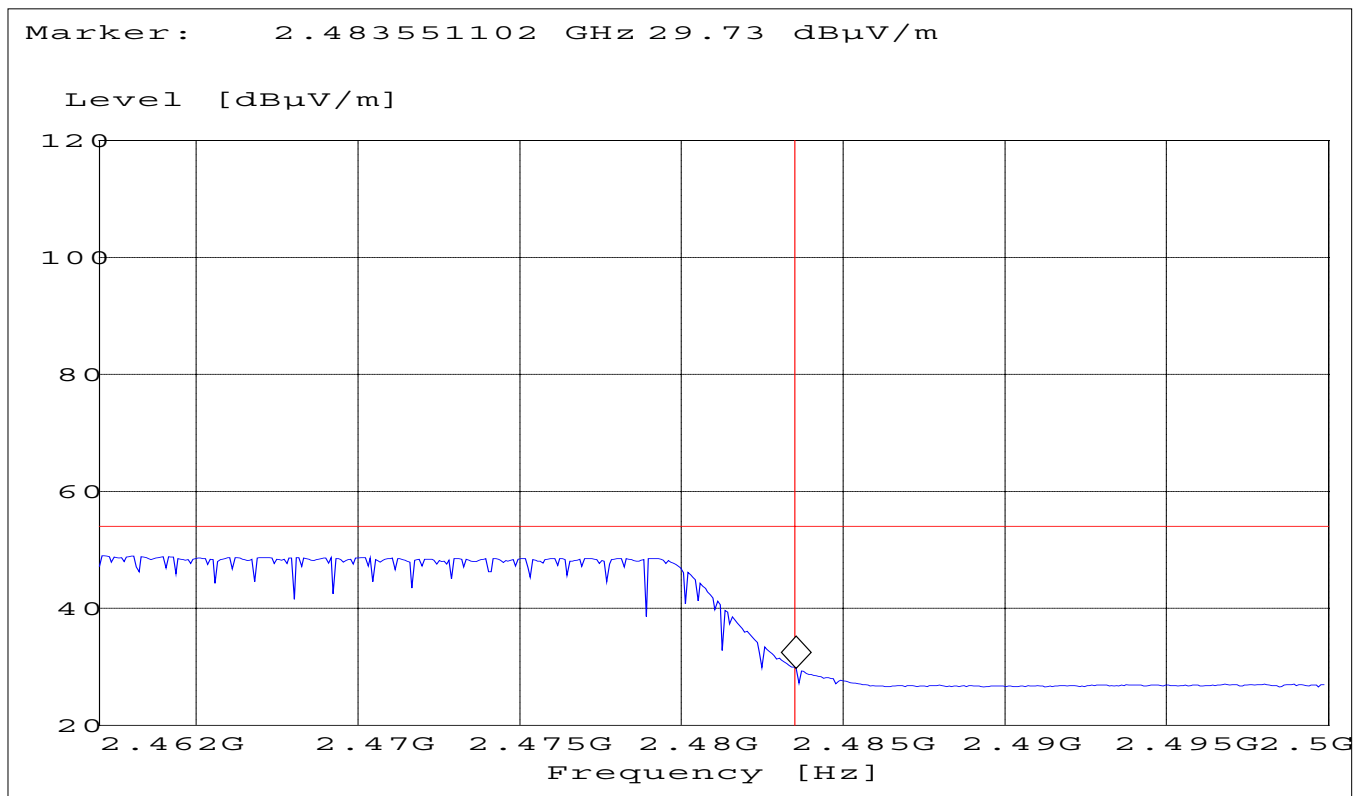

BAND EDGE COMPLIANCE


§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz)

(Hopping – ON, Peak measurement)

Operating condition : Tx at 2480MHz
 SWEEP TABLE : "FCC15.247 HBE_PK"
 Short Description : FCC15.247 BT High-band-edge
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

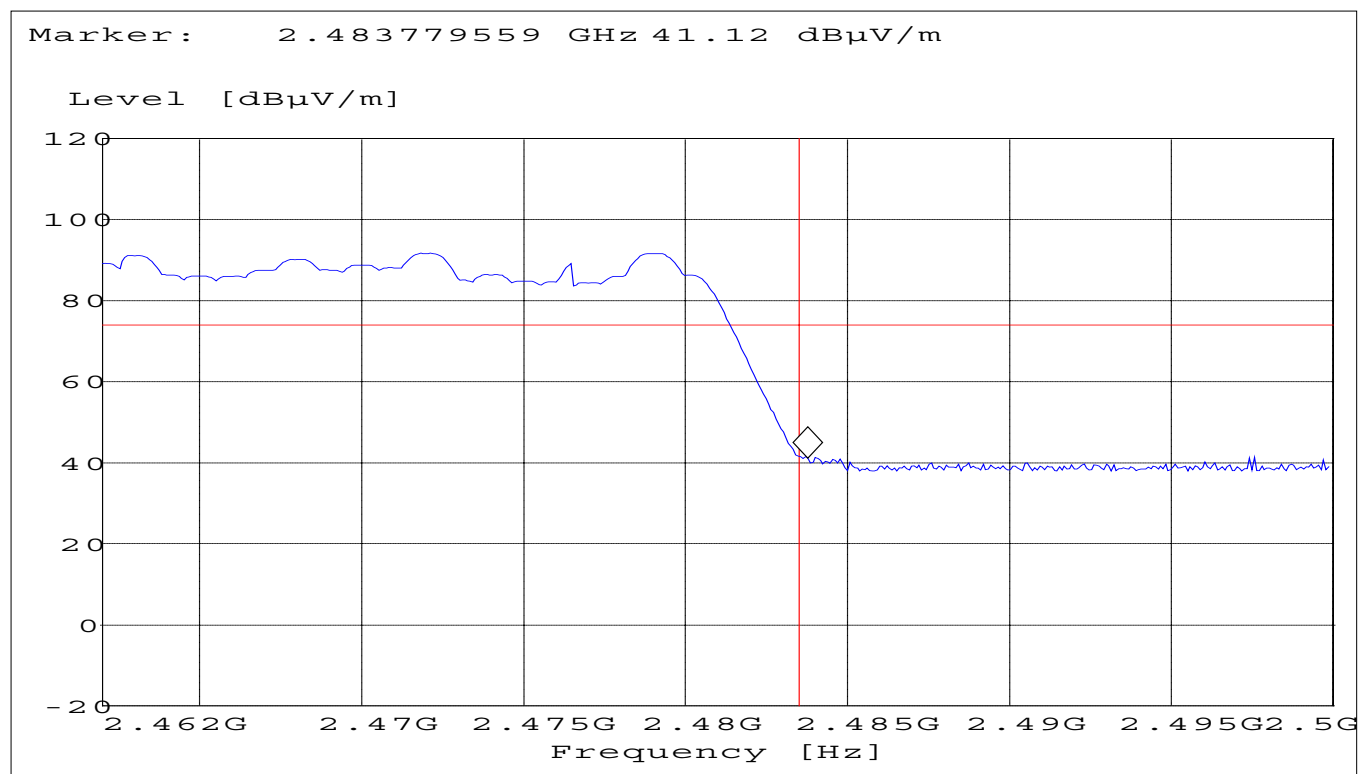

EMISSION LIMITATIONS**§ 15.247 (c) (1)****Transmitter (Conducted)****LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


NOTE: Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Lowest Channel(2402MHz): 10KHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

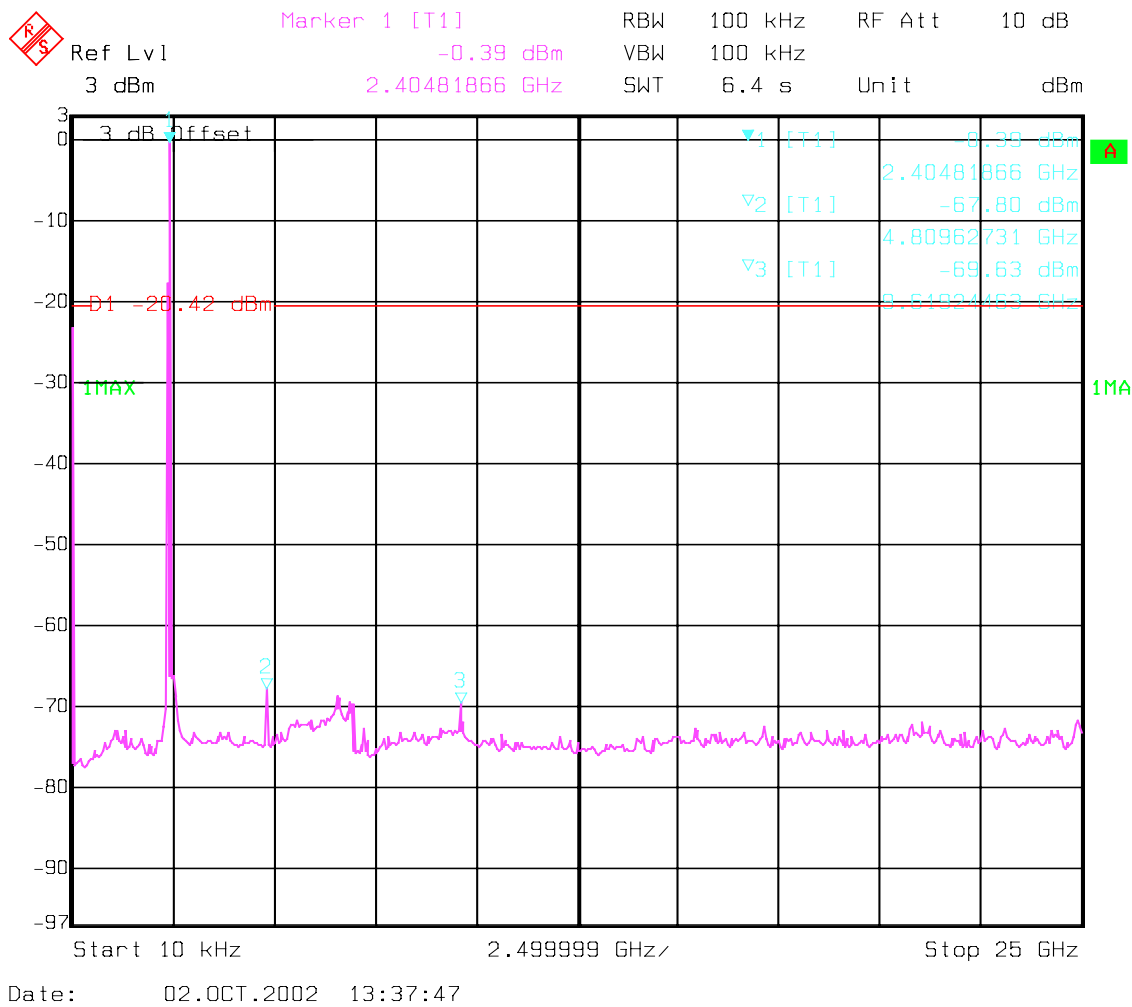


EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Mid Channel(2441MHz): 10KHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

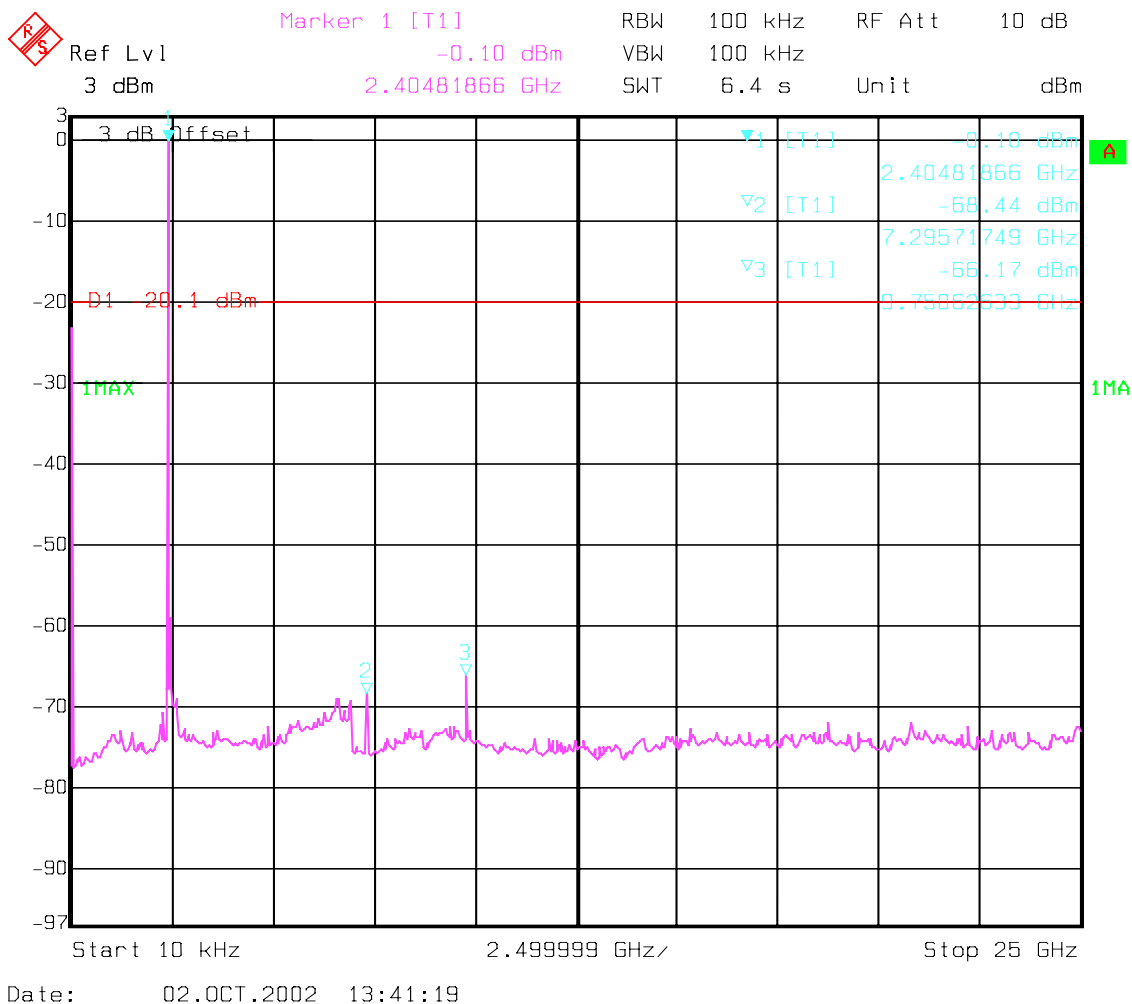


EMISSION LIMITATIONS - Conducted (Transmitter)

§ 15.247 (c) (1)

Highest Channel(2480MHz): 10KHz - 25GHz

NOTE: The peak above the limit line is the carrier frequency.

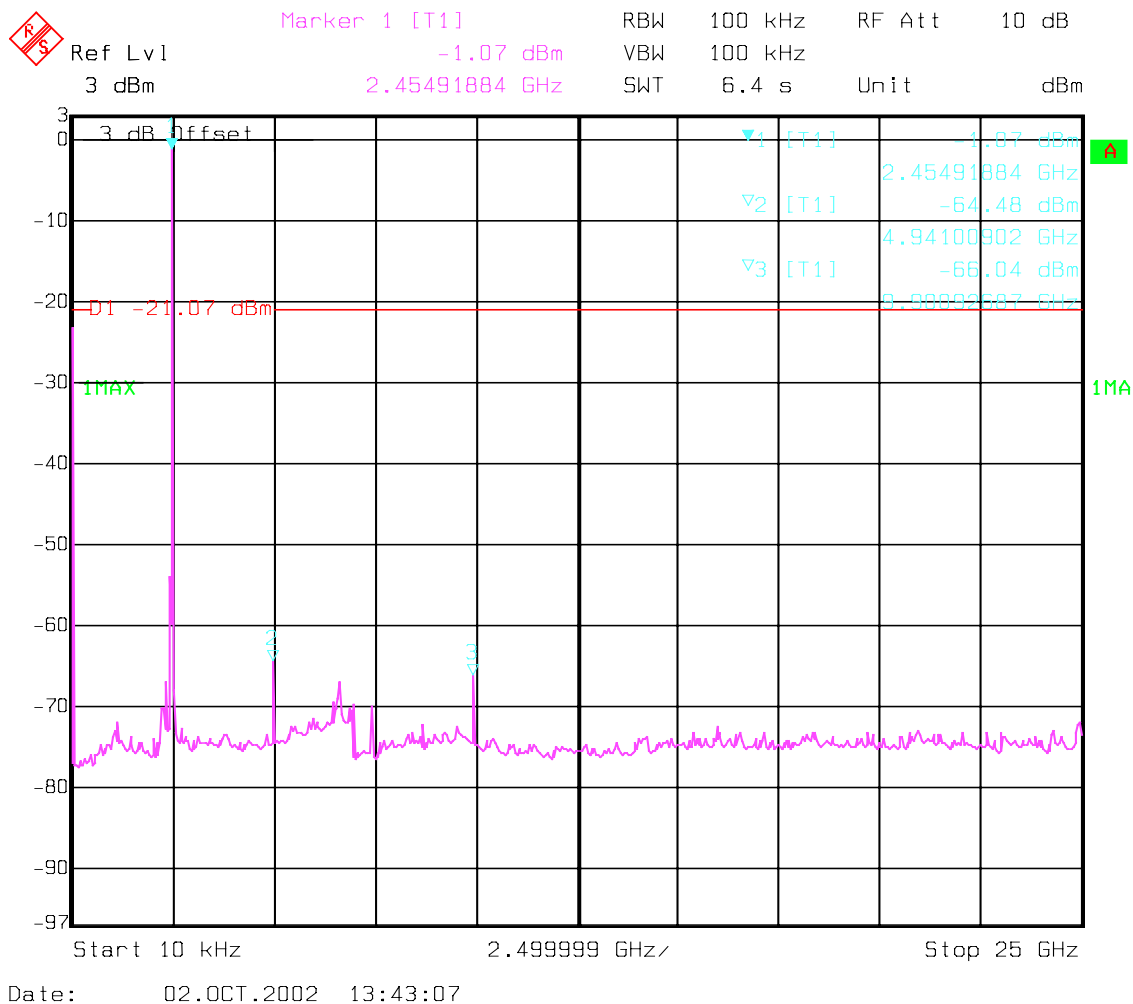

EMISSION LIMITATIONS**§ 15.247 (c) (1)****Transmitter (Radiated)****LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. Frequency resolution is not fine enough to show the exact frequency of the carrier, refer to plots under EIRP.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

§ 15.247 (c) (1)


[illegible]

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel(2402MHz): 30MHz – 1GHz

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

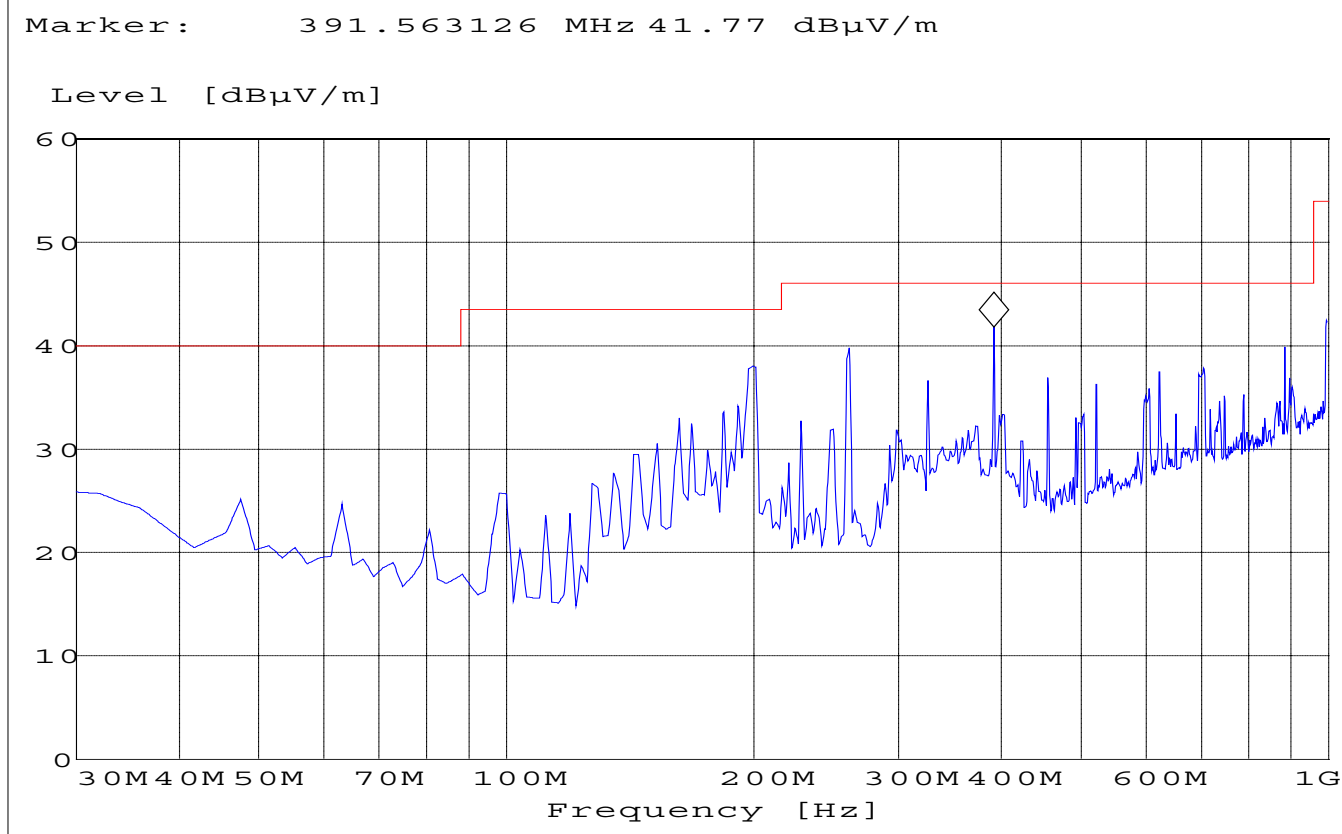

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Lowest Channel(2402MHz): 1GHz – 3GHz

NOTE: The peak above the limit is the carrier frequency.

SWEEP TABLE: "BT Spuri hi 1-3G"

Short Description: Bluetooth Spurious 1-3 GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

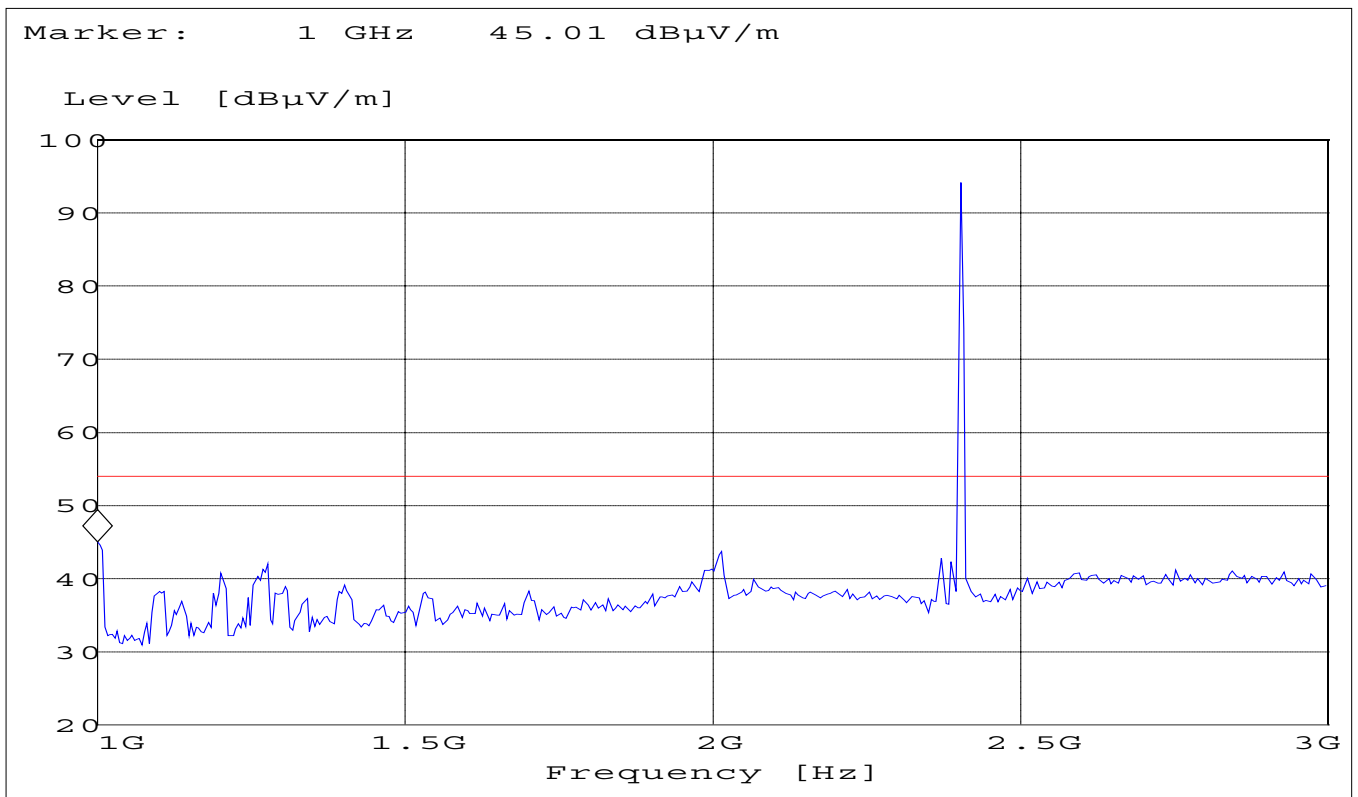


EMISSION LIMITATIONS - Radiated (Transmitter) Middle Channel(2441MHz): 30MHz – 1GHz

§ 15.247 (c) (1)

SWEEP TABLE: "BT Spuri hi 30-1G"
Short Description: Bluetooth 30MHz-1GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

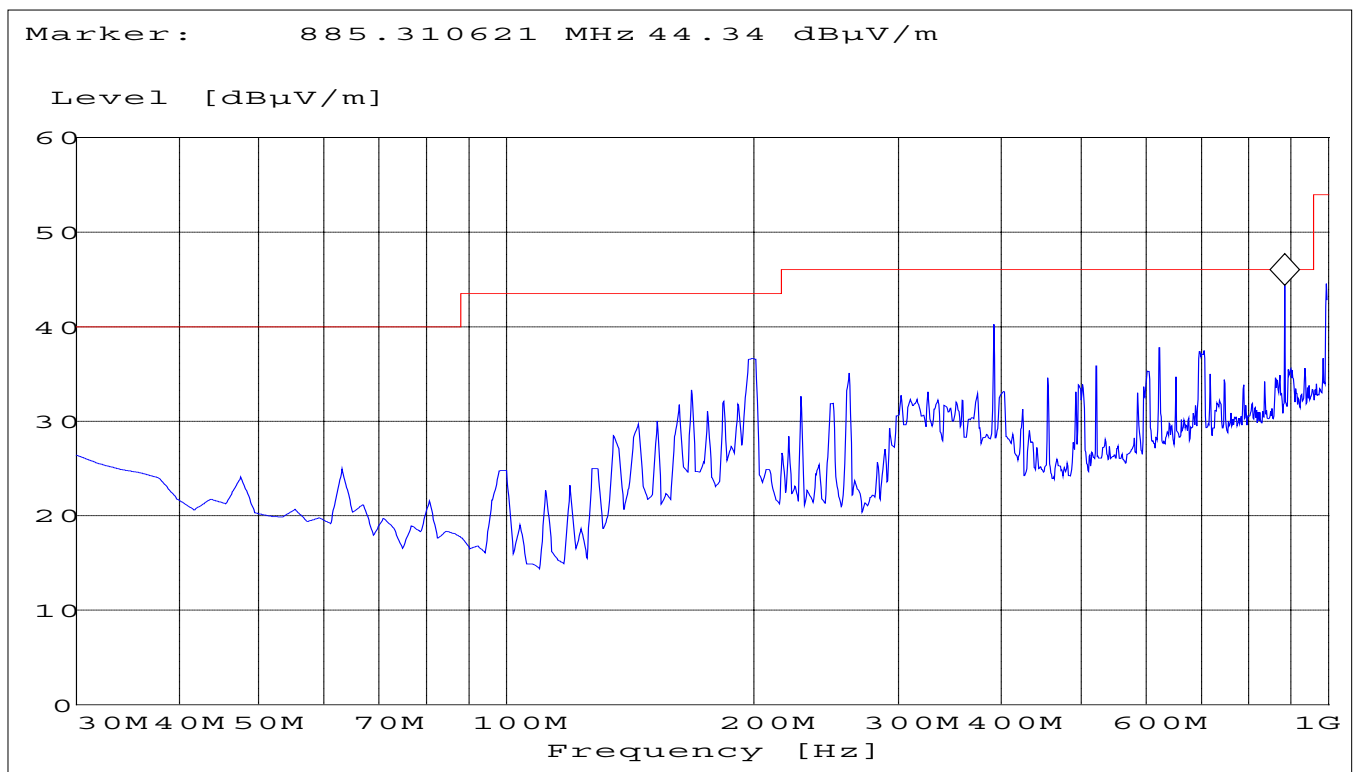

EMISSION LIMITATIONS - Radiated (Transmitter) Middle Channel(2441MHz): 1GHz – 3GHz


§ 15.247 (c) (1)

NOTE: The peak above the limit is the carrier frequency.

SWEEP TABLE: "BT Spuri hi 1-3G"

Short Description: Bluetooth Spurious 1-3GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

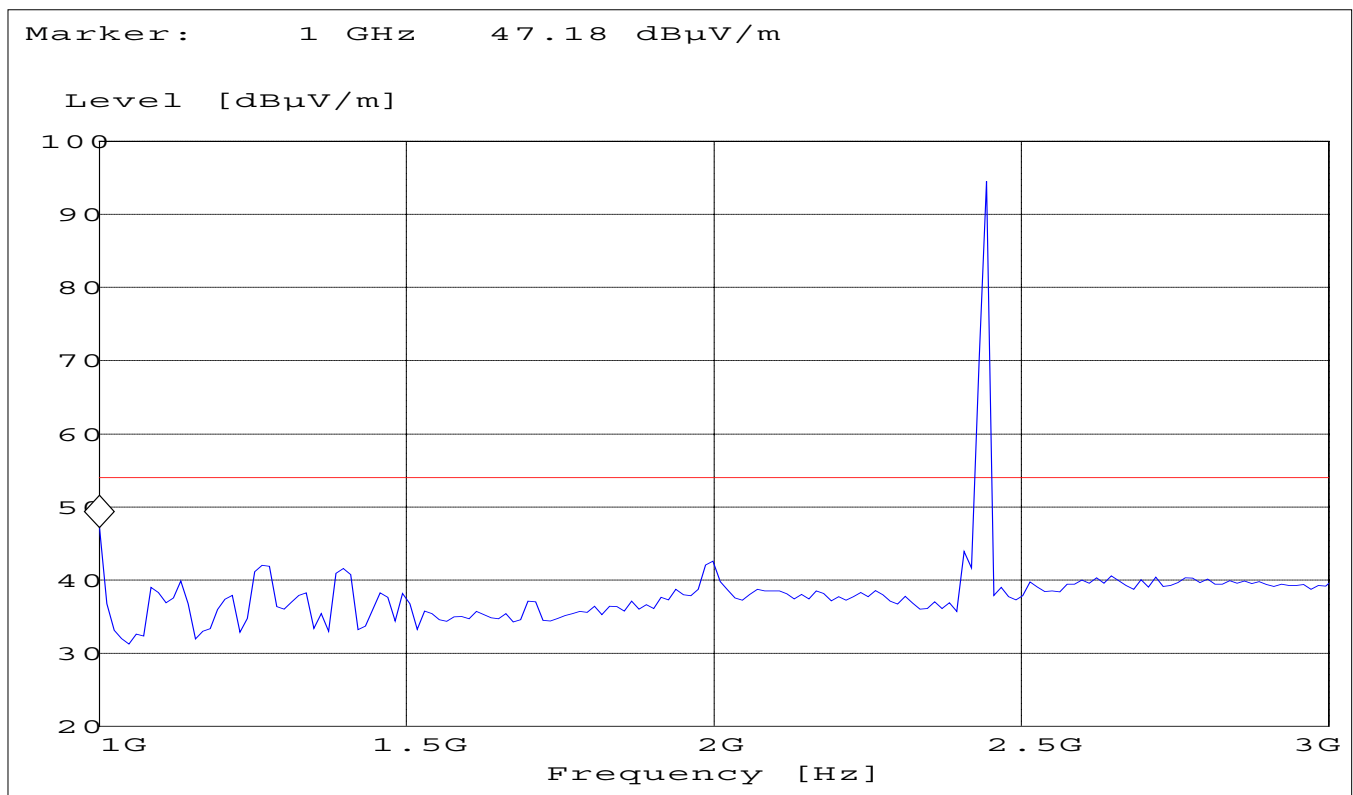


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Highest Channel(2480MHz): 30MHz – 1GHz

SWEEP TABLE:		"BT Spuri hi 30-1G"			
Short Description:		Bluetooth 30MHz-1GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

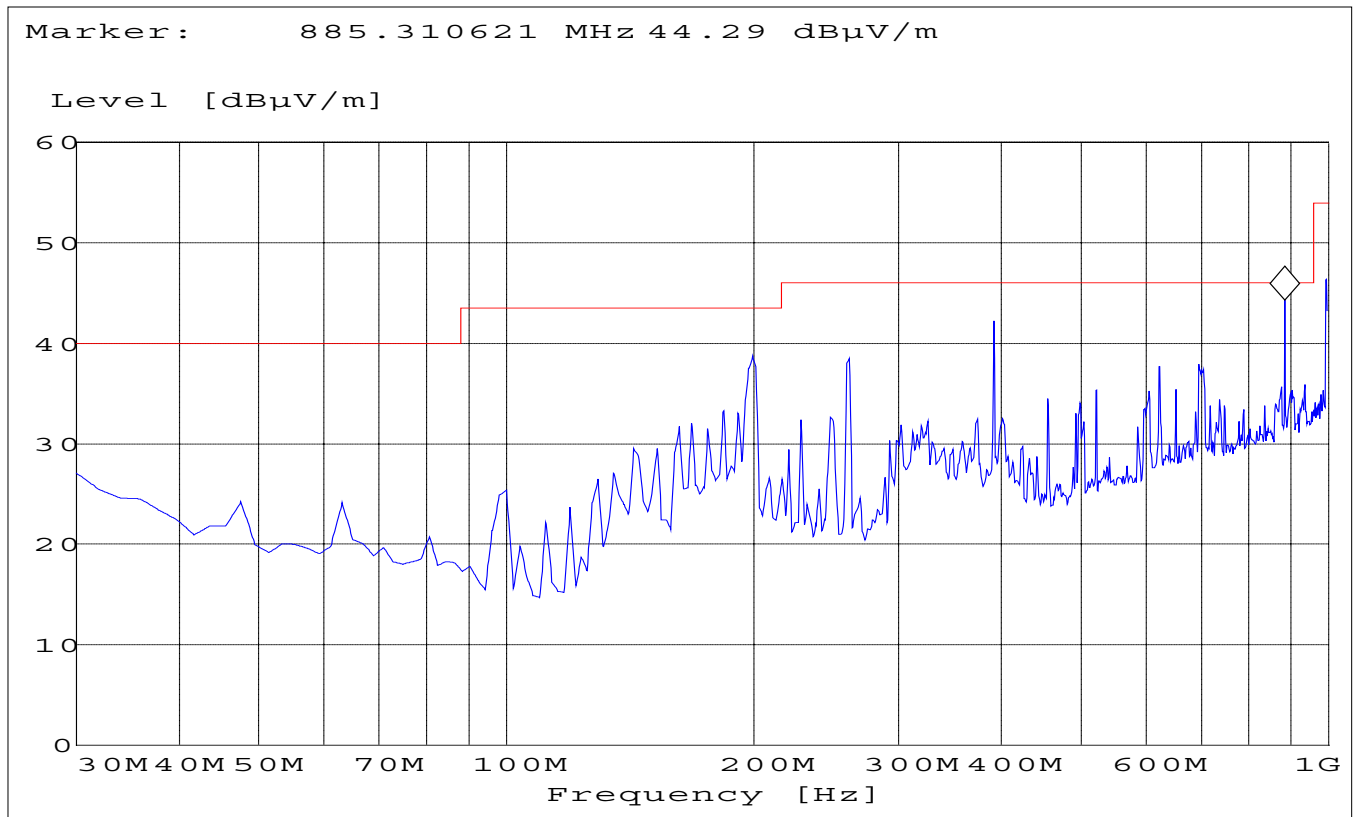

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Highest Channel(2480MHz): 1GHz – 3GHz

NOTE: The peak above the limit is the carrier frequency.

SWEEP TABLE: "BT Spuri hi 1-3G"

Short Description: Bluetooth Spurious 1-3GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

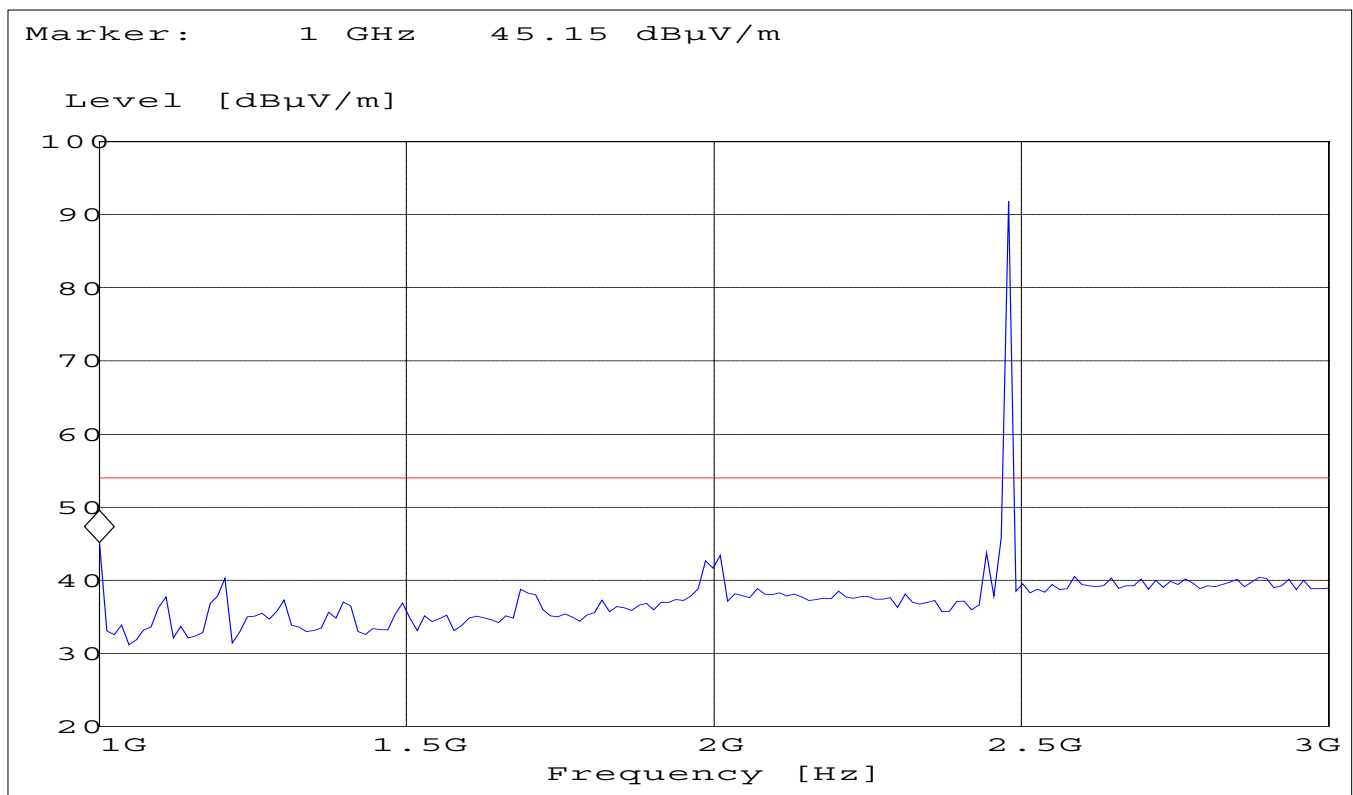

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

3GHz – 18GHz

(This plot is valid for all three channels)

SWEEP TABLE:

"BT Spuri hi 3-18G"

Short Description:

Bluetooth Spurious 3-18GHz

Start Stop

Detector

Meas.

RBW

Transducer

Frequency

Frequency

Time

Bandw.

VBW

3.0 GHz


18 GHz

MaxPeak

Coupled

1 MHz

#326 horn (dBi)

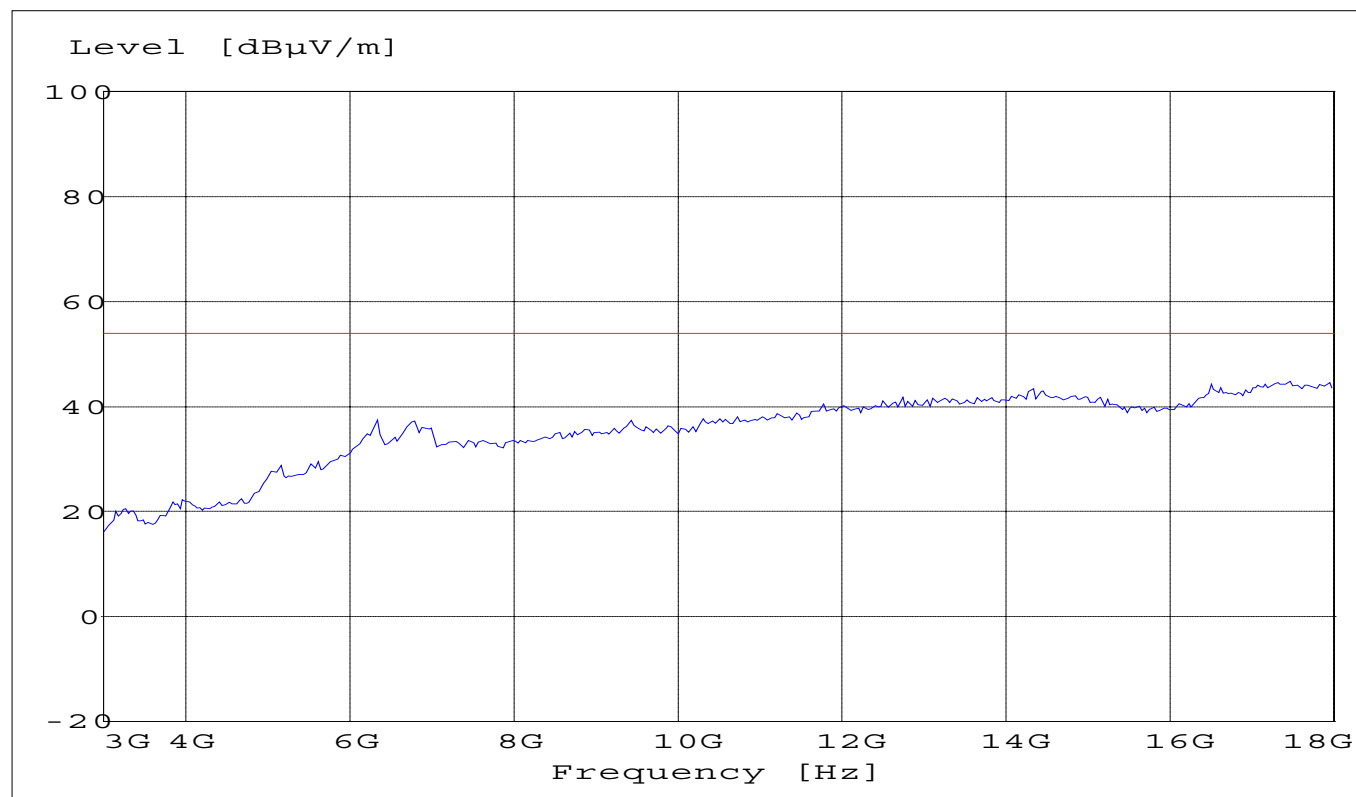

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

18GHz – 25GHz

(This plot is valid for all three channels)

SWEEP TABLE:

"BT Spuri hi 18-25G"

Short Description:

Bluetooth Spurious 18-25GHz

Start Stop

Detector

Meas.

RBW

Transducer

Frequency

Frequency

Time

Bandw.

VBW

18 GHz


25 GHz

MaxPeak

Coupled

1 MHz

#141 horn (dBi)

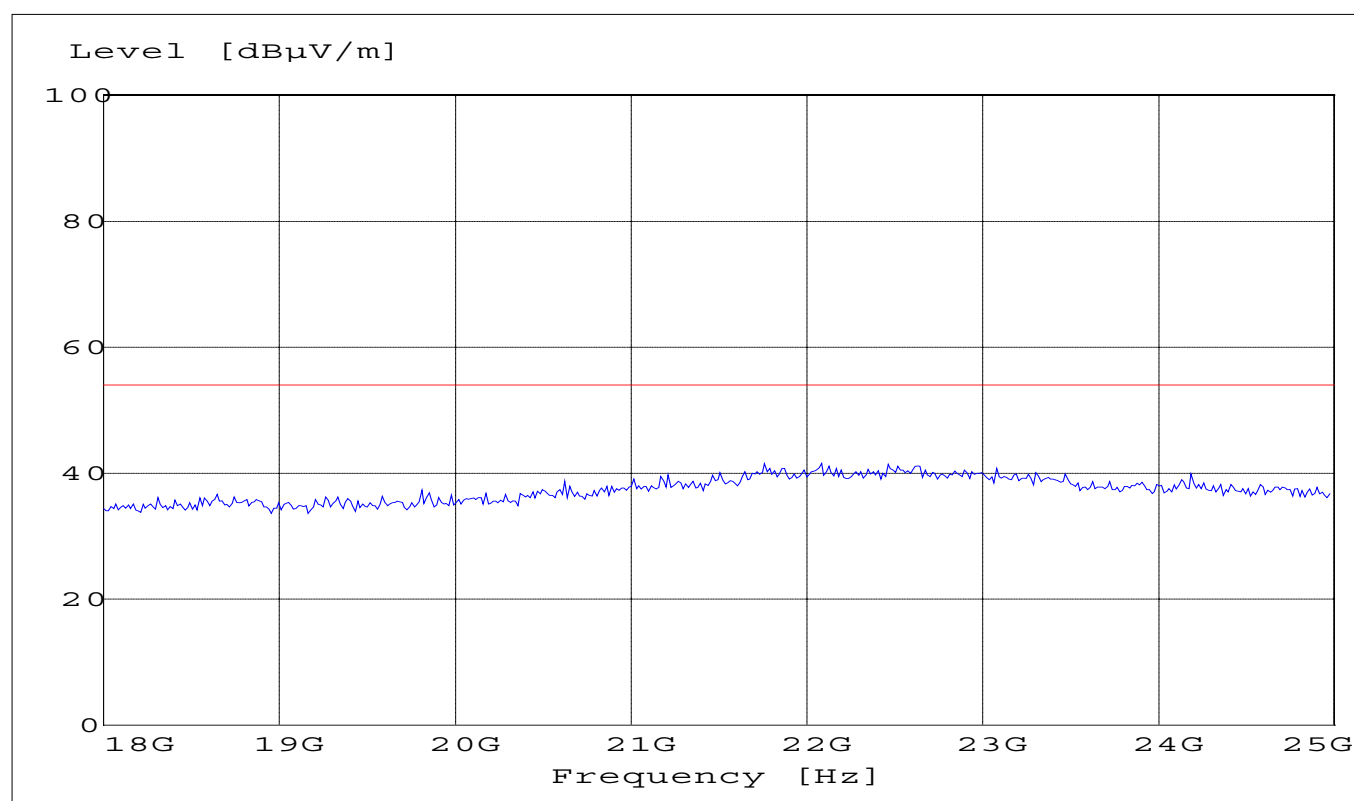

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter

Technical specification : 15.107 / 15.207 (Revised as of August 20, 2002)


Limit

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

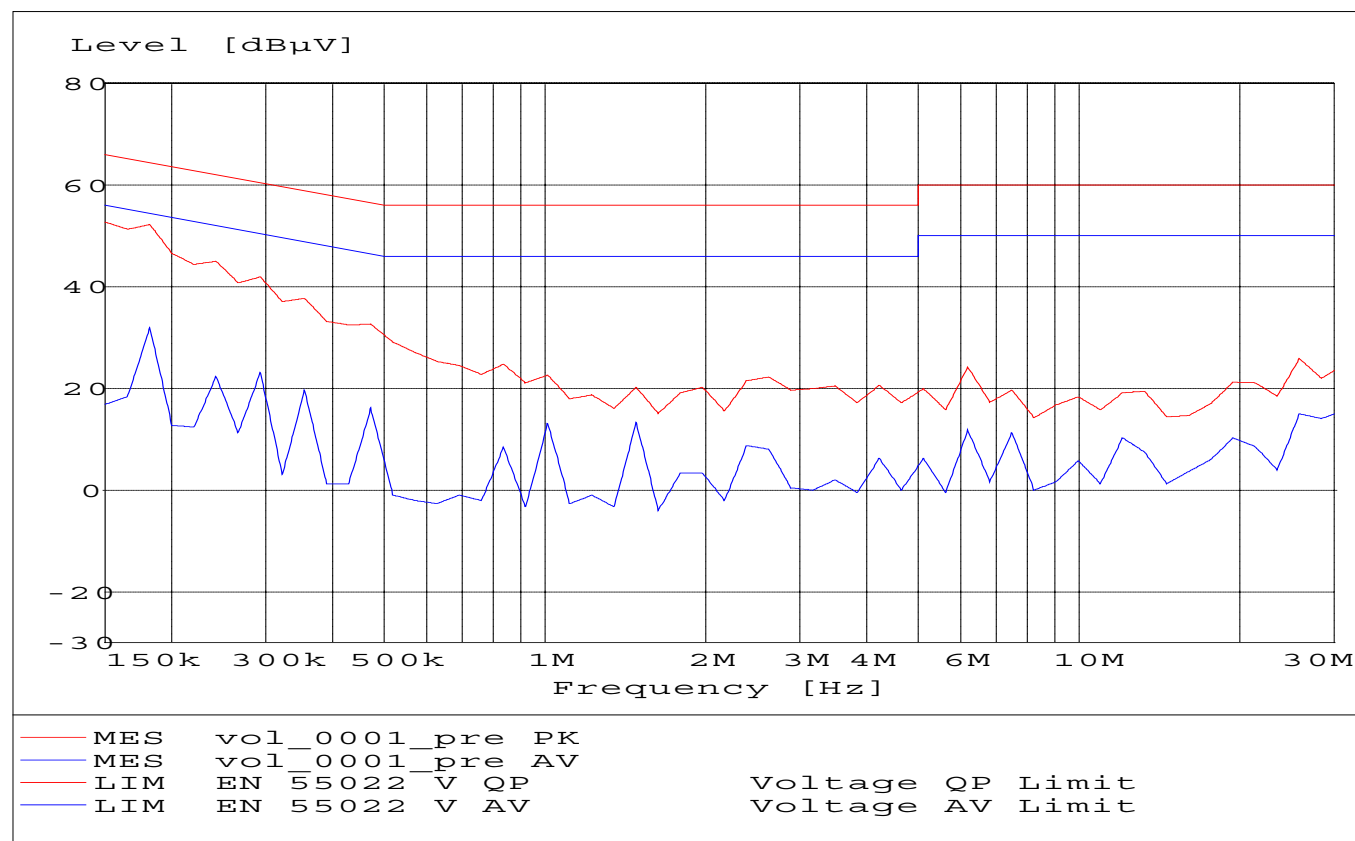

RECEIVER SPURIOUS RADIATION**§ 15.209****Limits**

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

RECEIVER SPURIOUS RADIATION

§ 15.209

30MHz – 1GHz

SWEEP TABLE:

"BT Spuri hi 30-1G"

Short Description:

Bluetooth 30MHz-1GHz

Start Stop

Detector

Meas.

RBW

Transducer

Frequency Frequency

Time

VBW


30.0 MHz 1.0 GHz

MaxPeak

Coupled

100 kHz

3141-#1186

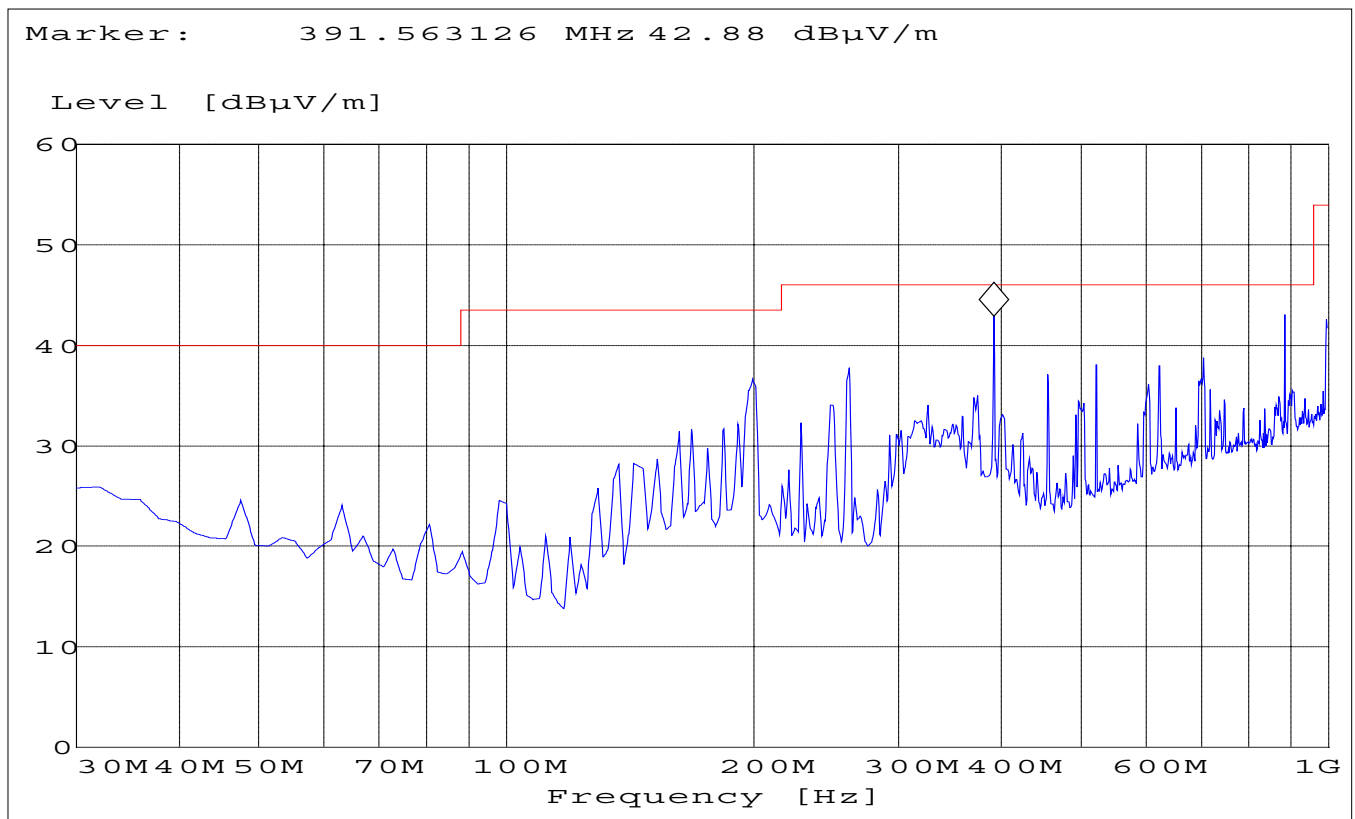

RECEIVER SPURIOUS RADIATION

§ 15.209

1GHz – 3GHz


SWEEP TABLE:

"BT Spuri hi 1-3G"

Short Description:

Bluetooth Spurious 1-3GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

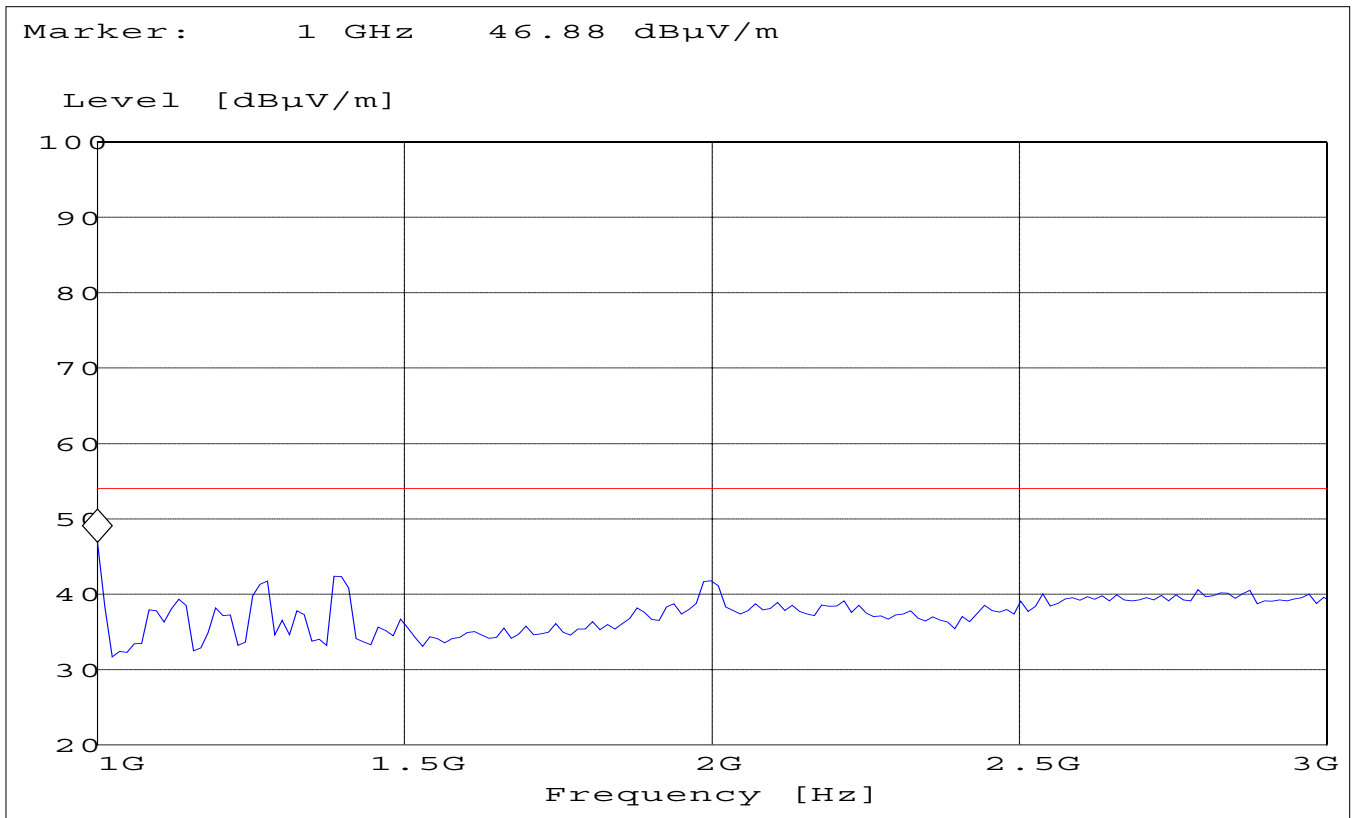

RECEIVER SPURIOUS RADIATION

§ 15.209

3GHz – 18GHz


SWEEP TABLE:

"BT Spuri hi 3-18G"

Short Description:

Bluetooth Spurious 3-18GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

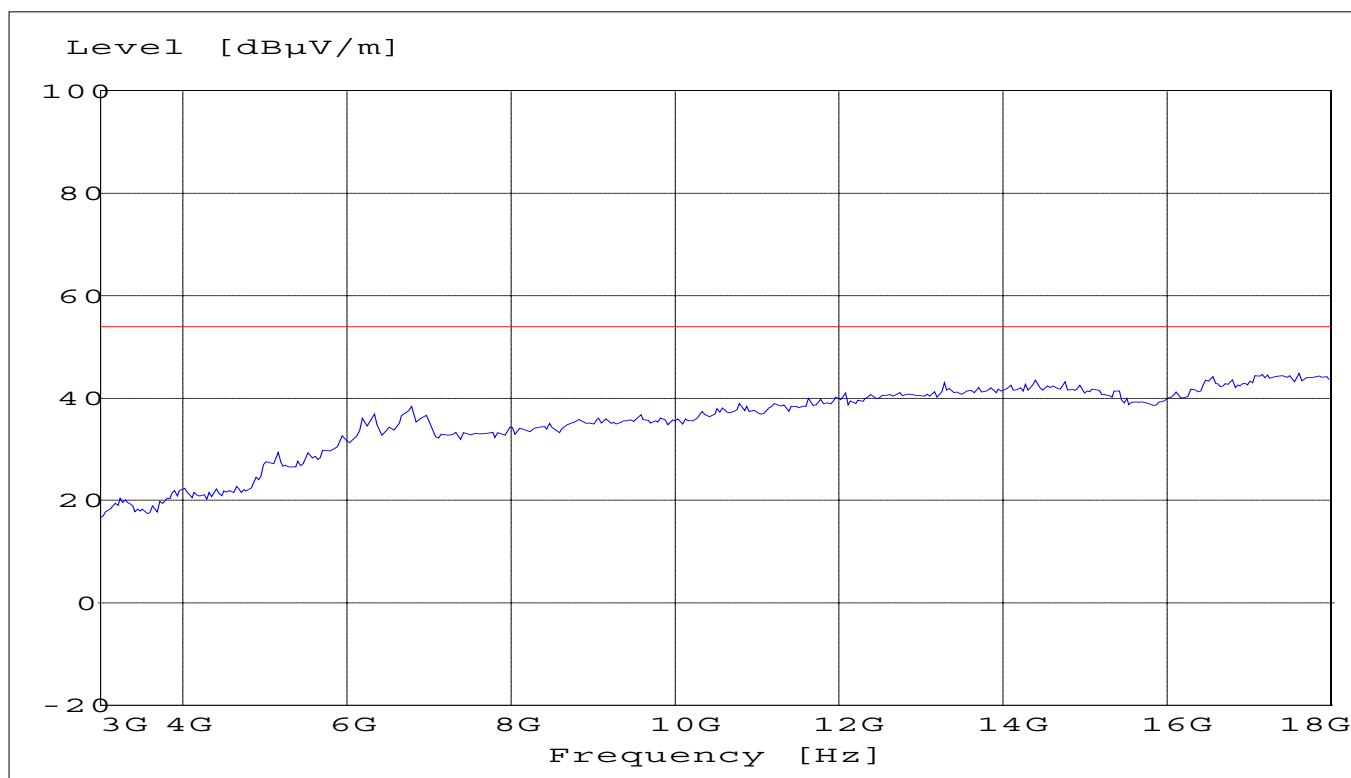

RECEIVER SPURIOUS RADIATION

§ 15.209

18GHz – 25GHz


SWEEP TABLE:

"BT Spuri hi 18-25G"

Short Description:

Bluetooth Spurious 18-25GHz


Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	25 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

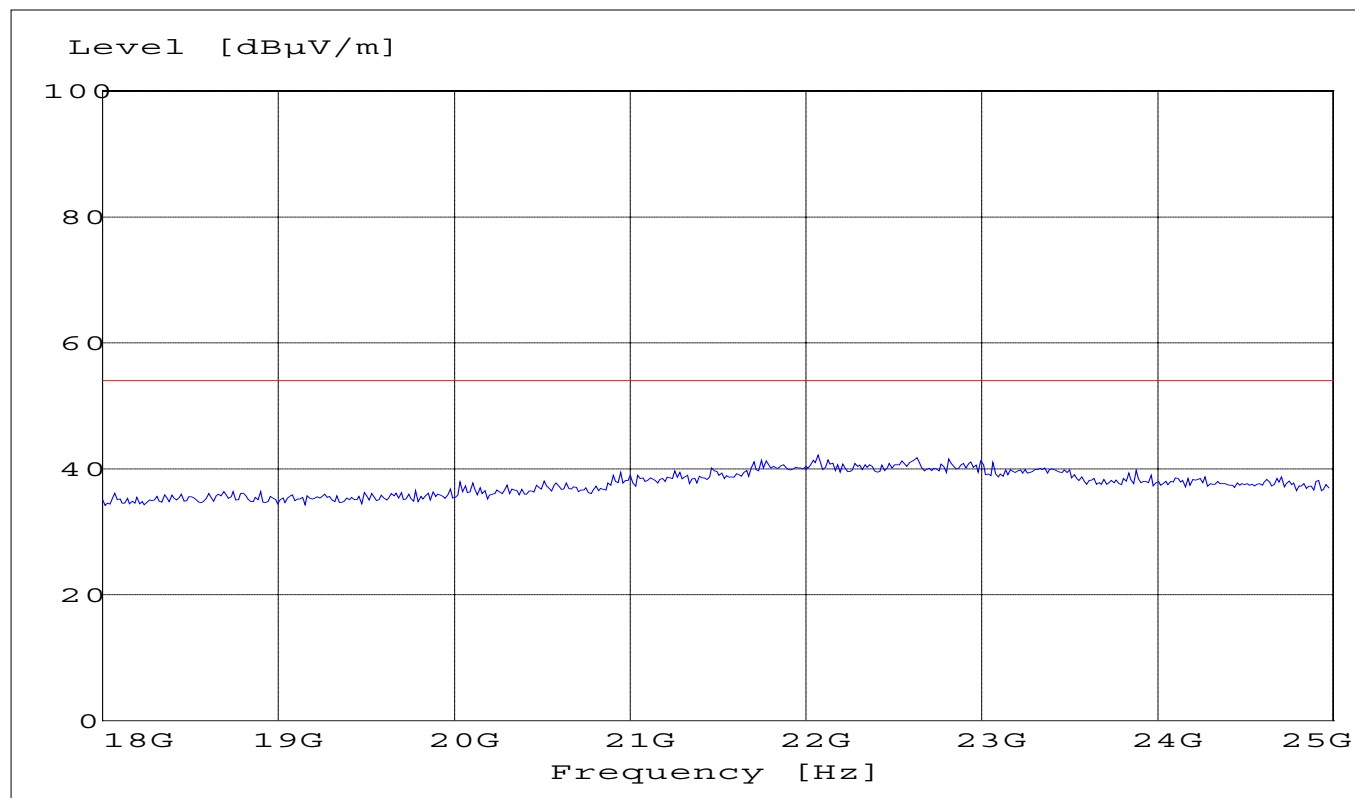

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
05	Power Amplifier	250W1000	Amplifier Research	300031
06	Biconilog Antenna	3141	EMCO	0005-1186
07	Horn Antenna	SAS-200/571	AH Systems	325
08	Power Splitter	11667B	Hewlett Packard	645348
09	Climatic Chamber	VT4004	Votch	G1115
10	Pre-Amplifier	JS4-00102600	Miteq	00616
11	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
12	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008

BLOCK DIAGRAMS
Conducted Testing

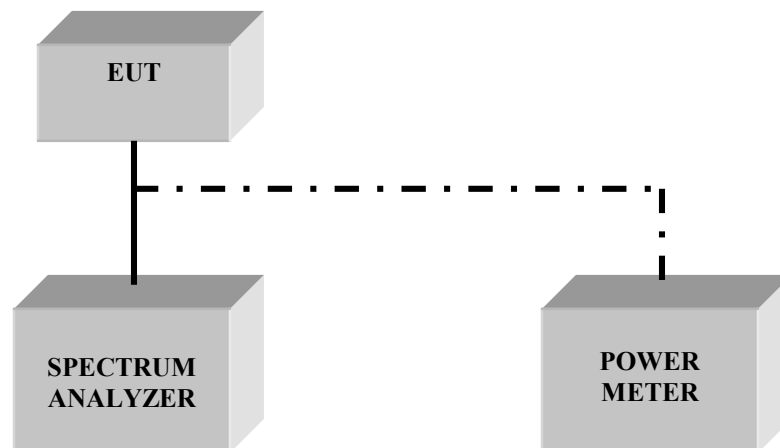

Radiated Testing

ANECHOIC CHAMBER

