

Report on the Radio Testing

For

Renishaw Plc

on

RMP60QE

Report no. TRA-046254-47-01B

7 April 2020

RF916 10.0



Report Number: TRA-046254-47-01B
Issue: A

REPORT ON THE RADIO TESTING OF A
Renishaw Plc
RMP60QE
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15.247

TEST DATE: 21st November 2019 - 17th December 2019

Written by: S Garwell, S Hodgkinson,
D Winstanley
Radio Test Engineer

Approved by: J Charters
Date: 7 April 2020 Lab Manager

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	7 April 2020	Original

2 Summary

TEST REPORT NUMBER:	TRA-046254-47-01B
WORKS ORDER NUMBER:	TRA-046254-00
PURPOSE OF TEST:	USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J..
TEST SPECIFICATION(S):	47CFR15.247
EQUIPMENT UNDER TEST (EUT):	RMP60QE
EQUIPMENT VARIANTS:	RMP60MQE; PP60QE; RMP60QE
FCC IDENTIFIER:	KQGRMP60QE
EUT SERIAL NUMBER:	2C3C54
MANUFACTURER/AGENT:	Renishaw Plc
ADDRESS:	New Mills Wotton Under Edge Gloucestershire GL12 8JR United Kingdom
CLIENT CONTACT:	Rich Warren  01453 523240  richard.warren@renishaw.com
TEST DATE:	21st November 2019 - 17th December 2019
TESTED BY:	S Garwell, S Hodgkinson, D Winstanley Element

2.1 Test Summary

Test Method and Description	Requirement Clause47CFR15	Applicable to this equipment	Result / Note
Radiated spurious emissions (restricted bands of operation and cabinet radiation)	15.205	<input checked="" type="checkbox"/>	Pass Note 4
AC power line conducted emissions	15.207	<input type="checkbox"/>	Note 1
Carrier frequency separation	15.247(a)(1)	<input checked="" type="checkbox"/>	Pass Note 2
Number of hopping channels	15.247(a)(1) (i), (ii) and (iii)	<input checked="" type="checkbox"/>	Pass Note 2
Average time of occupancy	15.247(a)(1) (i), (ii) and (iii)	<input checked="" type="checkbox"/>	Pass Note 2
Maximum peak conducted output power	15.247 (a)(1), (b)(1) and (b)(2)	<input checked="" type="checkbox"/>	Pass Note 2
Conducted carrier power	Peak	<input type="checkbox"/>	Pass Note 3
	Max.	<input checked="" type="checkbox"/>	
Power spectral density, conducted	15.247(e)	<input checked="" type="checkbox"/>	Pass Note 3
20dB emission bandwidth	15.247(a)(1) (i) and (ii)	<input checked="" type="checkbox"/>	Pass Note 2
Occupied bandwidth	15.247(a)(2)	<input checked="" type="checkbox"/>	Pass Note 3
Out-of-band emissions	15.247(d)	<input checked="" type="checkbox"/>	Pass Note 4

Notes:

- 1 Note applicable EUT is battery powered
- 2 Applicable for Mode 1 and Mode 2 – FHSS Operation
- 3 Applicable for Mode 2 – DTS operation
- 4 Applicable for Mode 1 and Mode 2 (both FHSS and DTS Operation) EUT uses same modulation techniques for both FHSS and DTS operation

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record	3
2	Summary	4
2.1	Test Summary	5
3	Contents	6
4	Introduction	8
5	Test Specifications	9
5.1	Normative References	9
5.2	Deviations from Test Standards	9
6	Glossary of Terms	10
7	Equipment Under Test	11
7.1	EUT Identification	11
7.2	Equipment Variants	11
7.3	System Equipment	11
7.4	EUT Mode of Operation	11
7.4.1	Transmission	11
7.5	EUT Radio Parameters	12
7.5.1	General	12
7.6	EUT Description	12
8	Modifications	13
9	EUT Test Setup	14
9.1	Block Diagram	14
9.2	General Set-up Photograph	15
9.3	Measurement software	15
10	General Technical Parameters	16
10.1	Normal Conditions	16
11	Radiated emissions	17
11.1	Definitions	17
11.2	Test Parameters	17
11.3	Test Limit	17
11.4	Test Method	18
11.5	Test Set-up Photographs	19
11.6	Test Equipment	19
11.7	Test Results	20
11.8	Test Results – RMP60QE	21
11.9	Test Results – RMP60MQE	Error! Bookmark not defined.
12	Carrier frequency separation	41
12.1	Definition	41
12.2	Test Parameters	41
12.3	Test Limit	41
12.4	Test Method	42
12.5	Test Equipment	42
12.6	Test Results	42
13	Number of hopping frequencies	44
13.1	Definition	44
13.2	Test Parameters	44
13.3	Test Limit	44
13.4	Test Method	45
13.5	Test Equipment	45
13.6	Test Results	45
14	Average channel occupancy	47
14.1	Definition	47
14.2	Test Parameters	47
14.3	Test Limit	47
14.4	Test Method	48
14.5	Test Equipment	48
14.6	Test Results	49
15	Maximum peak conducted output power	51
15.1	Definition	51
15.2	Test Parameters	51
15.3	Test Limit	52
15.4	Test Method	52
15.5	Test Equipment	52
15.6	Test Results	53
16	Power spectral density	55
16.1	Definition	55
16.2	Test Parameters	55

16.3	Test Limit.....	55
16.4	Test Method.....	56
16.5	Test Equipment	56
16.6	Test Results.....	57
17	Occupied Bandwidth.....	58
17.1	Definition.....	58
17.2	Test Parameters	58
17.3	Test Limit.....	58
17.4	Test Method.....	59
17.5	Test Equipment	59
17.6	Test Results.....	60
18	Out-of-band and conducted spurious emissions.....	63
18.1	Definition.....	63
18.2	Test Parameters	63
18.3	Test Limits	63
18.4	Test Method.....	64
18.5	Test Equipment	64
18.6	Test Results.....	65
19	Measurement Uncertainty.....	75
20	RF Exposure.....	76

4 Introduction

This report TRA-046254-47-01B presents the results of the Radio testing on a Renishaw Plc, RMP60QE to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for Renishaw Plc by Element, at the address detailed below.

- | | |
|--|--|
| <input type="checkbox"/> Element Hull
Unit E
South Orbital Trading Park
Hedon Road
Hull
HU9 1NJ
UK | <input checked="" type="checkbox"/> Element Skelmersdale
Unit 1
Pendle Place
Skelmersdale
West Lancashire
WN8 9PN
UK |
|--|--|

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

IC Registration Number(s):

Element Hull	3483A
Element North West	3930B

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

5.2 Deviations from Test Standards

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment Under Test

7.1 EUT Identification

- Name: RMP60QE
- Serial Number: 2C3C54
- Model Number: RMP60QE
- Software Revision: Not Applicable
- Build Level / Revision Number: Not Applicable

7.2 Equipment Variants

- RMP60QE
- PP60QE
- RMPM60QE

7.3 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

Not Applicable – No support/monitoring equipment required.

7.4 EUT Mode of Operation

7.4.1 Transmission

The mode of operation for Tx tests was as follows.

The EUT contains selections for test menus for Mode 1 or Mode 2 and selection of normal operation.

These test menus allow the unit to be set to top, middle or bottom frequencies or hopping across all frequencies in either Mode 1 or Mode 2.

7.5 EUT Radio Parameters

7.5.1 General

Frequency of operation:	2400 MHz-2483.5 MHz
Modulation type(s):	Mode 1: 1 MBps Binary GFSK Frequency Hopping Mode 2: 2 MBps Binary GFSK Frequency Hopping Mode 2: 2 MBps Binary GFSK DSSS
Occupied channel bandwidth(s):	Mode 1: 1 MHz Mode 2: 2 MHz
Channel spacing:	Mode 1: 1 MHz Mode 2: 2 MHz
Declared output power(s):	Mode 1: 0dBm Mode 2: +4dBm
Antenna type:	Slot type
Antenna gain:	1.31 dBi
Nominal Supply Voltage:	3.0 Vdc

7.6 EUT Description

The EUT is a measuring probe, using the 2400 MHz - 2483.5 MHz frequency band, and uses frequency hopping.

Mode 1 uses FHSS operating over 79 channels.

Mode 2 uses DTS and FHSS over 39 channels. DTS mode is used during setup and FHSS mode in probe operation.


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup

9.1 Block Diagram


The following diagram shows basic EUT interconnections with cable type and cable lengths

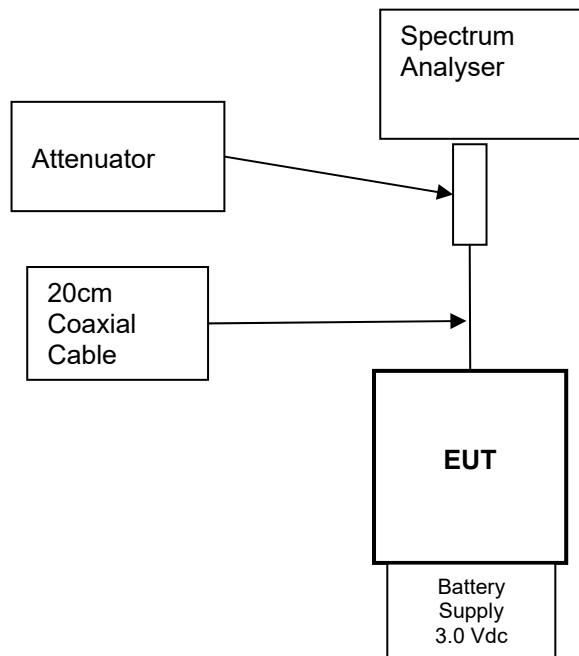

identified:

9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:

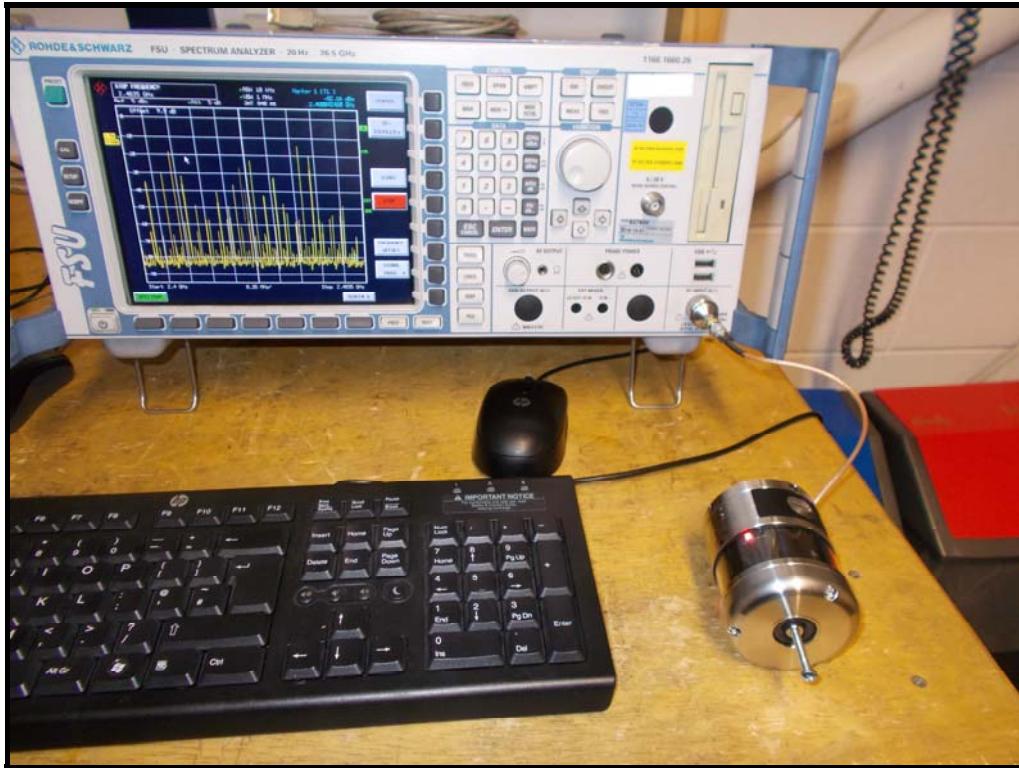

9.3 Measurement software

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5 (See Note)

Element Transmitter Bench Test (See Note)

ETS Lindgren EMPower V1.0.4.2

Note:

The version of the Element software used is recorded in the results sheets contained within this report.

10 General Technical Parameters

10.1 Normal Conditions

The EUT was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was approx. 3 Vdc from alkaline batteries

Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	Category	Nominal	Variation
<input type="checkbox"/>	Mains	110 V ac +/-2 %	85 % and 115 %
<input checked="" type="checkbox"/>	Battery	New battery	N/A

11 Radiated emissions

11.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Chamber 3
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Channels Measured:	Low / Mid / High
EUT Channel Bandwidths:	1 MHz / 2 MHz
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak; Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 39 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	

11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

Frequency (MHz)	Field Strength (μ V/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB μ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB μ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);


CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

Figure i Test Setup

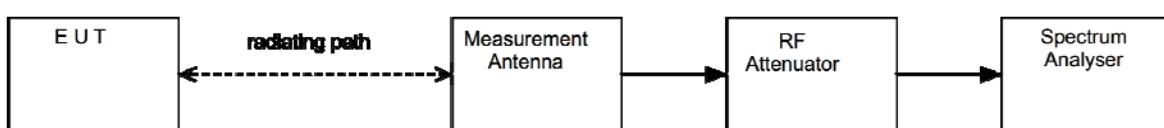

11.5 Test Set-up Photographs

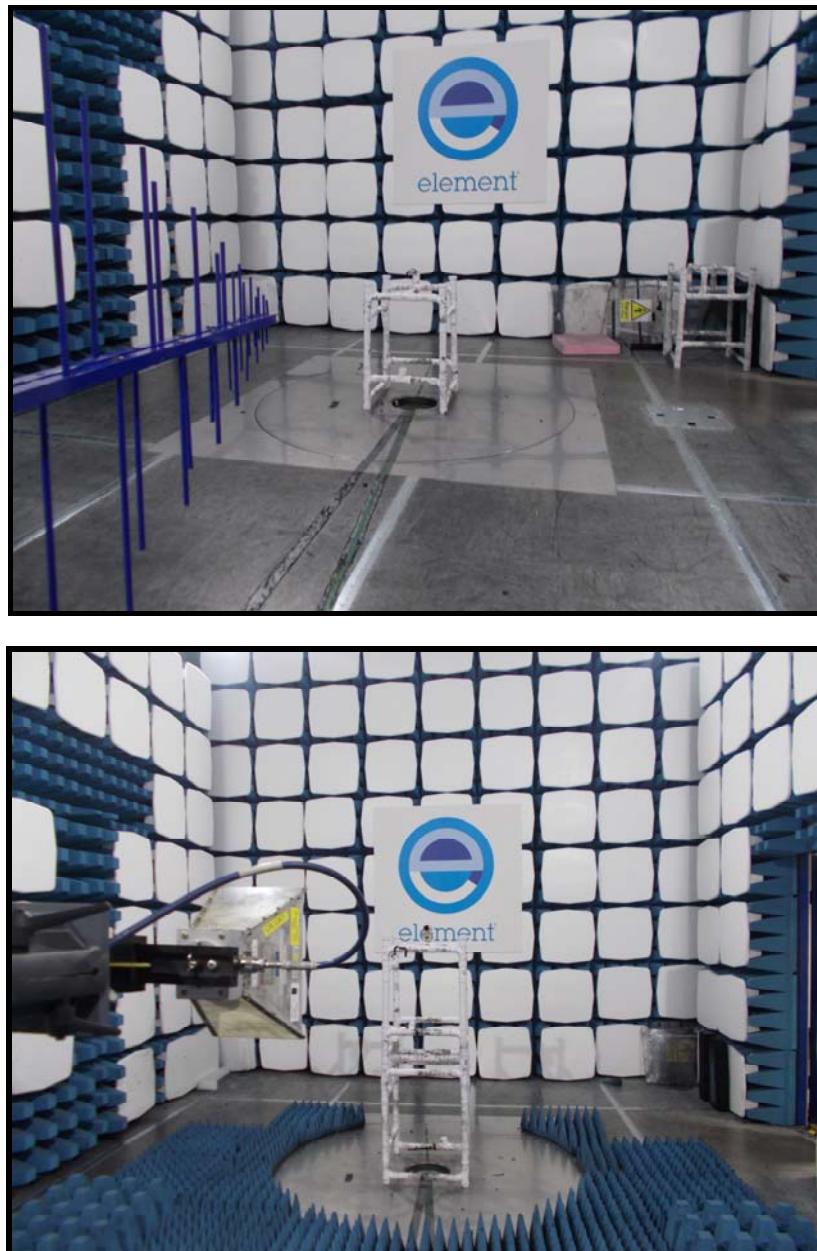


11.6 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Due For Calibration
Spectrum Analyser	R&S	FSU26	REF909	2020-06-21
Bilog	Chase	CBL611/A	U573	2021-09-19
Log Periodic Ant	Chase	UPA6108	L203	2020-06-11
PreAmp	Watkins Johnson	6201-69	U372	2020-02-25
8449B	Agilent	Pre Amp	L572	2020-10-15
1-18GHz Horn	EMCO	3115	L139	2021-07-16

11.7 Test Results


Duty cycle correction Mode 1

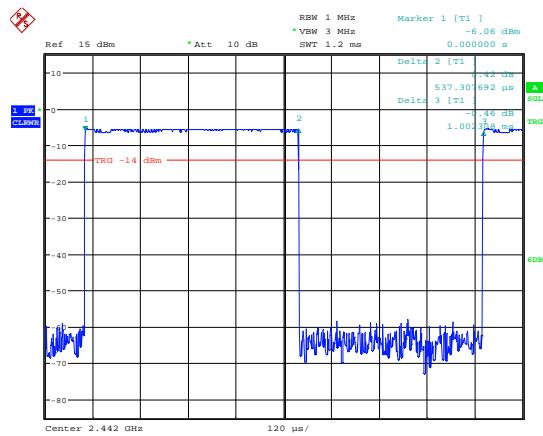

$$\text{Duty Cycle Correction} = 20 \log (1/D) = 20 \log (T/T_{on}) = 5.4$$

Where D is the duty cycle = T_{on}/T

Duty cycle correction Mode 2

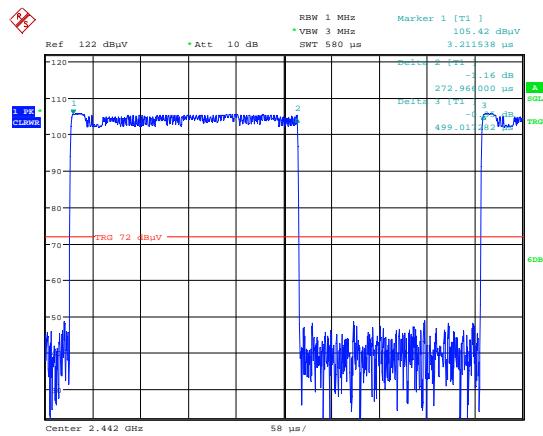


$$\text{Duty Cycle Correction} = 20 \log (1/D) = 20 \log (T/T_{on}) = 5.2$$



Where D is the duty cycle = T_{on}/T

11.8 Test Results – RMP60QE



RMP60QE - 2403 MHz – 1 Mbps

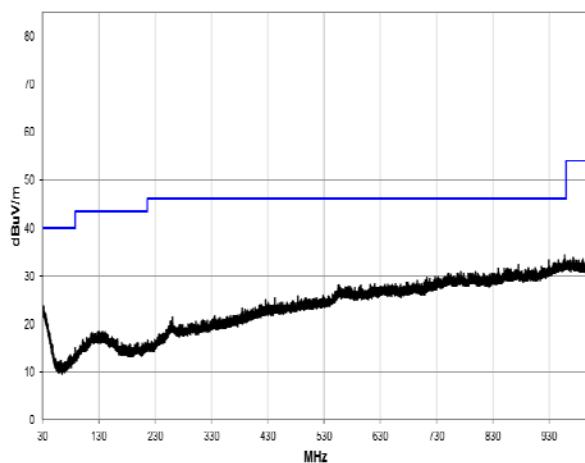

30 MHz to 1 GHz

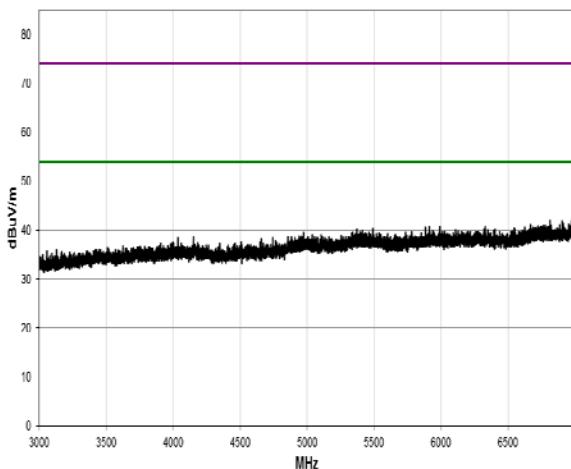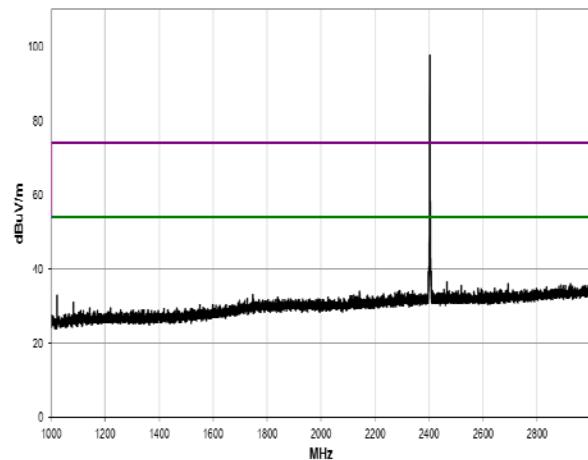

1 GHz to 3 GHz

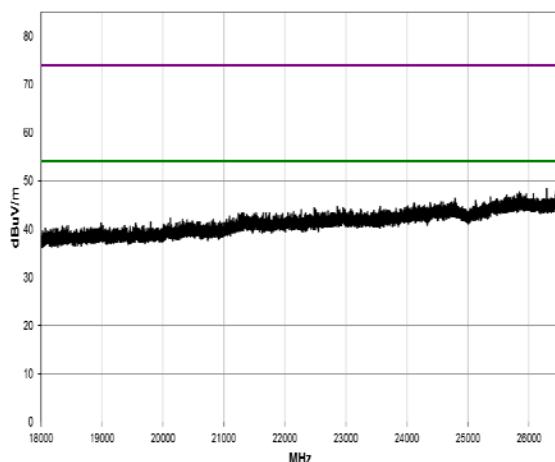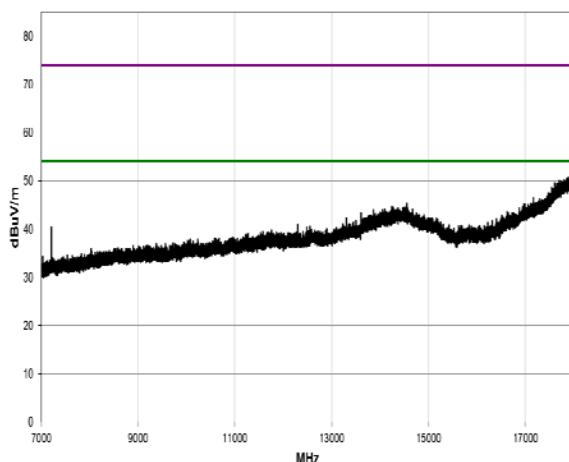


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7209.308	36.2	7.7	1.83	222.0	5.4	0.0	Horz	AV	-9.5	39.8	54.0	-14.2
7209.292	38.0	7.7	1.45	220.9	5.4	0.0	Vert	AV	-9.5	41.6	54.0	-12.4
7209.575	49.8	7.7	1.45	220.9		0.0	Vert	PK	-9.5	48.0	74.0	-26.0
7209.200	48.3	7.7	1.83	222.0		0.0	Horz	PK	-9.5	46.5	74.0	-27.5


RMP60QE - 2442 MHz – 1 Mbps

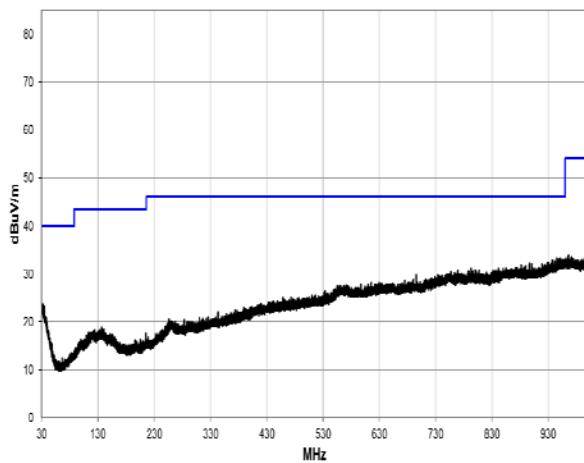

30 MHz to 1 GHz

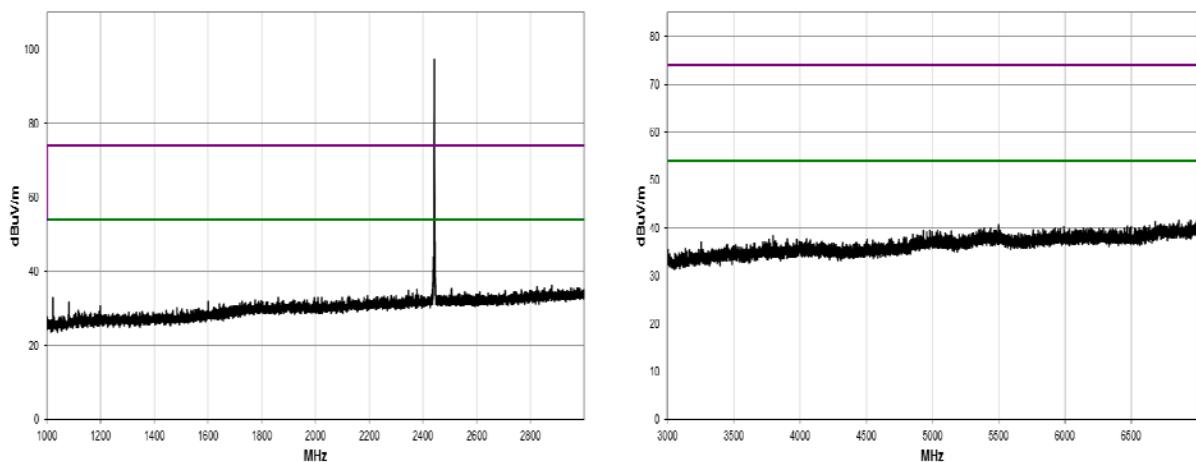

1 GHz to 3 GHz

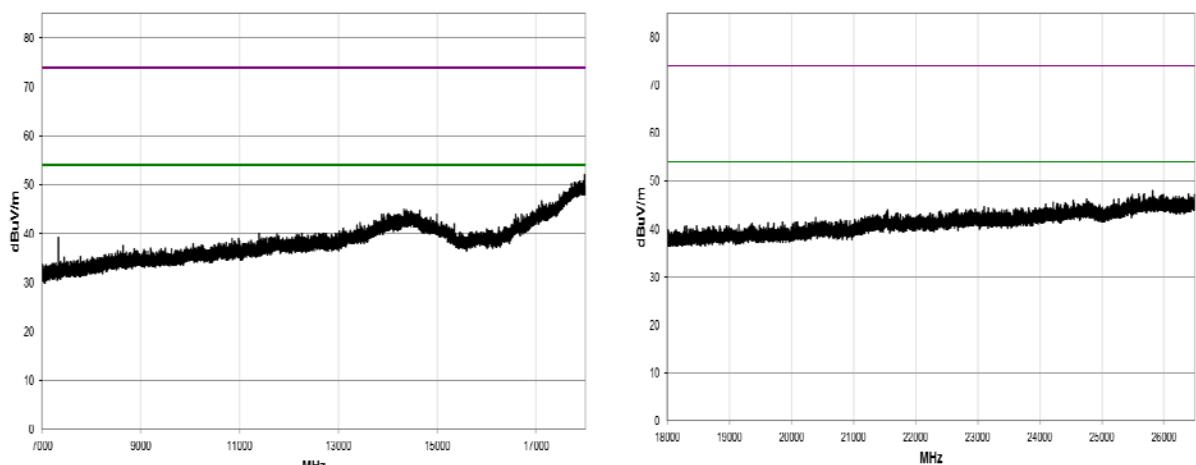


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7326.325	37.2	7.9	1.8	185.0	5.4	0.0	Vert	AV	-9.5	41.0	54.0	-13.0
7326.283	37.7	7.9	1.32	215.9	5.4	0.0	Horz	AV	-9.5	41.5	54.0	-12.5
7325.708	49.3	7.9	1.32	215.9	0.0	0.0	Horz	PK	-9.5	47.7	74.0	-26.3
7325.475	49.3	7.9	1.8	185.0	0.0	0.0	Vert	PK	-9.5	47.7	74.0	-26.3


RMP60QE - 2481 MHz – 1 Mbps

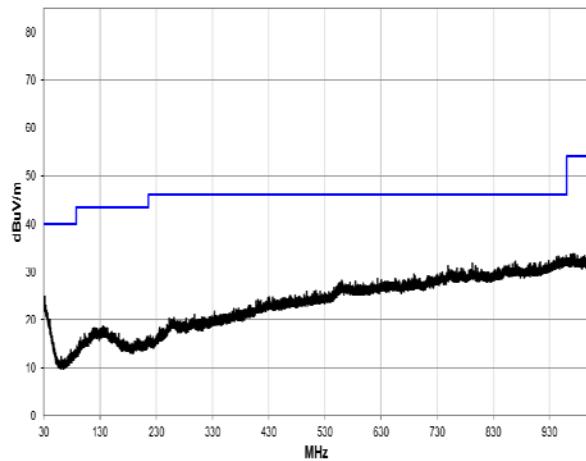

30 MHz to 1 GHz

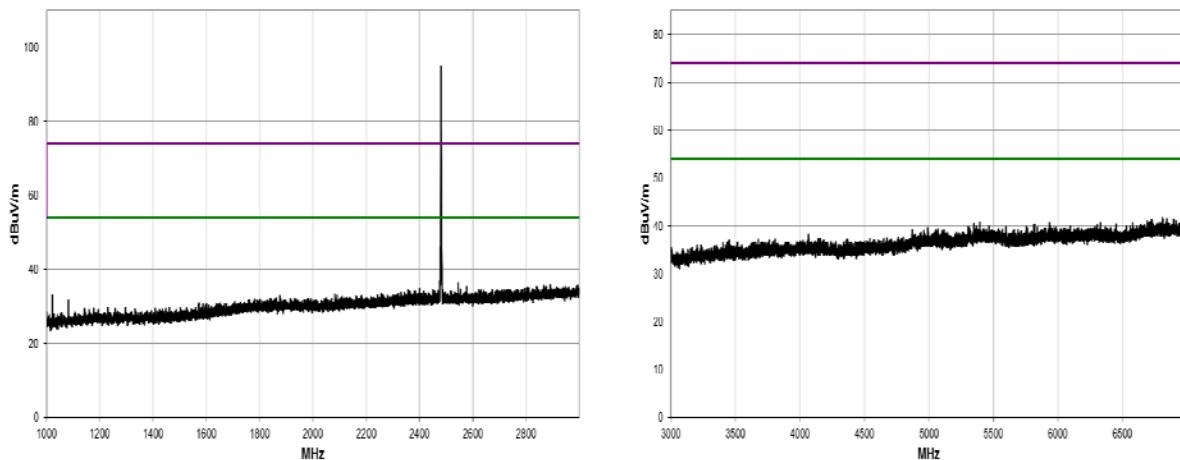

1 GHz to 3 GHz

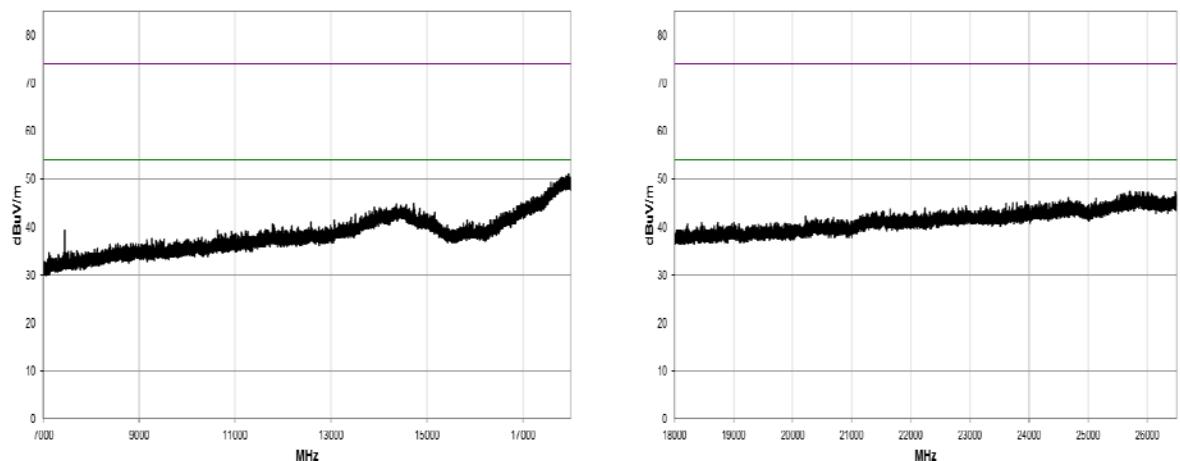


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7443.308	37.4	8.0	1.79	182.1	5.4	0.0	Vert	AV	-9.5	41.3	54.0	-12.7
7443.300	36.1	8.0	1.87	323.1	5.4	0.0	Horz	AV	-9.5	40.0	54.0	-14.0
7443.533	49.8	8.0	1.79	182.1	5.4	0.0	Vert	PK	-9.5	48.3	74.0	-25.7
7443.817	48.1	8.0	1.87	323.1	5.4	0.0	Horz	PK	-9.5	46.6	74.0	-27.4


RMP60QE - 2481 MHz Upper Band Edge Plot – Peak

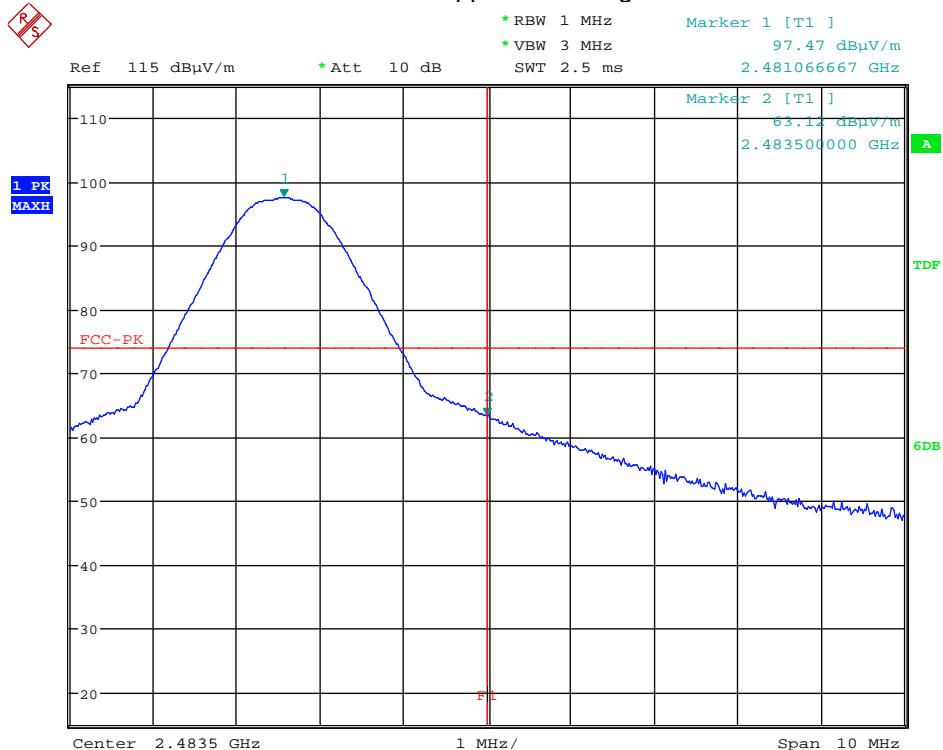


RMP60QE - 2481 MHz Upper Band Edge Plot – Average

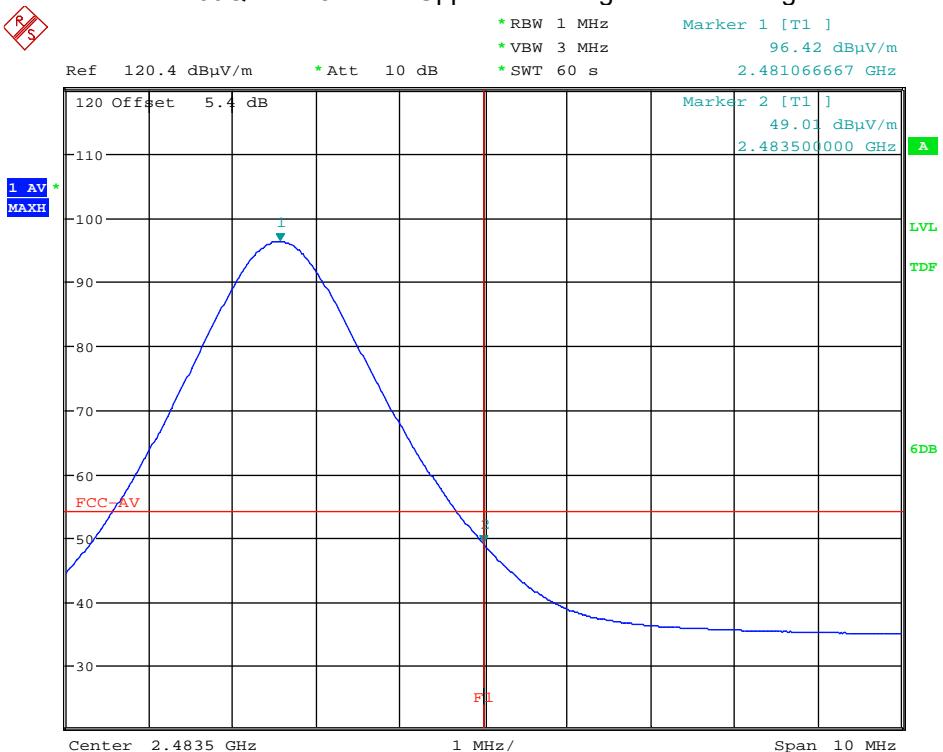


RMP60QE - 2481 MHz Upper Band Edge Plot – All Hopping

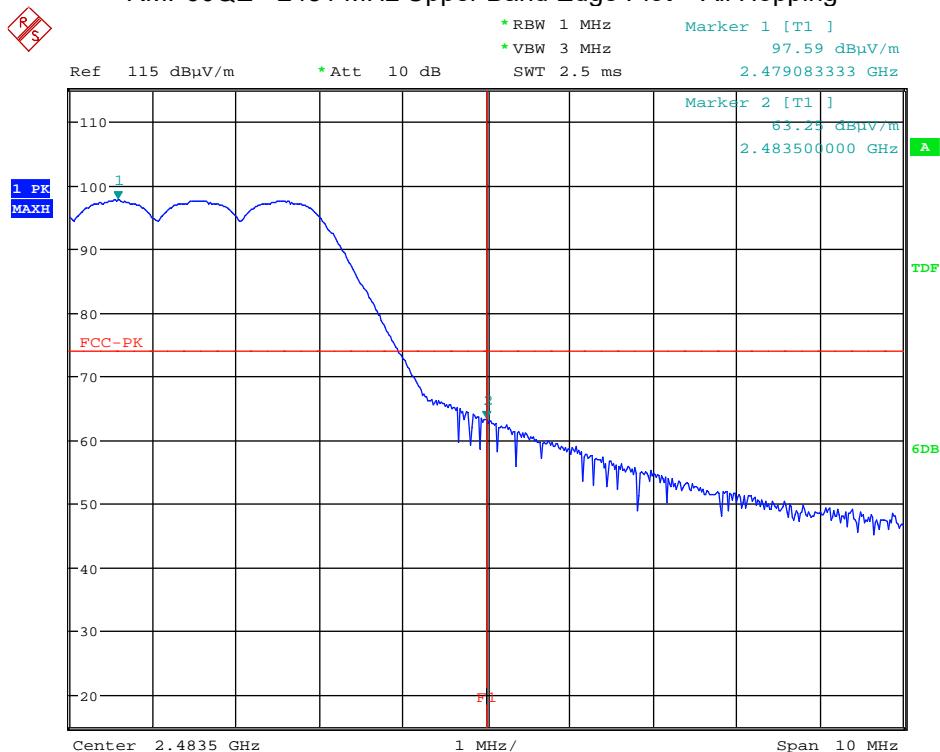


RMP60QE - 2404 MHz – 2 Mbps

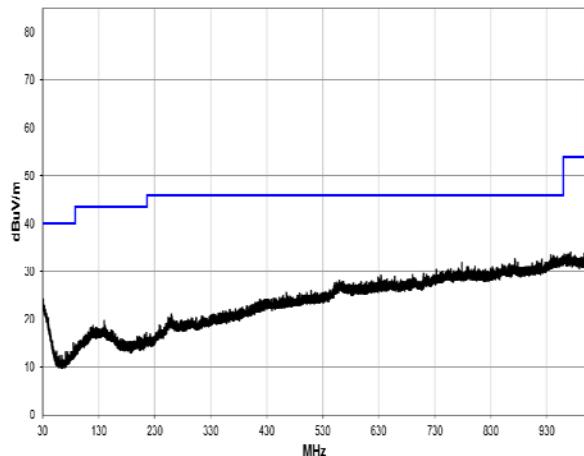

30 MHz to 1 GHz

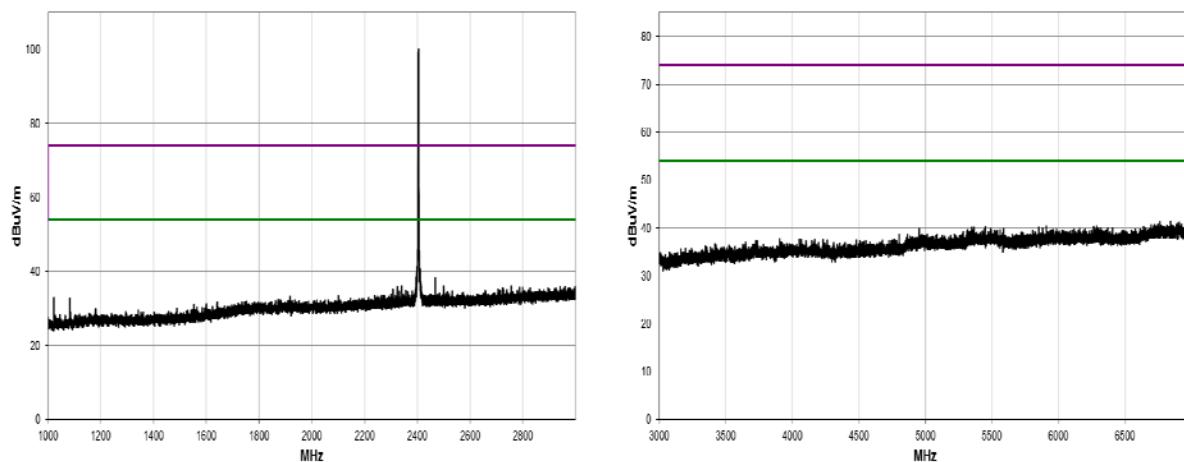

1 GHz to 3 GHz

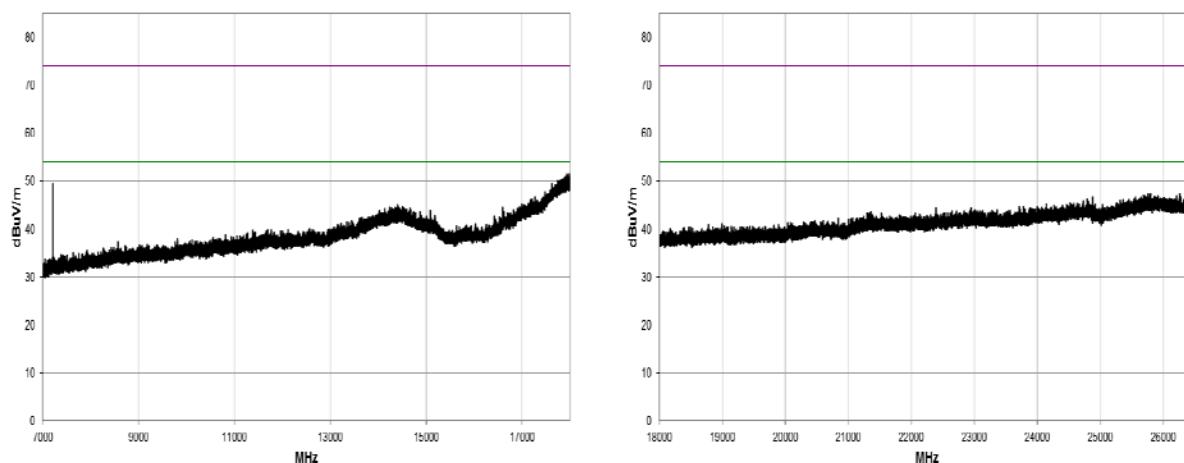


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7213.017	43.4	7.7	1.33	216.1	5.2	0.0	Horz	AV	-9.5	46.8	54.0	-7.2
7213.042	41.5	7.7	1.46	221.9	5.2	0.0	Vert	AV	-9.5	44.9	54.0	-9.1
7213.133	55.3	7.7	1.33	216.1	5.2	0.0	Horz	PK	-9.5	53.5	74.0	-20.5
7211.033	53.5	7.7	1.46	221.9	5.2	0.0	Vert	PK	-9.5	51.7	74.0	-22.3


RMP60QE - 2442 MHz – 2 Mbps

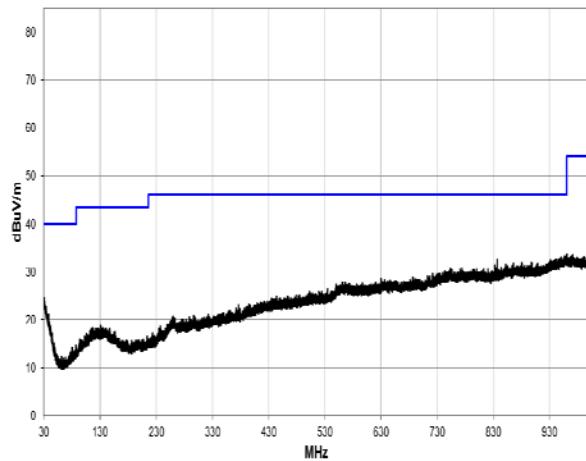


30 MHz to 1 GHz

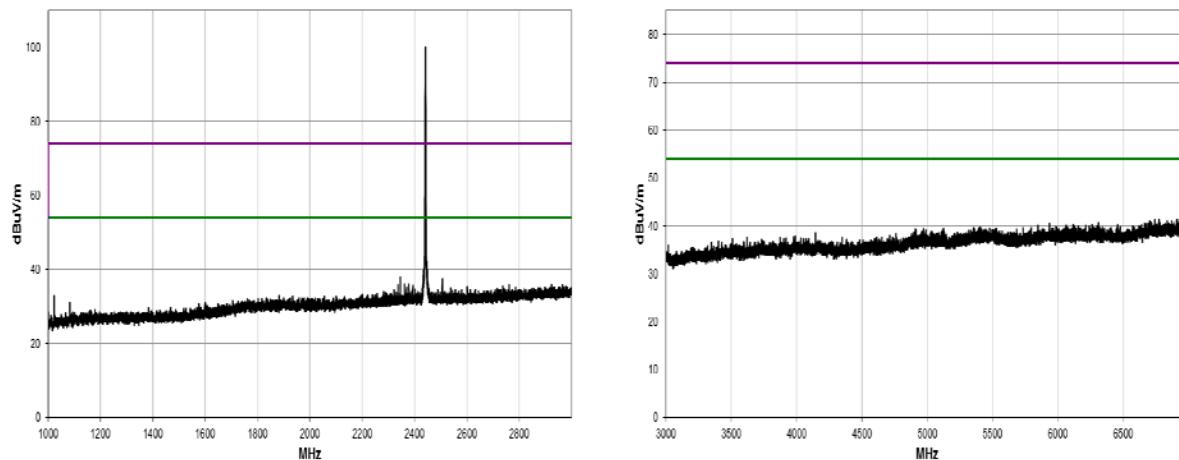

1 GHz to 3 GHz

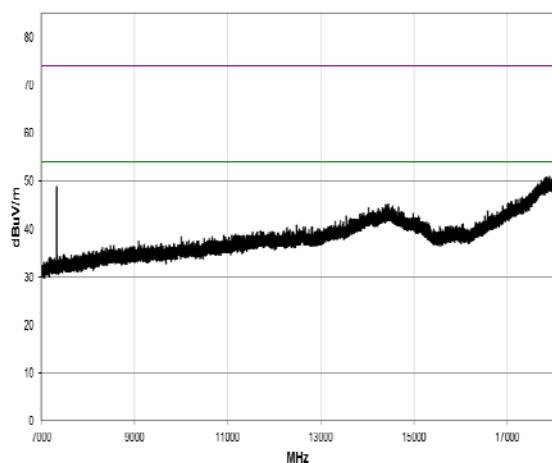

3 GHz to 7 GHz

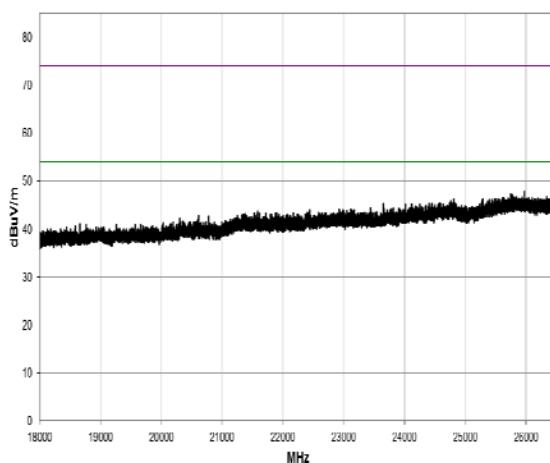


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7327.067	42.6	7.9	1.77	187.9	5.2	0.0	Vert	AV	-9.5	46.2	54.0	-7.8
7327.033	42.6	7.9	1.56	223.0	5.2	0.0	Horz	AV	-9.5	46.2	54.0	-7.8
7327.167	54.6	7.9	1.77	187.9	5.2	0.0	Vert	PK	-9.5	53.0	74.0	-21.0
7327.258	54.3	7.9	1.56	223.0		0.0	Horz	PK	-9.5	52.7	74.0	-21.3


RMP60QE - 2480 MHz – 2 Mbps

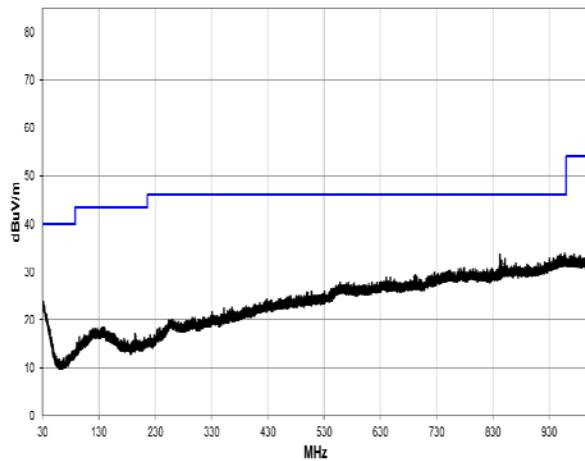


30 MHz to 1 GHz

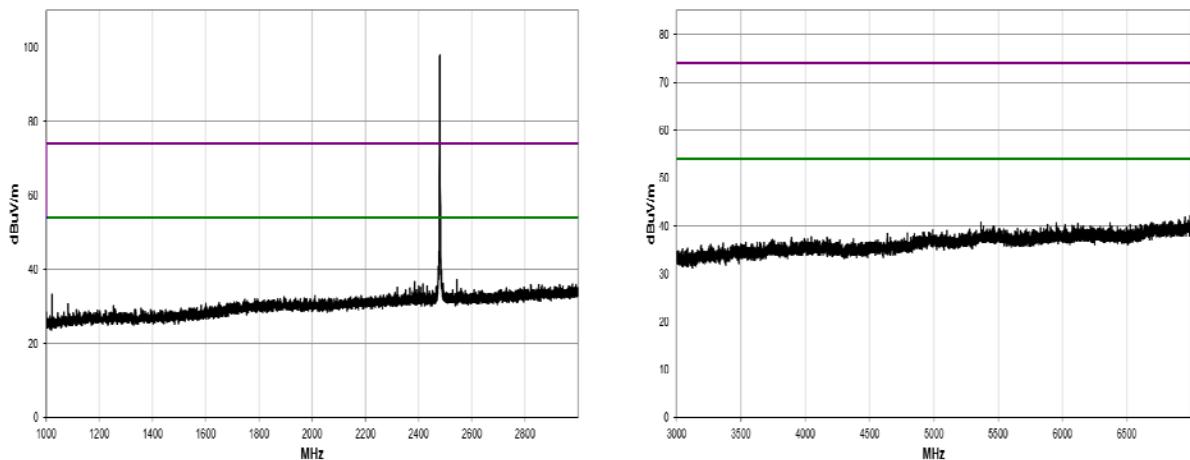

1 GHz to 3 GHz

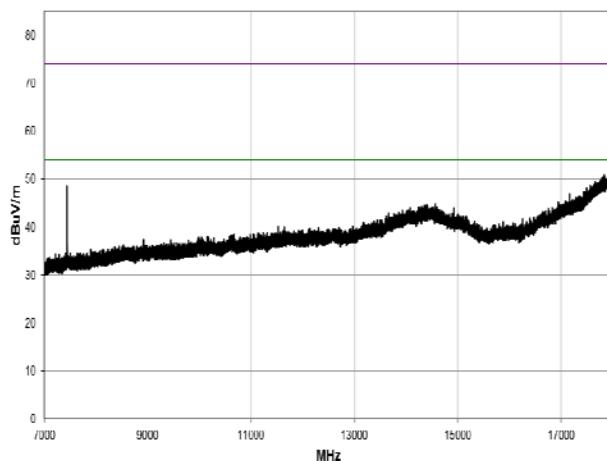


7 GHz to 18 GHz

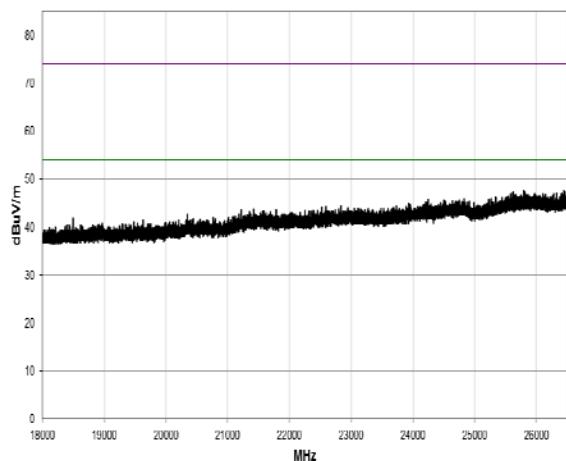


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7441.050	42.0	8.0	1.53	237.0	5.2	0.0	Horz	AV	-9.5	45.7	54.0	-8.3
7441.058	40.6	8.0	1.53	178.9	5.2	0.0	Vert	AV	-9.5	44.3	54.0	-9.7
7441.167	53.7	8.0	1.53	237.0	5.2	0.0	Horz	PK	-9.5	52.2	74.0	-21.8
7441.000	52.7	8.0	1.53	178.9	5.2	0.0	Vert	PK	-9.5	51.2	74.0	-22.8


RMP60QE - 2480 MHz Upper Band Edge Plot – Peak

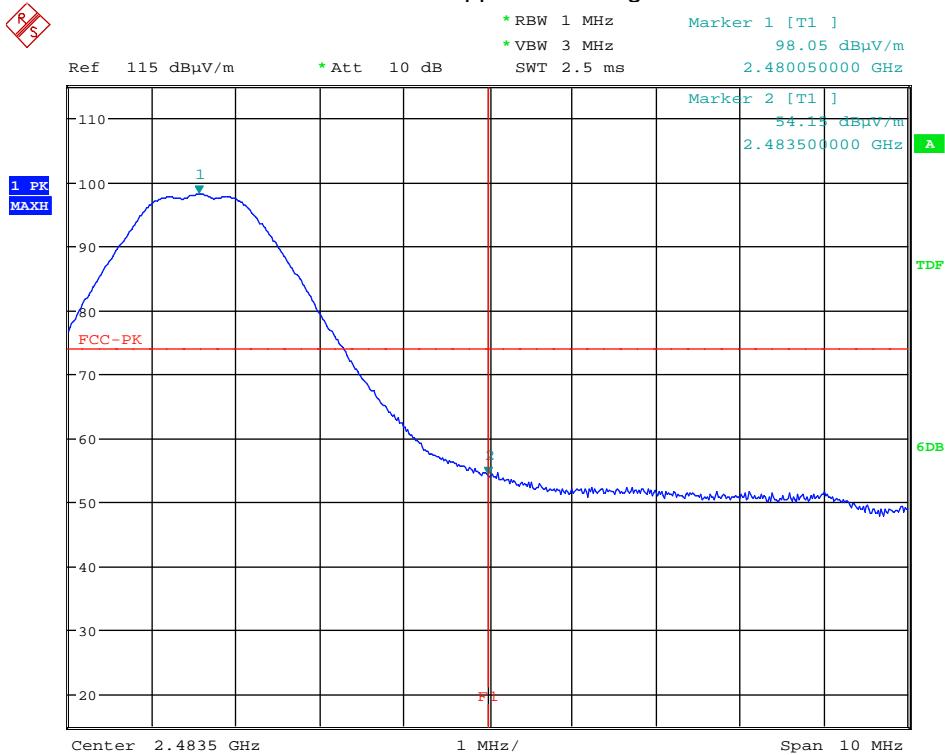

RMP60QE - 2480 MHz Upper Band Edge Plot - Average

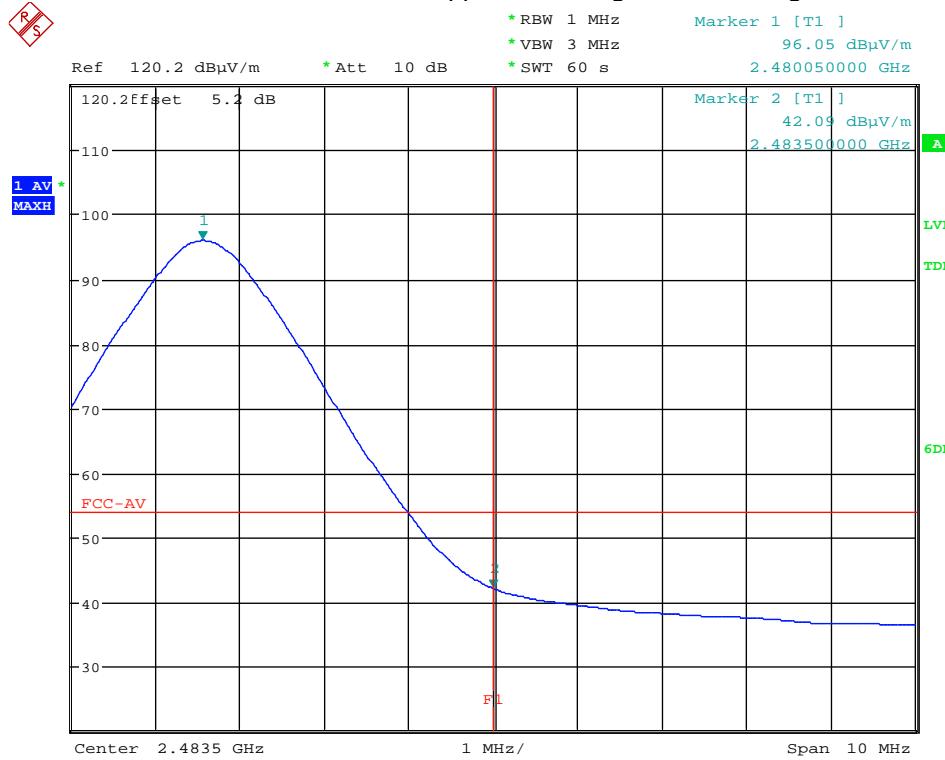


RMP60QE - 2480 MHz Upper Band Edge Plot – All Hopping


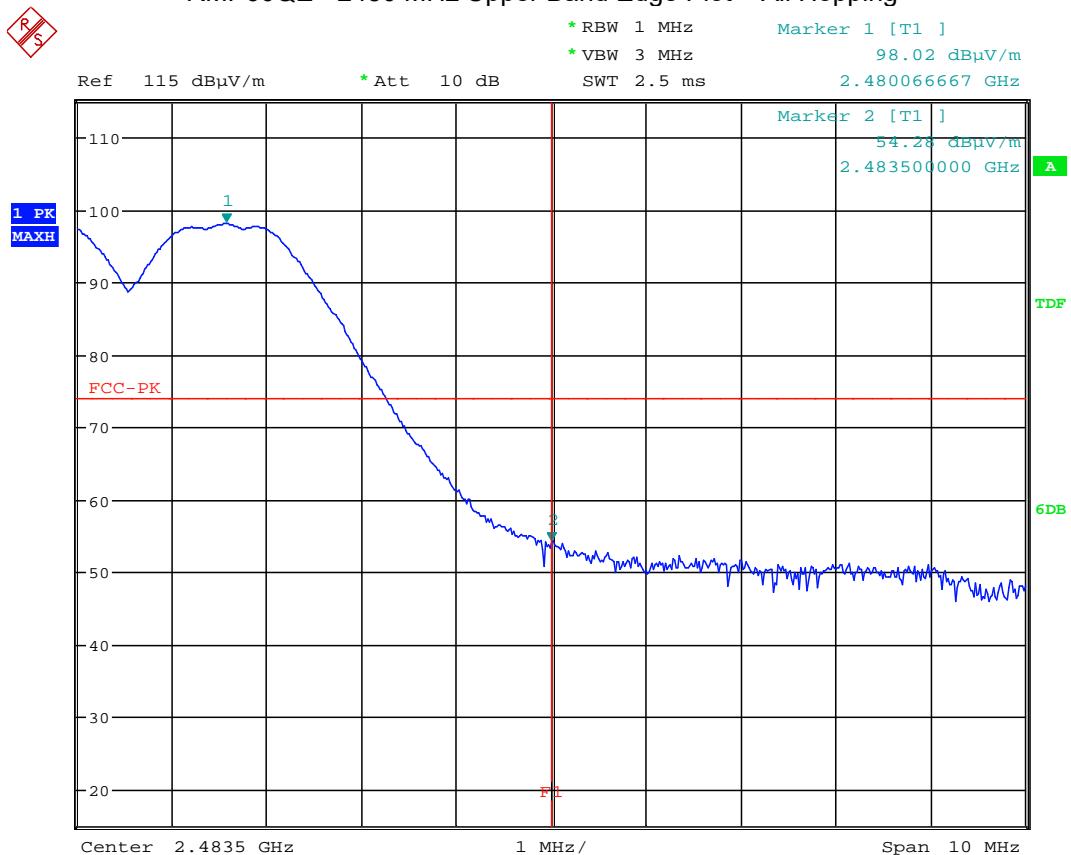


11.10 Test Results – RMP60MQE



RMP60MQE - 2403 MHz – 1 Mbps

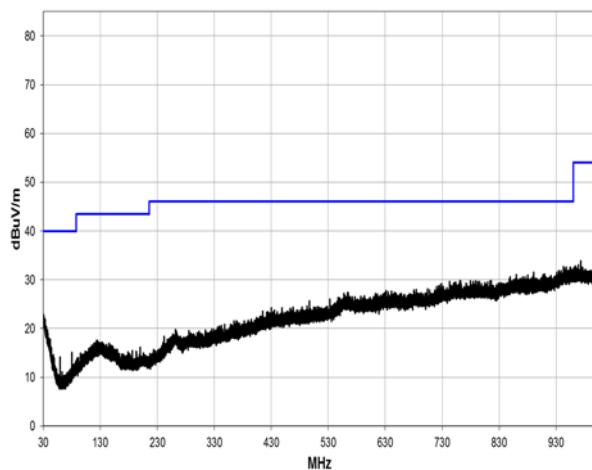

30 MHz to 1 GHz

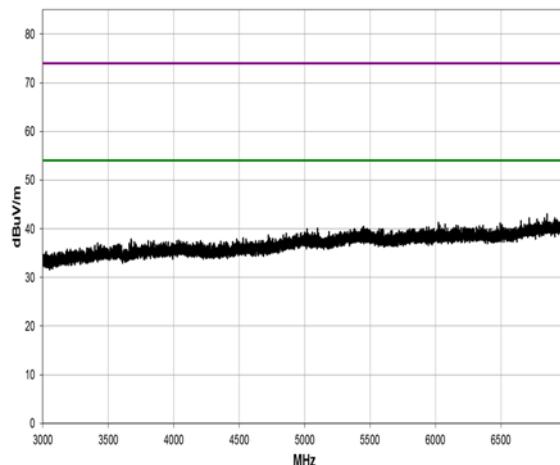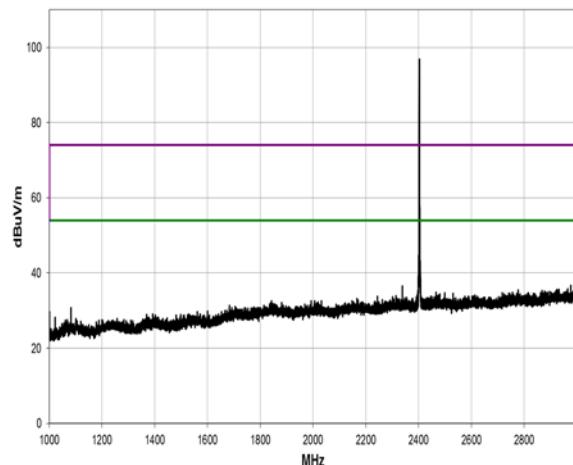

1 GHz to 3 GHz

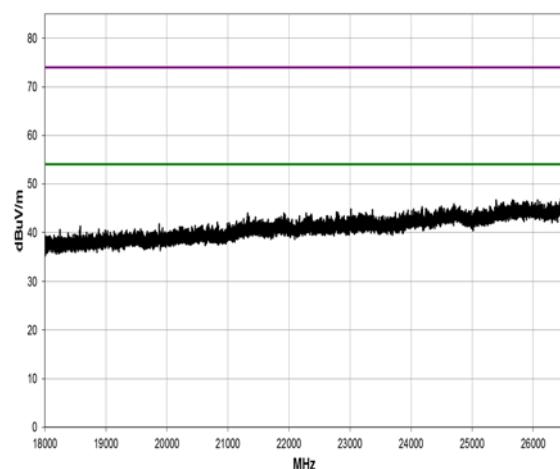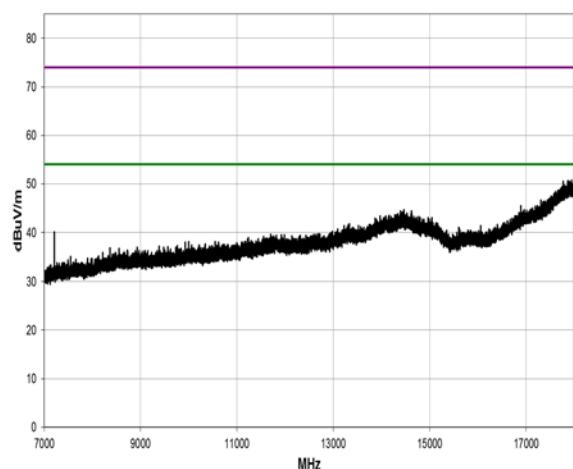


7 GHz to 18 GHz



18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7209.217	39.4	7.7	1.48	80.0	5.4	0.0	Horz	AV	-9.5	43.0	54.0	-11.0
7209.233	38.5	7.7	1.44	222.0	5.4	0.0	Vert	AV	-9.5	42.1	54.0	-11.9
7209.483	51.2	7.7	1.48	80.0	5.4	0.0	Horz	PK	-9.5	49.4	74.0	-24.6
7208.567	50.5	7.7	1.44	222.0	5.4	0.0	Vert	PK	-9.5	48.7	74.0	-25.3



RMP60MQE - 2442 MHz – 1 Mbps

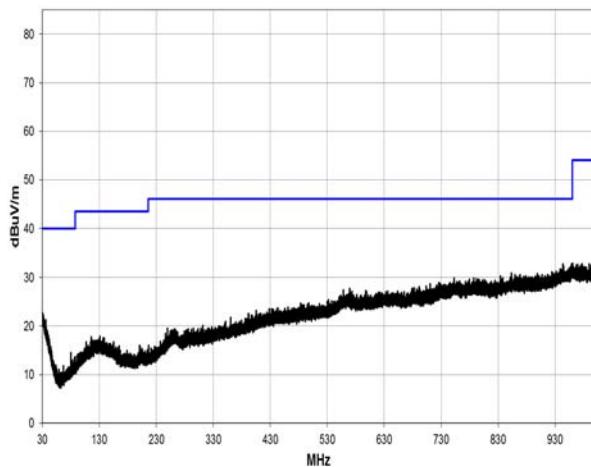

30 MHz to 1 GHz

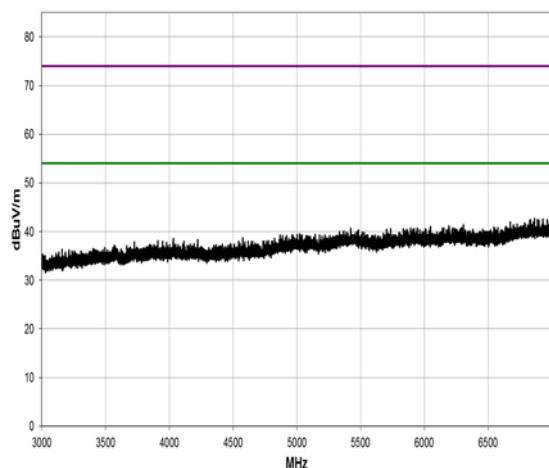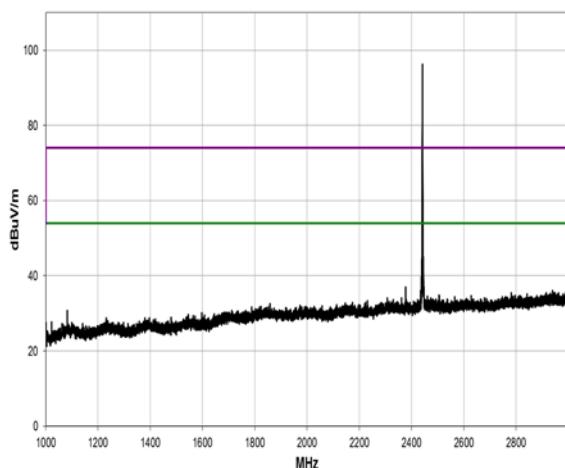

1 GHz to 3 GHz

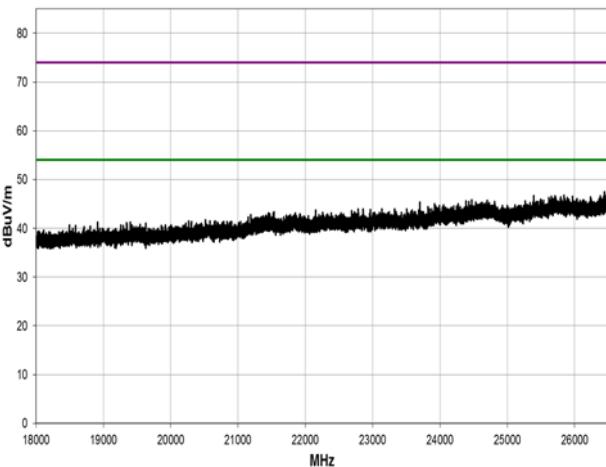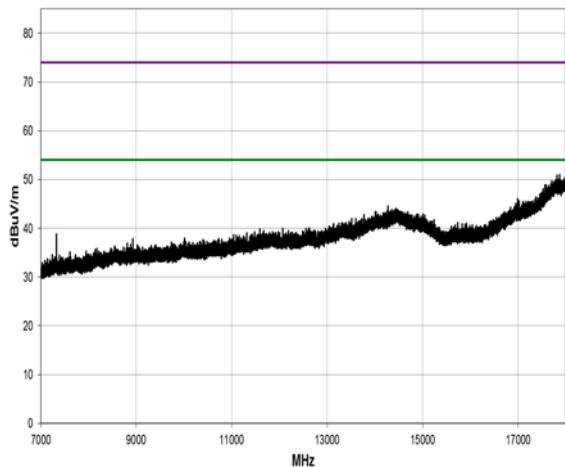


7 GHz to 18 GHz



18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBu)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7326.242	39.6	7.9	1.62	51.0	5.4	0.0	Horz	AV	-9.5	43.4	54.0	-10.6
7326.242	37.4	7.9	1.53	335.0	5.4	0.0	Vert	AV	-9.5	41.2	54.0	-12.8
7326.592	51.6	7.9	1.62	51.0	0.0	0.0	Horz	PK	-9.5	50.0	74.0	-24.0
7326.408	50.1	7.9	1.53	335.0	0.0	0.0	Vert	PK	-9.5	48.5	74.0	-25.5



RMP60MQE - 2481 MHz – 1 Mbps

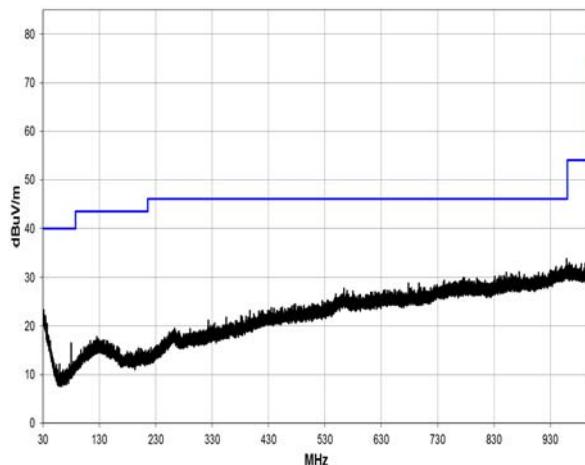

30 MHz to 1 GHz

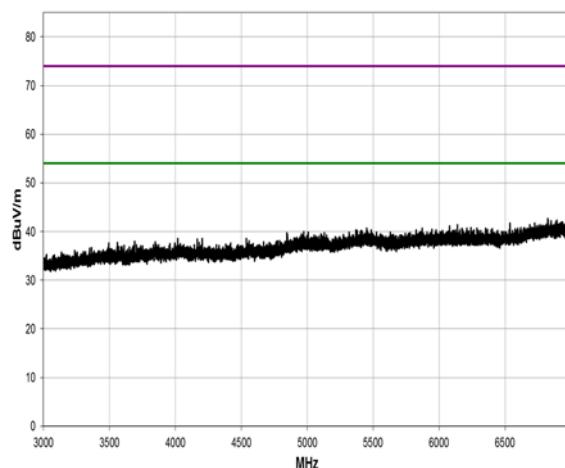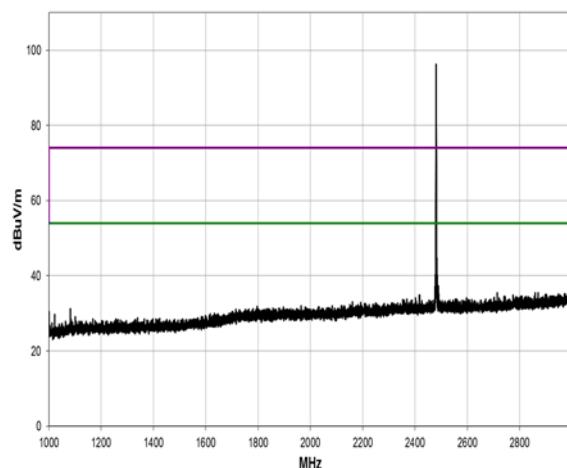

1 GHz to 3 GHz

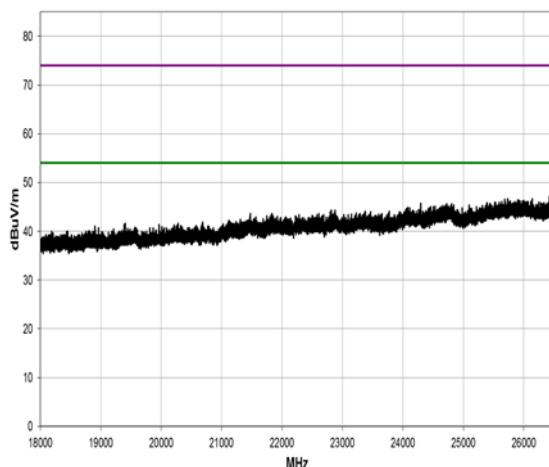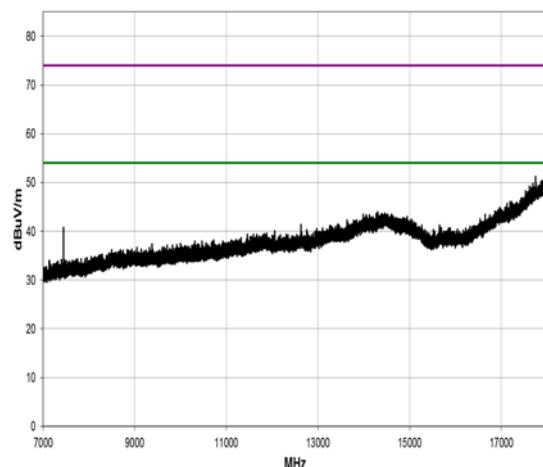


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7443.217	37.4	8.0	1.53	333.0	5.4	0.0	Vert	AV	-9.5	41.3	54.0	-12.7
7443.233	36.3	8.0	1.43	148.1	5.4	0.0	Horz	AV	-9.5	40.2	54.0	-13.8
7443.567	50.2	8.0	1.43	148.1		0.0	Horz	PK	-9.5	48.7	74.0	-25.3
7443.875	50.1	8.0	1.53	333.0		0.0	Vert	PK	-9.5	48.6	74.0	-25.4


RMP60MQE - 2481 MHz Upper Band Edge Plot – Peak

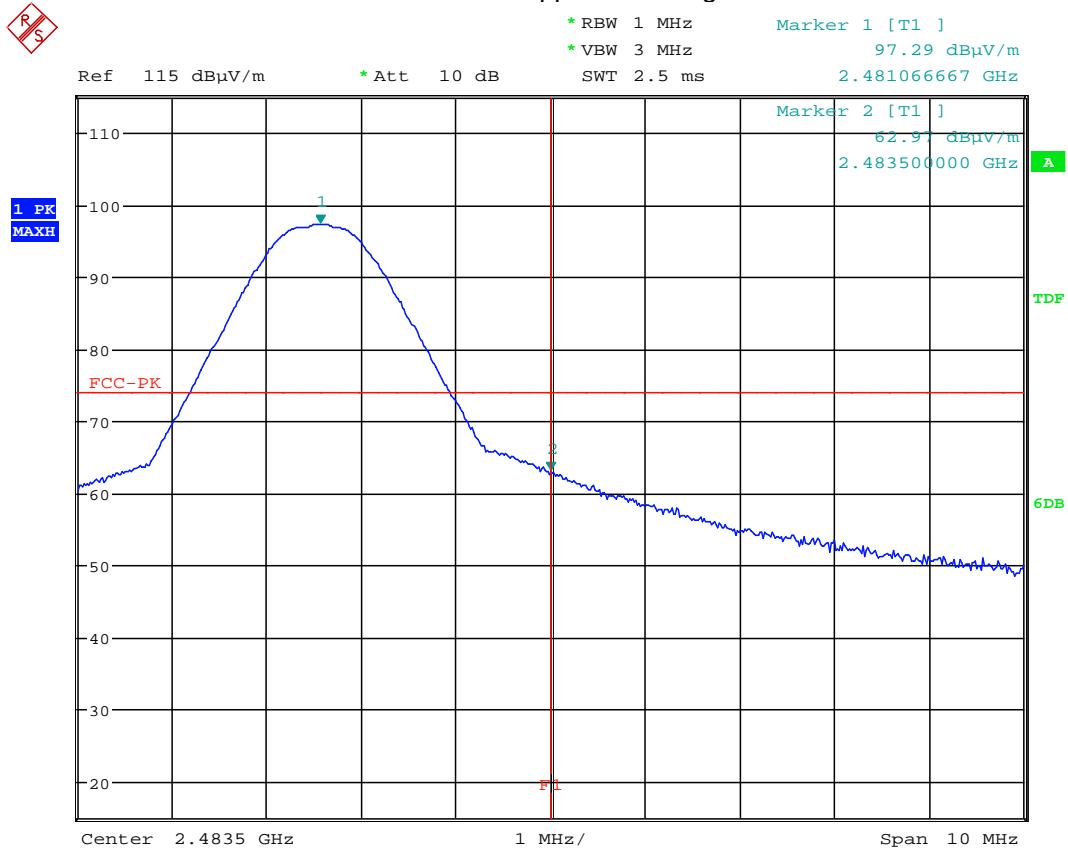


RMP60MQE - 2481 MHz Upper Band Edge Plot – Average

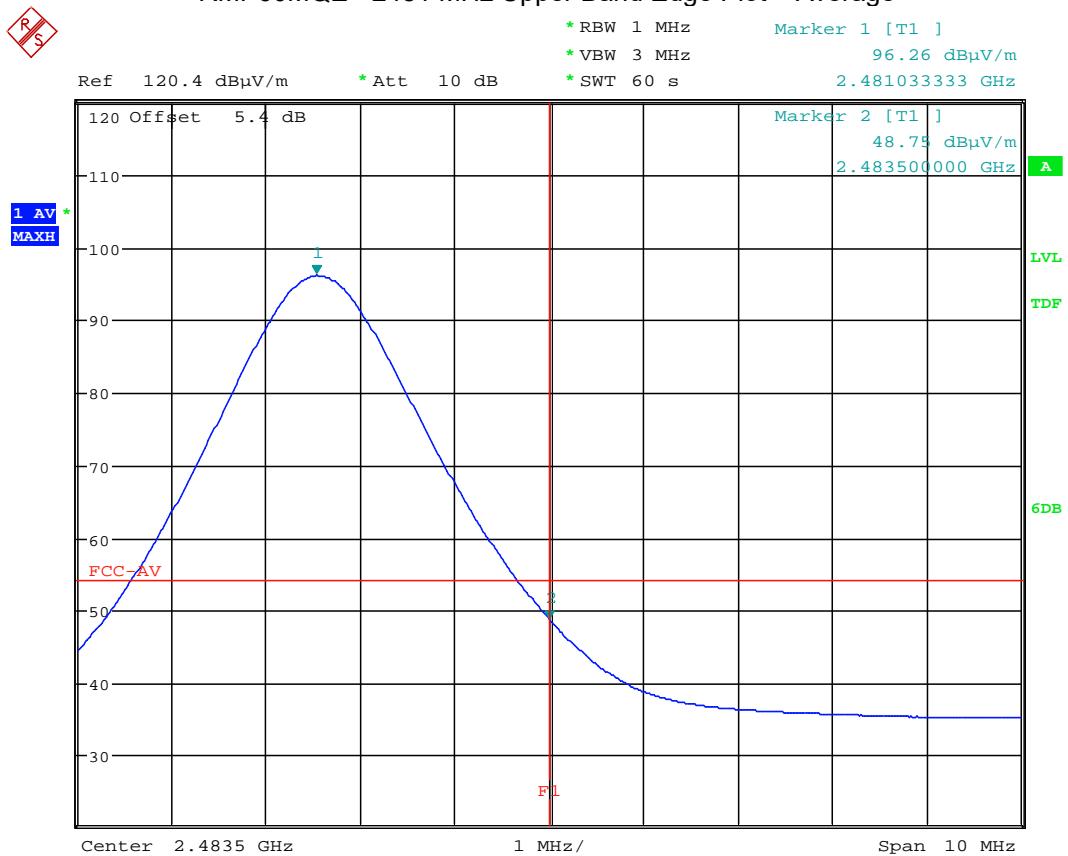



RMP60MQE - 2481 MHz Upper Band Edge Plot – All Hopping

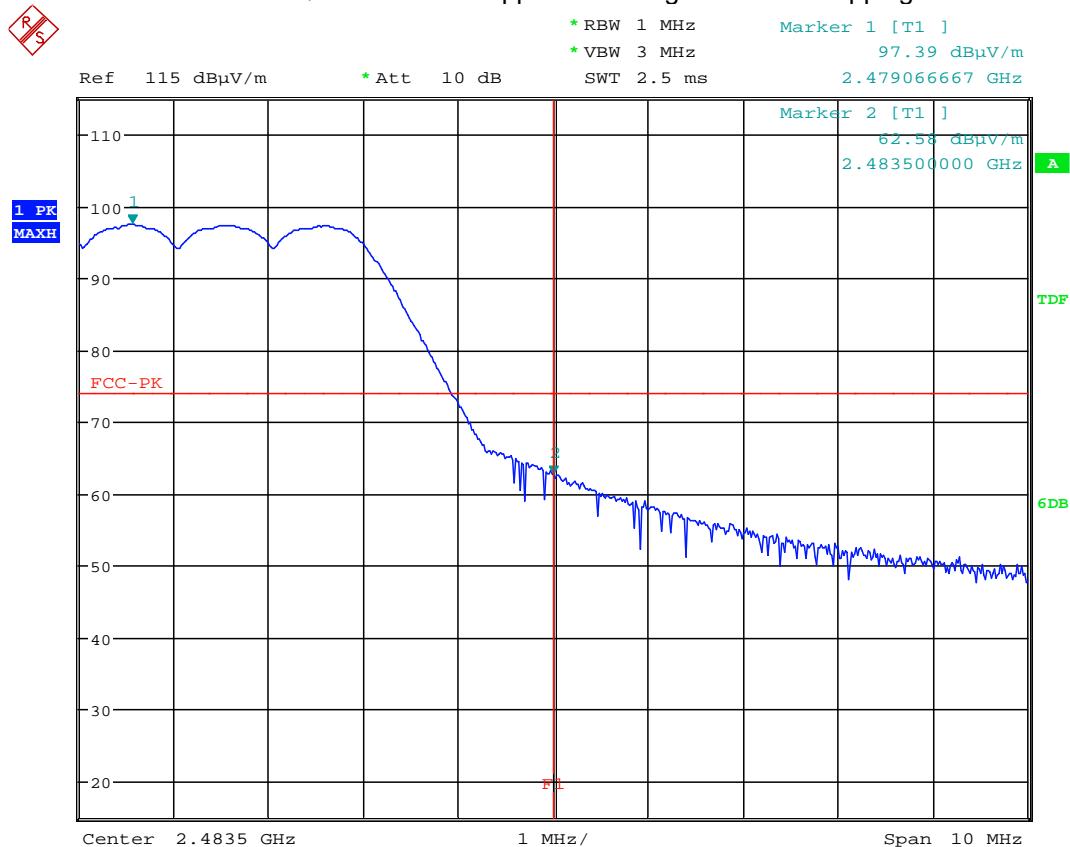



RMP60MQE - 2404 MHz – 2 Mbps

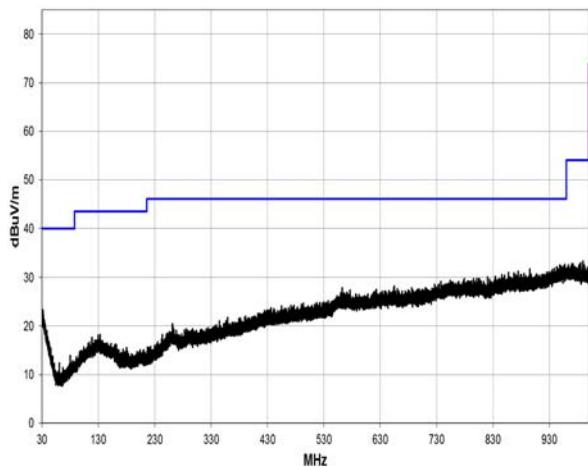

30 MHz to 1 GHz

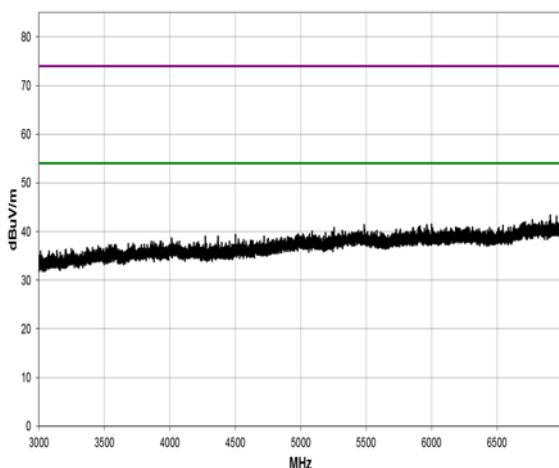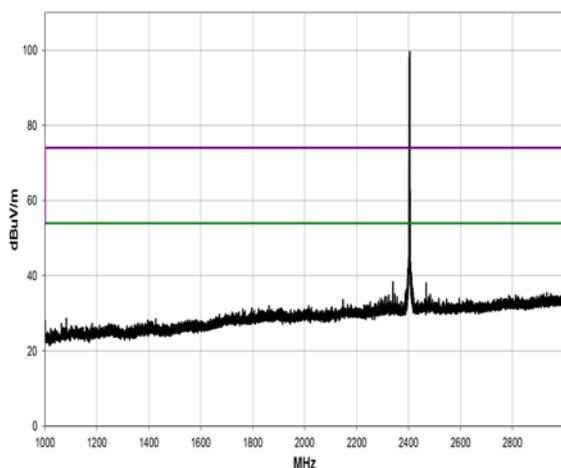

1 GHz to 3 GHz

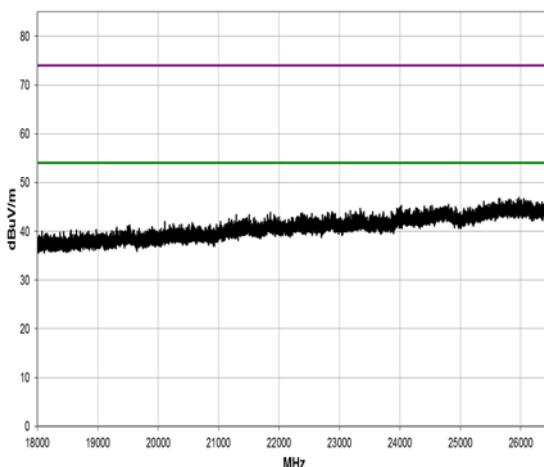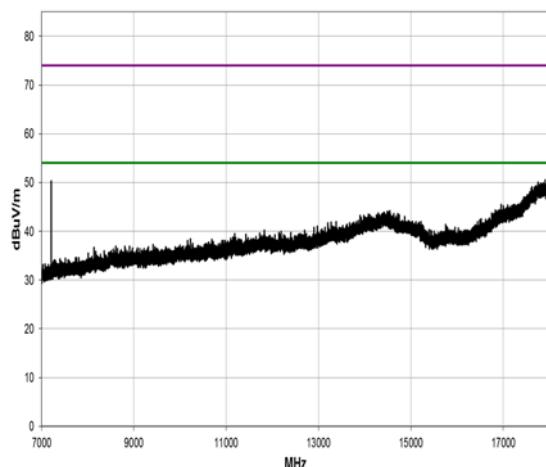


7 GHz to 18 GHz



18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7213.042	45.0	7.7	1.5	79.9	5.2	0.0	Horz	AV	-9.5	48.4	54.0	-5.6
7213.050	43.4	7.7	1.43	219.9	5.2	0.0	Vert	AV	-9.5	46.8	54.0	-7.2
7213.025	57.5	7.7	1.5	79.9	0.0	0.0	Horz	PK	-9.5	55.7	74.0	-18.3
7212.975	55.9	7.7	1.43	219.9	0.0	0.0	Vert	PK	-9.5	54.1	74.0	-19.9



RMP60MQE - 2442 MHz – 2 Mbps

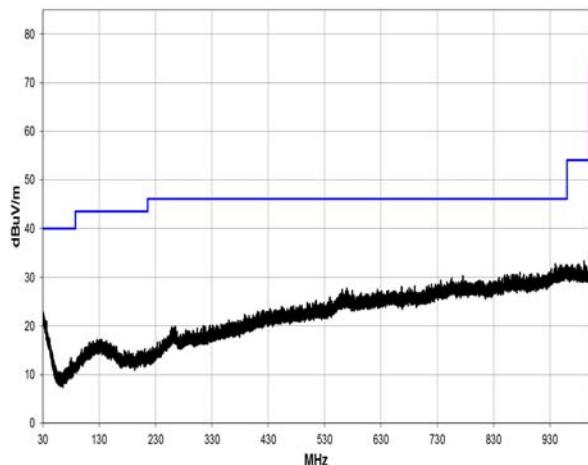

30 MHz to 1 GHz

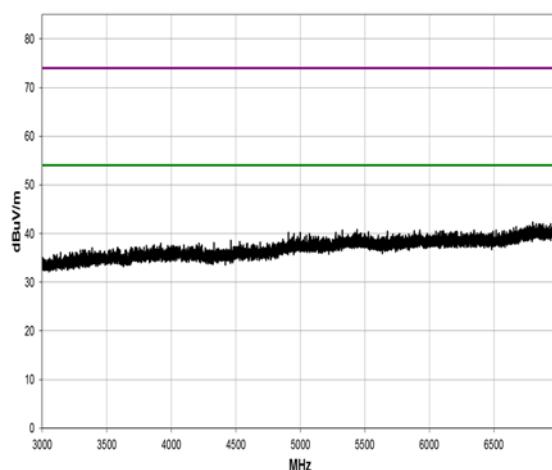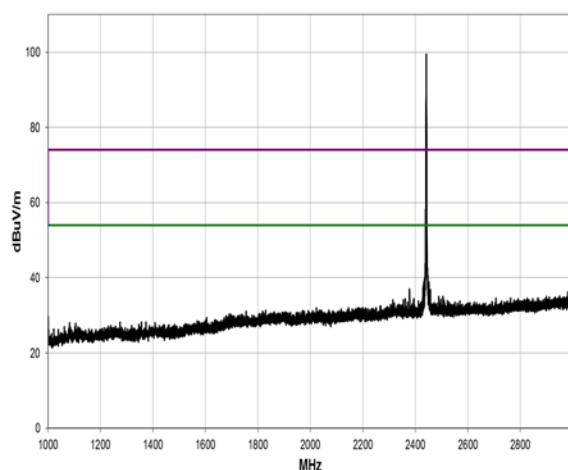

1 GHz to 3 GHz

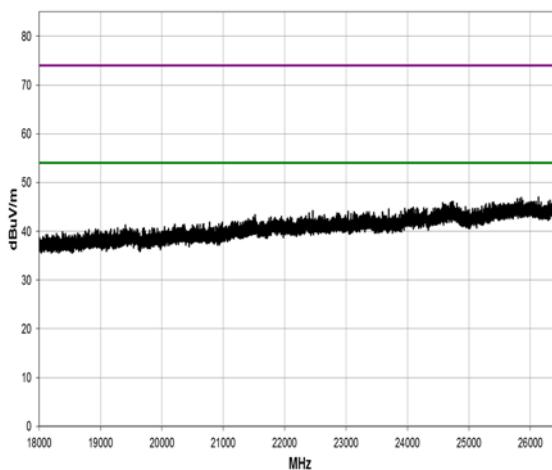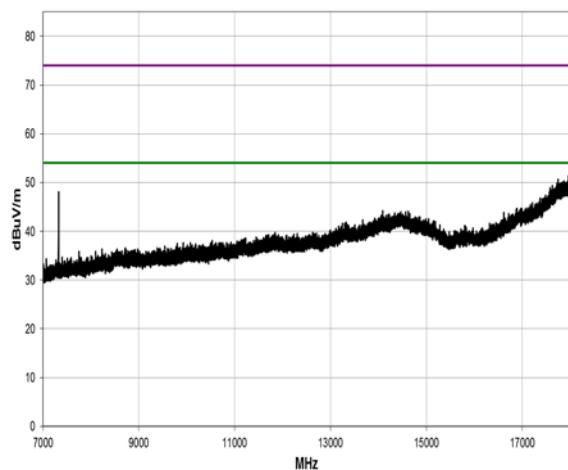


7 GHz to 18 GHz



18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBu)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7327.050	44.2	7.9	1.45	146.1	5.2	0.0	Horz	AV	-9.5	47.8	54.0	-6.2
7327.017	41.9	7.9	1.5	336.0	5.2	0.0	Vert	AV	-9.5	45.5	54.0	-8.5
7327.033	56.8	7.9	1.45	146.1	0.0	0.0	Horz	PK	-9.5	55.2	74.0	-18.8
7325.300	54.8	7.9	1.5	336.0	0.0	0.0	Vert	PK	-9.5	53.2	74.0	-20.8



RMP60MQE - 2480 MHz – 2 Mbps

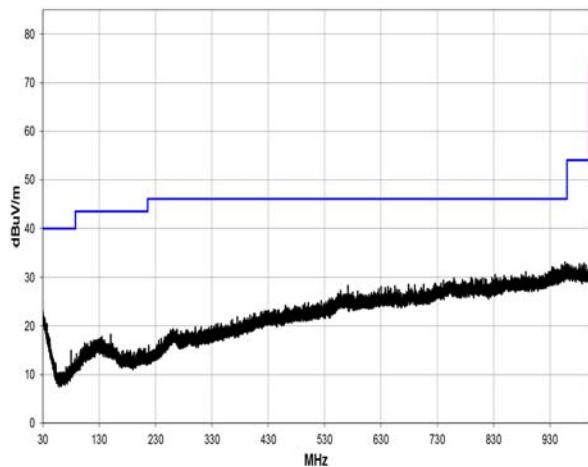

30 MHz to 1 GHz

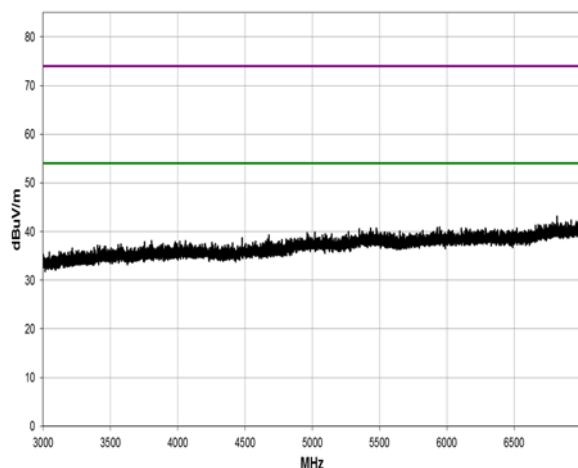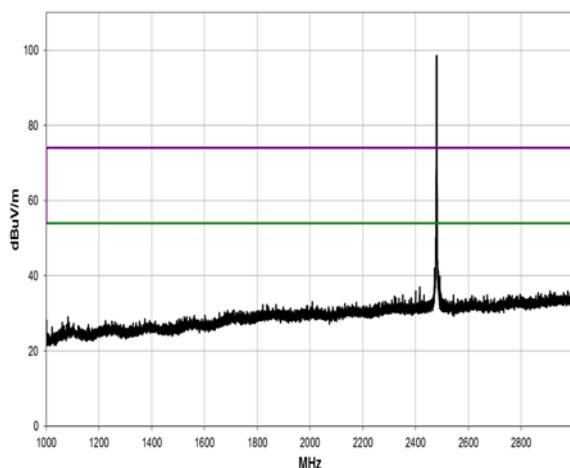

1 GHz to 3 GHz

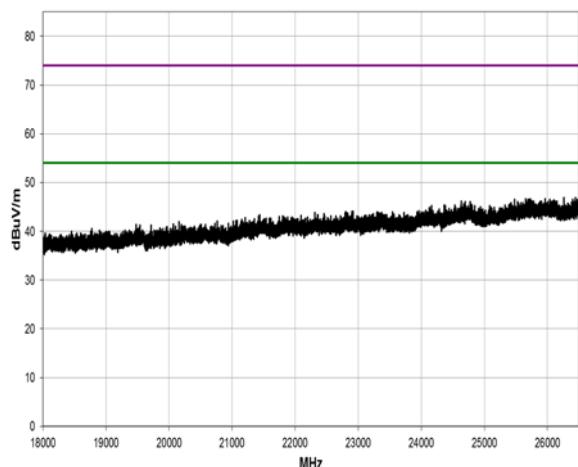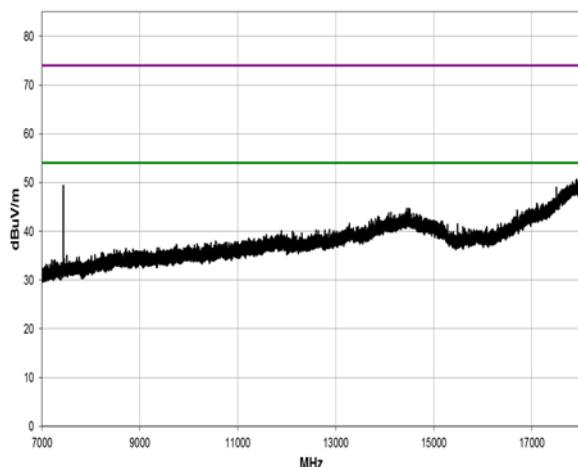


7 GHz to 18 GHz


18 GHz to 26.5 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
7441.025	42.5	8.0	1.46	145.1	5.2	0.0	Horz	AV	-9.5	46.2	54.0	-7.8
7441.050	41.8	8.0	1.53	335.0	5.2	0.0	Vert	AV	-9.5	45.5	54.0	-8.5
7439.942	55.9	8.0	1.46	145.1	0.0	0.0	Horz	PK	-9.5	54.4	74.0	-19.6
7439.083	54.9	8.0	1.53	335.0	0.0	0.0	Vert	PK	-9.5	53.4	74.0	-20.6


RMP60MQE - 2480 MHz Upper Band Edge Plot – Peak

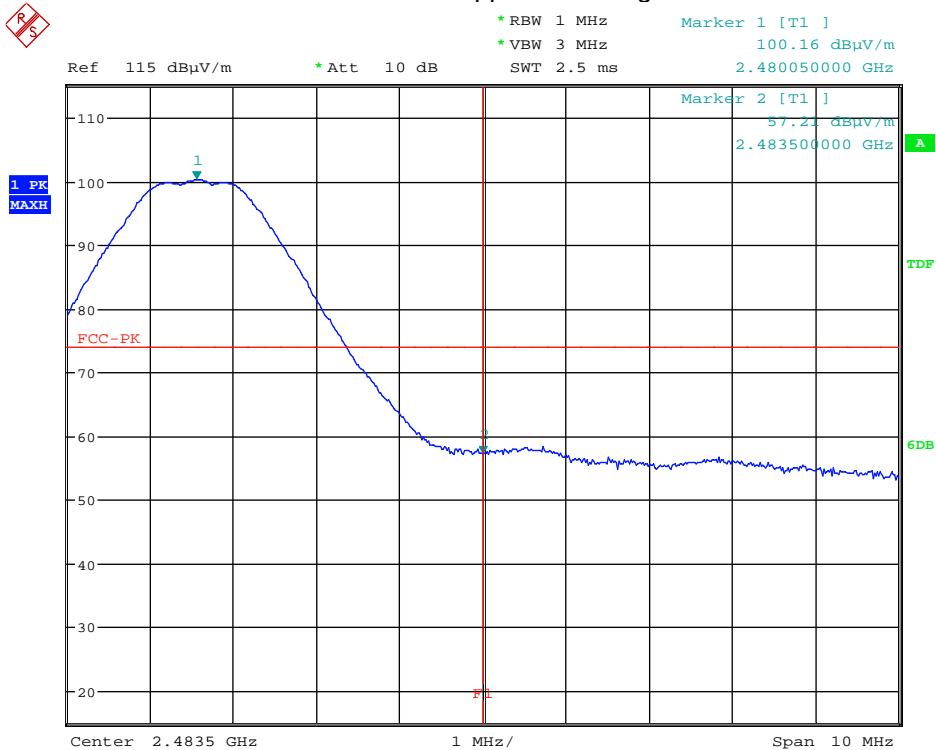

RMP60MQE - 2480 MHz Upper Band Edge Plot - Average

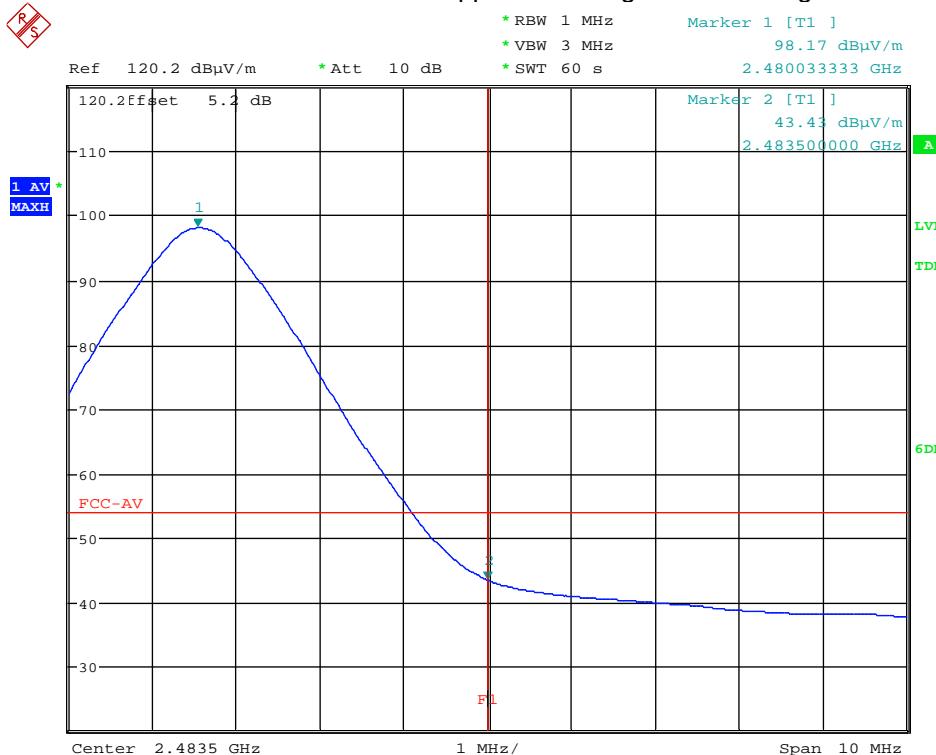

RMP60MQE - 2480 MHz Upper Band Edge Plot – All Hopping

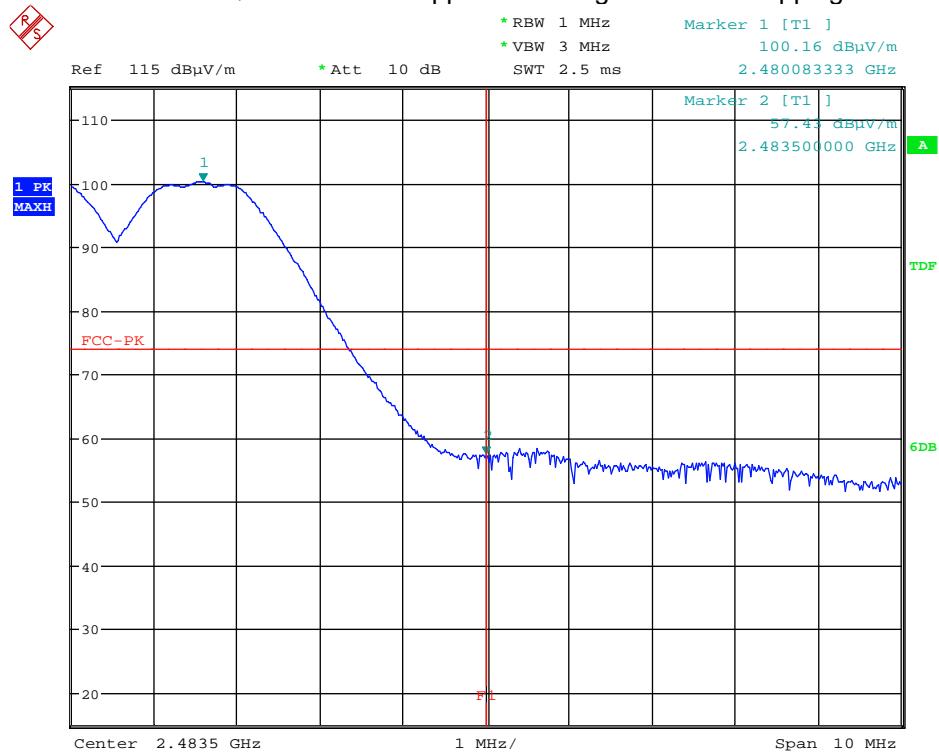

12 Carrier frequency separation

12.1 Definition

The carrier frequency separation is the frequency separation between two adjacent hopping frequencies.

12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.2
EUT Channels / Frequencies Measured:	Mode 1: 2403 to 2481 MHz Mode 2: 2404 to 2480
EUT 20dB Bandwidth:	Mode 1: 937.5 kHz Mode 2: 1.818 MHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	100 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23x °C	+15 °C to +35 °C (as declared)
Humidity: 29 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 Vdc	

12.3 Test Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400 to 2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

Figure iii Test Setup



12.5 Test Equipment


Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2020-10-21

12.6 Test Results

<i>Mode 1: 1MBps</i>				
<i>Data Rate</i>	<i>F_{1c} (MHz)</i>	<i>F_{2c} (MHz)</i>	<i>Channel Separation, F_{2c} – F_{1c} (kHz)</i>	<i>Result</i>
1 MBps	2441.194712	2442.192308	997.596153	PASS


<i>Mode 2: 2MBps</i>				
<i>Data Rate</i>	<i>F_{1c} (MHz)</i>	<i>F_{2c} (MHz)</i>	<i>Channel Separation, F_{2c} – F_{1c} (MHz)</i>	<i>Result</i>
2 MBps	2440.018429	2442.030448	2.012015	PASS

Mode 1:

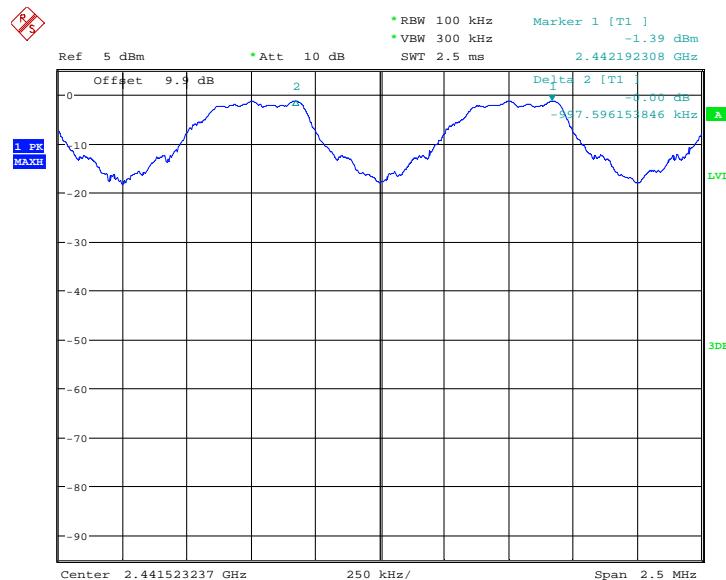

Date: 20.NOV.2019 12:27:23

Mode 2:

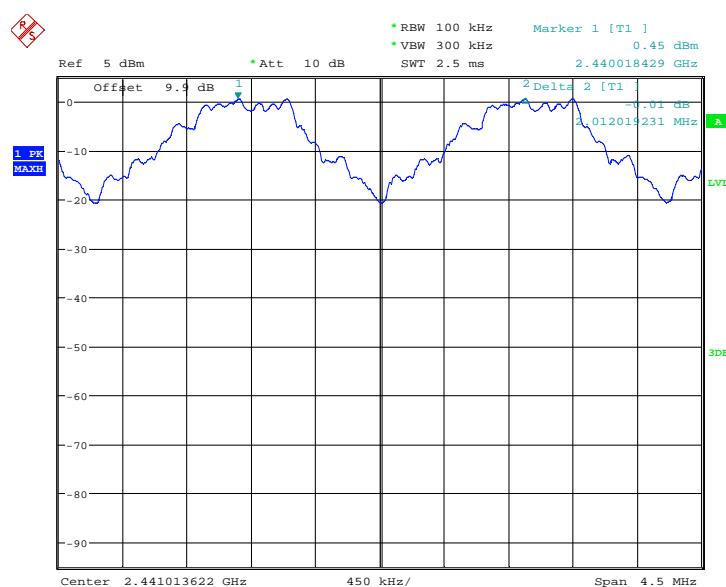

Date: 20.NOV.2019 12:10:18

13 Number of hopping frequencies

13.1 Definition

The total number of hopping frequencies (the centre frequencies defined within the hopping sequence of a FHSS equipment) which are randomly sequenced in order to spread the transmission.

13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.3
EUT Channels / Frequencies Measured:	All; 2400 – 2483.5 MHz
EUT 20dB Bandwidth:	Mode 1: 937.5 kHz Mode 2: 1.818 MHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 29 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 V dc	

13.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels; If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz shall use at least 15 hopping channels;
- Frequency hopping systems operating in the band 5725 to 5850 MHz shall use at least 75 hopping channels.

13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

Figure iv Test Setup




13.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2020-10-21

13.6 Test Results


Data Rate	Lowest channel, F_{CL} (MHz)	Highest channel, F_{CH} (MHz)	Number of channels observed	Result
1 MBps	2403.0 MHz	2481.0 MHz	79	PASS
2 MBps	2404.0 MHz	2480.0 MHz	39	PASS

Mode 1:

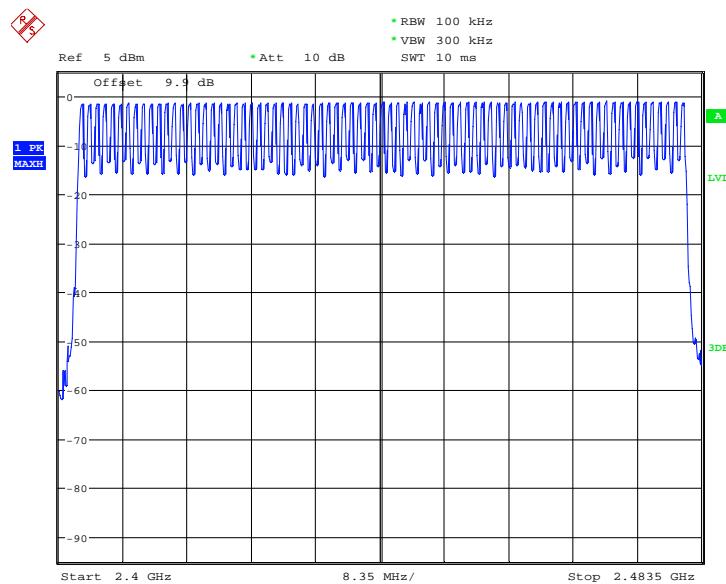

Date: 20.NOV.2019 11:58:06

Mode 2:

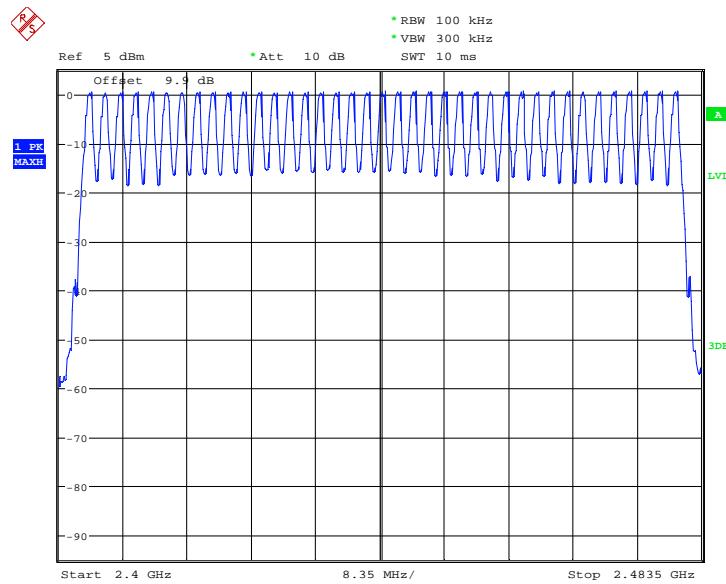

Date: 20.NOV.2019 12:03:30

14 Average channel occupancy

14.1 Definition

The channel occupancy is the total of the transmitter 'on' times, during an observation period, on a particular hopping frequency.

14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.4
Frequencies Measured:	2442.0 MHz
EUT 20dB bandwidth:	Mode 1:937.5 kHz Mode 2:1818.910 kHz
EUT Number of hopping channels:	Mode 1: 79 Mode 2: 39
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	100 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 30 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 Vdc	

14.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20 second period;
If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10 second period;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed;
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. A number of hops were observed to confirm consistency of the dwell time / observe the worst case. All modulation schemes, data rates and power settings were used to observe the worst-case configuration.

Figure v Test Setup




14.5 Test Equipment


Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2020-10-21
SMBV100A	R&S	Signal Generator	U677	2020-05-07
AA18-10H	Atlantic Microwave	Attenuator	U634	Cal using U405 and U677

14.6 Test Results

Mode 1: 1Mbps					
Data Rate	Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
1Mbps	0.192	31.6	400	0.0768	PASS

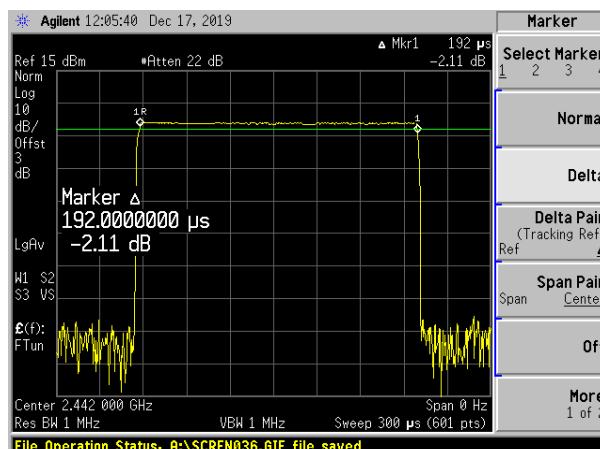

TX On

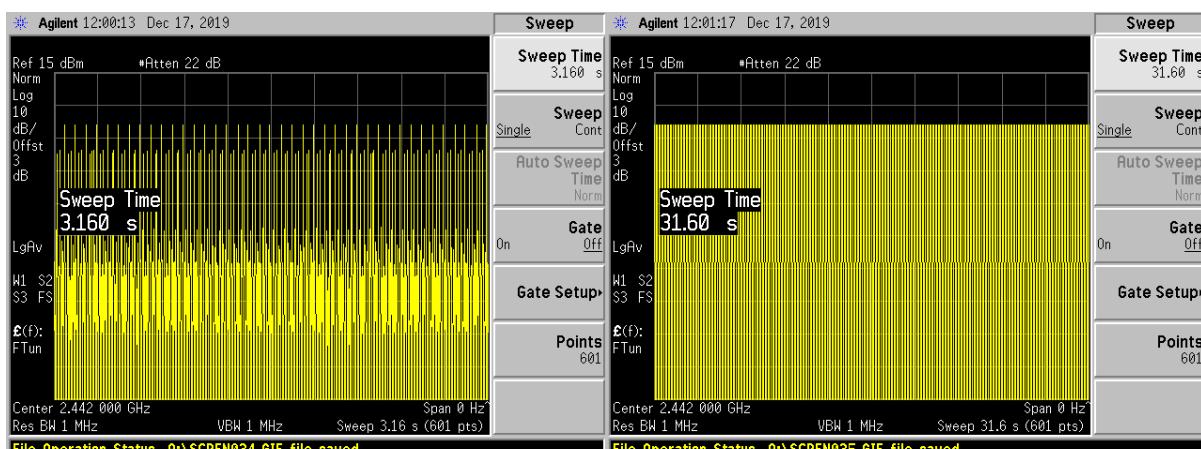


Number of Transmissions in measurement period

Number of transmissions in a 3.16 second period = 40

Number of transmissions in a 31.6 second period = 40 * 10 = 400

Mode 2: 2Mbps					
Data Rate	Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
2Mbps	0.103	15.6	810	0.08343	PASS

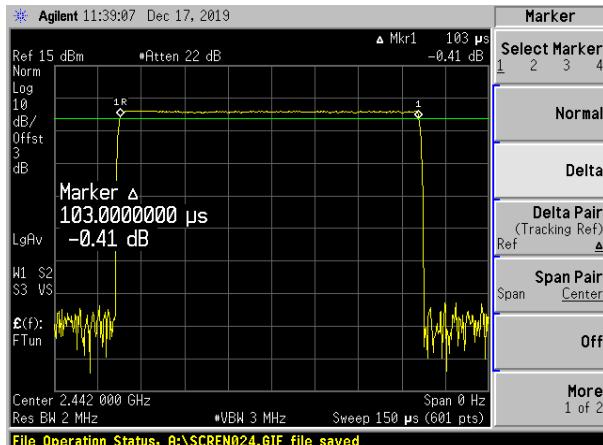

TX On



Number of Transmissions in measurement period

Number of transmissions in a 1.56 second period = 81

Number of transmissions in a 15.6 second period = 81 * 10 = 810

15 Maximum peak conducted output power

15.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

The maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.5
Frequencies Measured:	Mode 1: 2403 MHz / 2442 MHz/ 2481 MHz – hopping disabled. Mode 2: 2404 MHz / 2442 MHz/ 2480 MHz – hopping disabled / DTS
EUT Channel Bandwidths:	Mode 1: 1 MHz Mode 2: 2 MHz
Deviations From Standard:	None
Measurement BW:	Mode 1: 1 MHz Mode 2: 2 MHz
Spectrum Analyzer Video BW:	Mode 1: 3 MHz Mode 2: 5 MHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	Battery Power = new battery.

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 29 % RH	20 % RH to 75 % RH (as declared)

15.3 Test Limit


- For frequency hopping systems operating in the band 902 to 928 MHz, the maximum peak conducted output power shall not exceed 1 W, and the e.i.r.p. shall not exceed 4 W, if the hopset uses 50 or more hopping channels;
the maximum peak conducted output power shall not exceed 0.25 W, and the e.i.r.p. shall not exceed 1 W, if the hopset uses less than 50 hopping channels.
- For frequency hopping systems operating in the band 2400 to 2483.5 MHz and employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W. The e.i.r.p. shall not exceed 4 W.
- For frequency hopping systems operating in the band 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.
- Point-to-point systems in the bands 2400-2483.5 MHz and 5725 to 5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers.
- For systems employing digital modulation techniques operating in the bands 902 to 928 MHz, 2400 to 2483.5 MHz and 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure vi Test Setup




15.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2020-10-21
SMBV100A	R&S	Signal Generator	U677	2020-05-07
AA18-10H	Atlantic Microwave	Attenuator	U634	Cal using U405 and U677


15.6 Test Results

Mode 1: 1 Mbps							
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Maximum Peak Conducted Output power (dBm)	Maximum peak conducted output power (W)	Antenna gain (dBi)	E.I.R.P. (W)	Result
2403	-10.90	9.9	-1.00	0.0008	1.31	0.0011	PASS
2442	-10.66	9.9	-0.76	0.0008	1.31	0.0011	PASS
2481	-10.40	9.9	-0.50	0.0009	1.31	0.0012	PASS

2403 MHz

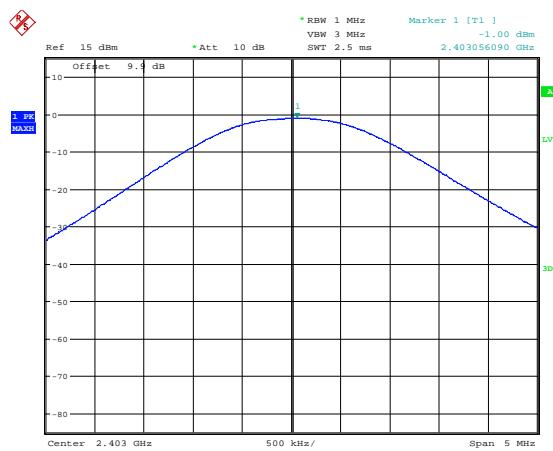

2442 MHz

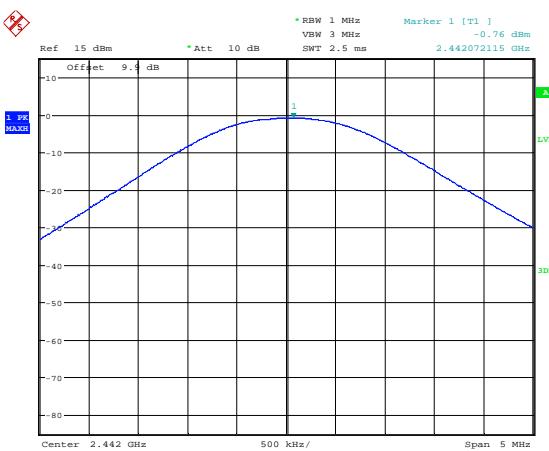

Date: 20.NOV.2019 16:46:59

Date: 20.NOV.2019 16:47:58


2481 MHz




Date: 20.NOV.2019 16:50:59

Mode 2: 2 Mbps							
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Maximum Peak Conducted Output power (dBm)	Maximum peak conducted output power (W)	Antenna gain (dBi)	E.I.R.P. (W)	Result
2404	-8.74	9.9	1.16	0.0013	1.31	0.0018	PASS
2442	-8.68	9.9	1.22	0.0013	1.31	0.0018	PASS
2480	-8.52	9.9	1.38	0.0014	1.31	0.0019	PASS

2404 MHz

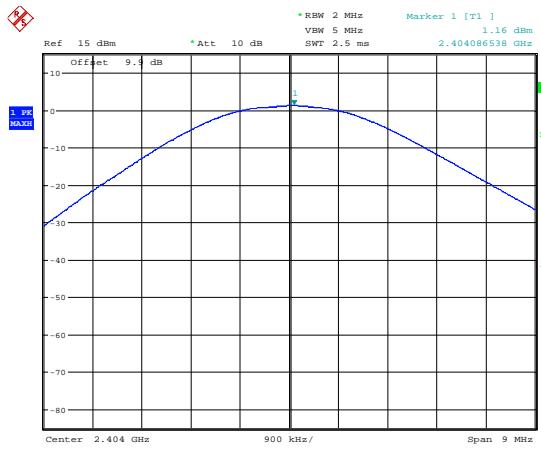

2442 MHz

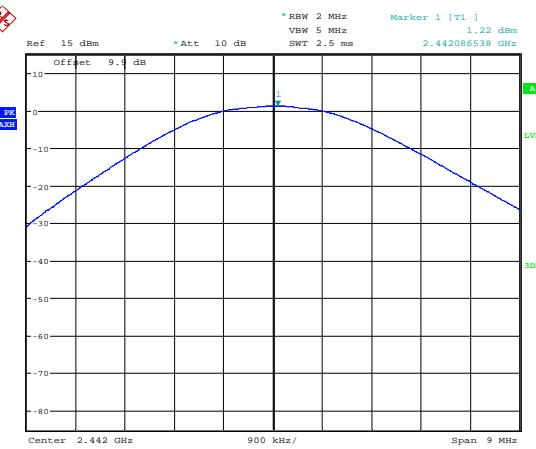

2480 MHz



16 Power spectral density

16.1 Definition

The power per unit bandwidth.

16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.10
EUT Channels / Frequencies Measured:	2404 MHz / 2442 MHz / 2480 MHz
EUT Channel Bandwidths:	2 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Span: (requirement 1.5 times Channel BW)	1.3 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)

16.3 Test Limit


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

16.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure vi Test Setup




16.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
E4440A	Agilent	Spectrum Analyser	REF837	2020-07-16
AA18-03H	Atlantec	3dB SMA Attenuator	U638	Cal in Use

16.6 Test Results

Mode 2: 2 Mbps				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (dBm)	Result
2404	-2.02	3.00	0.98	PASS
2442	-2.15	3.00	0.85	PASS
2480	-1.97	3.00	1.03	PASS

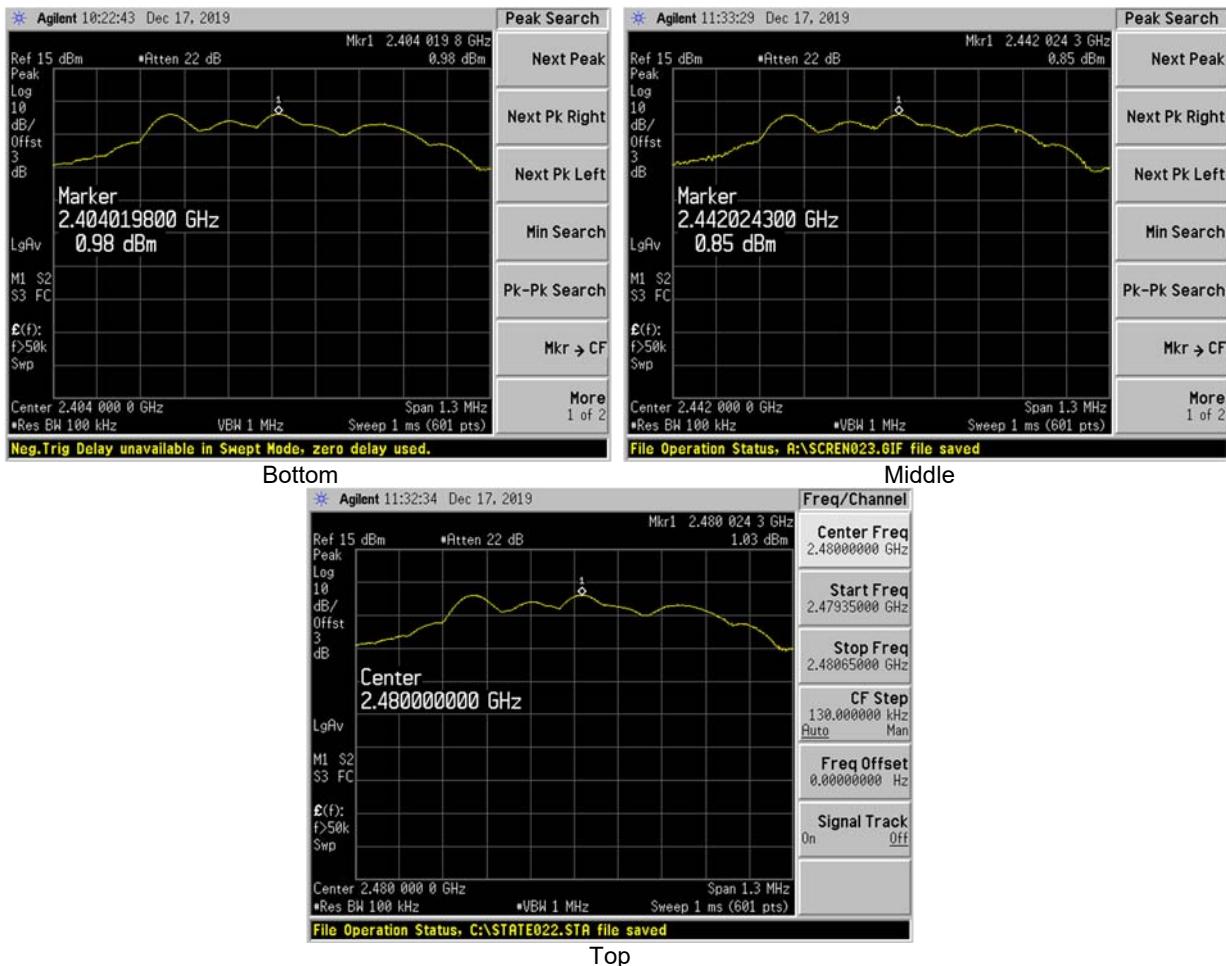

17 Occupied Bandwidth

17.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

17.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.8
Frequencies Measured:	Mode 1: 2403 MHz 2442 MHz / 2481 MHz – hopping stopped. Mode 2: 2404 MHz 2442 MHz / 2480 MHz – hopping stopped / DTS
EUT Channel Bandwidths:	Mode 1: 1 MHz Mode 2: 2 MHz
EUT Test Modulations:	Mode 1: 1MBps Binary GFSK Mode 2: 1MBps Binary GFSK
Deviations From Standard:	None
Measurement BW:	30 kHz / 100 kHz
Spectrum Analyzer Video BW:	100 kHz / 1 MHz
Measurement Span: (requirement 2 to 5 times OBW)	3 MHz / 5 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 29 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 Vdc	

17.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: The maximum allowed -20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The maximum -20 dB bandwidth of the hopping channel shall be 1 MHz
- For DTS the minimum -6 dB bandwidth shall be at least 500 kHz.

17.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure vii Test Setup




17.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2020-10-21
AA18-03H	Atlantec	3dB SMA Attenuator	U638	Cal in Use


17.6 Test Results

Mode 1: 1 Mbps 20 dB Bandwidth				
Channel Frequency (MHz)	F _L (MHz)	F _H (MHz)	20dB Bandwidth (kHz)	Result
2403.0	2402.538462	2403.475962	937.500	PASS
2442.0	2441.538462	2442.475962	937.500	PASS
2481.0	2480.538462	2481.475962	937.500	PASS

2403 MHz

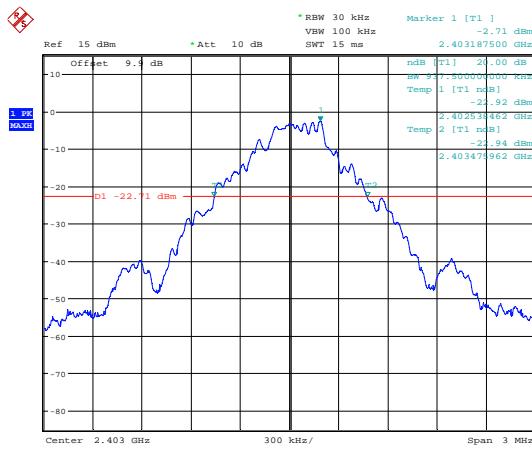


2442.0 MHz

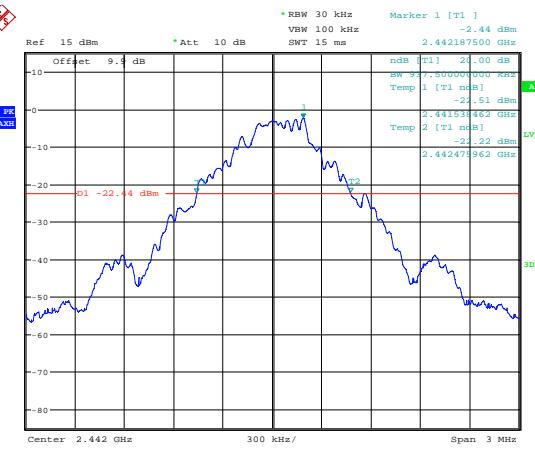

Date: 20.NOV.2019 13:20:28

Date: 20.NOV.2019 13:25:08

2481 MHz

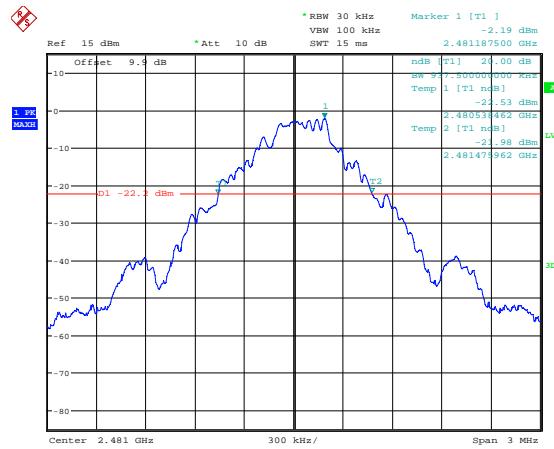


Date: 20.NOV.2019 13:27:27

Mode 2: 2Mbps 20 dB Bandwidth				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	20dB Bandwidth (kHz)	Result
2404.0	2403.062500	2404.881410	1818.910	PASS
2442.0	2441.062500	2442.881410	1818.910	PASS
2480.0	2479.062500	2480.881410	1818.910	PASS

2404 MHz


2442.0 MHz

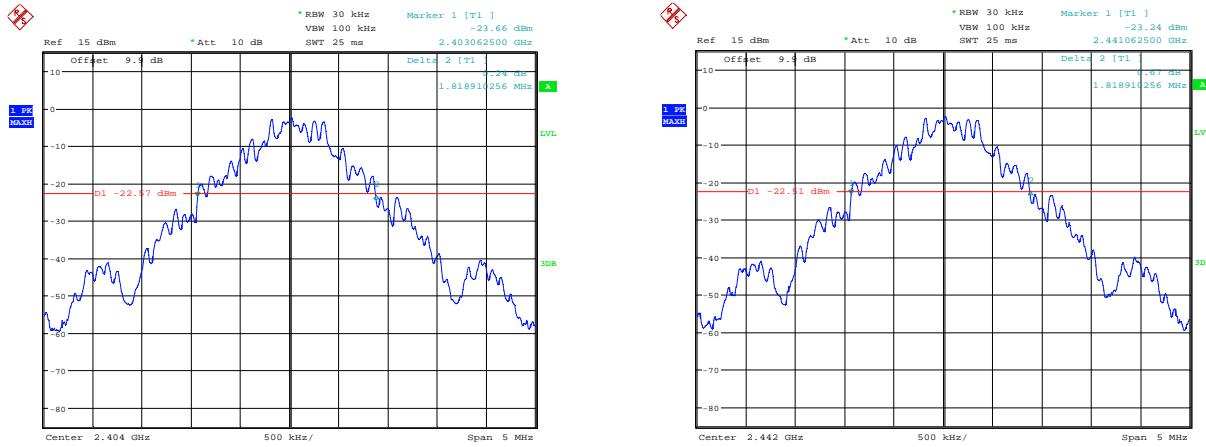

Date: 20.NOV.2019 16:01:45

Date: 20.NOV.2019 16:06:46

2480 MHz

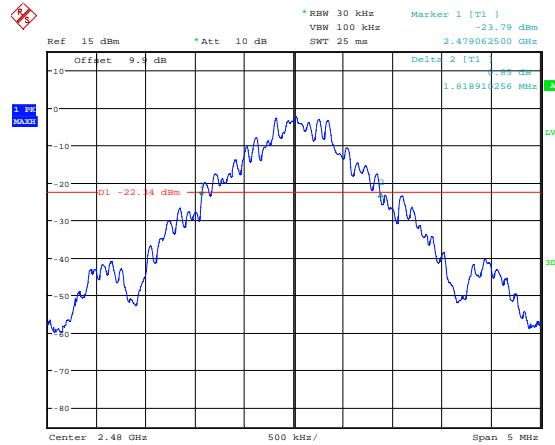

Date: 20.NOV.2019 16:33:31

Mode 2: 2 Mbps 6 dB DTS bandwidth				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	6dB Bandwidth (kHz)	Result
2404.0	2403.600	2404.425	825.0	PASS
2442.0	2441.600	2442.425	825.0	PASS
2480.0	2479.600	2480.425	825.0	PASS

2404 MHz**2442 MHz****2480 MHz**

18 Out-of-band and conducted spurious emissions

18.1 Definition

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

18.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.8 ANSI C63.10-2013, Clause 11.11
Frequencies Measured:	Mode 1: 2403 MHz/2442 MHz/2481 MHz Mode 2: 2404 MHz/2442 MHz/2480 MHz
EUT Channel Bandwidths:	Mode 1: 1 MHz Mode 2: 2 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	30 MHz to 25 GHz

Environmental Conditions (Normal Environment)

Temperature: 23°C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)
Supply: 3.0 Vdc	

18.3 Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

18.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure viii Test Setup




18.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2020-10-21
SMBV100A	R&S	Signal Generator	U677	2020-05-07
AA18-10H	Atlantic Microwave	Attenuator	U634	Cal using U405 and U677

18.6 Test Results


Mode 1: 1MBps GFSK						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
2403	No Significant emissions within 20 dB of the limit					PASS
2442	No Significant emissions within 20 dB of the limit					PASS
2481	No Significant emissions within 20 dB of the limit					PASS

2403 MHz 30 MHz- 1 GHz

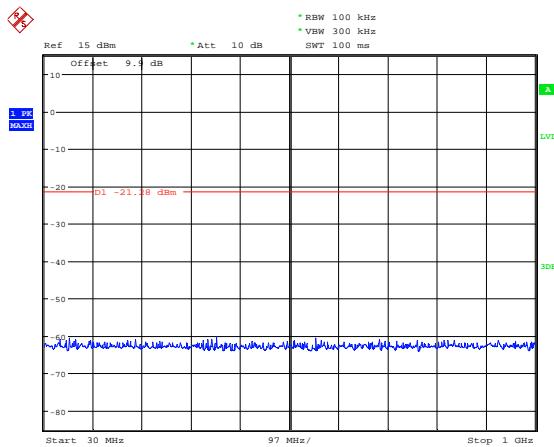


Date: 22.NOV.2019 10:55:32

2403 MHz 1 GHz-5 GHz

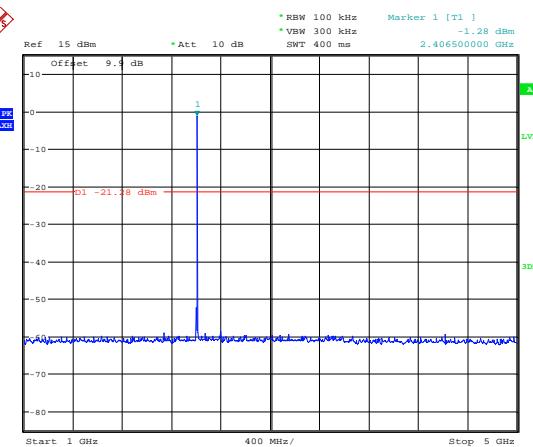


Date: 22.NOV.2019 10:53:27

2403 MHz 5 GHz -10 GHz

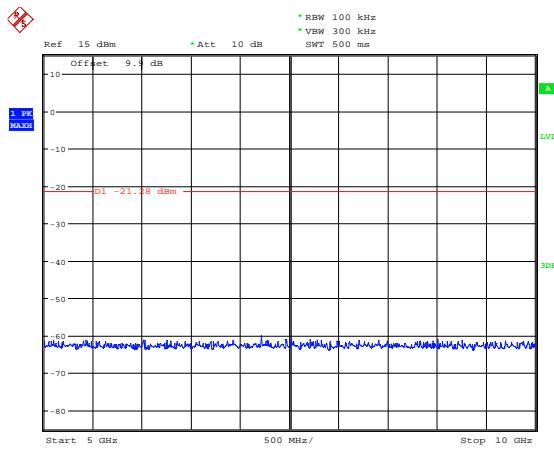


Date: 22.NOV.2019 10:53:51

2403 MHz 10 GHz-15 GHz

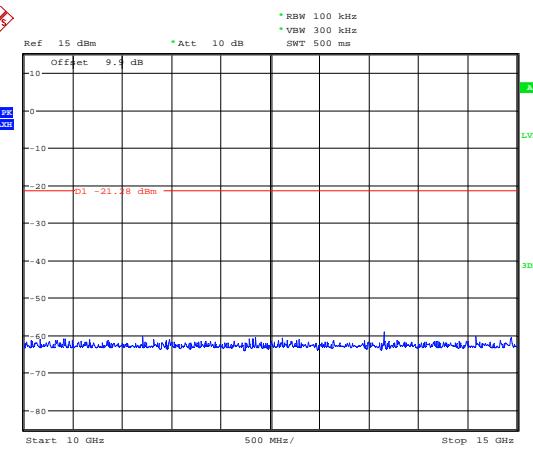


Date: 22.NOV.2019 10:54:14

2403 MHz 15 GHz -20 GHz

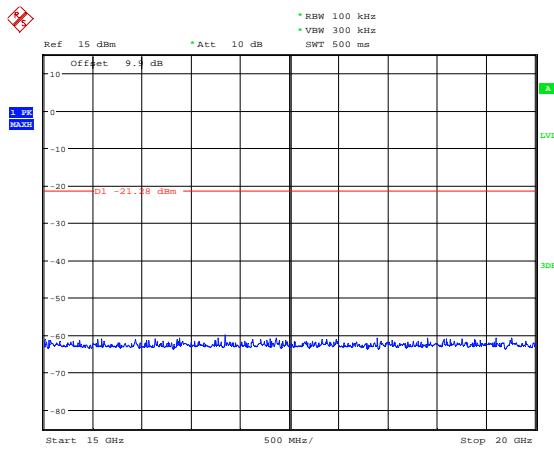


Date: 22.NOV.2019 10:54:43

2403 MHz 20 GHz-25 GHz

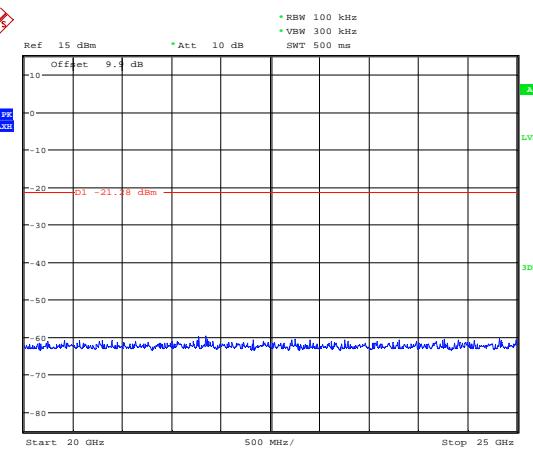


Date: 22.NOV.2019 10:55:14

2442 MHz 30 MHz- 1 GHz

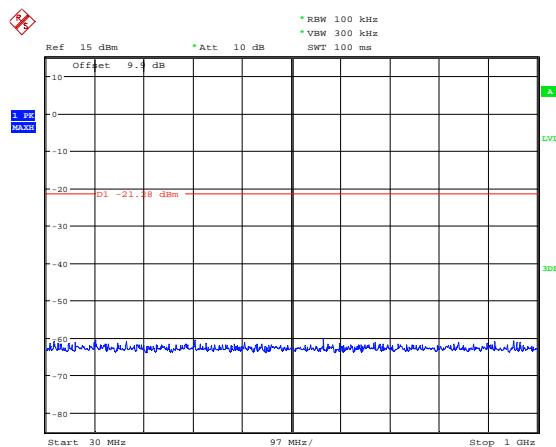


Date: 22.NOV.2019 10:59:47

2442 MHz 1 GHz-5 GHz

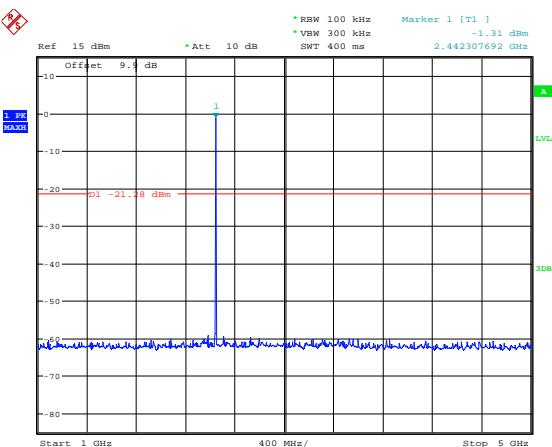


Date: 22.NOV.2019 10:57:58

2442 MHz 5 GHz -10 GHz

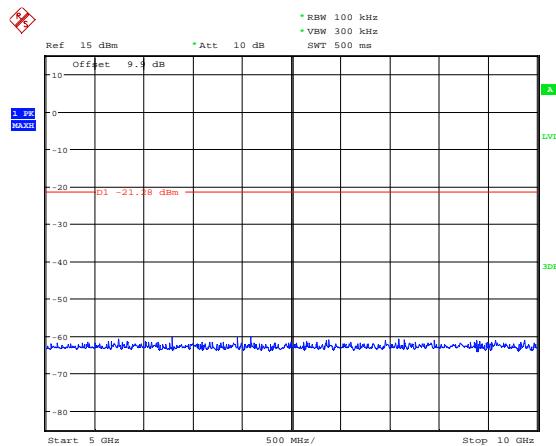


Date: 22.NOV.2019 10:58:17

2442 MHz 10 GHz-15 GHz

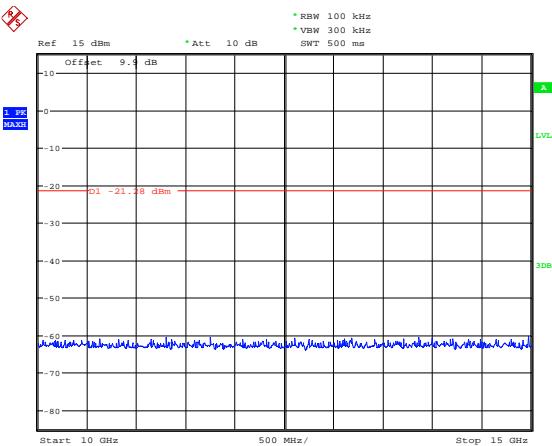


Date: 22.NOV.2019 10:58:40

2442 MHz 15 GHz -20 GHz

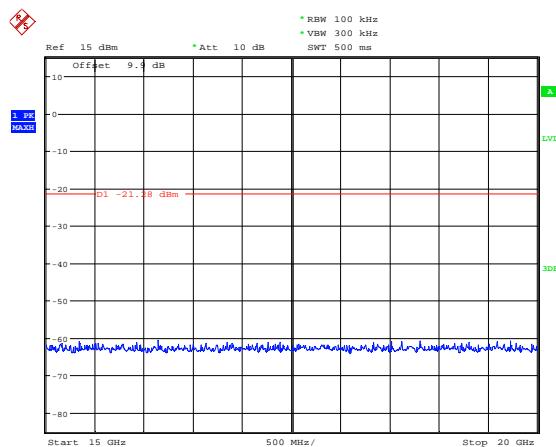


Date: 22.NOV.2019 10:58:58

2442 MHz 20 GHz-25 GHz

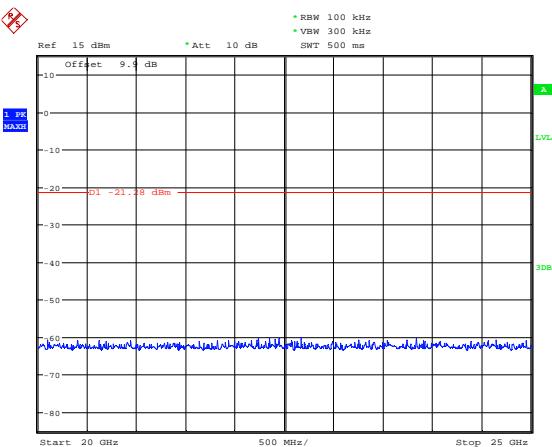


Date: 22.NOV.2019 10:59:24

2481 MHz 30 MHz- 1 GHz

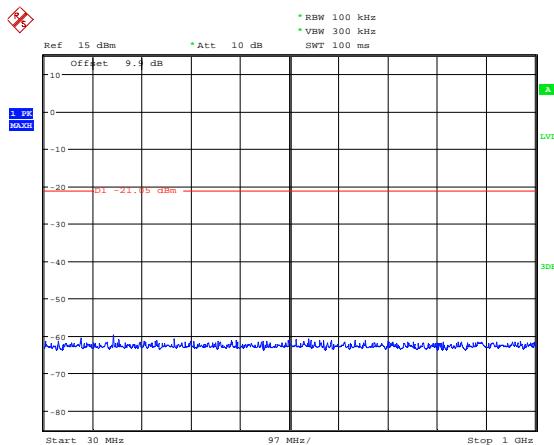


Date: 22.NOV.2019 11:05:02

2481 MHz 1 GHz-5 GHz

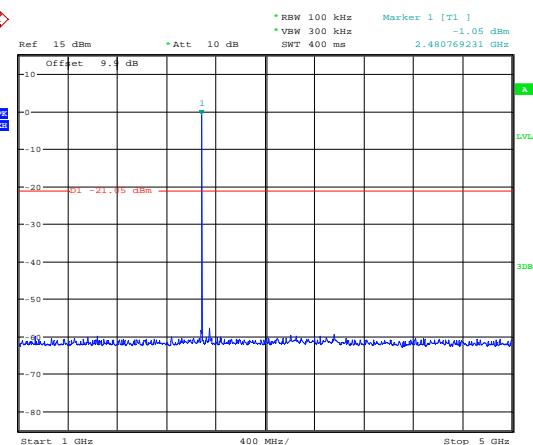


Date: 22.NOV.2019 11:03:03

2481 MHz 5-10 GHz

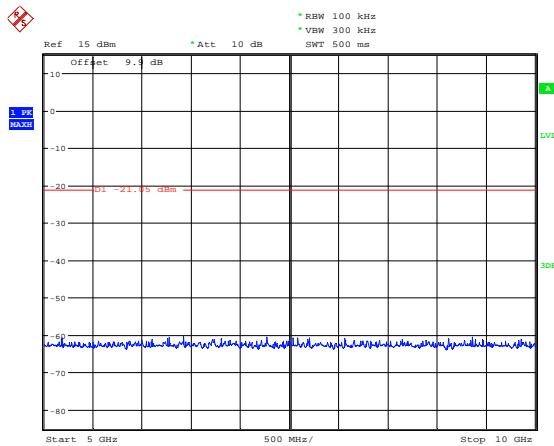


Date: 22.NOV.2019 11:03:24

2481 MHz 10 GHz-15 GHz

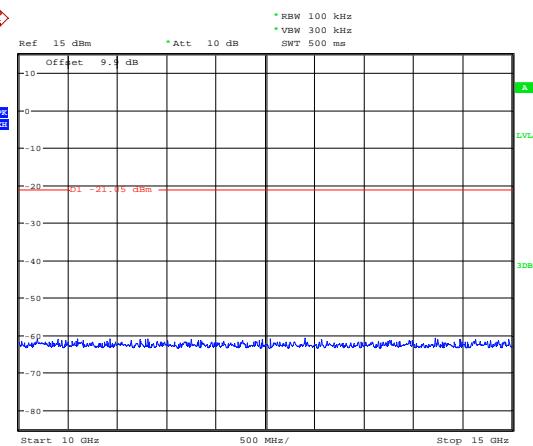


Date: 22.NOV.2019 11:03:53

2481 MHz 15-20 GHz

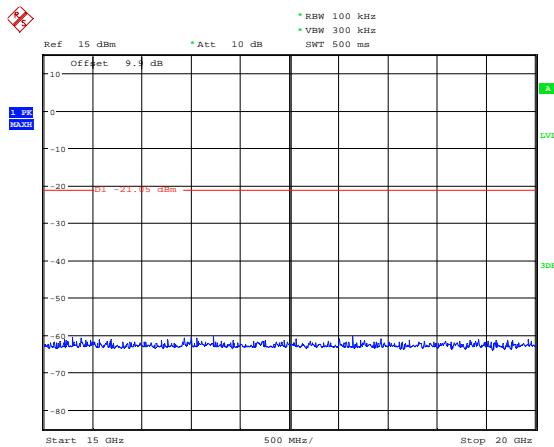

Date: 22.NOV.2019 11:04:17


2481 MHz 20 GHz-25 GHz

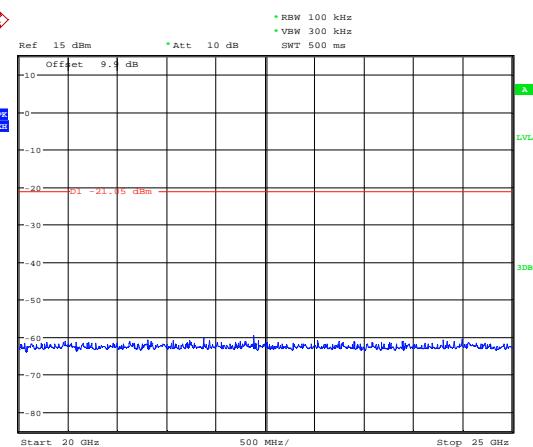

Date: 22.NOV.2019 11:04:41


Band edge Mode 1:

Lower band edge single hopping channel

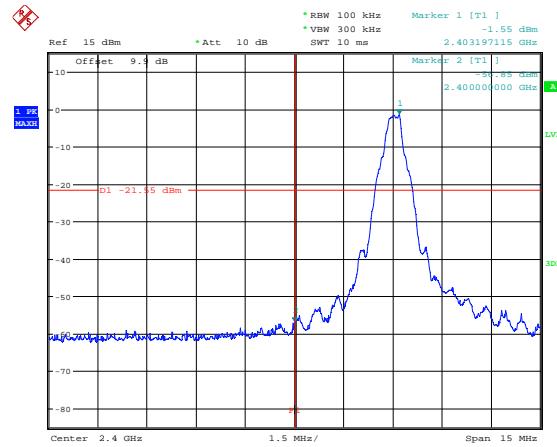


Date: 22.NOV.2019 12:21:40

Upper band edge single hopping channel

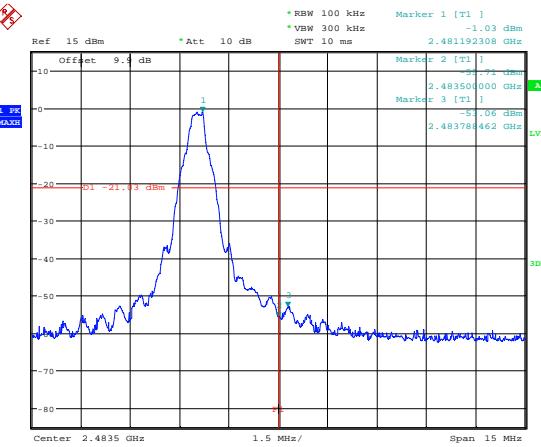


Date: 22.NOV.2019 12:23:31

Lower band edge hopping channel

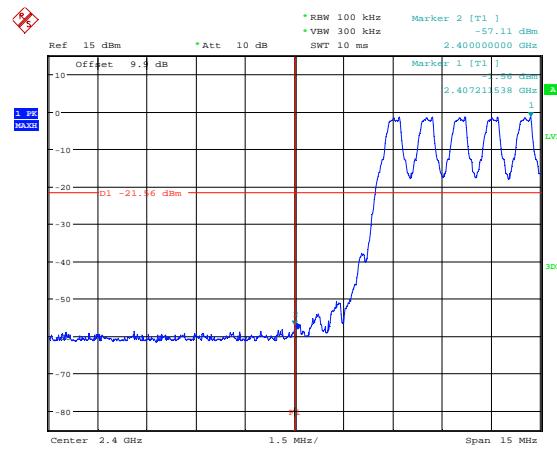

Date: 22.NOV.2019 12:57:05


Upper band edge hopping channel

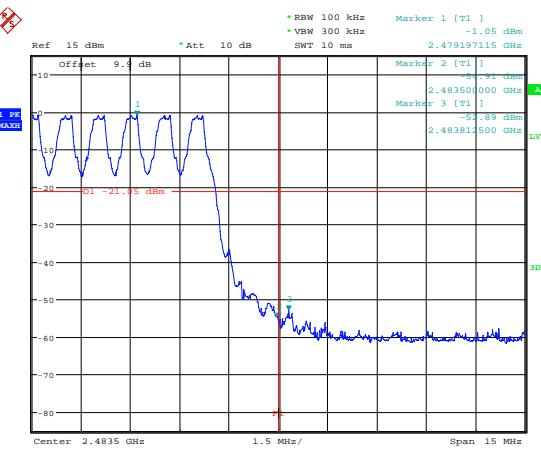

Date: 22.NOV.2019 12:43:09


Mode 2: 2MBps GFSK						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
2404	No Significant emissions within 20 dB of the limit					PASS
2442	No Significant emissions within 20 dB of the limit					PASS
2480	No Significant emissions within 20 dB of the limit					PASS

2404 MHz 30 MHz- 1 GHz

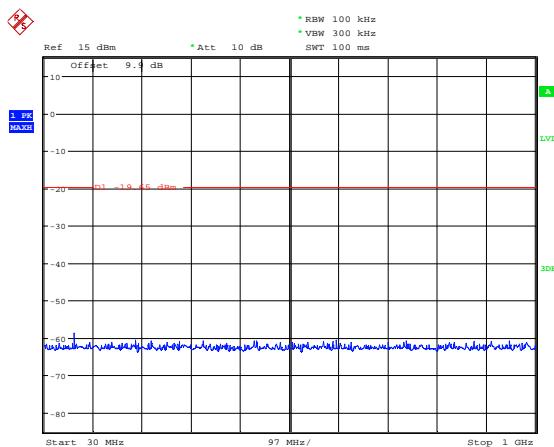


Date: 22.NOV.2019 11:50:53

2404 MHz 1 GHz-5 GHz

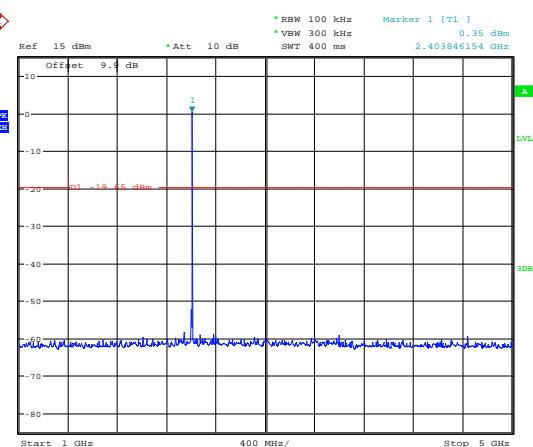


Date: 22.NOV.2019 11:40:22

2404 MHz 5 GHz - 10GHz

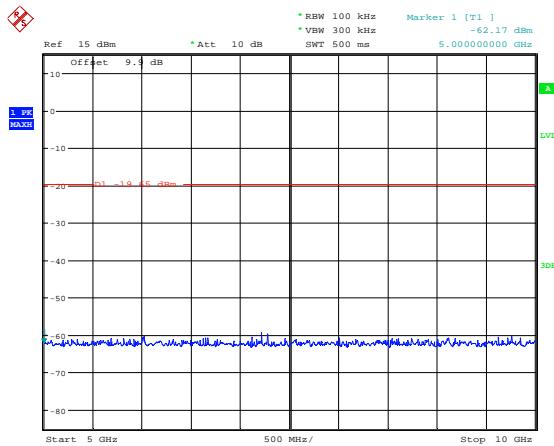


Date: 22.NOV.2019 11:41:06

2404 MHz 10 GHz-15 GHz

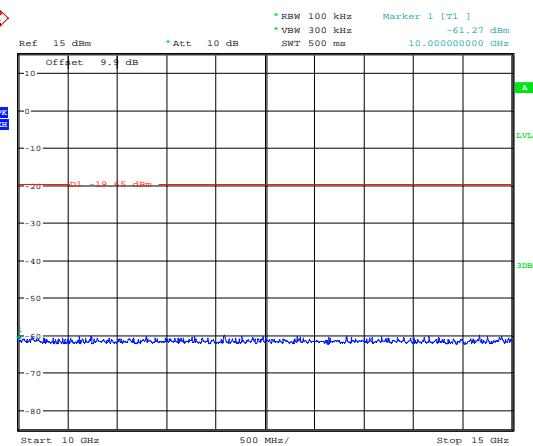


Date: 22.NOV.2019 11:45:07

2404 MHz 15 GHz - 20GHz

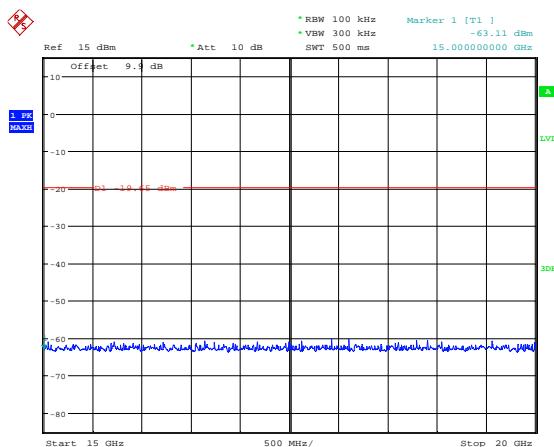


Date: 22.NOV.2019 11:45:31

2404 MHz 20 GHz-25 GHz

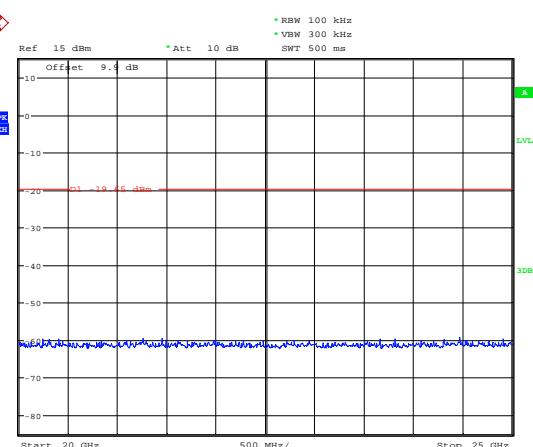


Date: 22.NOV.2019 11:50:28

2442 MHz 30 MHz- 1 GHz

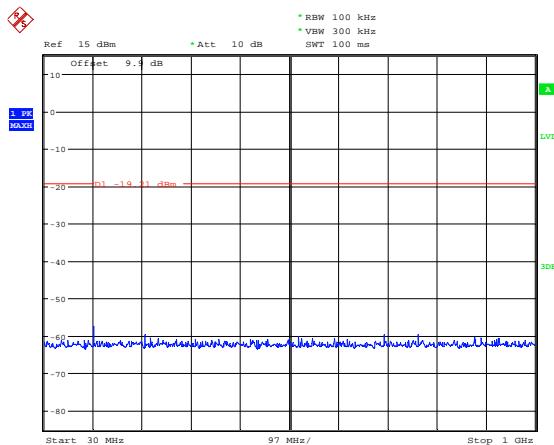


Date: 22.NOV.2019 12:08:10

2442 MHz 1 GHz-5 GHz

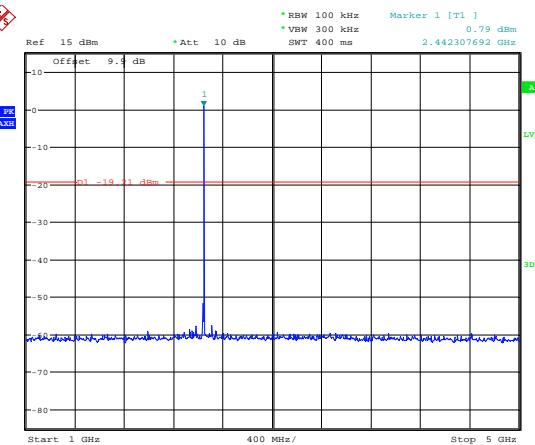


Date: 22.NOV.2019 12:02:02

2442 MHz 5 GHz -10 GHz

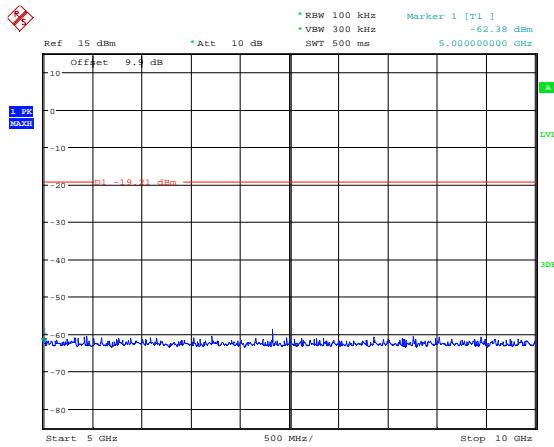


Date: 22.NOV.2019 12:02:30

2442 MHz 10 GHz-15 GHz

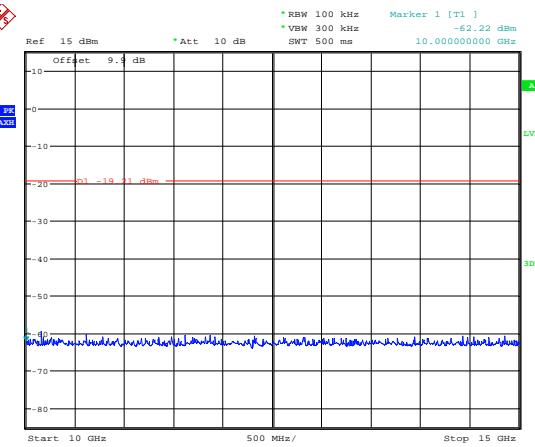


Date: 22.NOV.2019 12:02:56

2442 MHz 15 GHz -20 GHz

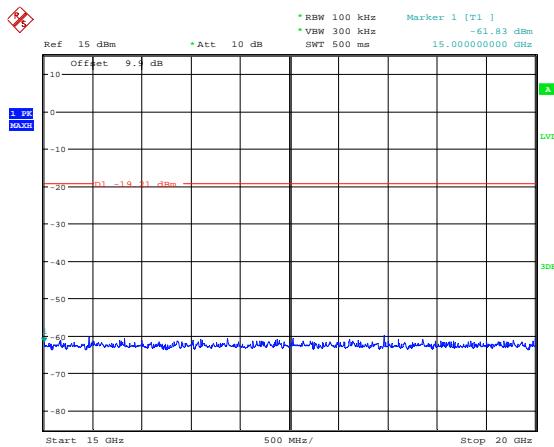


Date: 22.NOV.2019 12:03:31

2442 MHz 20 GHz-25 GHz

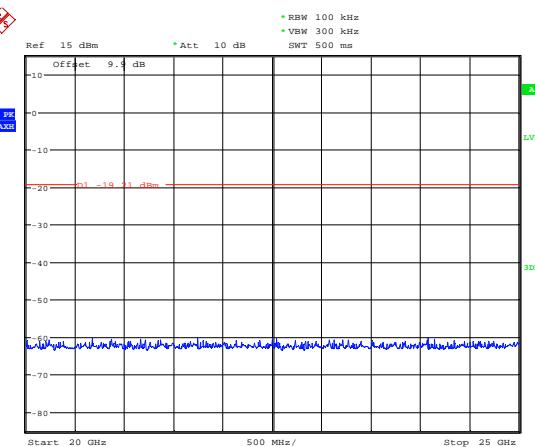


Date: 22.NOV.2019 12:04:04

2480 MHz 30 MHz- 1 GHz

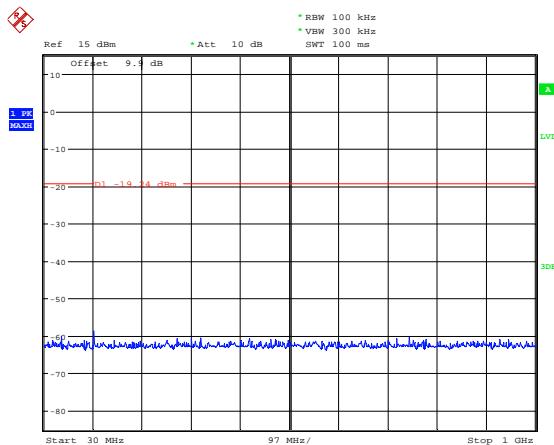


Date: 22.NOV.2019 12:14:30

2480 MHz 1 GHz-5 GHz

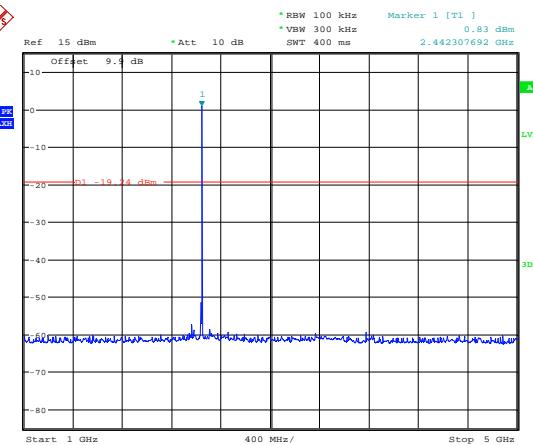


Date: 22.NOV.2019 12:12:38

2480 MHz 5 GHz -10 GHz

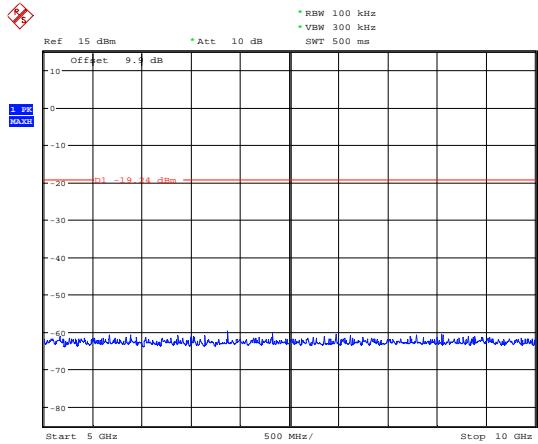


Date: 22.NOV.2019 12:13:01

2480 MHz 10 GHz-15 GHz

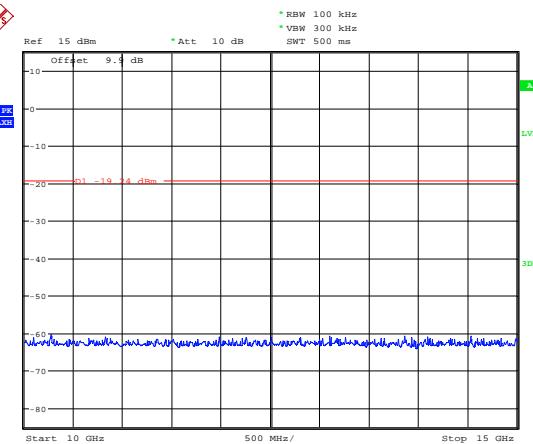


Date: 22.NOV.2019 12:13:22

2480 MHz 15 GHz -20 GHz

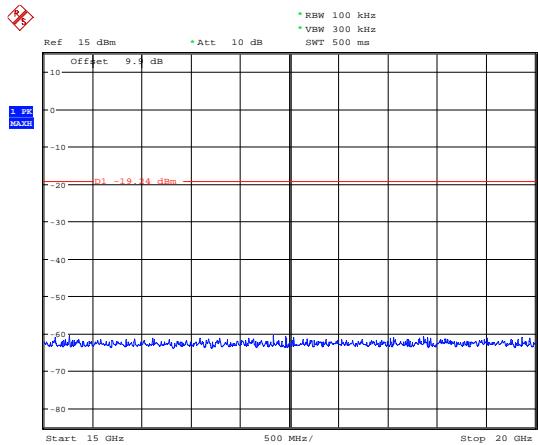

Date: 22.NOV.2019 12:13:44


2480 MHz 20 GHz-25 GHz

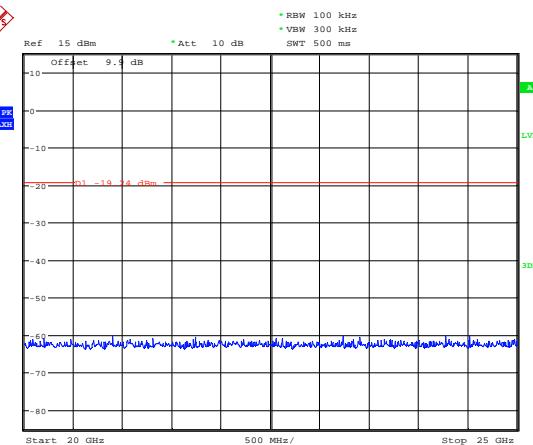

Date: 22.NOV.2019 12:14:06


Band edge Mode 2:

Lower band edge single hopping channel

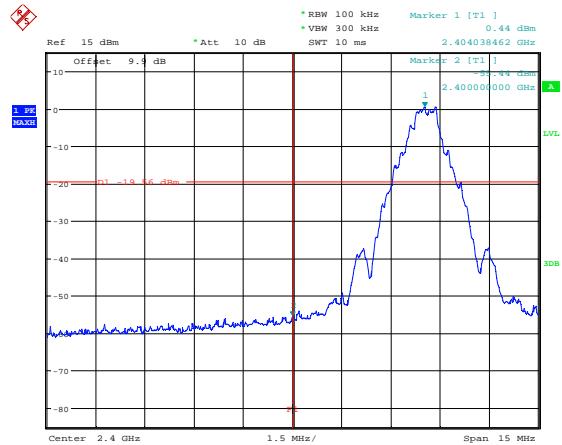


Date: 22.NOV.2019 14:29:10

Upper band edge single hopping channel

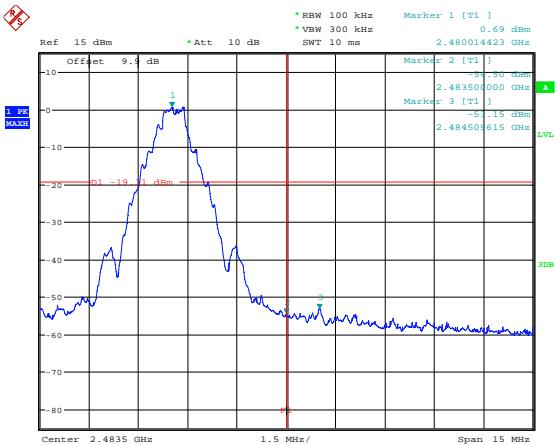


Date: 22.NOV.2019 14:51:39

Lower band edge hopping channel

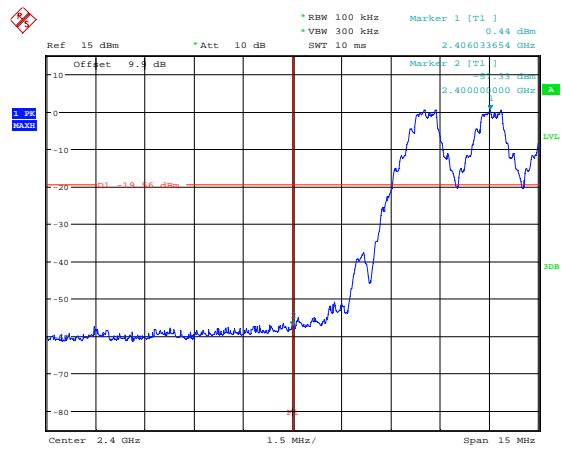

Date: 22.NOV.2019 13:13:38

Upper band edge hopping channel

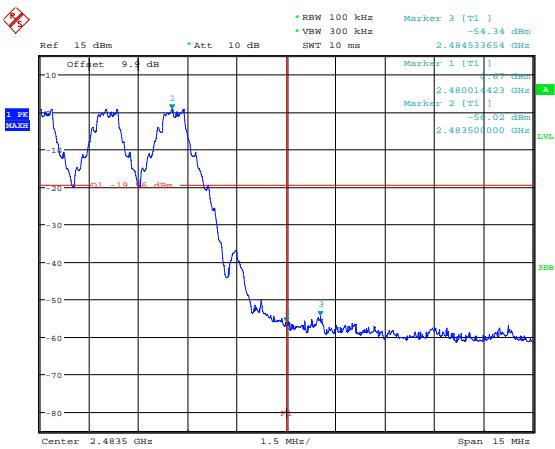

Date: 22.NOV.2019 13:24:52

19 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

[1] Radiated spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**
 Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[2] AC power line conducted emissions

Uncertainty in test result = **3.4 dB**

[3] Occupied bandwidth

Uncertainty in test result = **15.5 %**

[4] Conducted carrier power

Uncertainty in test result (Power Meter) = **1.08 dB**

[5] Conducted / radiated RF power out-of-band

Uncertainty in test result – up to 8.1 GHz = **3.31 dB**
 Uncertainty in test result – 8.1 GHz to 15.3 GHz = **4.43 dB**
 Uncertainty in test result (30 MHz to 1 GHz) = **4.75 dB**
 Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[6] Frequency separation

Uncertainty in test result (Spectrum Analyser) = **3.6 kHz**

[7] Accumulated channel occupancy time

Uncertainty in test result = **7.98 %**

[8] Radiated RF power out-of-band

Uncertainty in test result (30 MHz to 1 GHz) = **4.75 dB**
 Uncertainty in test result (1 GHz to 18 GHz) = **4.46 dB**

[9] Power spectral density

Uncertainty in test result (Spectrum Analyser) = **3.11 dB**

[10] ERP / EIRP

Uncertainty in test result (Laboratory) = **4.71 dB**
 Uncertainty in test result (Pershore OATS) = **4.26 dB**

20 RF Exposure

KDB 447498

Section 4.3 General SAR test reduction and exclusion guidance

For Standalone SAR exclusion consideration, when SAR Exclusion Threshold requirement in KDB 447498 is satisfied, standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

In the frequency range below 100 MHz to 6 GHz and test separation distance of 50mm, the SAR Test Exclusion Threshold for operation in the 2400 – 2483.5 MHz band will be determined as follows

SAR Exclusion Threshold (SARET)

$$\text{SAR Exclusion Threshold} = \text{Step 1} + \text{Step 2}$$

Step 1

$$NT = [(MP/TSD^A) * \sqrt{f_{GHz}}]$$

NT = Numeric Threshold (3.0 for 1-g SAR and 7.5 for 10-g SAR)

MP = Max Power of channel (mW) (inc tune up)

TSD^A = Min Test separation Distance or 50mm (whichever is lower) = 50

We can transpose this formula to allow us to find the maximum power of a channel allowed and compare this to the measured maximum power.

$$= [(NT \times TSD^A) / \sqrt{f_{GHz}}]$$

For Distances Greater than 50 mm Step 2 applies

Step 2

$$(TSD^B - 50mm) * 10\}$$

Where:

TSD^B = Min Test separation Distance (mm) = 50

Operating Frequency 2.403 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.402}] + \{(50 - 50) * 10\} \\ \text{SARET} &= [150 / 1.55] + (0 * 10) \\ \text{SARET} &= 96.77 \text{mW} \end{aligned}$$

Operating Frequency 2.442 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.442}] + \{(50 - 50) * 10\} \\ \text{SARET} &= [150 / 1.56] + (0 * 10) \\ \text{SARET} &= 96.15 \text{mW} \end{aligned}$$

Operating Frequency 2.481 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.481}] + \{(50 - 50) * 10\} \\ \text{SARET} &= [150 / 1.57] + (0 * 10) \\ \text{SARET} &= 95.54 \text{mW} \end{aligned}$$

Mode 1				
Evaluation Frequency	2403	2442	2481	MHz
SAR Exclusion Threshold	96.77	96.15	95.54	Watts
Conduced Power	-1.00	-0.76	-0.50	dBm
Antenna Gain	1.31	1.31	1.31	dBi
EIRP	1.1	1.1	1.2	mW
SAR Evaluation	<i>Exempt</i>			

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

Operating Frequency 2.404 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.404}] + \{(50 - 50) * 10\} \\ \text{SARET} &= [150 / 1.55] + (0 * 10) \\ \text{SARET} &= 96.77 \text{mW} \end{aligned}$$

Operating Frequency 2.440 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.44}] + \{(50 - 50) * 10\} \\ \text{SARET} &= [150 / 1.56] + (0 * 10) \\ \text{SARET} &= 96.15 \text{mW} \end{aligned}$$

Operating Frequency 2.480 GHz

$$\begin{aligned} \text{SARET} &= [(3.0 \times 50) / \sqrt{2.48}] + \{(50 - 50) * 10\} \\ \text{SARET} &= [150 / 1.57] + (0 * 10) \\ \text{SARET} &= 95.54 \text{mW} \end{aligned}$$

Mode 2				
Evaluation Frequency	2404	2440	2480	MHz
SAR Exclusion Threshold	96.77	96.15	95.54	Watts
Conduced Power	1.16	1.22	1.38	dBm
Antenna Gain	1.31	1.31	1.31	dBi
EIRP	1.80	1.80	1.90	mW
SAR Evaluation	<i>Exempt</i>			

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.