



# Test Report

## 22-1-0030601T052a



Deutsche  
Akkreditierungsstelle  
D-PL-12047-01-01  
D-PL-12047-01-03  
D-PL-12047-01-04

<b>Number of pages:</b>	19	<b>Date of Report:</b>	2023-Jan-09
<b>Testing company:</b>	CETECOM GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	<b>Applicant:</b>	Continental Automotive Technologies GmbH
<b>Product:</b>	Telematic Control Unit		
<b>Model:</b>	BSRF_EA_RWO		
<b>FCC ID:</b>	KR5-BSRFEARW0	<b>IC:</b>	--
<b>Testing has been carried out in accordance with:</b>	<b>FCC Regulations</b> Title 47 CFR, Chapter I, Subchapter A, Part 15 Subpart B Unintentional Radiators § 15.109 Radiated emission limits <b>ISED-Regulations</b> Radio Standards Specification ICES-003, Issue 7 Information Technology Equipment (including Digital Apparatus)		
<b>Test Results:</b>	<input checked="" type="checkbox"/> <b>The EUT complies with the requirements in respect of all parameters subject to the test.</b> The test results relate only to devices specified in this document		
<b>Signatures:</b>	 Ninovic Perez Test Lab Manager Authorization of test report		
	 Wolfgang Markus (Senior) Test Manager Responsible of test report		

## Table of Contents

Table of Annex.....	3
1 General information .....	4
1.1 Disclaimer and Notes.....	4
1.2 Attestation.....	4
1.3 Summary of Test Results .....	5
1.4 Summary of Test Methods .....	5
2 Administrative Data .....	6
2.1 Identification of the Testing Laboratory .....	6
2.2 General limits for environmental conditions.....	6
2.3 Test Laboratories sub-contracted.....	6
2.4 Organizational Items .....	6
2.5 Applicant’s details .....	6
2.6 Manufacturer’s details .....	6
2.7 Equipment under Test (EUT) .....	7
2.8 Untested Variant (VAR) .....	7
2.9 Auxiliary Equipment (AE).....	7
2.10 Connected cables (CAB).....	8
2.11 Software (SW).....	8
2.12 EUT set-ups.....	8
2.13 EUT operation modes .....	8
3 Equipment under test (EUT) .....	9
3.1 General Data of Main EUT as Declared by Applicant.....	9
3.2 Modifications on Test sample.....	9
4 Measurements.....	10
4.1 Radiated field strength emissions 30 MHz – 1 GHz .....	10
4.2 Equipment lists .....	12
4.3 Radiated field strength emissions above 1 GHz .....	13
4.4 Equipment lists .....	16
5 Results from external laboratory .....	17
6 Opinions and interpretations.....	17
7 List of abbreviations .....	17
8 Measurement Uncertainty valid for conducted/radiated measurements .....	18
9 Versions of test reports (change history) .....	19

**Table of Annex**

<b>Annex No.</b>	<b>Contents</b>	<b>Reference Description</b>	<b>Total Pages</b>
<b>Annex 1</b>	Test result diagrams	<b>CETECOM_TR22-1-0030601T052a-A1</b>	5
<b>Annex 2</b>	Internal photographs of EUT	--	--
<b>Annex 3</b>	External photographs of EUT	<b>CETECOM_TR22-1-0030601T052a-A3</b>	6
<b>Annex 4</b>	Test set-up photographs	<b>CETECOM_TR22-1-0030601T052a-A4</b>	3

The listed attachments are separate documents.

# 1 General information

## 1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

## 1.2 Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All of the above requirements are met in accordance with enumerated standards.

### 1.3 Summary of Test Results

Test case	Reference in FCC ☒	Reference in ISED ☒	Reference in RSS-GEN ☒	Page	Remark	Result
<a href="#">Radiated field strength emissions 30 MHz – 1 GHz</a>	§15.109 §15.33 §15.35	ICES-003, Issue 7	RSS-Gen., Issue 5 Chapter 8.9, Chapter 7.3	11	--	PASSED
<a href="#">Radiated field strength emissions above 1 GHz</a>	§15.109 §15.33 §15.35	ICES-003, Issue 7	RSS-Gen., Issue 5 Chapter 8.9, Chapter 7.3	15	--	PASSED

PASSED                                   The EUT complies with the essential requirements in the standard.  
 FAILED                                    The EUT does not comply with the essential requirements in the standard.  
 N/A   Test case does not apply to the test object.  
 NP   The test was not performed by the CETECOM Laboratory.

Decision Rule: CETECOM GmbH follows [ILAC G8:2019 chapter 4.2.1 \(Simple Acceptance Rule\)](#).

### 1.4 Summary of Test Methods

Test case	Test method
Radiated field strength emissions 30 MHz – 1 GHz	ANSI C63.4-2014 chapter 8.2.3
Radiated field strength emissions above 1 GHz	ANSI C63.4-2014 chapter 8.3

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Ninovic Perez
Accreditation scope:	<b>DAkkS Webpage:</b> <a href="#">FCC ISED</a>
IC Lab company No. / CAB ID:	3462D / DE0005
Test location:	CETECOM GmbH; Im Teelbruch 116; 45219 Essen - Kettwig

### 2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

### 2.3 Test Laboratories sub-contracted

Company name:	--
---------------	----

### 2.4 Organizational Items

Responsible test manager:	Wolfgang Markus
Receipt of EUT:	2022-Sep-27
Date(s) of test:	2022-Oct-25 – 2022-Nov-04
Version of template:	22.0901

### 2.5 Applicant's details

Applicant's name:	Continental Automotive Technologies GmbH
Address:	Siemensstraße 12 93055 Regensburg  Germany
Contact Person:	Kelvin Fongang
Contact Person's Email:	kelvin.fongang@continental.com

### 2.6 Manufacturer's details

Manufacturer's name:	Continental Automotive Technologies GmbH
Address:	Siemensstraße 12 93055 Regensburg  Germany

## 2.7 Equipment under Test (EUT)

EUT No. *)	Sample No.	Product	Model	Type	SN	HW	SW
EUT 1	22-1-00306S138_C01	Telematic Control Unit	BSRF_EA_RW0	n/a	229901290 87079	C4.2	V19.06

\*) EUT short description is used to simplify the identification of the EUT in this test report.

## 2.8 Untested Variant (VAR)

VAR No. *)	Sample No.	Product	Model	Type	SN	HW	SW
------------	------------	---------	-------	------	----	----	----

\*) The listed additional untested model variant(s) (VAR) is/are not object of evaluation of compliance. For further information please see Annex 5: Declaration of applicant of model differences.

If the table above does not show any other line than the headline, no untested variants are available.

## 2.9 Auxiliary Equipment (AE)

AE No. *)	Sample No.	Auxiliary Equipment	Type	SN	HW	SW
AE1	22-1-00306S25_C01	Optical CAN Transceiver	OptoCAN 2000	n/a	22-029298	n/a
AE 2	22-1-00306S26_C01	Optical CAN Transceiver	OptoCAN 2000	n/a	22-029297	n/a
AE 3	22-1-00306S31_C01	Optical LAN Converter	OptoLAN-BCM89810	n/a	200330 121	n/a
AE 4	22-1-00306S33_C01	Optical LAN Converter	OptoLAN-BCM89810	n/a	22-029299	n/a
AE 5	22-1-00306S39_C01	Dummy GNSS antenna	RF shielded load box with load for GNSS	n/a	n/a	n/a
AE 6	22-1-00306S45_C01	HP Laptop	EliteBook 840 G3	n/a	5CG808 0WXB	n/a
AE 7	22-1-00306S54_C01	Microphone	KHM0090-010010 Peugeot Citroen	n/a	22-029294	n/a
AE 8	22-1-00306S59_C01	Loudspeaker	ASK 900065001	n/a	9832955 480 00	n/a
AE 9	22-1-00306S62_C01	Ethernet BRR media converter BSRF1	100BASE-T1 MediaConverter_BCM	n/a	220630 350	n/a
AE 10	22-1-00306S78_C01	External antenna cable GNSS/LTE	FAKRA cables SMB/SMB between patch antenna and BSRF EA	n/a	n/a	n/a
AE 11	22-1-00306S89_C01	CAN stim box	CAN STIM3	n/a	03701	n/a

AE 12	22-1-00306S111_C01	DUT Power supply with CAN	DUT power supply with CAN harness	n/a	n/a	n/a
AE 13	22-1-00306S116_C01	Ethernet cable	47163 RJ45 Câble 1,5m	n/a	n/a	n/a
AE 14	22-1-00306S117_C01	FM2/DAB Dummy antenna	RF shielded load box with load for FM/DAB	n/a	n/a	n/a
AE 15	22-1-00306S118_C01	FM/AM Dummy antenna	RF shielded load box with load for AM/FM	n/a	n/a	n/a
AE 16	22-1-00306S121_C01	Orig. LTE1/LTE2/GNSS antenna	LTE1/LTE2/GNSS patch antennas	n/a	n/a	n/a
AE 17	22-1-00306S122_C01	E-call button Box	Shielded load box for E-call and A-Call	n/a	n/a	n/a

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report. If the table above does not show any other line than the headline, no AE was used during testing nor was taken into account for evaluation

## 2.10 Connected cables (CAB)

CAB No. *)	Sample No.	Cable Type	Connectors / Details	Length
CAB 1	22-1-00306S05_C01	EMC harness	EMC harness 2m	n/a

\*) CAB short description is used to simplify the identification of the connected cables in this test report. If the table above does not show any other line than the headline, no cable was used during testing nor was taken into account for evaluation

## 2.11 Software (SW)

SW No. *)	Sample No.	SW Name	Description	SW Status
-----------	------------	---------	-------------	-----------

\*) SW short description is used to simplify the identification of the used software in this test report. If the table above does not show any other line than the headline, no SW was used during testing nor was taken into account for evaluation.

## 2.12 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
1	EUT A + AE 1 + AE 2 + AE 3 + AE 4 + AE 5 + AE 6 + AE 7 + AE 8 + AE 9 + AE 10 + AE 11 + AE 12 + AE 13 + AE 14 + AE 15 + AE 16 + AE 17 + CAB 1	--

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

## 2.13 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
	<p><b>GSM 850</b></p> <p>Idle mode</p> <p>BCCH 150</p> <p><b>GPS</b></p>	<p>The mobile station is synchronized to the Broadcast Control Channel (BCCH) and listening to the Common Control Channel (CCCH). Periodic location update is disabled.</p> <p>GPS coordinates was read out with special customer SW "BSRF Stimulation"</p>

\*) EUT operating mode no. is used to simplify the test report.



### 3 Equipment under test (EUT)

#### 3.1 General Data of Main EUT as Declared by Applicant

<b>Firmware</b>	<input checked="" type="checkbox"/> for normal use	<input type="checkbox"/> Special version for test execution	
<b>Power supply</b>	<input type="checkbox"/> AC Mains		
	<input checked="" type="checkbox"/> DC Mains	12V	
	<input type="checkbox"/> Battery		
<b>Operational conditions</b>	$T_{nom} = +21\text{ °C}$	$T_{min} = -40\text{ °C}$	$T_{max} = +80\text{ °C}$
<b>EUT sample type</b>	<b>Pre-Production</b>		
<b>Weight</b>	0.400 kg		
<b>Size [LxWxH]</b>	18.5 cm x 11.0 cm x 2.0 cm		
<b>Interfaces/Ports</b>	--		
<b>For further details refer Applicants Declaration &amp; following technical documents</b>			

#### 3.2 Modifications on Test sample

<b>Additions/deviations or exclusions</b>	--
---	----


## 4 Measurements

### 4.1 Radiated field strength emissions 30 MHz – 1 GHz

#### 4.1.1 Description of the general test setup and methodology, see below example:

Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the regulatory commissions.

#### Schematic:

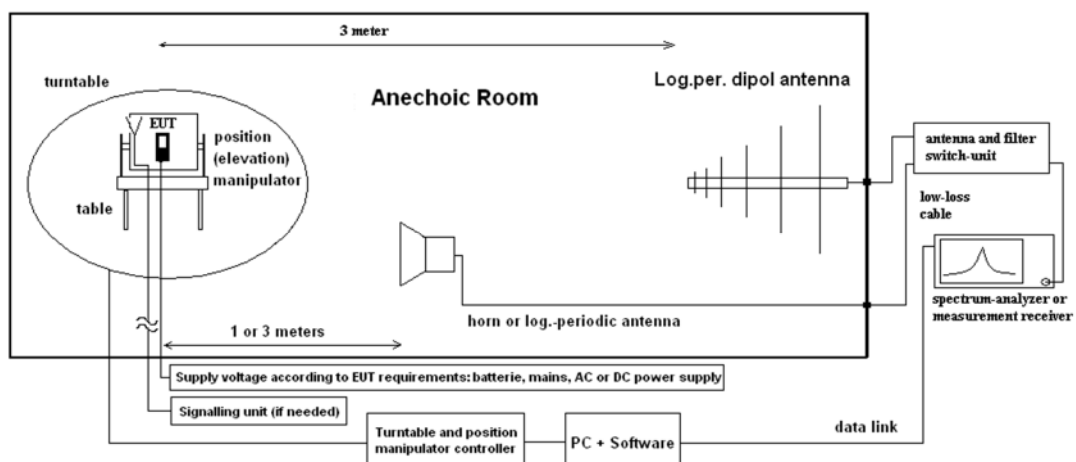

#### Testing method:

The measurement is made according to relevant reference clauses:  
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

#### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

#### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc. either on 10m OATS or 3m semi-anechoic room.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

- AF = Antenna factor
- C<sub>L</sub> = Cable loss
- D<sub>F</sub> = Distance correction factor (if used)
- E<sub>C</sub> = Electrical field – corrected value
- E<sub>R</sub> = Receiver reading
- G<sub>A</sub> = Gain of pre-amplifier (if used)
- L<sub>T</sub> = Limit
- M = Margin

All units are dB-units, positive margin means value is below limit.

**4.1.2 Sample calculation**

Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss	Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
32.7	22.25	--	3.1	--	25.35	58.05	--

Remark: This calculation is based on an example value at 800.4 MHz

**4.1.3 Measurement Location**

<b>Test site</b>	120901 - SAC - Radiated Emission <1GHz
------------------	--

**4.1.4 Limit**

Frequency Range [MHz]	Class B <input checked="" type="checkbox"/> (3 meters)		Class A <input type="checkbox"/> (10 meters)		Detector	RBW / VBW [kHz]
	Limit [µV/m]	Limit [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]		
30 - 88	100	40.0	90	39.0	Quasi peak	100 / 300
88 - 216	150	43.5	150	43.5	Quasi peak	100 / 300
216 - 960	200	46.0	210	46.4	Quasi peak	100 / 300
960 - 1000	500	54.0	300	49.5	Quasi peak	100 / 300

**4.1.5 Result**

Diagram	Set-up	Mode	Maximum Level [dBµV/m] Frequency Range 30 – 1000 MHz	Result
3.01	1	1	33.21 dBµV/m @ 794.03 MHz	Passed

Remark: for more information and graphical plot see annex A1 CETECOM\_TR22-1-0030601T052a-A1

## 4.2 Equipment lists

ID	Description	Manufacturer	SerNo	CheckType	Last Check	Interval	Next Check
	120901 - SAC - Radiated Emission <1GHz			calchk	cal: 2015-Jul-21 chk: 2022-Jul-27	cal: 10Y chk: 12M	cal: 2025-Jul-21 chk: 2023-Jul-27
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH / Glottertal	81650455	cal	cal: 2022-May-18	cal: 24M	cal: 2024-May-18
20442	Semi Anechoic Chamber	ETS-Lindgren GmbH / Taufkirchen	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20482	filter matrix Filter matrix SAR 1	CETECOM GmbH	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20574	Biconilog Hybrid Antenna BTA-L	Frankonia GmbH / Heideck	980026L	cal	cal: 2022-Jun-15	cal: 36M	cal: 2025-Jun-15
20620	Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100362	cal	cal: 2022-Jun-08	cal: 12M	cal: 2023-Jun-08
20885	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
25038	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH / Memmingen	879824/13	cal	cal: 2022-Jul-04	cal: 24M	cal: 2024-Jul-04

Tools used in 'P1M1'

### 4.2.1 Legend

Note / remarks	Interval of calibration & Verification
12M	12 months
24M	24 months
36M	36 months
10Y	10 Years


Abbreviation Check Type	Description
cnn	Calibration and verification not necessary
cal	Calibration
calchk	Calibration plus intermediate Verification
chk	Verification
cpu	Verification before usage

### 4.3 Radiated field strength emissions above 1 GHz

#### 4.3.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 18-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

#### Schematic:

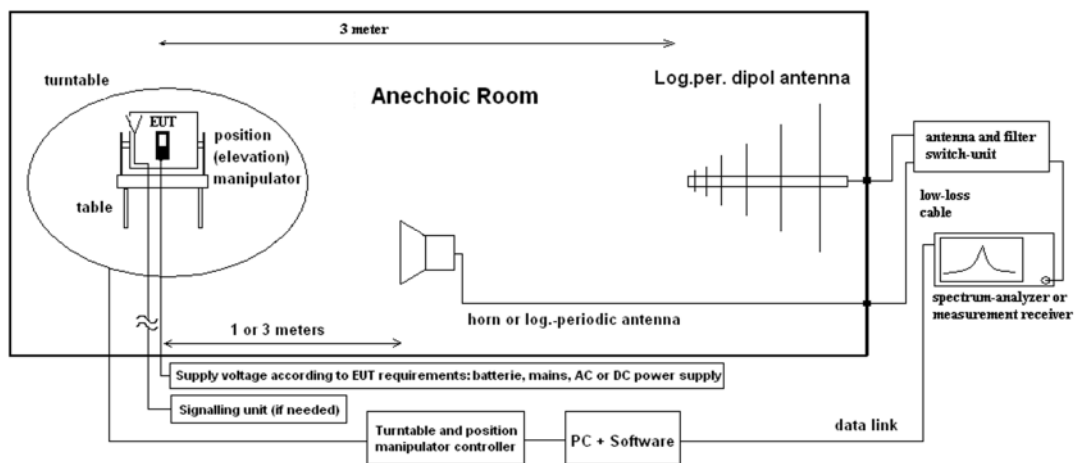

#### Testing method:

The measurement is made according to relevant reference clauses:  
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

#### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 15°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

#### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions or three axis scan for portable/small equipment.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + A_F + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$M$  = Margin

$L_T$  = Limit

$A_F$  = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor (if used)

$G_A$  = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

**4.3.2 Sample calculation**

Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss + Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
29.37	41.20	--	24.28	16.92	46.3	CableLoss and PreAmp data in one data correction file

Remark: This calculation is based on an example value at 10 GHz

**4.3.3 Measurement Location**

<b>Test site</b>	120907 - FAC2 - Radiated Emissions
------------------	------------------------------------

**4.3.4 Limit**

Radiated emissions limits (3 meters)				
Frequency Range [MHz]	Limit [ $\mu$ V/m]	Limit [dB $\mu$ V/m]	Detector	RBW / VBW [kHz]
Above 1000	500	54	Average	1000 / 3000
Above 1000	5000	74	Peak	1000 / 3000

#### 4.3.5 Result

Diagram	Set-up	Mode	Maximum Level [dB $\mu$ V/m] Frequency Range 1 – 12.4 GHz	Result
4.01	1	1	41.28 dB $\mu$ V/m @ 12.24GHz	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM\_TR22-1-0030601T052a-A1**

Diagram	Set-up	Mode	Maximum Level [dB $\mu$ V/m] Frequency Range 12.4 – 18 GHz	Result
4.01	1	1	48.01 dB $\mu$ V/m @ 17.62GHz	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM\_TR22-1-0030601T052a-A1**

Diagram	Set-up	Mode	Maximum Level [dB $\mu$ V/m] Frequency Range 18 – 26.5 GHz	Result
4.01	1	1	45.33 dB $\mu$ V/m @ 26.49GHz	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM\_TR22-1-0030601T052a-A1**

### 4.4 Equipment lists

ID	Description	Manufacturer	SerNo	CheckType	Last Check	Interval	Next Check
	120907 - FAC2 - Radiated Emissions			chk			
20005	AC - LISN 50 Ohm/50µH ESH2-Z5	Rohde & Schwarz Messgerätebau GmbH / Memmingen	861741/005	cal	chk: 2021-Aug-30 cal: 2022-May-19	chk: 18M cal: 12M	chk: 2023-Jan-30 cal: 2023-May-19
20133	Horn Antenna 3115 (Meas 1)	EMCO Elektronik GmbH	9012-3629	cal	cal: 2020-Apr-08	cal: 36M	cal: 2023-Apr-08
20302	Horn Antenna BBHA9170 (Meas 1)	Schwarzbeck Mess-Elektronik OHG / Schönau	155	cpu	chk: 2020-Apr-15	chk: 12M	
20412	Fully Anechoic Chamber 2	ETS-Lindgren GmbH / Taufkirchen	without	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20729	FS-Z140	Rohde & Schwarz Messgerätebau GmbH	101004	cal	cal: 2020-May-26	cal: 36M	cal: 2023-May-26
20730	FS-Z110	Rohde & Schwarz Messgerätebau GmbH	101468	cal	cal: 2020-Jun-19	cal: 36M	cal: 2023-Jun-19
20731	FS-Z75	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101022	cal	cal: 2022-May-18	cal: 36M	cal: 2025-May-18
20732	Signal- and Spectrum Analyzer FSW67	Rohde & Schwarz Messgerätebau GmbH / Memmingen	104023	cal	cal: 2022-Jun-08	cal: 12M	cal: 2023-Jun-08
20733	Harmonic Mixer FS-Z220	RPG-Radiometer Physics GmbH	101009	cal	cal: 2021-May-27	cal: 36M	cal: 2024-May-27
20734	Harmonic Mixer FS-Z325	RPG-Radiometer Physics GmbH	101005	cal	cal: 2021-May-27	cal: 36M	cal: 2024-May-27
20765	Pickett-Potter Horn Antenna FH-PP 40-60	RPG-Radiometer Physics GmbH / Meckenheim	010001	cal	cal: 2020-Sep-15	cal: 36M	cal: 2023-Sep-15
20767	Pickett-Potter Horn Antenna FH-PP 140-220	RPG-Radiometer Physics GmbH / Meckenheim	010011	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20811	Horn Antenna ASY-SGH-124-SMA	Antenna Systems Solutions S.L	29F14182337	cal	cal: 2021-Oct-20	cal: 36M	cal: 2024-Oct-20
20812	Pickett-Potter Horn Antenna FH-PP-325	RPG-Radiometer Physics GmbH	10024	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20813	Pickett-Potter Horn Antenna FH-PP 075	RPG-Radiometer Physics GmbH / Meckenheim	10006	cal	cal: 2020-Sep-09	cal: 36M	cal: 2023-Sep-09
20814	Pickett-Potter Horn Antenna FH-PP 140	RPG-Radiometer Physics GmbH	10008	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20815	Pickett-Potter Horn Antenna FH-PP 110	RPG-Radiometer Physics GmbH	10014	cal	cal: 2020-Sep-04	cal: 36M	cal: 2023-Sep-04
20816	SGH Antenna SGH-26-WR10	Anteral S.L.	1144	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20817	Waveguide Rectangular Horn Antenna SAR-2309-22-S2	ERAVAN	13254-01	cal	cal: 2020-Jul-29	cal: 36M	cal: 2023-Jul-29
20836	1-18 GHz Amplifier	Wright Technologies, Inc., Inc.	0001	chk		chk: 36M	
20877	JS42-08001800-16-8P Verstärker	Miteq Inc.	2079991 / 2079992	chk	chk: 2020-Feb-27	chk: 36M	chk: 2023-May-27
20907	Waveguide WR-15 attenuator STA-30-15-M2	SAGE Millimeter Inc.	13256-01	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20908	Waveguide WR 10 attenuator STA-30-10-M2	SAGE Millimeter Inc.	13256-01	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20909	Waveguide Horn Antenna PE9881-24	Pasternack Enterprises, Inc.	37/2016	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20910	Frequency Multiplier 936VF-10/385	MI-Wave, Millimeter Wave Products Inc.	142	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20911	Frequency Multiplier 938WF-10/387	MI-Wave, Millimeter Wave Products Inc.	141	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20912	Low noise Amplifier Module 0.5-4GHz	RF-Lambda Europe GmbH	19041200083	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20913	Phase Amplitude Stable Cable Assembly DC-40GHz	RF-Lambda Europe GmbH	AC19040001	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -

Tools used in \*P2M1\*

#### 4.4.1 Legend

Note / remarks	Interval of calibration & Verification
12M	12 months
24M	24 months
36M	36 months
10Y	10 Years

Abbreviation Check Type	Description
cnn	Calibration and verification not necessary
cal	Calibration
calchk	Calibration plus intermediate Verification
chk	Verification
cpu	Verification before usage



## 5 Results from external laboratory

None

-

## 6 Opinions and interpretations

None

-

## 7 List of abbreviations

None

-

## 8 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

Measurement type	Frequency range of measurement		Calculated Uncertainty based on confidence level of 95.54%	Remarks
	Start [MHz]	Stop [MHz]		
Magnetic field strength	0.009	30	4.86	Magnetic loop antenna, Pre-amp on
RF-Output power (eirp) Unwanted emissions (eirp) [dB]	30	100	4.57	without Pre-Amp
	30	100	4.91	with PreAmp
	100	1000	4.02	without Pre-Amp
	100	1000	4.26	with PreAmp
	1000	18000	4.36	without Pre-Amp
	1000	18000	5.23	with PreAmp
	18000	33000	4.92	Schwarzbeck BBHA9170 (#20302) Antenna set-up non-waveguide antenna)
	33000	50000	4.17	Set-up for Q-Band (WR-22), non-wave guide antenna
	40000	60000	4.69	Set-up U-Band (WR-19), non-waveguide antenna
	50000	75000	4.06	External Mixer set-up V-Band (WR-15)
	75000	110000	4.17	External Mixer set-up W-Band (WR-6)
	90000	140000	5.49	External Mixer set-up F-Band (WR-8)
	140000	225000	6.22	External Mixer set-up G-Band (WR-5)
	225000	325000	7.04	External Mixer set-up (WR-3)
325000	500000	8.84	External Mixer set-up (WR-2.2)	
Radiated Blocking [dB]	1000	18000	2.85	Typical set-up with microwave generator and antenna, value for 7GHz calculated
	18000	33000	4.66	Typical set-up with microwave generator and antenna
	33000	50000	3.48	WR-22 set-up
	50000	75000	3.73	WR-15 set-up
	75000	110000	4.26	WR-6 set-up
Frequency Error [kHz]	40000	77000	276.19	calculated for 77 GHz (FMCW) carrier
	6000	7000	33.92	calculated for 6.5GHz UWB Ch.5
TS 8997 conducted Parameters	30	6000	1.11	1. Power measurement with Fast-sampling-detector
	30	6000	1.20	2. Power measurement with Spectrum-Analyzer
	30	6000	1.20	3. Power Spectrum-Density measurement
	30	7500	1.20	4. Conducted Spurious emissions:
	0.009	30	2.56	5. Conducted Spurious emissions:
	2.4	2.48	1.95 ppm	6a. Bandwidth / 2-Marker Method for 2.4GHz ISM
	5.18	5.825	7.180 ppm	6b. Bandwidth / 2-Marker Method for 5GHz WLAN
	5.18	5.825	1.099 ppm	7 Frequency (Marker method) for 5GHz WLAN
	30	6000	0.11561µs	8 Medium-Utilization factor / Timing
	30	6000	1.85	9 Blocking-Level of companion device
	30	6000	1.62	9 Blocking Generator level
Conducted emissions	0.009	30	3.57	

## 9 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2023-Jan-09
--	--	--
--	--	--

**End Of Test Report**