

## 1.2 Conducted measurements

### RF output power

| Mode                     | DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|--------------------------|---------------------|-----------------|-----------------|------------------|---------------|--------|
| a-mode [6Mbps]; 5180MHz  | 5180.0000           | 6.5             | 30.0            | 6.5              | 94.223        | PASS   |
| a-mode [6Mbps]; 5200MHz  | 5200.0000           | 6.4             | 30.0            | 6.4              | 94.351        | PASS   |
| a-mode [6Mbps]; 5240MHz  | 5240.0000           | 7.4             | 30.0            | 7.4              | 94.281        | PASS   |
| a-mode [6Mbps]; 5745MHz  | 5745.0000           | 3.5             | 30.0            | 3.5              | 94.306        | PASS   |
| a-mode [6Mbps]; 5785MHz  | 5785.0000           | 4.0             | 30.0            | 4.0              | 94.309        | PASS   |
| a-mode [6Mbps]; 5825MHz  | 5825.0000           | 2.0             | 30.0            | 2.0              | 94.320        | PASS   |
| a-mode [9Mbps]; 5180MHz  | 5180.0000           | 8.3             | 30.0            | 8.3              | 91.931        | PASS   |
| a-mode [9Mbps]; 5200MHz  | 5200.0000           | 7.9             | 30.0            | 7.9              | 91.748        | PASS   |
| a-mode [9Mbps]; 5240MHz  | 5240.0000           | 8.7             | 30.0            | 8.7              | 91.928        | PASS   |
| a-mode [9Mbps]; 5745MHz  | 5745.0000           | 3.4             | 30.0            | 3.4              | 91.902        | PASS   |
| a-mode [9Mbps]; 5785MHz  | 5785.0000           | 3.8             | 30.0            | 3.8              | 91.831        | PASS   |
| a-mode [9Mbps]; 5825MHz  | 5825.0000           | 3.7             | 30.0            | 3.7              | 91.720        | PASS   |
| a-mode [12Mbps]; 5180MHz | 5180.0000           | 8.3             | 30.0            | 8.3              | 89.521        | PASS   |
| a-mode [12Mbps]; 5200MHz | 5200.0000           | 7.9             | 30.0            | 7.9              | 89.439        | PASS   |
| a-mode [12Mbps]; 5240MHz | 5240.0000           | 8.7             | 30.0            | 8.7              | 89.439        | PASS   |
| a-mode [12Mbps]; 5745MHz | 5745.0000           | 3.4             | 30.0            | 3.4              | 89.538        | PASS   |
| a-mode [12Mbps]; 5785MHz | 5785.0000           | 3.8             | 30.0            | 3.8              | 89.484        | PASS   |
| a-mode [12Mbps]; 5825MHz | 5825.0000           | 3.7             | 30.0            | 3.7              | 89.393        | PASS   |
| a-mode [18Mbps]; 5180MHz | 5180.0000           | 8.5             | 30.0            | 8.5              | 85.304        | PASS   |
| a-mode [18Mbps]; 5200MHz | 5200.0000           | 8.1             | 30.0            | 8.1              | 85.171        | PASS   |
| a-mode [18Mbps]; 5240MHz | 5240.0000           | 8.9             | 30.0            | 8.9              | 85.166        | PASS   |
| a-mode [18Mbps]; 5745MHz | 5745.0000           | 3.5             | 30.0            | 3.5              | 85.361        | PASS   |
| a-mode [18Mbps]; 5785MHz | 5785.0000           | 4.0             | 30.0            | 4.0              | 85.251        | PASS   |
| a-mode [18Mbps]; 5825MHz | 5825.0000           | 3.8             | 30.0            | 3.8              | 85.337        | PASS   |
| a-mode [24Mbps]; 5180MHz | 5180.0000           | 8.7             | 30.0            | 8.7              | 81.427        | PASS   |
| a-mode [24Mbps]; 5200MHz | 5200.0000           | 8.3             | 30.0            | 8.3              | 81.444        | PASS   |
| a-mode [24Mbps]; 5240MHz | 5240.0000           | 9.1             | 30.0            | 9.1              | 81.334        | PASS   |
| a-mode [24Mbps]; 5745MHz | 5745.0000           | 3.9             | 30.0            | 3.9              | 81.255        | PASS   |
| a-mode [24Mbps]; 5785MHz | 5785.0000           | 4.3             | 30.0            | 4.3              | 81.440        | PASS   |
| a-mode [24Mbps]; 5825MHz | 5825.0000           | 4.2             | 30.0            | 4.2              | 81.228        | PASS   |
| a-mode [36Mbps]; 5180MHz | 5180.0000           | 8.7             | 30.0            | 8.7              | 74.863        | PASS   |
| a-mode [36Mbps]; 5200MHz | 5200.0000           | 8.3             | 30.0            | 8.3              | 74.761        | PASS   |
| a-mode [36Mbps]; 5240MHz | 5240.0000           | 9.1             | 30.0            | 9.1              | 74.779        | PASS   |
| a-mode [36Mbps]; 5745MHz | 5745.0000           | 3.8             | 30.0            | 3.8              | 74.991        | PASS   |
| a-mode [36Mbps]; 5785MHz | 5785.0000           | 4.2             | 30.0            | 4.2              | 75.030        | PASS   |
| a-mode [36Mbps]; 5825MHz | 5825.0000           | 4.1             | 30.0            | 4.1              | 74.966        | PASS   |
| a-mode [48Mbps]; 5180MHz | 5180.0000           | 8.8             | 30.0            | 8.8              | 69.578        | PASS   |
| a-mode [48Mbps]; 5200MHz | 5200.0000           | 8.4             | 30.0            | 8.4              | 69.495        | PASS   |
| a-mode [48Mbps]; 5240MHz | 5240.0000           | 9.1             | 30.0            | 9.1              | 69.440        | PASS   |
| a-mode [48Mbps]; 5745MHz | 5745.0000           | 3.9             | 30.0            | 3.9              | 69.657        | PASS   |
| a-mode [48Mbps]; 5785MHz | 5785.0000           | 4.3             | 30.0            | 4.3              | 69.531        | PASS   |
| a-mode [48Mbps]; 5825MHz | 5825.0000           | 4.1             | 30.0            | 4.1              | 69.582        | PASS   |
| a-mode [54Mbps]; 5180MHz | 5180.0000           | 8.7             | 30.0            | 8.7              | 67.225        | PASS   |
| a-mode [54Mbps]; 5200MHz | 5200.0000           | 8.3             | 30.0            | 8.3              | 67.360        | PASS   |
| a-mode [54Mbps]; 5240MHz | 5240.0000           | 9.1             | 30.0            | 9.1              | 67.352        | PASS   |
| a-mode [54Mbps]; 5745MHz | 5745.0000           | 3.8             | 30.0            | 3.8              | 67.217        | PASS   |
| a-mode [54Mbps]; 5785MHz | 5785.0000           | 4.2             | 30.0            | 4.2              | 67.293        | PASS   |
| a-mode [54Mbps]; 5825MHz | 5825.0000           | 4.1             | 30.0            | 4.1              | 67.157        | PASS   |


## RF output power (5180 MHz; a-mode [6Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 6.5             | 30.0            | 6.5              | 94.223        | PASS   |

Gated Trace

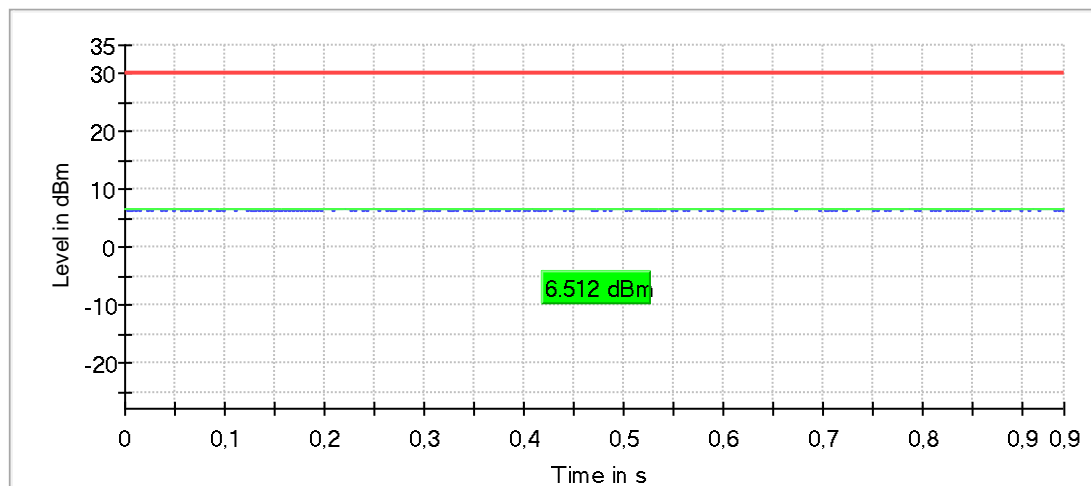

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5200 MHz; a-mode [6Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 6.4             | 30.0            | 6.4              | 94.351        | PASS   |

Gated Trace

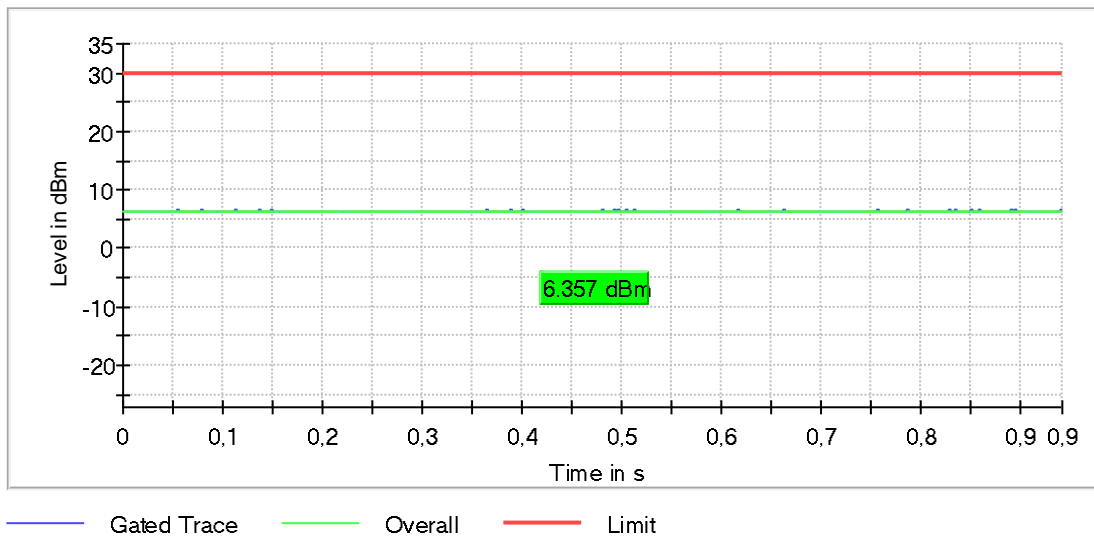

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; a-mode [6Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 7.4             | 30.0            | 7.4              | 94.281        | PASS   |

Gated Trace

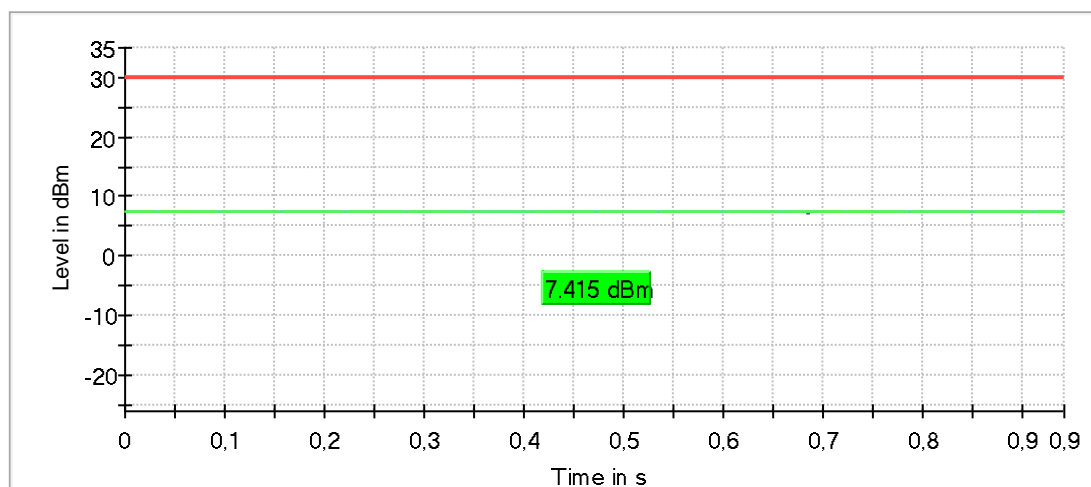

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5745 MHz; a-mode [6Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.5             | 30.0            | 3.5              | 94.306        | PASS   |

Gated Trace

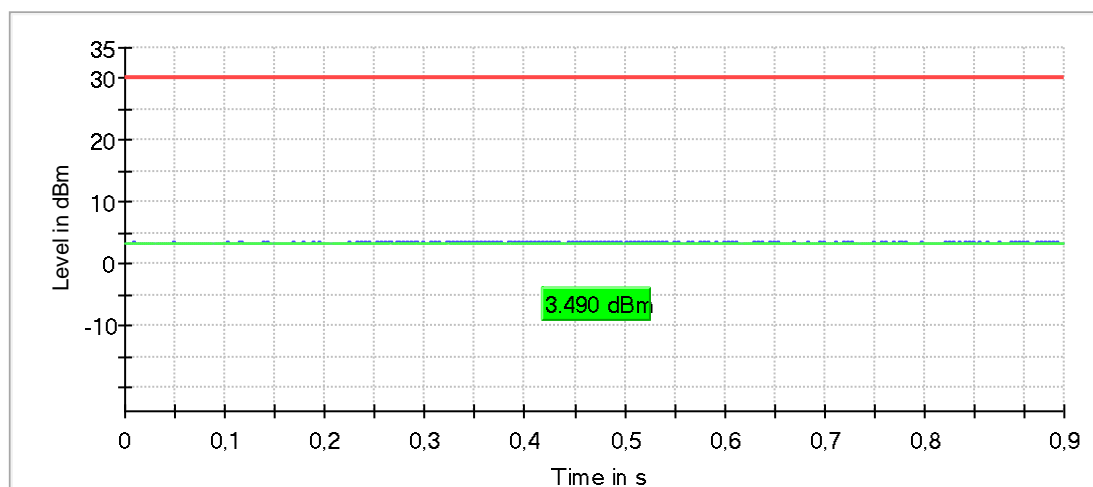

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5785 MHz; a-mode [6Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.0             | 30.0            | 4.0              | 94.309        | PASS   |

Gated Trace

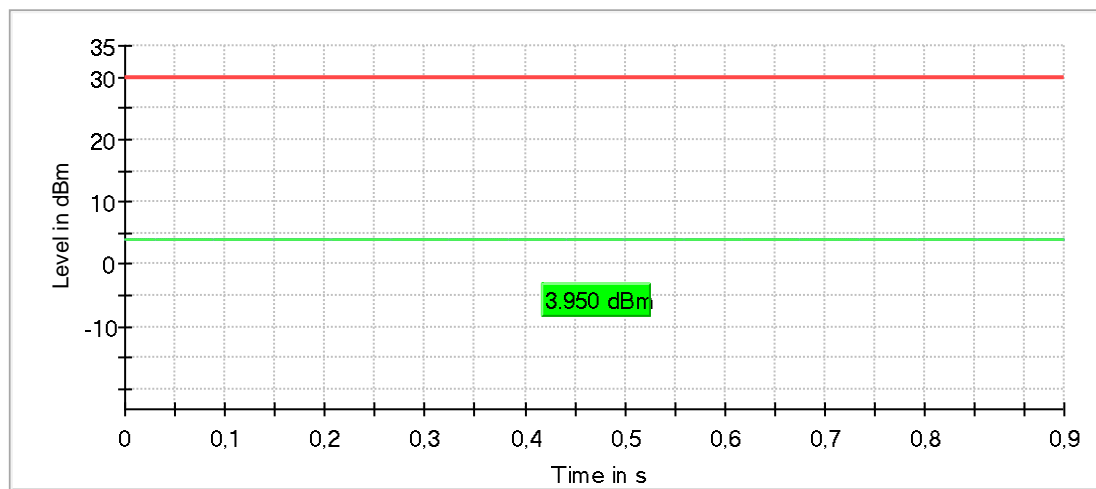

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5825 MHz; a-mode [6Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 2.0             | 30.0            | 2.0              | 94.320        | PASS   |

Gated Trace

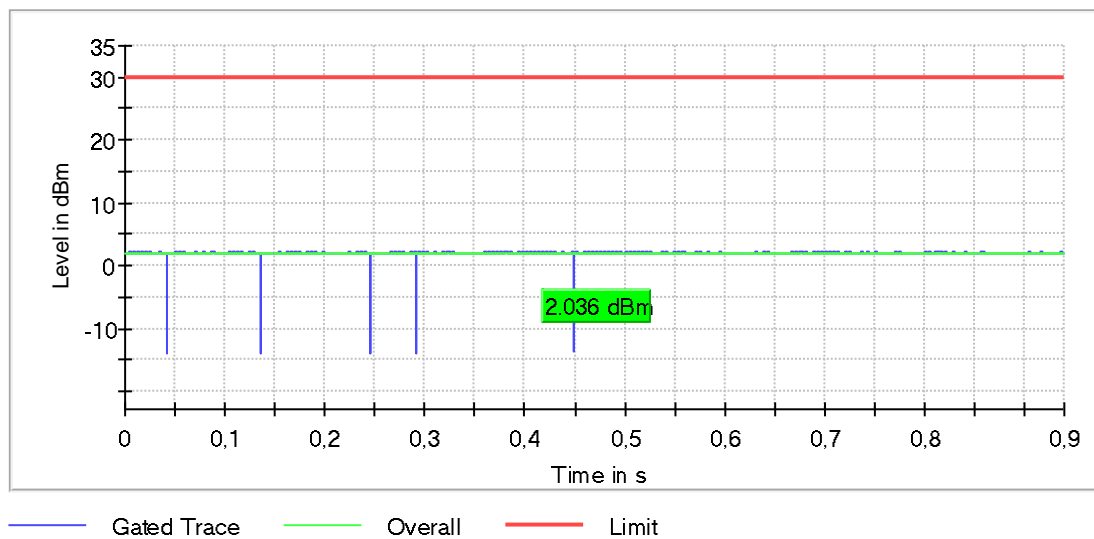

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5180 MHz; a-mode [9Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.3             | 30.0            | 8.3              | 91.931        | PASS   |

Gated Trace

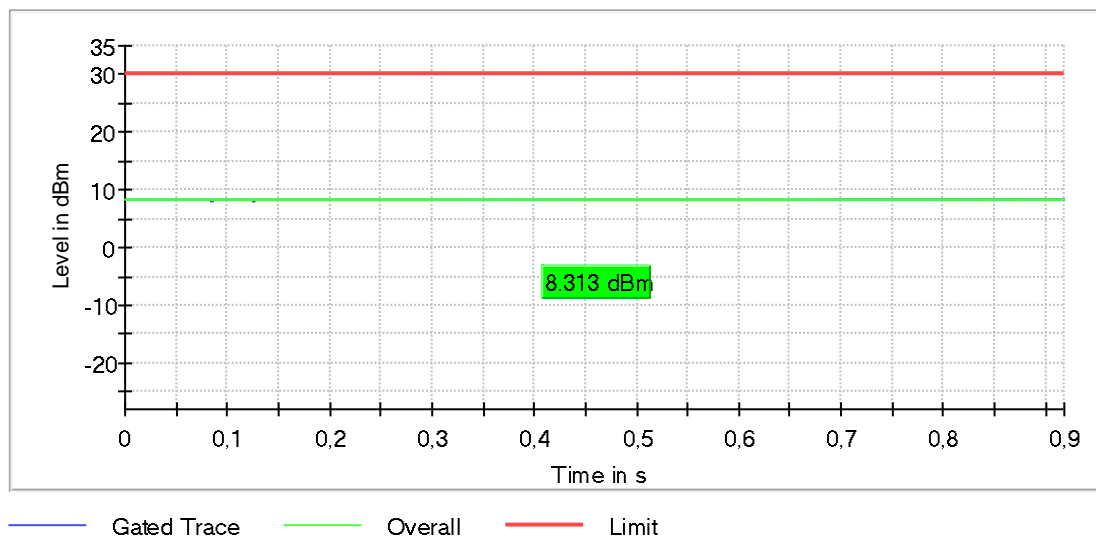

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |




## RF output power (5200 MHz; a-mode [9Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 7.9             | 30.0            | 7.9              | 91.748        | PASS   |

Gated Trace

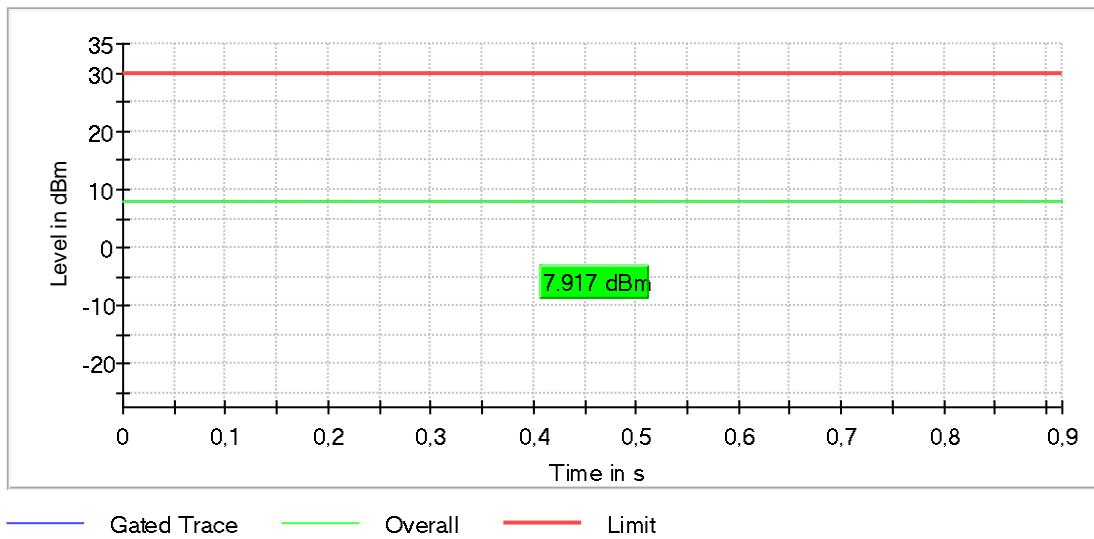

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; a-mode [9Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 8.7             | 30.0            | 8.7              | 91.928        | PASS   |

Gated Trace

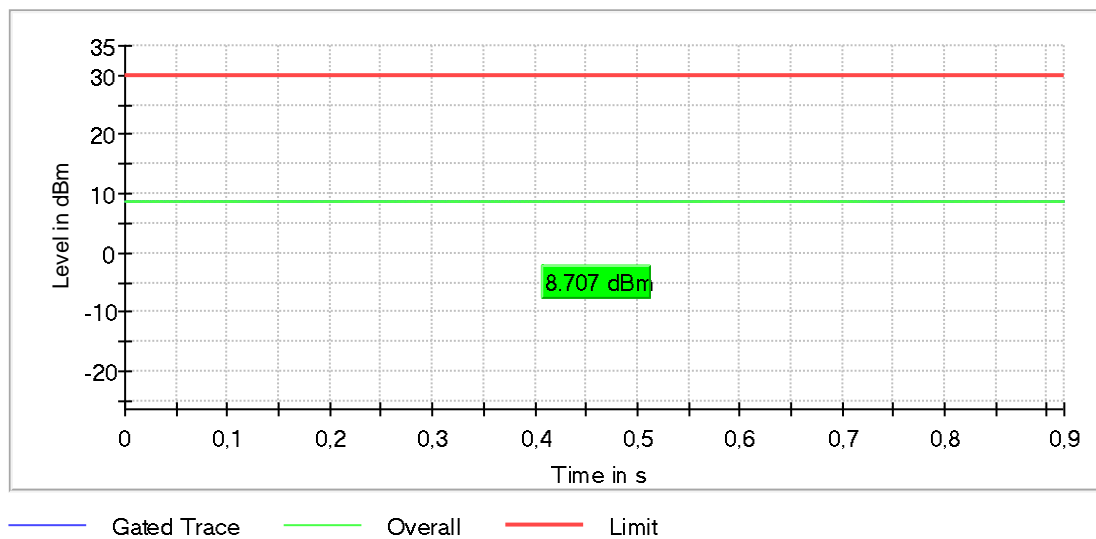

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; a-mode [9Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.4             | 30.0            | 3.4              | 91.902        | PASS   |

Gated Trace

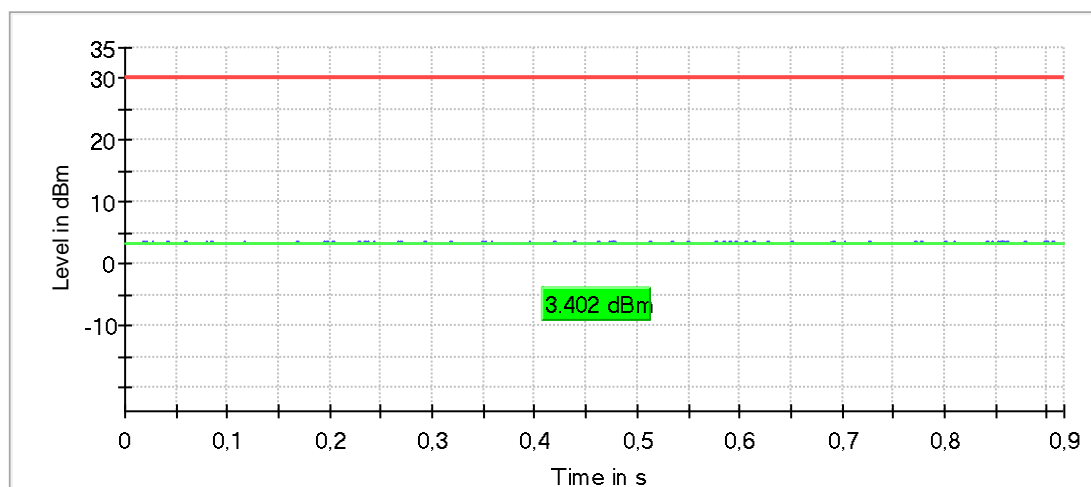

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5785 MHz; a-mode [9Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 3.8             | 30.0            | 3.8              | 91.831        | PASS   |

Gated Trace

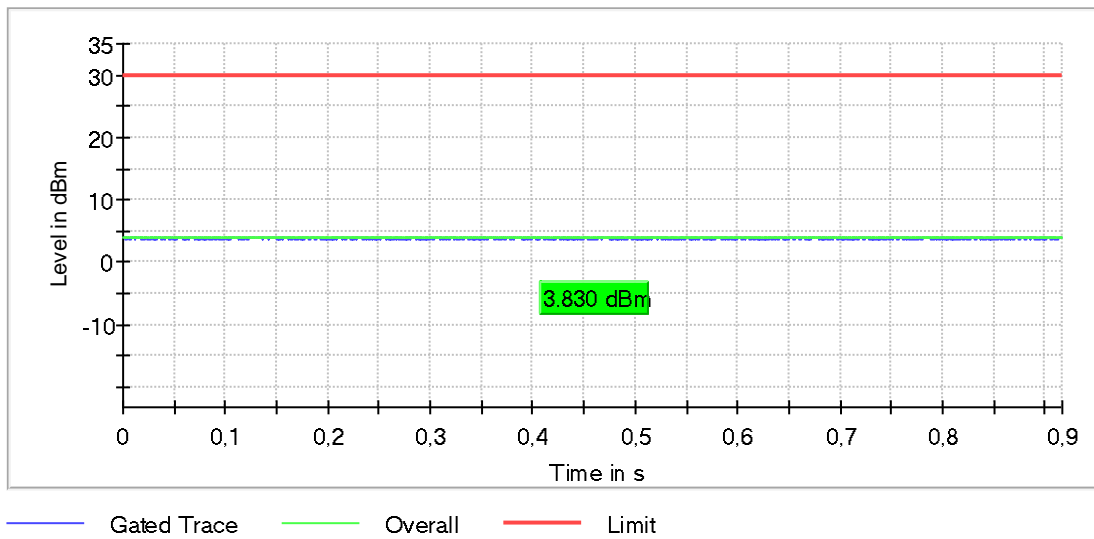

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5825 MHz; a-mode [9Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 3.7             | 30.0            | 3.7              | 91.720        | PASS   |

Gated Trace

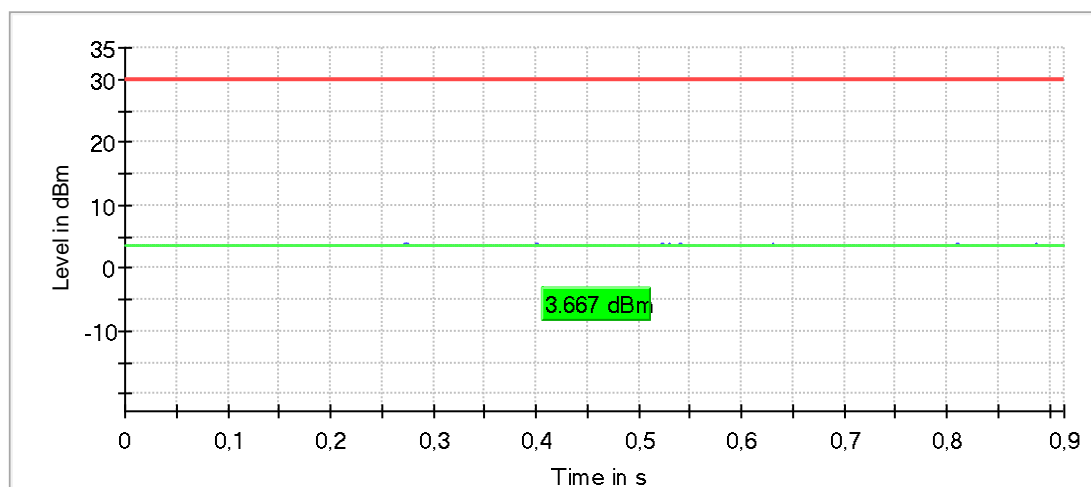

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5180 MHz; a-mode [12Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.3             | 30.0            | 8.3              | 89.521        | PASS   |

Gated Trace

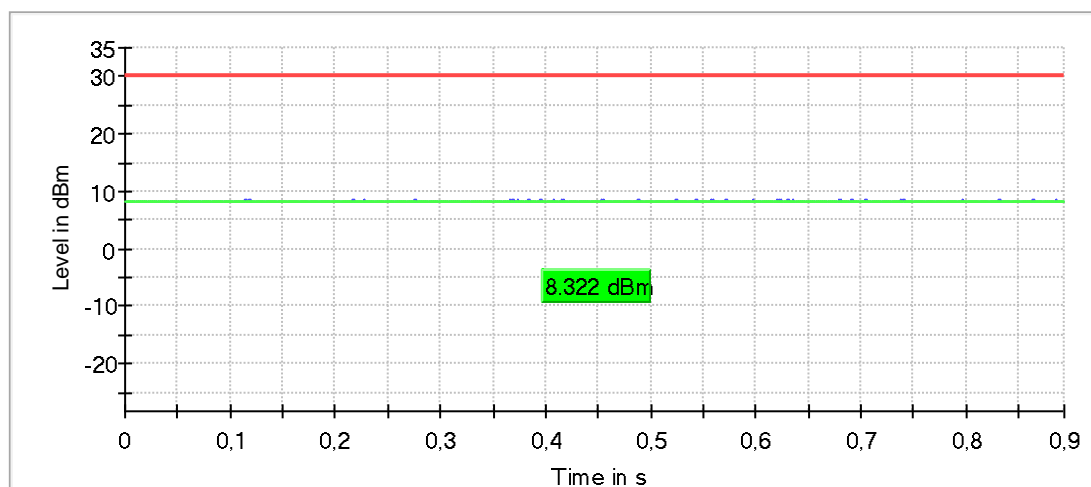

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5200 MHz; a-mode [12Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 7.9             | 30.0            | 7.9              | 89.439        | PASS   |

Gated Trace

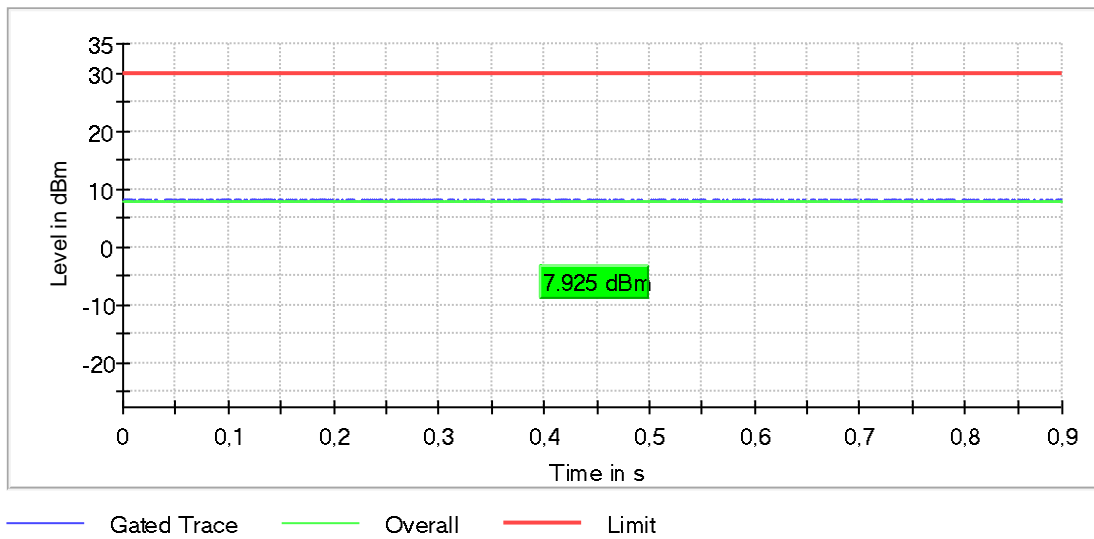

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; a-mode [12Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 8.7             | 30.0            | 8.7              | 89.439        | PASS   |

Gated Trace

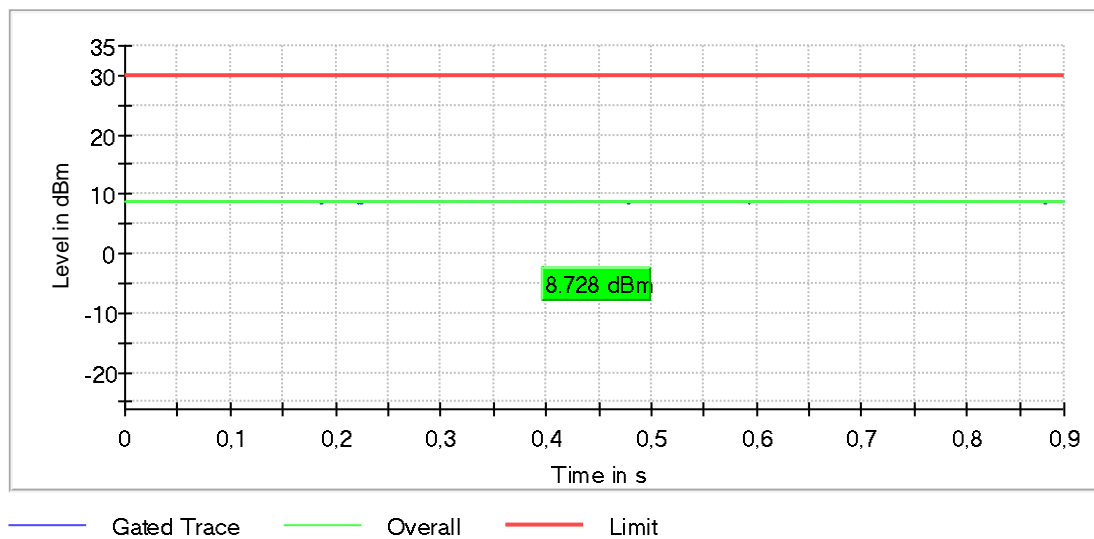

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |




## RF output power (5745 MHz; a-mode [12Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.4             | 30.0            | 3.4              | 89.538        | PASS   |

Gated Trace

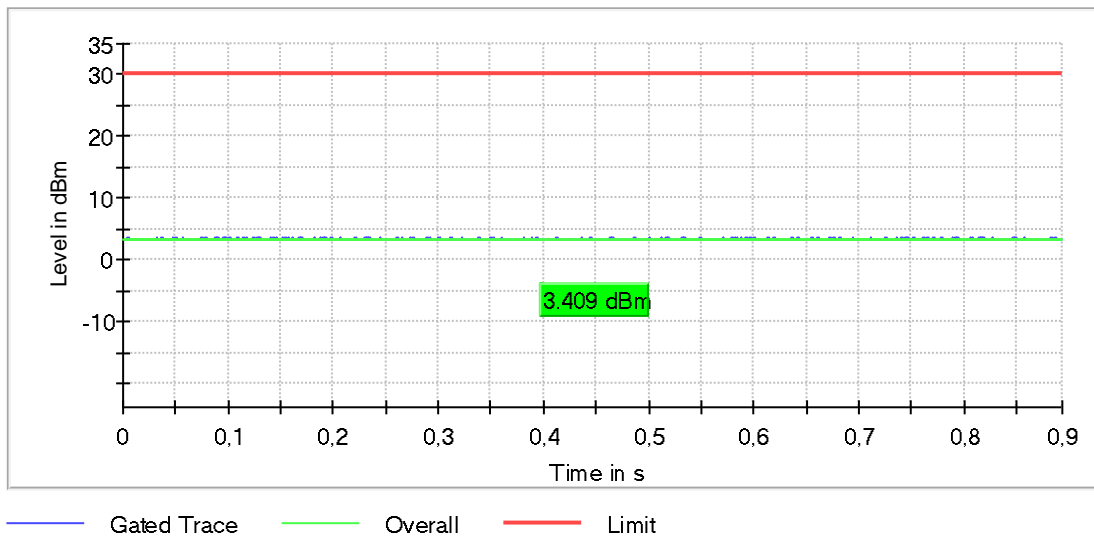

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5785 MHz; a-mode [12Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 3.8             | 30.0            | 3.8              | 89.484        | PASS   |

Gated Trace

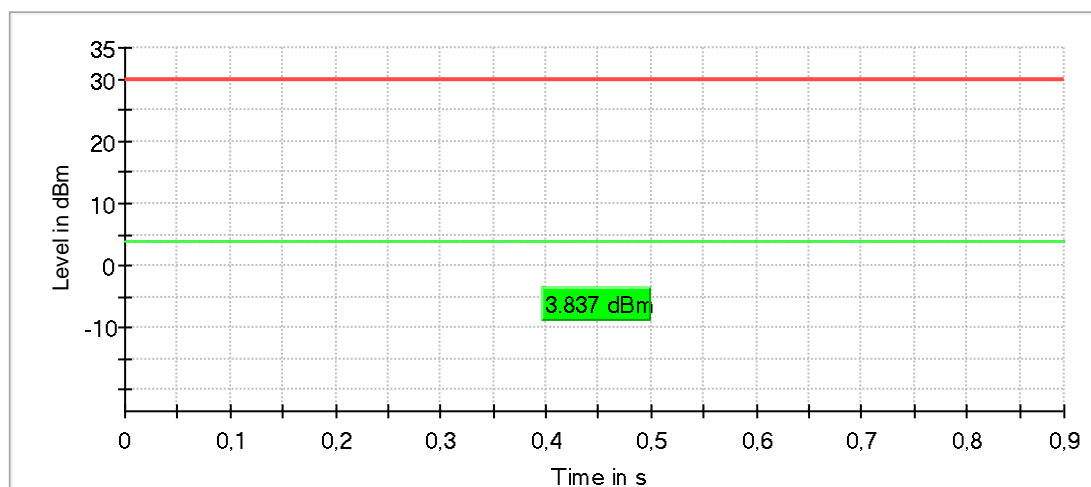

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5825 MHz; a-mode [12Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 3.7             | 30.0            | 3.7              | 89.393        | PASS   |

Gated Trace

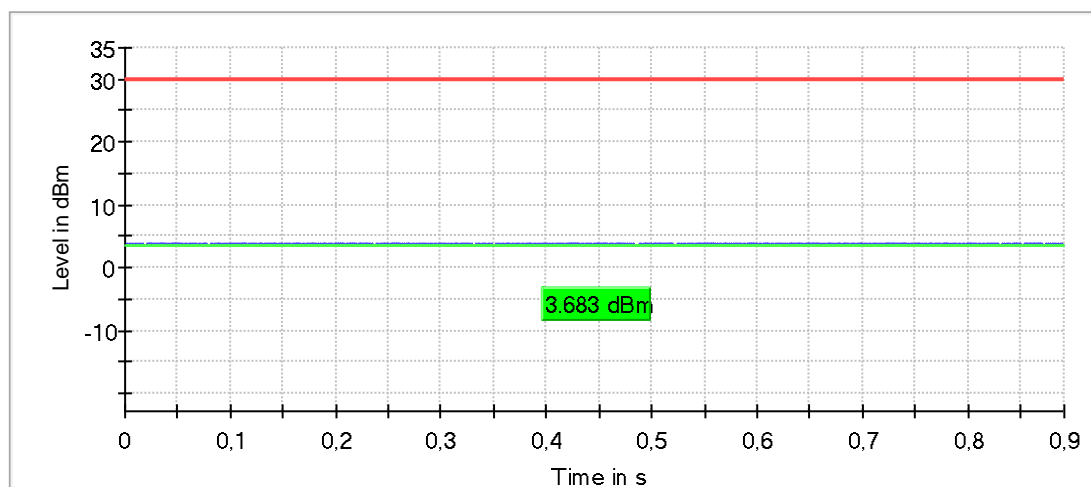

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5180 MHz; a-mode [18Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.5             | 30.0            | 8.5              | 85.304        | PASS   |

Gated Trace

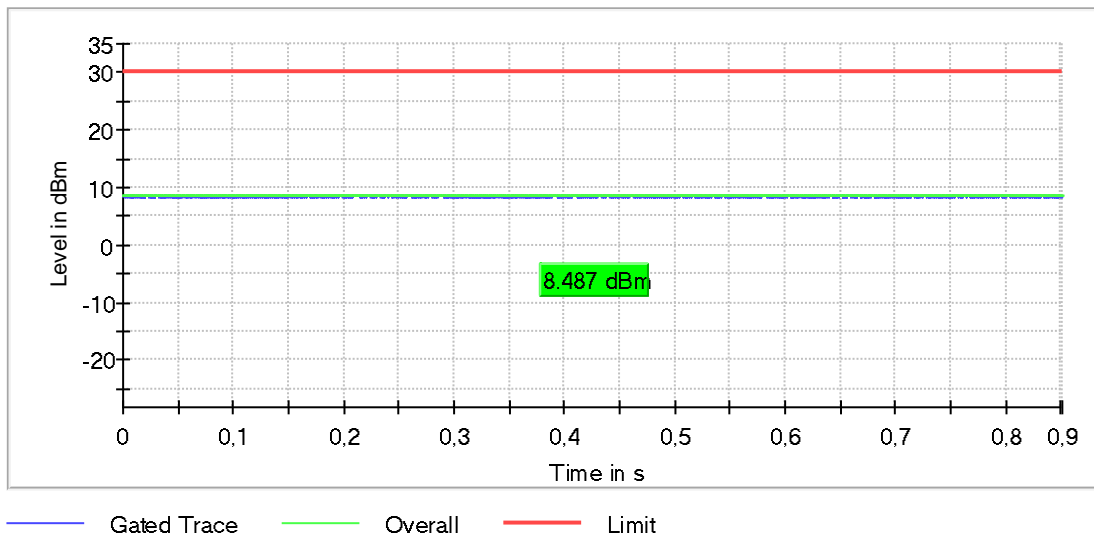

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5200 MHz; a-mode [18Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.1             | 30.0            | 8.1              | 85.171        | PASS   |

Gated Trace

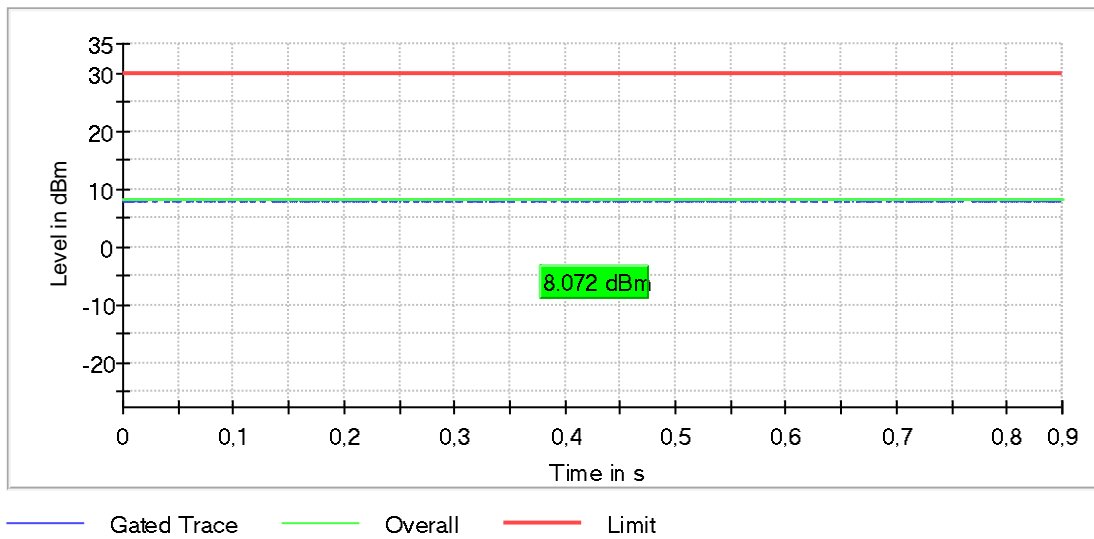

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; a-mode [18Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 8.9             | 30.0            | 8.9              | 85.166        | PASS   |

Gated Trace

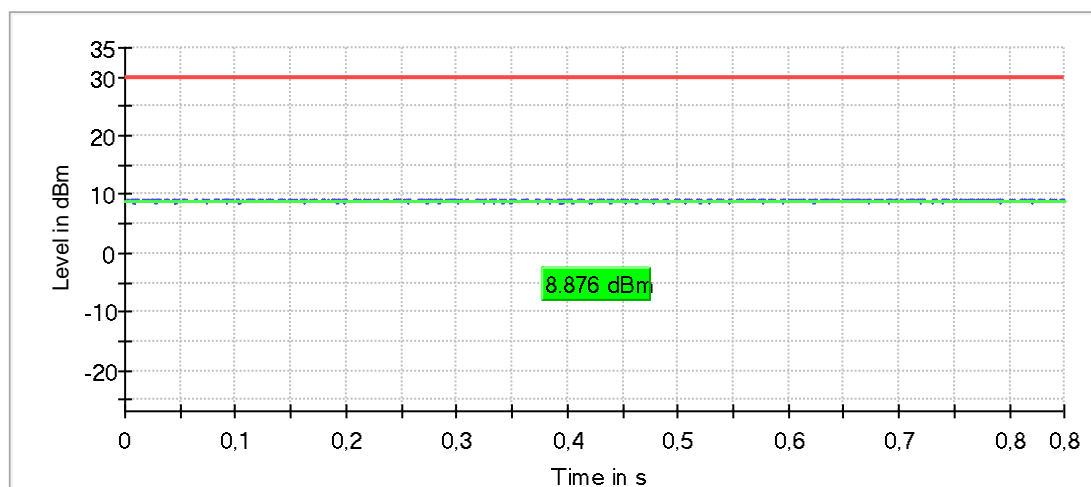

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; a-mode [18Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.5             | 30.0            | 3.5              | 85.361        | PASS   |

Gated Trace

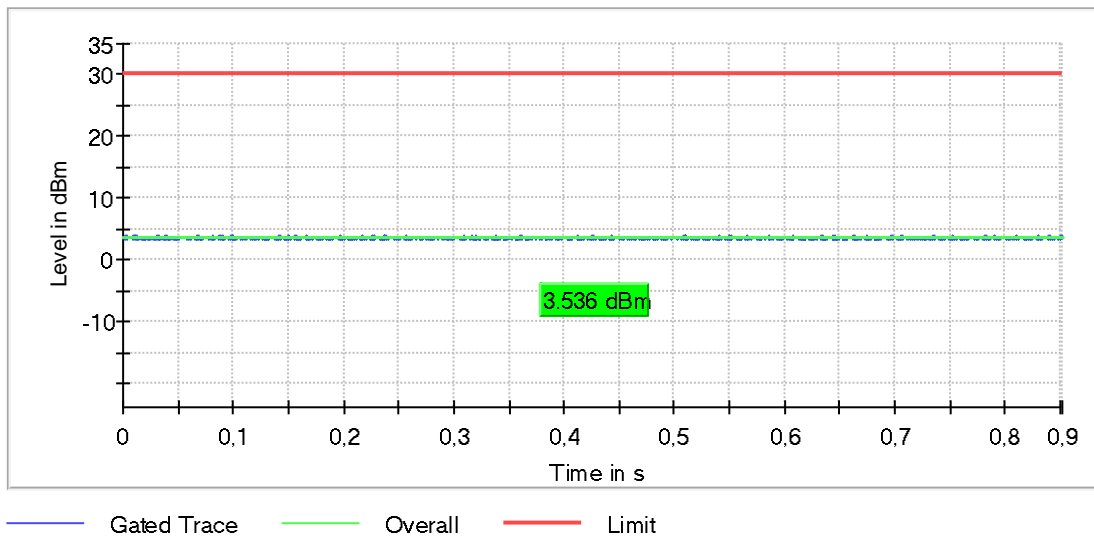

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5785 MHz; a-mode [18Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.0             | 30.0            | 4.0              | 85.251        | PASS   |

Gated Trace

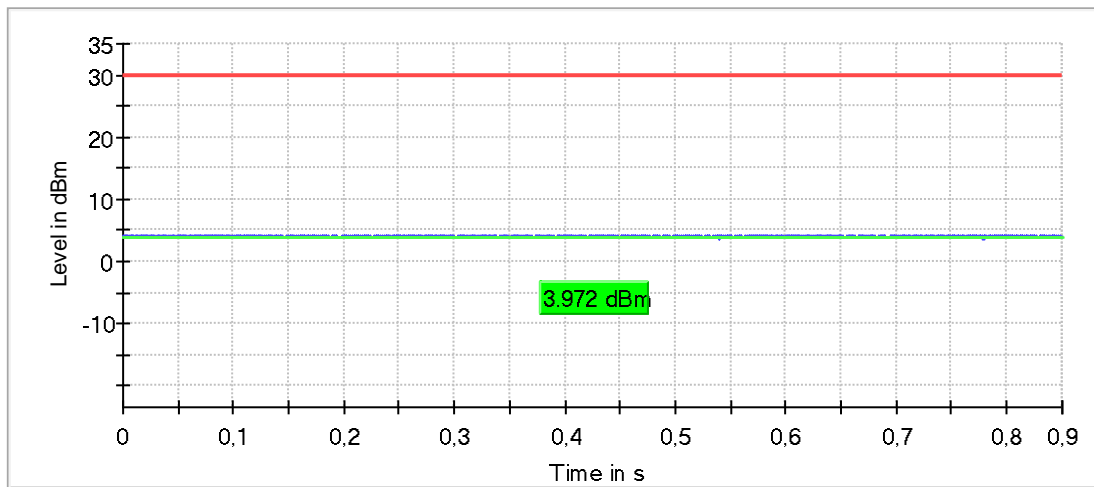

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |




## RF output power (5825 MHz; a-mode [18Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 3.8             | 30.0            | 3.8              | 85.337        | PASS   |

Gated Trace

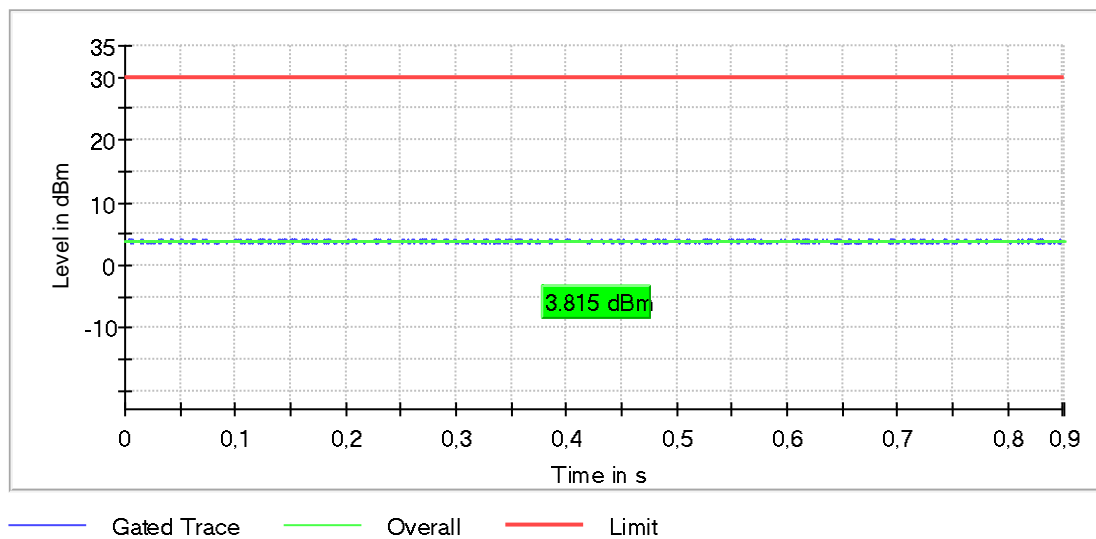

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5180 MHz; a-mode [24Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.7             | 30.0            | 8.7              | 81.427        | PASS   |

Gated Trace

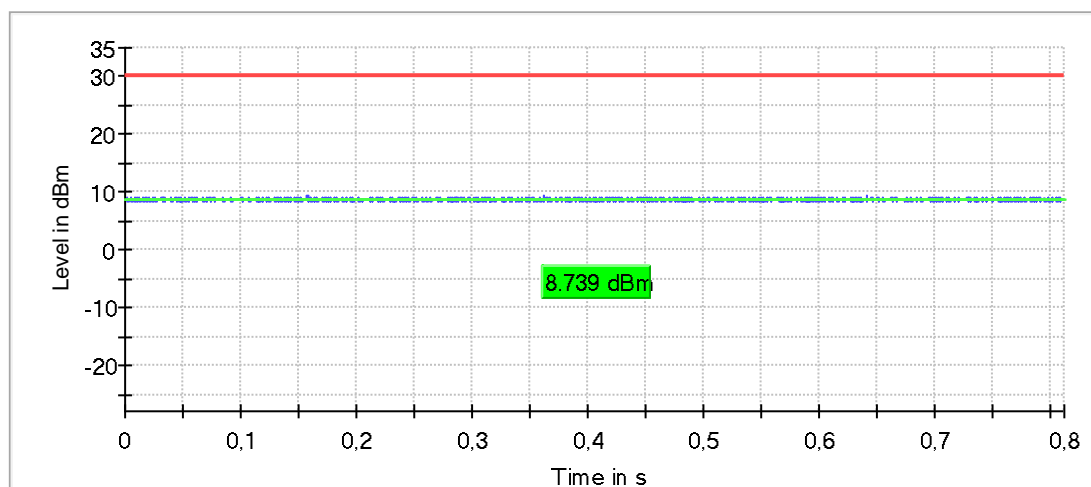

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5200 MHz; a-mode [24Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.3             | 30.0            | 8.3              | 81.444        | PASS   |

Gated Trace

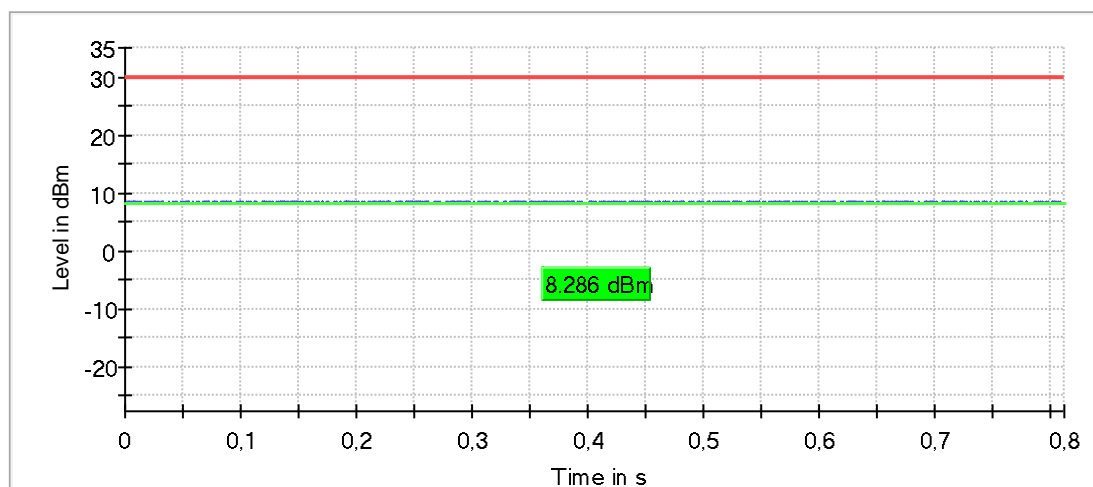

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5240 MHz; a-mode [24Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.1             | 30.0            | 9.1              | 81.334        | PASS   |

Gated Trace

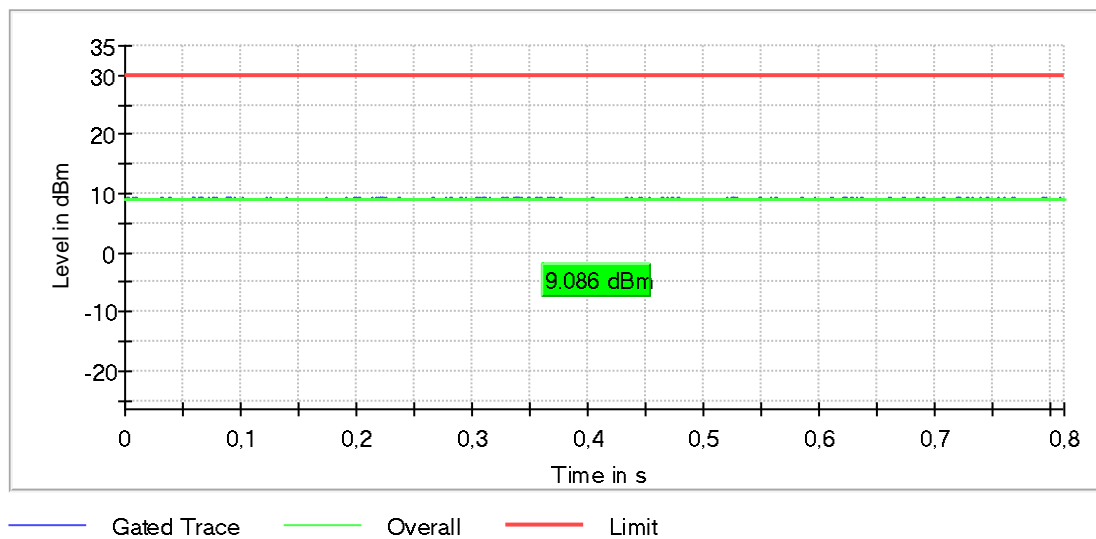

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; a-mode [24Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.9             | 30.0            | 3.9              | 81.255        | PASS   |

Gated Trace

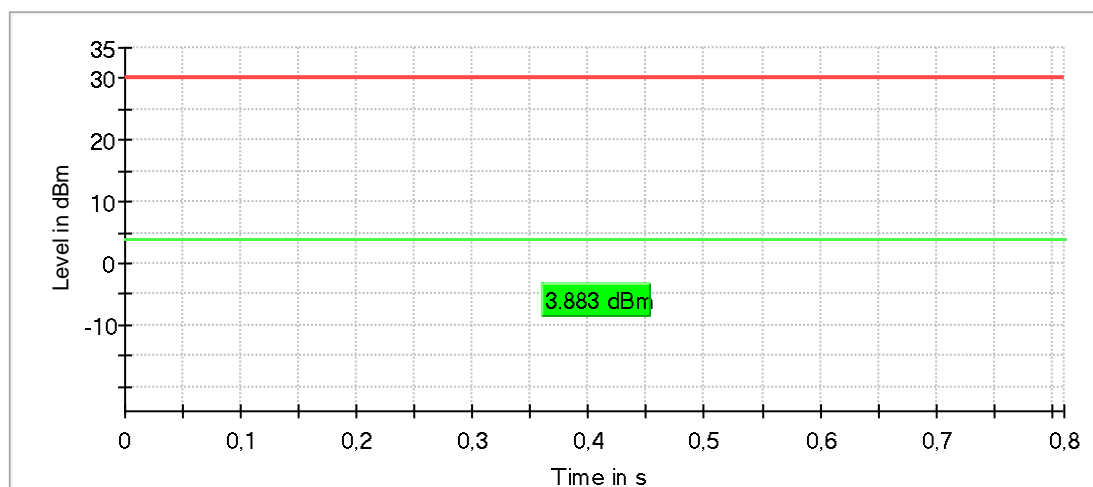

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5785 MHz; a-mode [24Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.3             | 30.0            | 4.3              | 81.440        | PASS   |

Gated Trace

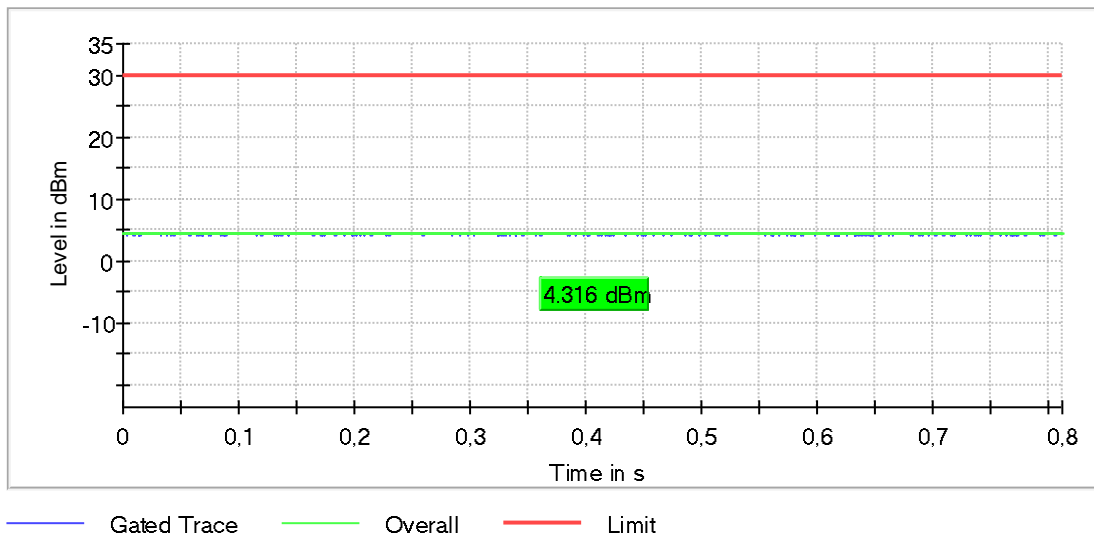

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5825 MHz; a-mode [24Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.2             | 30.0            | 4.2              | 81.228        | PASS   |

Gated Trace

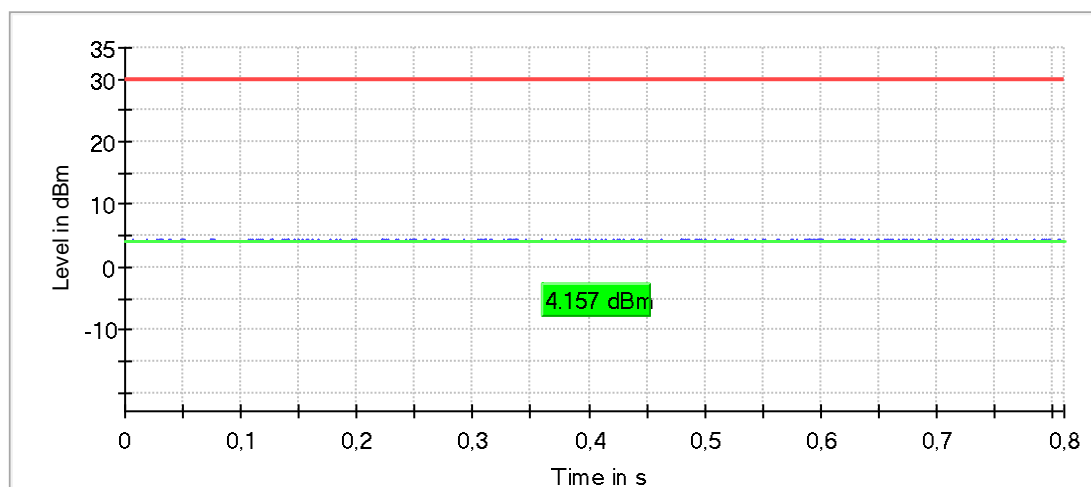

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5180 MHz; a-mode [36Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.7             | 30.0            | 8.7              | 74.863        | PASS   |

Gated Trace

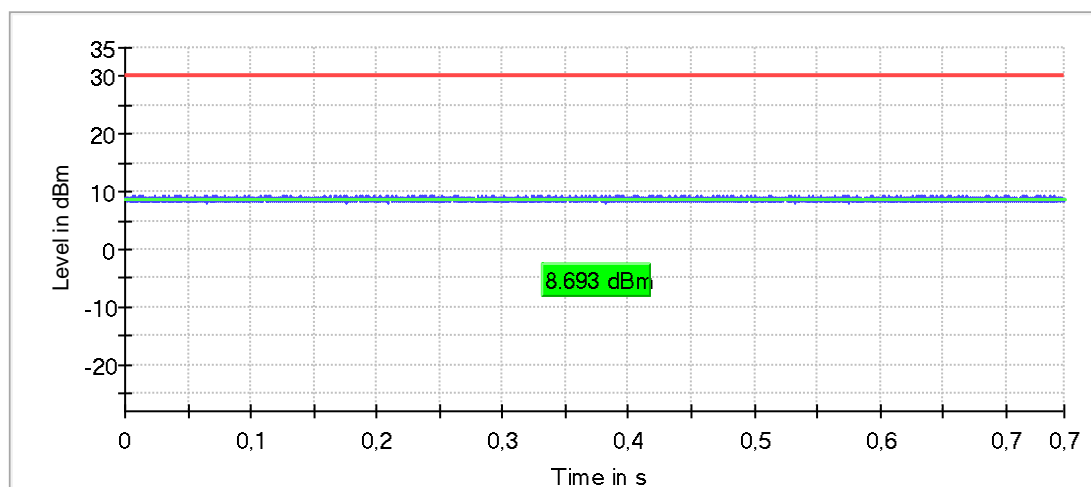

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |




## RF output power (5200 MHz; a-mode [36Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.3             | 30.0            | 8.3              | 74.761        | PASS   |

Gated Trace

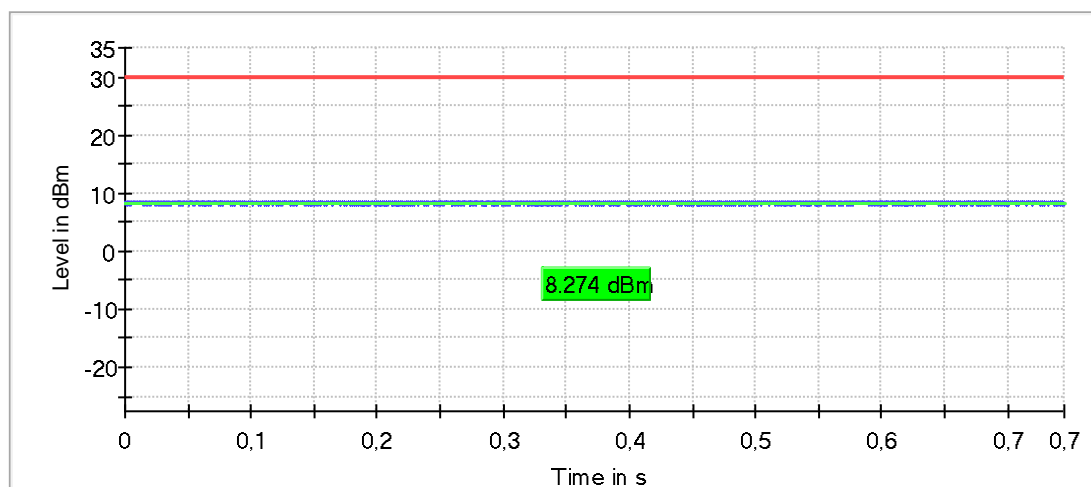

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; a-mode [36Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.1             | 30.0            | 9.1              | 74.779        | PASS   |

Gated Trace

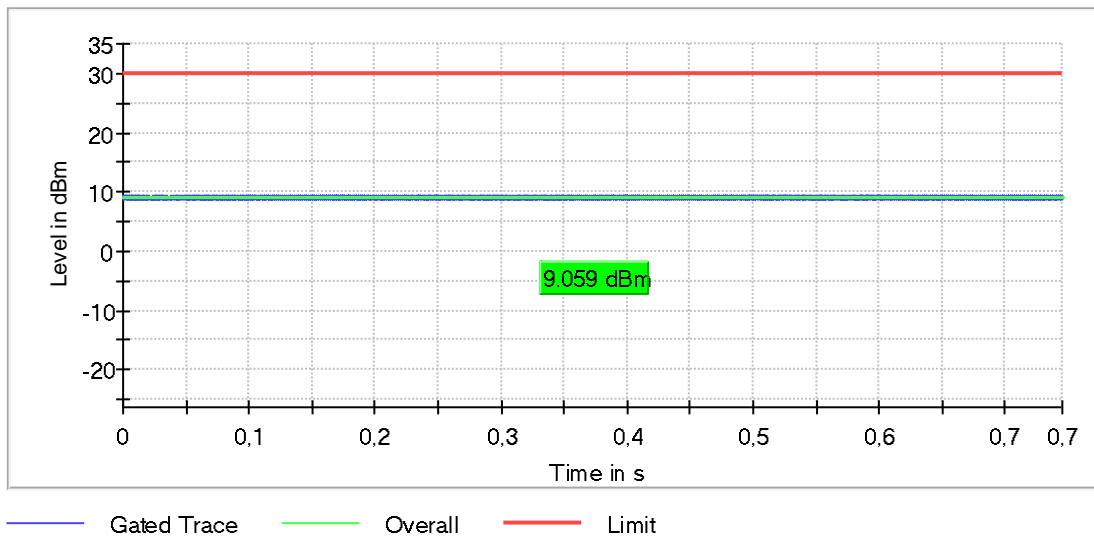

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; a-mode [36Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.8             | 30.0            | 3.8              | 74.991        | PASS   |

Gated Trace

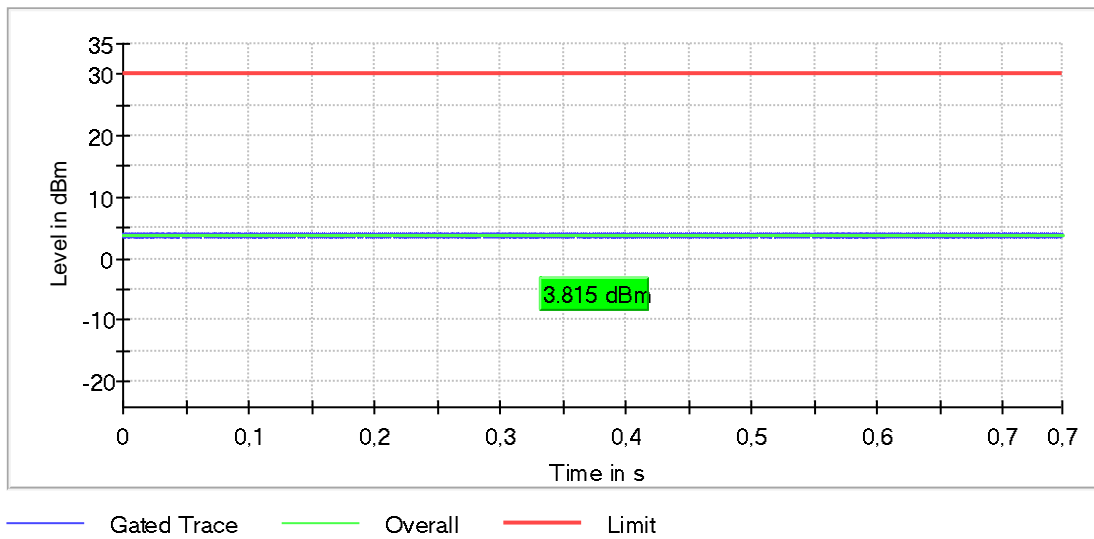

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5785 MHz; a-mode [36Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.2             | 30.0            | 4.2              | 75.030        | PASS   |

Gated Trace

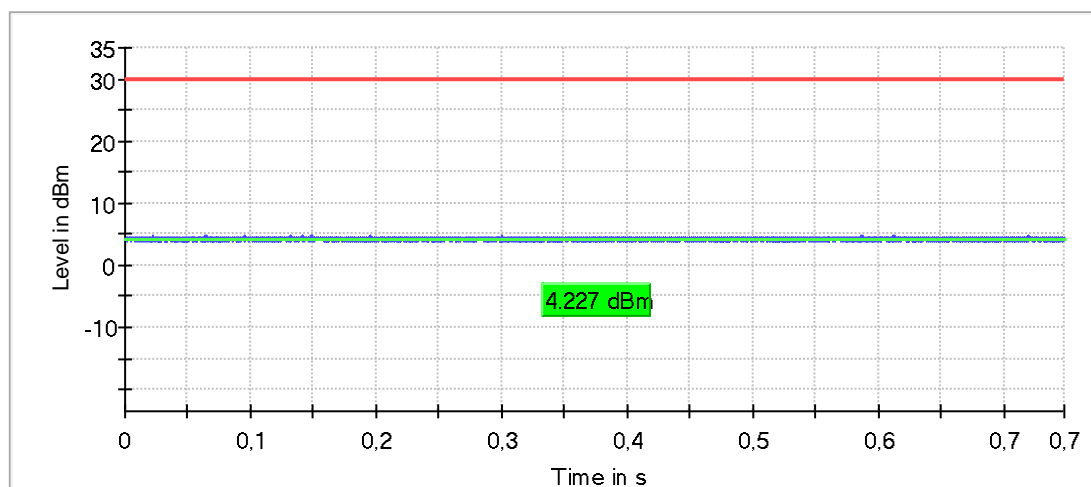

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5825 MHz; a-mode [36Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.1             | 30.0            | 4.1              | 74.966        | PASS   |

Gated Trace

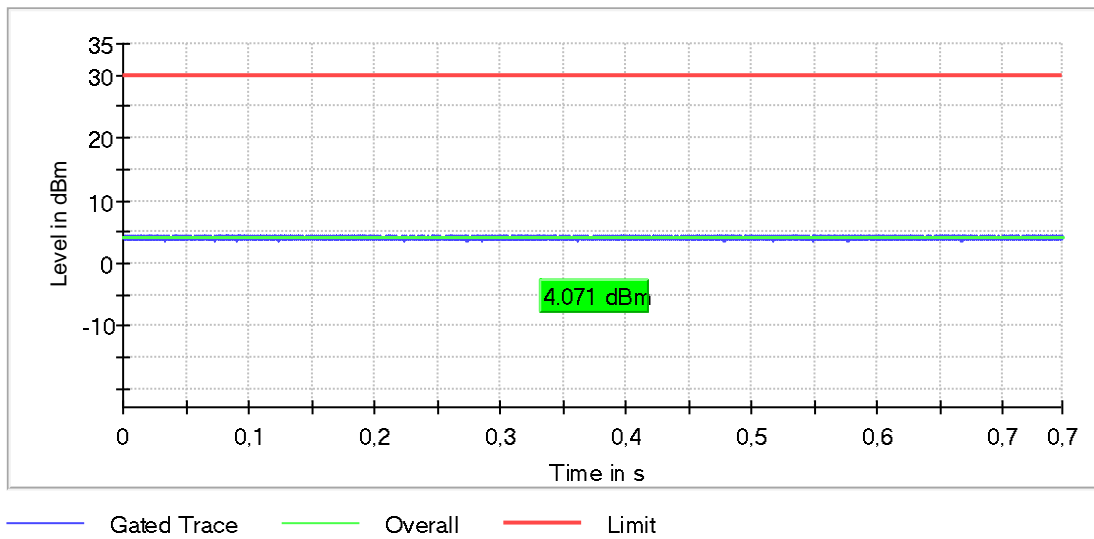

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5180 MHz; a-mode [48Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.8             | 30.0            | 8.8              | 69.578        | PASS   |

Gated Trace

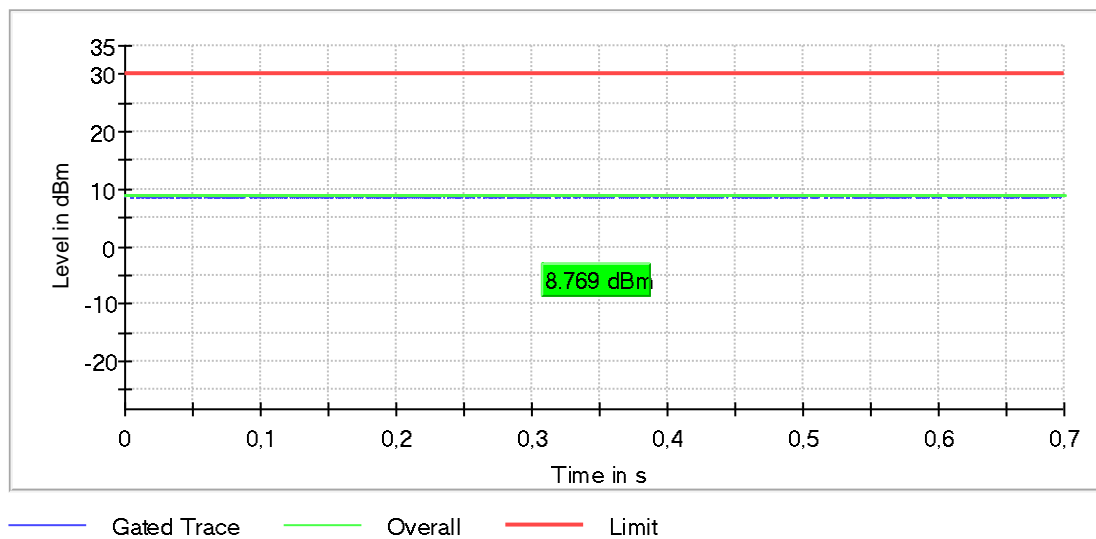

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5200 MHz; a-mode [48Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.4             | 30.0            | 8.4              | 69.495        | PASS   |

Gated Trace

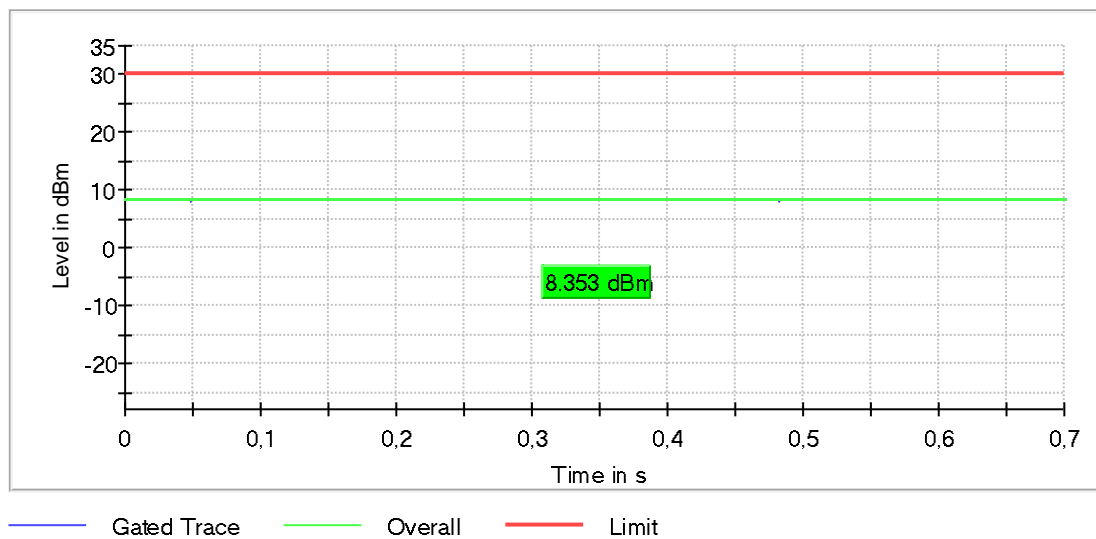

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; a-mode [48Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.1             | 30.0            | 9.1              | 69.440        | PASS   |

Gated Trace

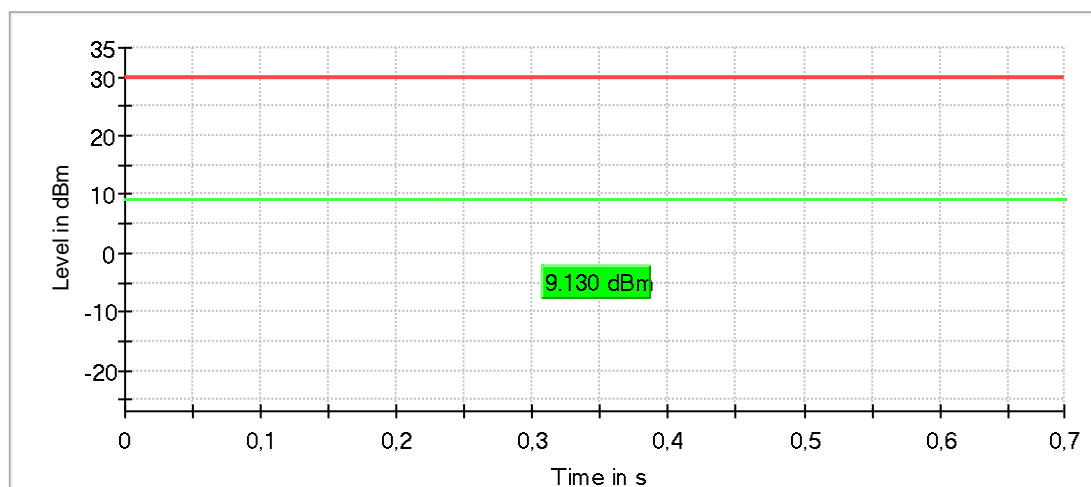

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |




## RF output power (5745 MHz; a-mode [48Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.9             | 30.0            | 3.9              | 69.657        | PASS   |

Gated Trace

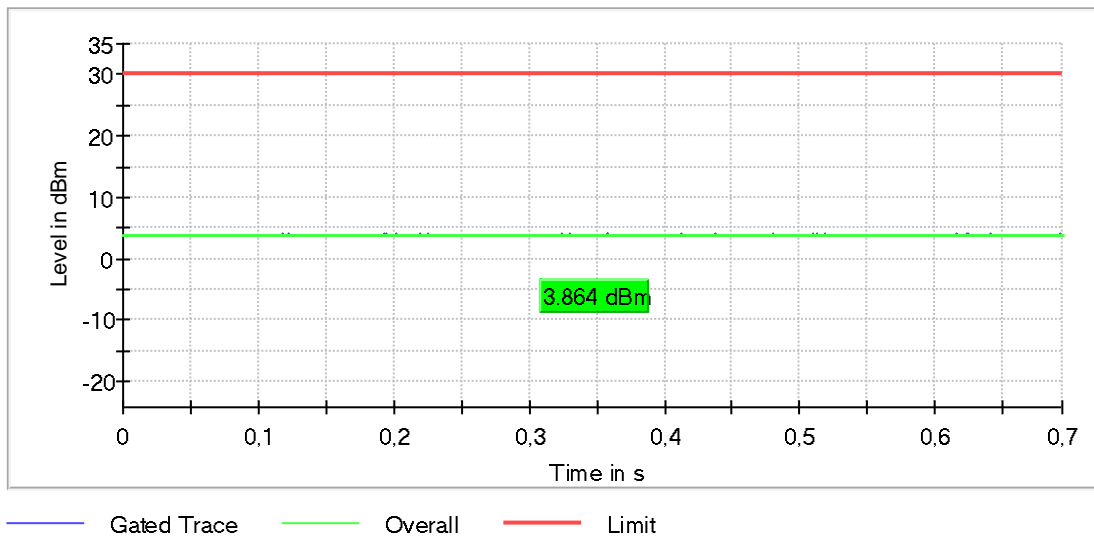

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5785 MHz; a-mode [48Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.3             | 30.0            | 4.3              | 69.531        | PASS   |

Gated Trace

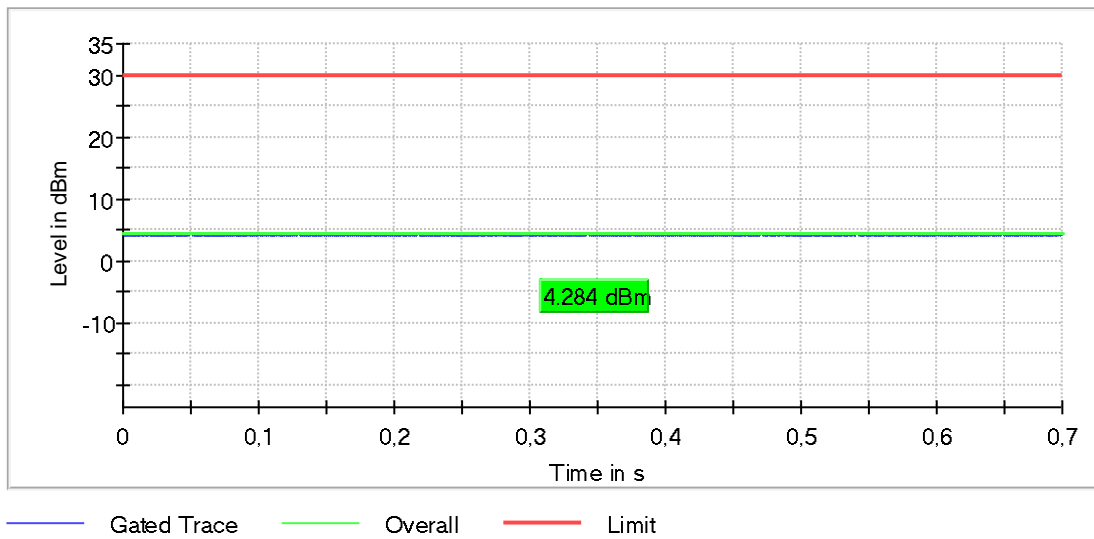

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5825 MHz; a-mode [48Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.1             | 30.0            | 4.1              | 69.582        | PASS   |

Gated Trace

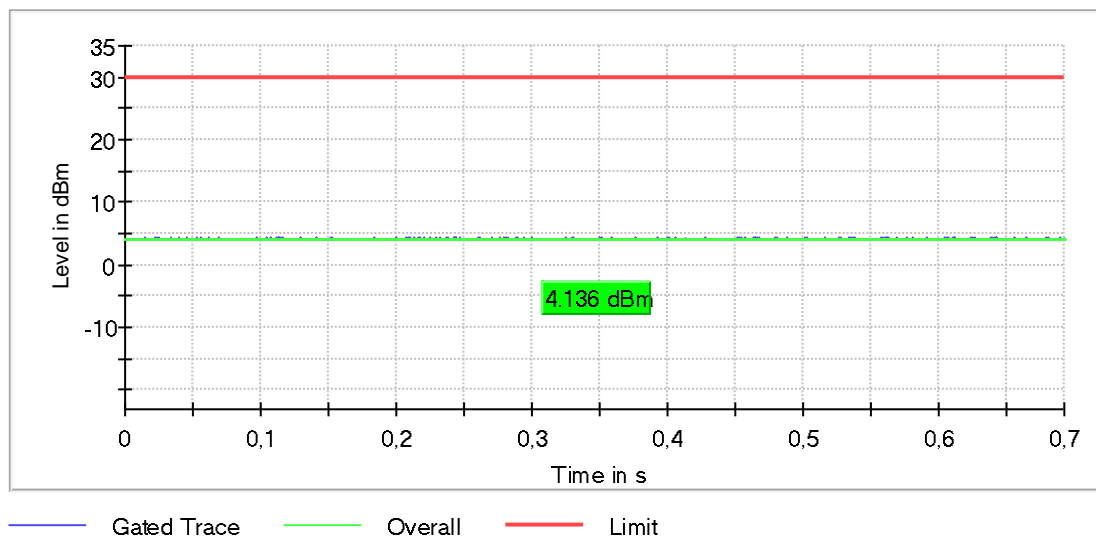

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5180 MHz; a-mode [54Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.7             | 30.0            | 8.7              | 67.225        | PASS   |

Gated Trace

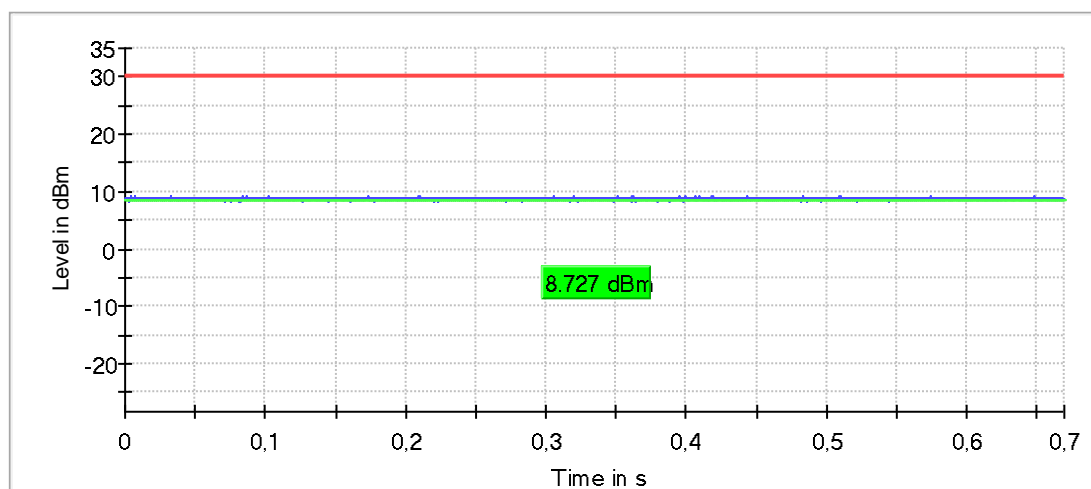

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5200 MHz; a-mode [54Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.3             | 30.0            | 8.3              | 67.360        | PASS   |

Gated Trace

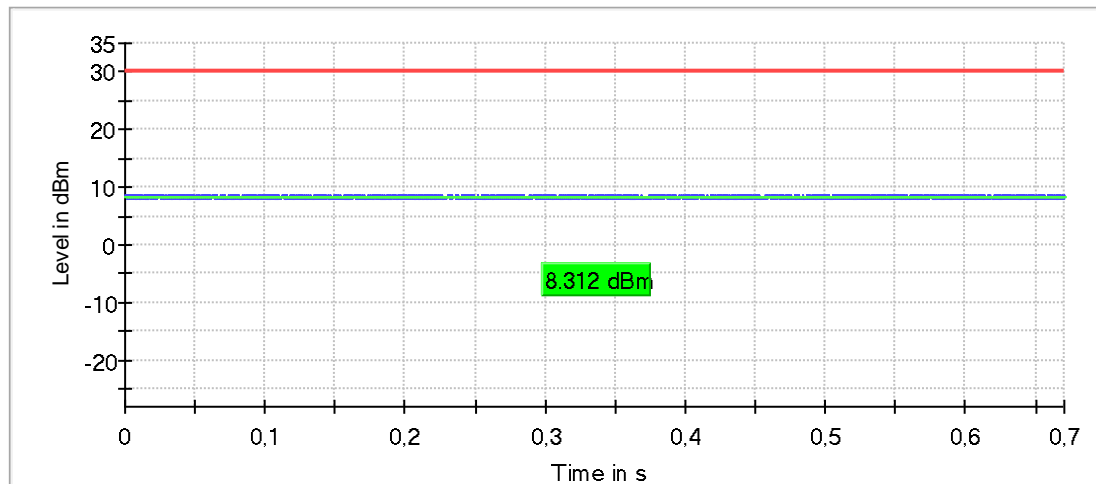

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; a-mode [54Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.1             | 30.0            | 9.1              | 67.352        | PASS   |

Gated Trace

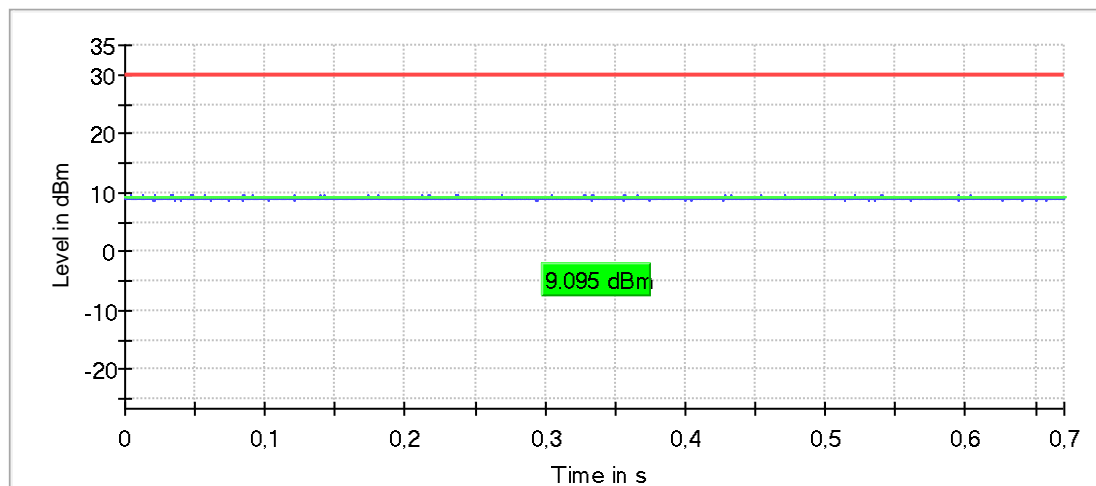

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5745 MHz; a-mode [54Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.8             | 30.0            | 3.8              | 67.217        | PASS   |

Gated Trace

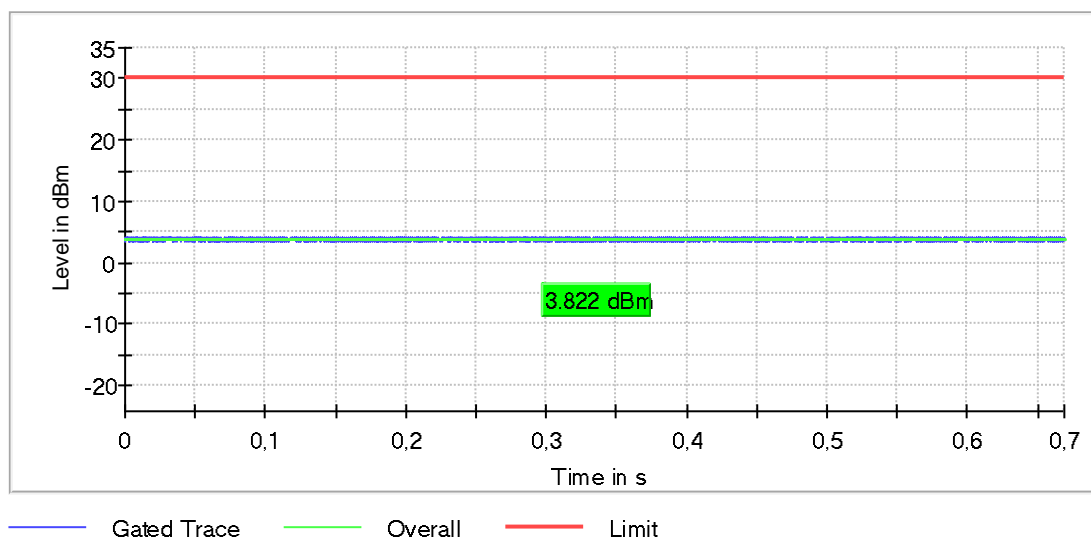

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5785 MHz; a-mode [54Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.2             | 30.0            | 4.2              | 67.293        | PASS   |

Gated Trace

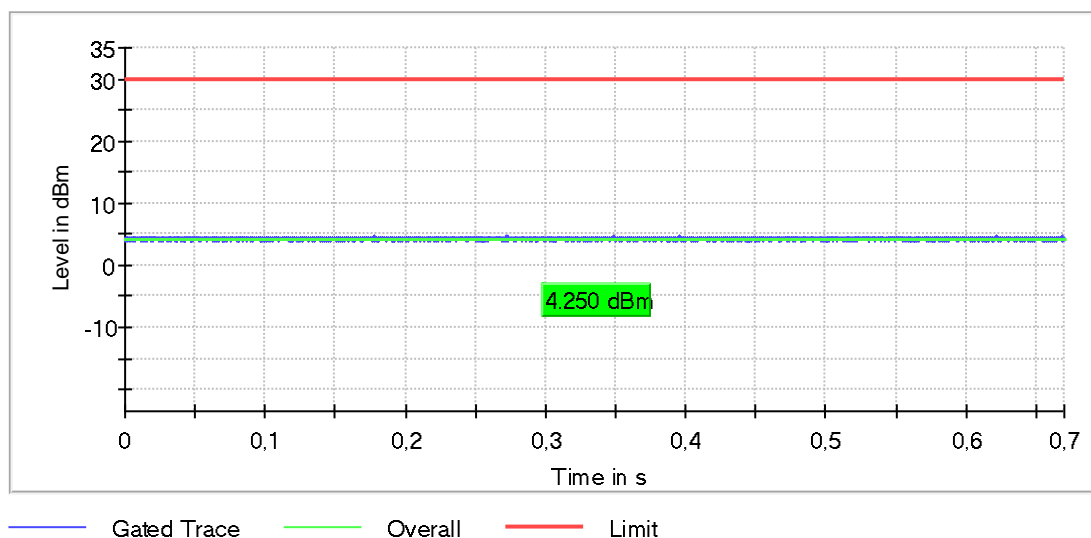

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |




## RF output power (5825 MHz; a-mode [54Mbps] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.1             | 30.0            | 4.1              | 67.157        | PASS   |

Gated Trace

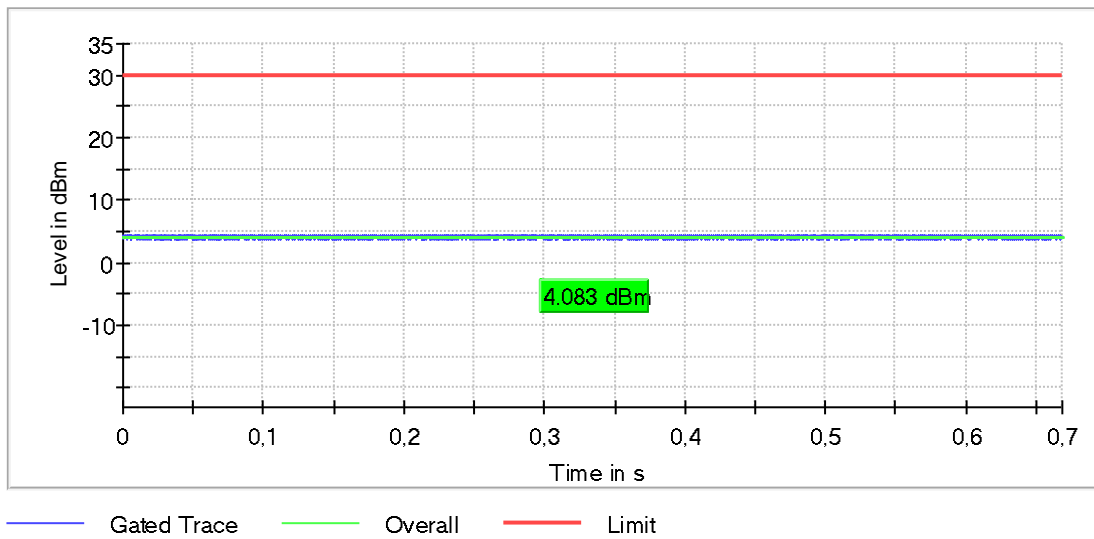

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |

## RF output power

| Mode                     | DUT Frequency | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|--------------------------|---------------|-----------------|-----------------|------------------|---------------|--------|
| n20-mode [MCS0]; 5180MHz | 5180.0000     | 8.2             | 30.0            | 8.2              | 93.763        | PASS   |
| n20-mode [MCS0]; 5200MHz | 5200.0000     | 7.8             | 30.0            | 7.8              | 93.819        | PASS   |
| n20-mode [MCS0]; 5240MHz | 5240.0000     | 8.6             | 30.0            | 8.6              | 93.845        | PASS   |
| n20-mode [MCS0]; 5745MHz | 5745.0000     | 3.2             | 30.0            | 3.2              | 93.973        | PASS   |
| n20-mode [MCS0]; 5785MHz | 5785.0000     | 3.7             | 30.0            | 3.7              | 93.871        | PASS   |
| n20-mode [MCS0]; 5825MHz | 5825.0000     | 3.5             | 30.0            | 3.5              | 93.916        | PASS   |
| n20-mode [MCS1]; 5180MHz | 5180.0000     | 8.1             | 30.0            | 8.1              | 88.756        | PASS   |
| n20-mode [MCS1]; 5200MHz | 5200.0000     | 7.7             | 30.0            | 7.7              | 88.919        | PASS   |
| n20-mode [MCS1]; 5240MHz | 5240.0000     | 8.5             | 30.0            | 8.5              | 88.909        | PASS   |
| n20-mode [MCS1]; 5745MHz | 5745.0000     | 3.1             | 30.0            | 3.1              | 88.954        | PASS   |
| n20-mode [MCS1]; 5785MHz | 5785.0000     | 3.6             | 30.0            | 3.6              | 88.816        | PASS   |
| n20-mode [MCS1]; 5825MHz | 5825.0000     | 3.4             | 30.0            | 3.4              | 89.005        | PASS   |
| n20-mode [MCS2]; 5180MHz | 5180.0000     | 8.3             | 30.0            | 8.3              | 84.527        | PASS   |
| n20-mode [MCS2]; 5200MHz | 5200.0000     | 7.9             | 30.0            | 7.9              | 84.415        | PASS   |
| n20-mode [MCS2]; 5240MHz | 5240.0000     | 8.7             | 30.0            | 8.7              | 84.444        | PASS   |
| n20-mode [MCS2]; 5745MHz | 5745.0000     | 3.3             | 30.0            | 3.3              | 84.629        | PASS   |
| n20-mode [MCS2]; 5785MHz | 5785.0000     | 3.8             | 30.0            | 3.8              | 84.553        | PASS   |
| n20-mode [MCS2]; 5825MHz | 5825.0000     | 3.6             | 30.0            | 3.6              | 84.585        | PASS   |
| n20-mode [MCS3]; 5180MHz | 5180.0000     | 8.8             | 30.0            | 8.8              | 80.698        | PASS   |
| n20-mode [MCS3]; 5200MHz | 5200.0000     | 8.4             | 30.0            | 8.4              | 80.733        | PASS   |
| n20-mode [MCS3]; 5240MHz | 5240.0000     | 9.1             | 30.0            | 9.1              | 80.830        | PASS   |
| n20-mode [MCS3]; 5745MHz | 5745.0000     | 3.9             | 30.0            | 3.9              | 80.783        | PASS   |
| n20-mode [MCS3]; 5785MHz | 5785.0000     | 4.3             | 30.0            | 4.3              | 80.697        | PASS   |
| n20-mode [MCS3]; 5825MHz | 5825.0000     | 4.1             | 30.0            | 4.1              | 80.788        | PASS   |
| n20-mode [MCS4]; 5180MHz | 5180.0000     | 8.8             | 30.0            | 8.8              | 74.205        | PASS   |
| n20-mode [MCS4]; 5200MHz | 5200.0000     | 8.4             | 30.0            | 8.4              | 74.388        | PASS   |
| n20-mode [MCS4]; 5240MHz | 5240.0000     | 9.1             | 30.0            | 9.1              | 74.336        | PASS   |
| n20-mode [MCS4]; 5745MHz | 5745.0000     | 3.9             | 30.0            | 3.9              | 74.532        | PASS   |
| n20-mode [MCS4]; 5785MHz | 5785.0000     | 4.3             | 30.0            | 4.3              | 74.503        | PASS   |
| n20-mode [MCS4]; 5825MHz | 5825.0000     | 4.1             | 30.0            | 4.1              | 74.389        | PASS   |
| n20-mode [MCS5]; 5180MHz | 5180.0000     | 8.8             | 30.0            | 8.8              | 69.186        | PASS   |
| n20-mode [MCS5]; 5200MHz | 5200.0000     | 8.4             | 30.0            | 8.4              | 69.100        | PASS   |
| n20-mode [MCS5]; 5240MHz | 5240.0000     | 9.1             | 30.0            | 9.1              | 68.931        | PASS   |
| n20-mode [MCS5]; 5745MHz | 5745.0000     | 5.9             | 30.0            | 5.9              | 68.687        | PASS   |
| n20-mode [MCS5]; 5785MHz | 5785.0000     | 4.3             | 30.0            | 4.3              | 69.314        | PASS   |
| n20-mode [MCS5]; 5825MHz | 5825.0000     | 4.1             | 30.0            | 4.1              | 69.321        | PASS   |
| n20-mode [MCS6]; 5180MHz | 5180.0000     | 8.8             | 30.0            | 8.8              | 67.252        | PASS   |
| n20-mode [MCS6]; 5200MHz | 5200.0000     | 8.4             | 30.0            | 8.4              | 67.246        | PASS   |
| n20-mode [MCS6]; 5240MHz | 5240.0000     | 9.2             | 30.0            | 9.2              | 67.092        | PASS   |
| n20-mode [MCS6]; 5745MHz | 5745.0000     | 3.9             | 30.0            | 3.9              | 67.285        | PASS   |
| n20-mode [MCS6]; 5785MHz | 5785.0000     | 4.3             | 30.0            | 4.3              | 67.338        | PASS   |
| n20-mode [MCS6]; 5825MHz | 5825.0000     | 4.2             | 30.0            | 4.2              | 67.207        | PASS   |
| n20-mode [MCS7]; 5180MHz | 5180.0000     | 8.8             | 30.0            | 8.8              | 65.281        | PASS   |
| n20-mode [MCS7]; 5200MHz | 5200.0000     | 8.3             | 30.0            | 8.3              | 65.282        | PASS   |
| n20-mode [MCS7]; 5240MHz | 5240.0000     | 9.1             | 30.0            | 9.1              | 65.324        | PASS   |
| n20-mode [MCS7]; 5745MHz | 5745.0000     | 3.8             | 30.0            | 3.8              | 65.352        | PASS   |
| n20-mode [MCS7]; 5785MHz | 5785.0000     | 4.3             | 30.0            | 4.3              | 65.606        | PASS   |
| n20-mode [MCS7]; 5825MHz | 5825.0000     | 4.1             | 30.0            | 4.1              | 65.714        | PASS   |


## RF output power (5180 MHz; n20-mode [MCS0] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.2             | 30.0            | 8.2              | 93.763        | PASS   |

Gated Trace

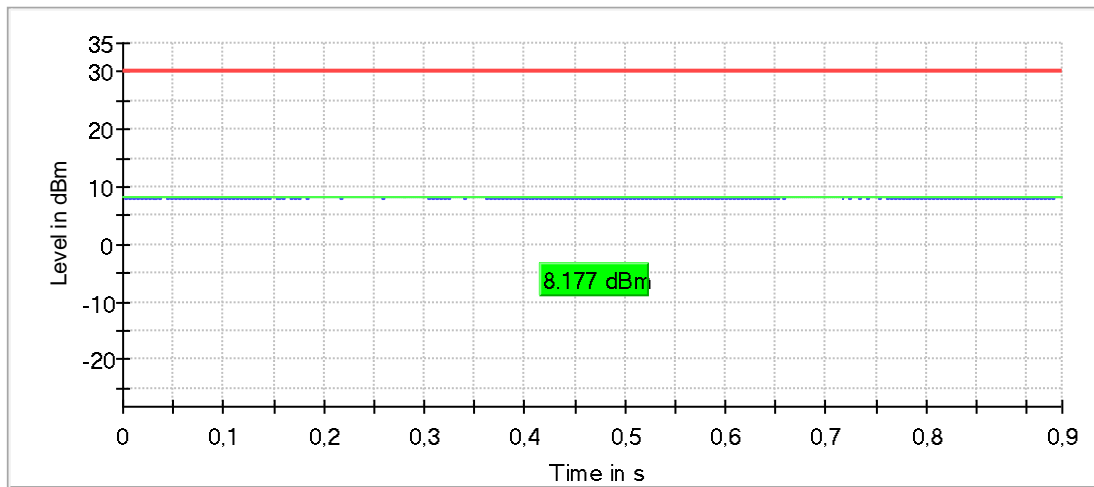

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5200 MHz; n20-mode [MCS0] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 7.8             | 30.0            | 7.8              | 93.819        | PASS   |

Gated Trace

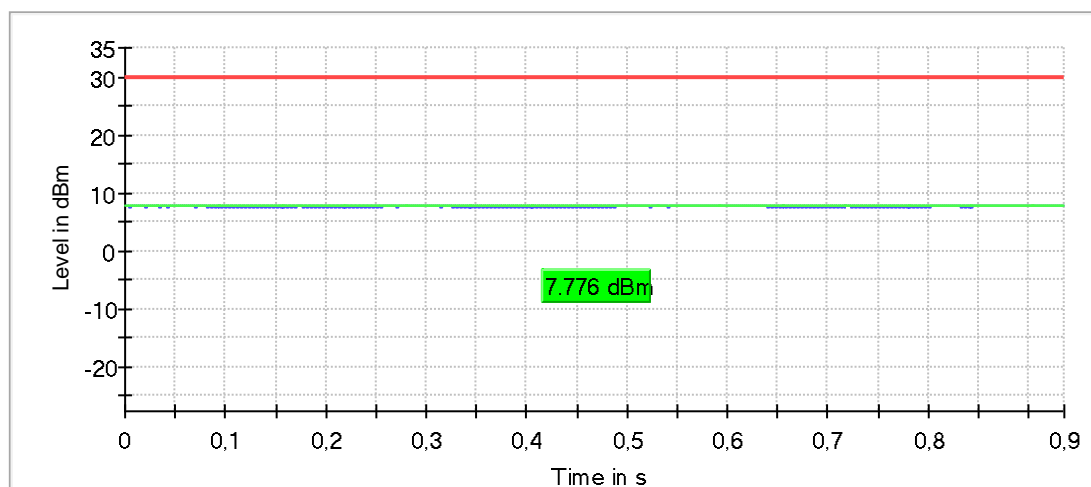

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; n20-mode [MCS0] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 8.6             | 30.0            | 8.6              | 93.845        | PASS   |

Gated Trace

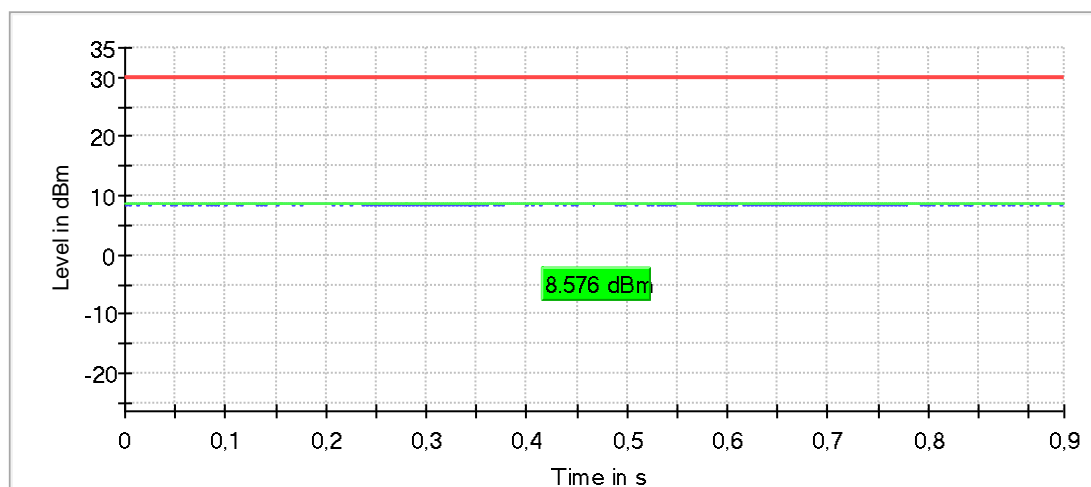

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; n20-mode [MCS0] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.2             | 30.0            | 3.2              | 93.973        | PASS   |

Gated Trace

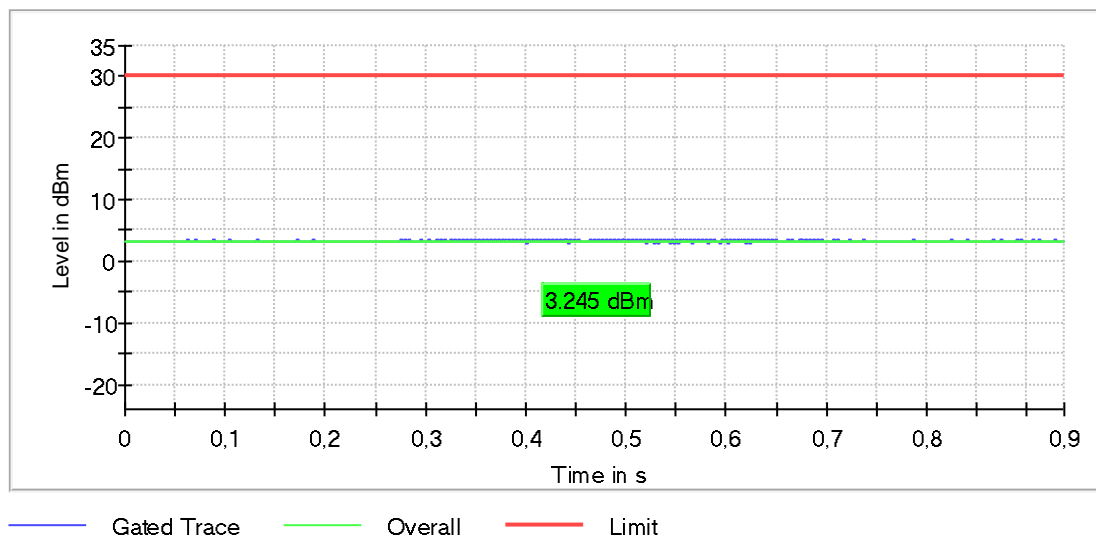

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5785 MHz; n20-mode [MCS0] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 3.7             | 30.0            | 3.7              | 93.871        | PASS   |

Gated Trace

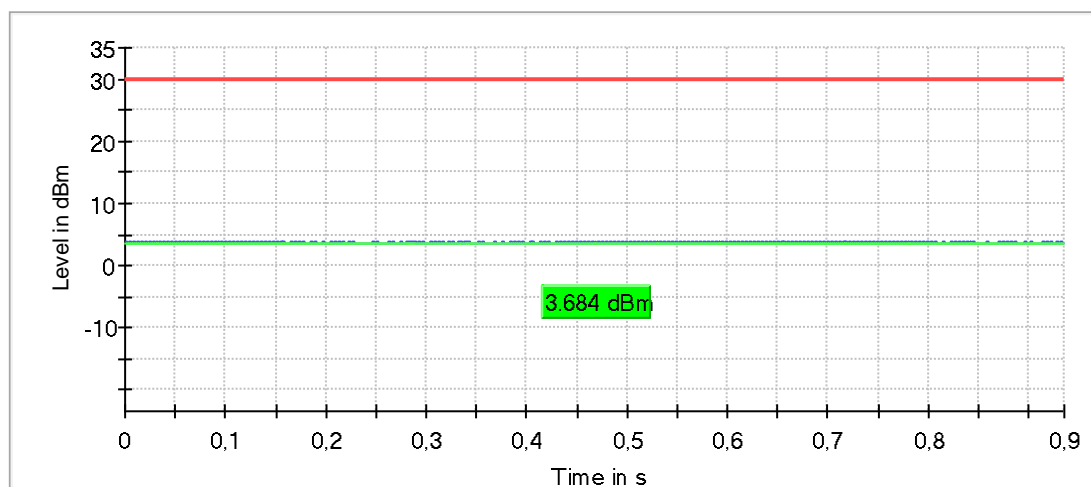

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5825 MHz; n20-mode [MCS0] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 3.5             | 30.0            | 3.5              | 93.916        | PASS   |

Gated Trace

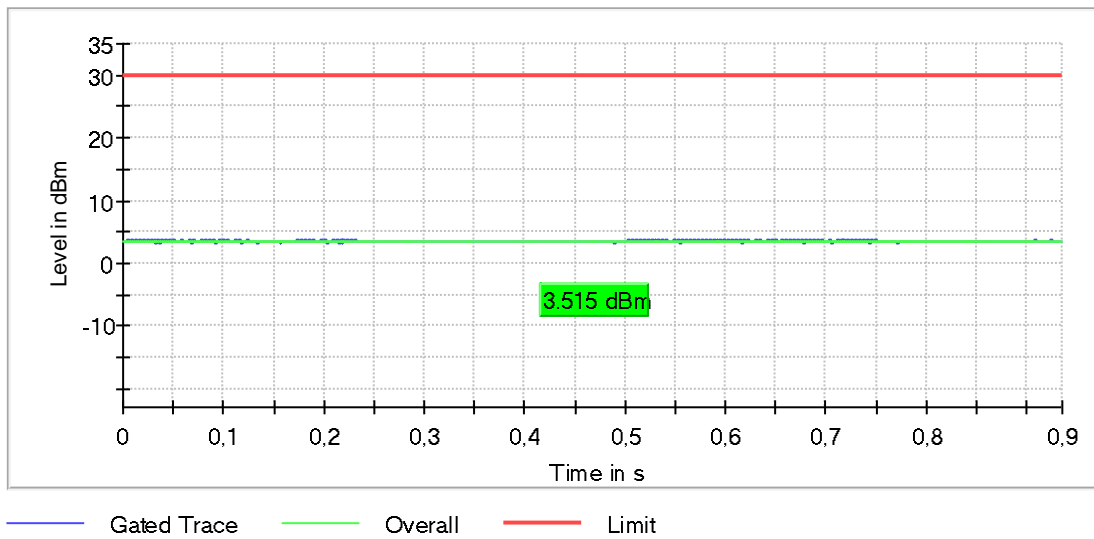

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |




## RF output power (5180 MHz; n20-mode [MCS1] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.1             | 30.0            | 8.1              | 88.756        | PASS   |

Gated Trace

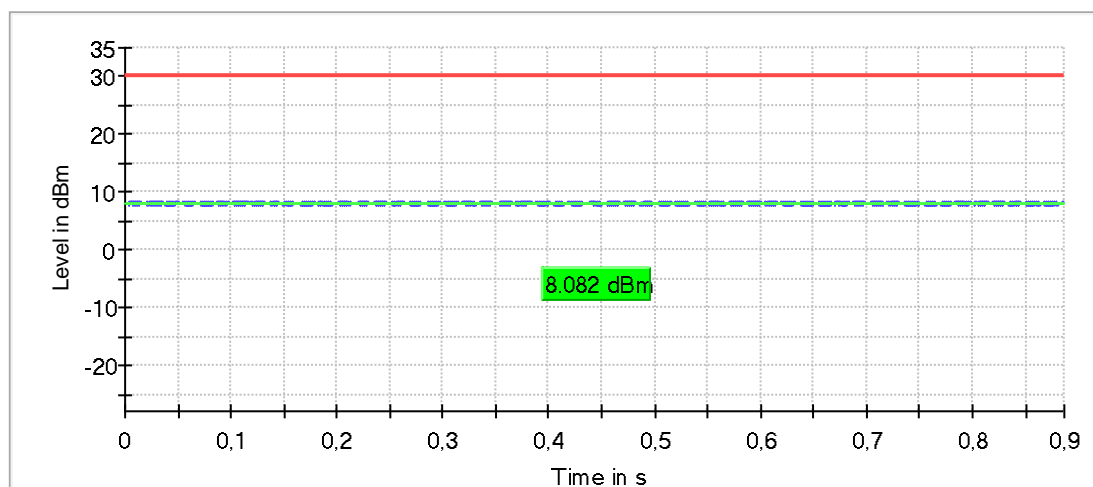

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5200 MHz; n20-mode [MCS1] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 7.7             | 30.0            | 7.7              | 88.919        | PASS   |

Gated Trace

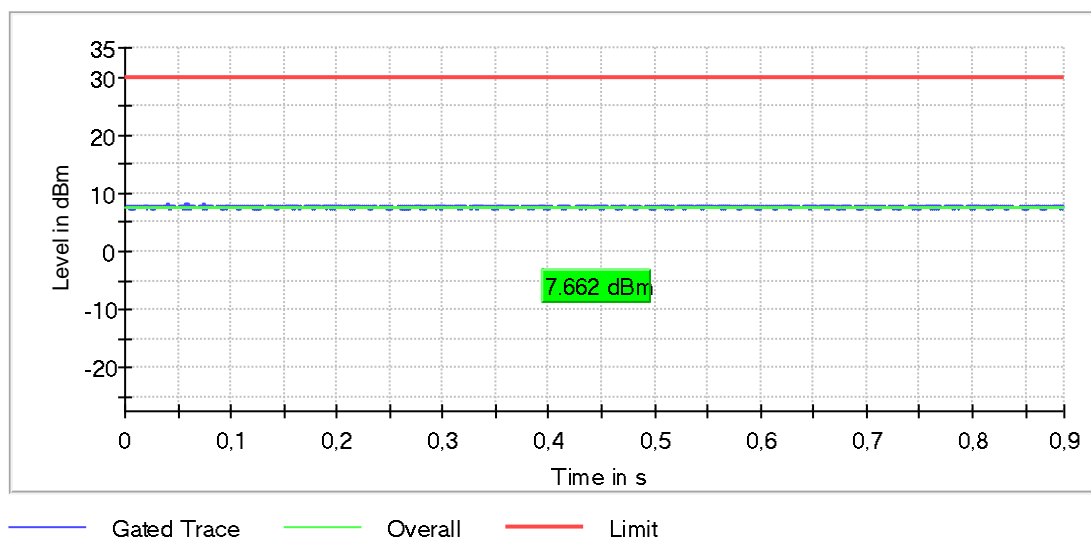

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5240 MHz; n20-mode [MCS1] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 8.5             | 30.0            | 8.5              | 88.909        | PASS   |

Gated Trace

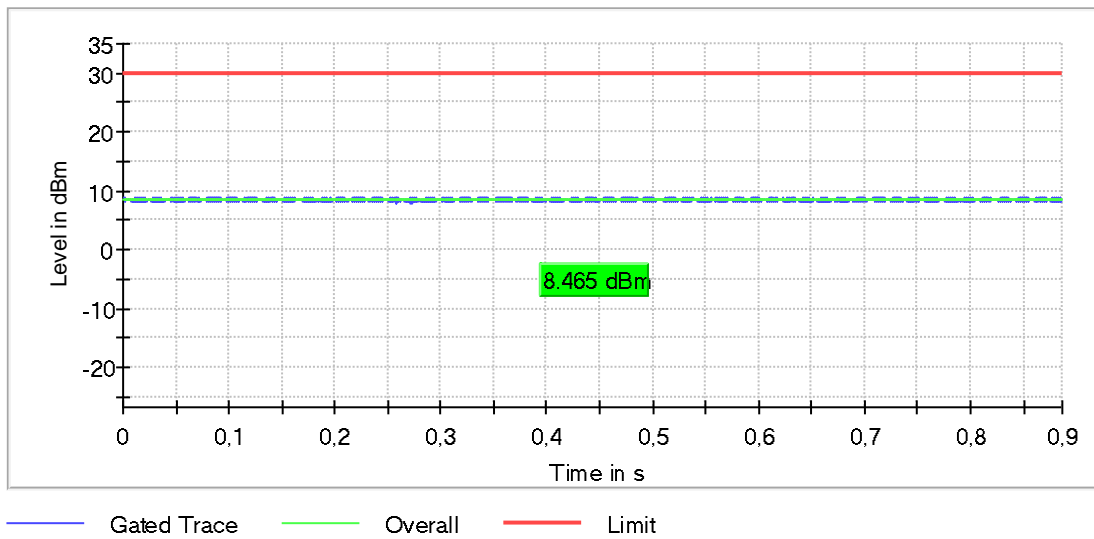

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5745 MHz; n20-mode [MCS1] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.1             | 30.0            | 3.1              | 88.954        | PASS   |

Gated Trace

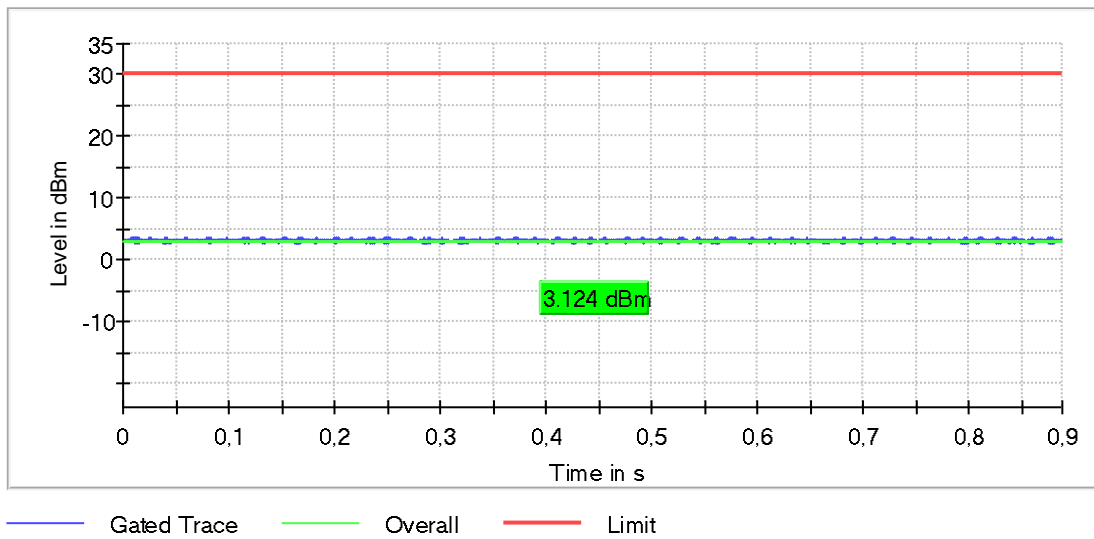

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5785 MHz; n20-mode [MCS1] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 3.6             | 30.0            | 3.6              | 88.816        | PASS   |

Gated Trace

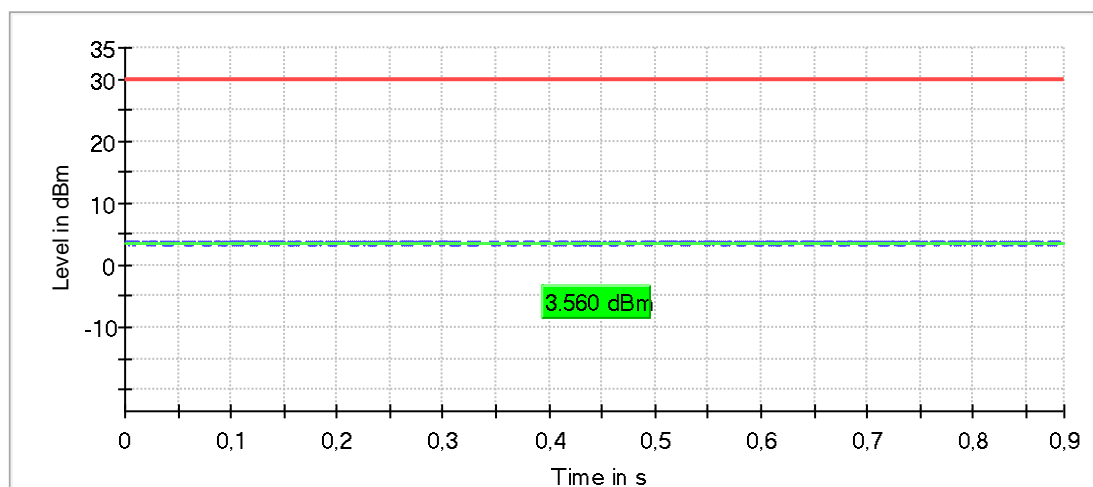

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5825 MHz; n20-mode [MCS1] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 3.4             | 30.0            | 3.4              | 89.005        | PASS   |

Gated Trace

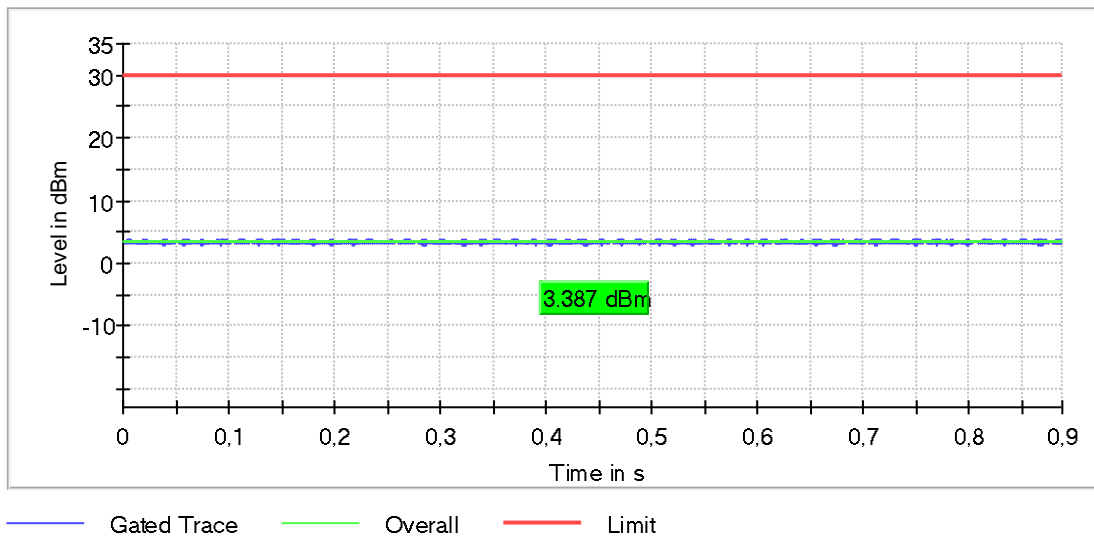

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5180 MHz; n20-mode [MCS2] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.3             | 30.0            | 8.3              | 84.527        | PASS   |

Gated Trace

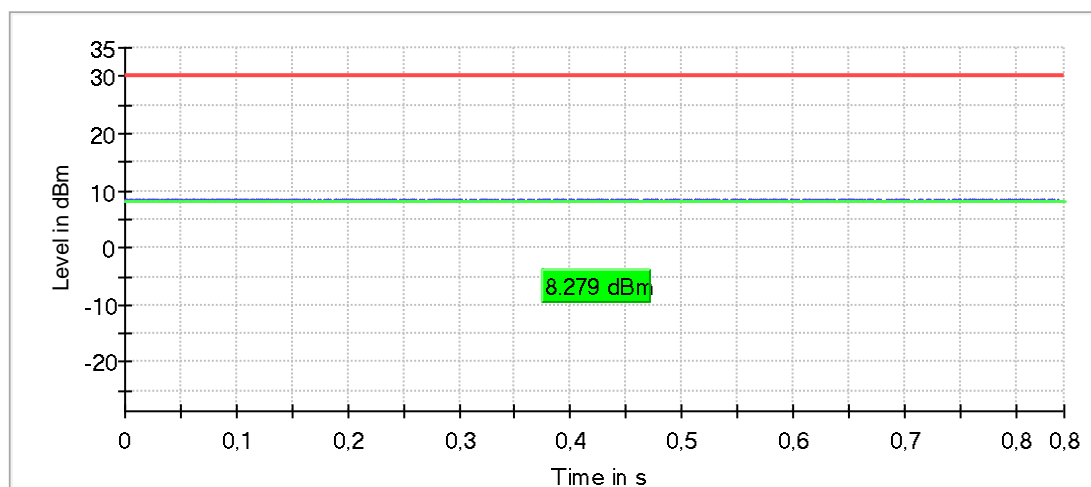

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5200 MHz; n20-mode [MCS2] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 7.9             | 30.0            | 7.9              | 84.415        | PASS   |

Gated Trace

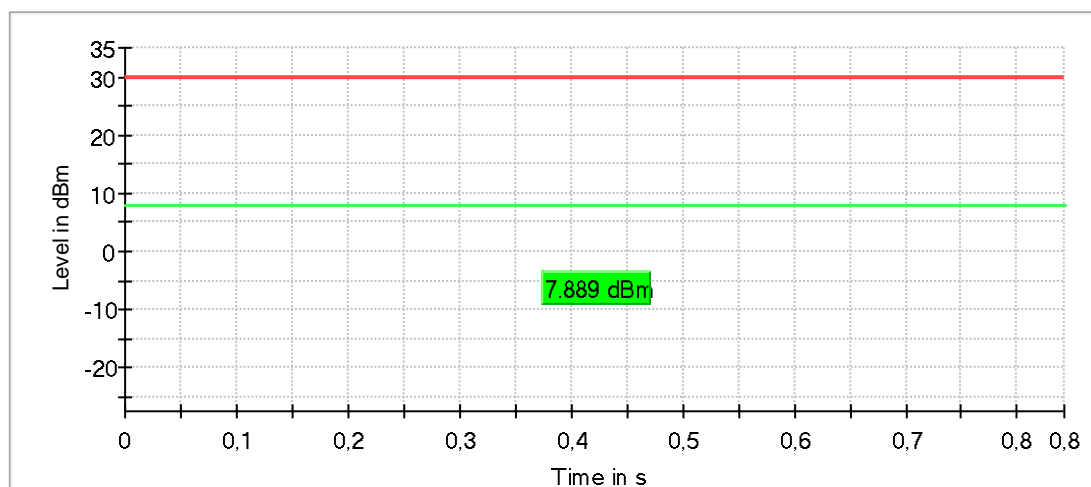

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |




## RF output power (5240 MHz; n20-mode [MCS2] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 8.7             | 30.0            | 8.7              | 84.444        | PASS   |

Gated Trace

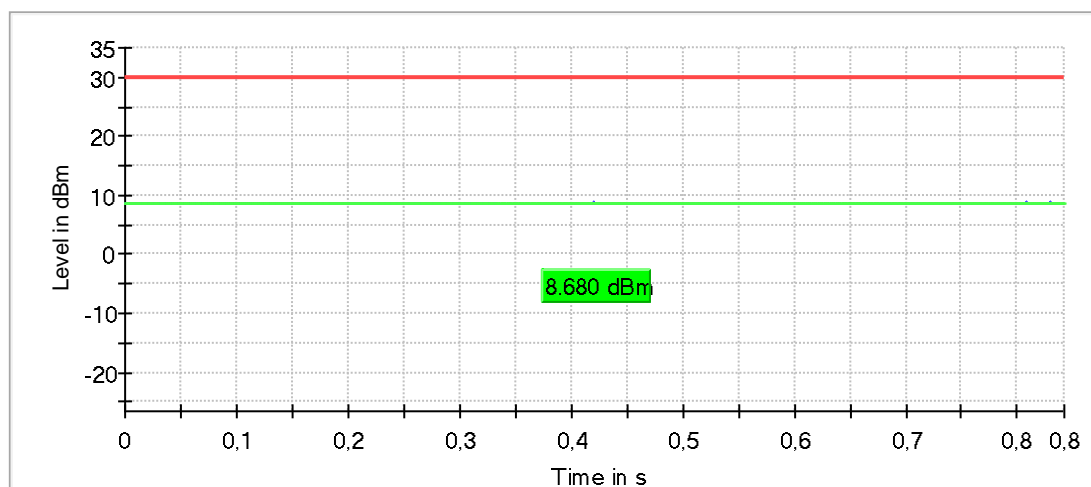

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; n20-mode [MCS2] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.3             | 30.0            | 3.3              | 84.629        | PASS   |

Gated Trace

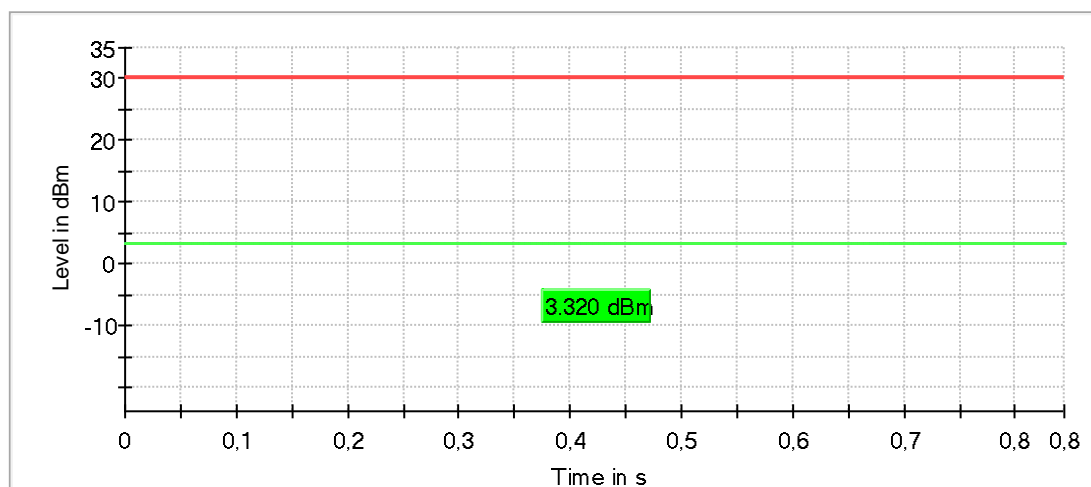

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5785 MHz; n20-mode [MCS2] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 3.8             | 30.0            | 3.8              | 84.553        | PASS   |

Gated Trace

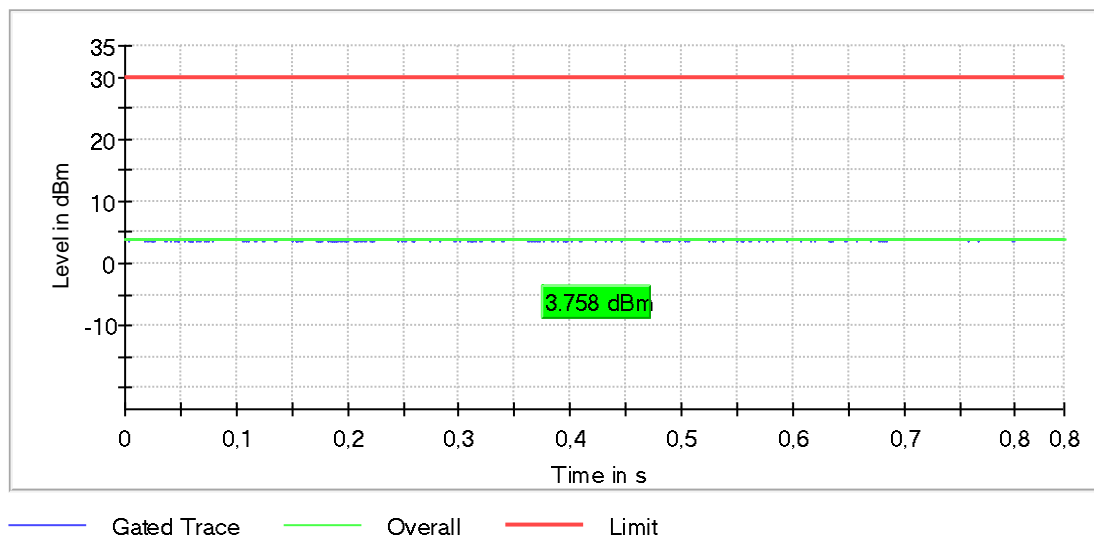

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5825 MHz; n20-mode [MCS2] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 3.6             | 30.0            | 3.6              | 84.585        | PASS   |

Gated Trace

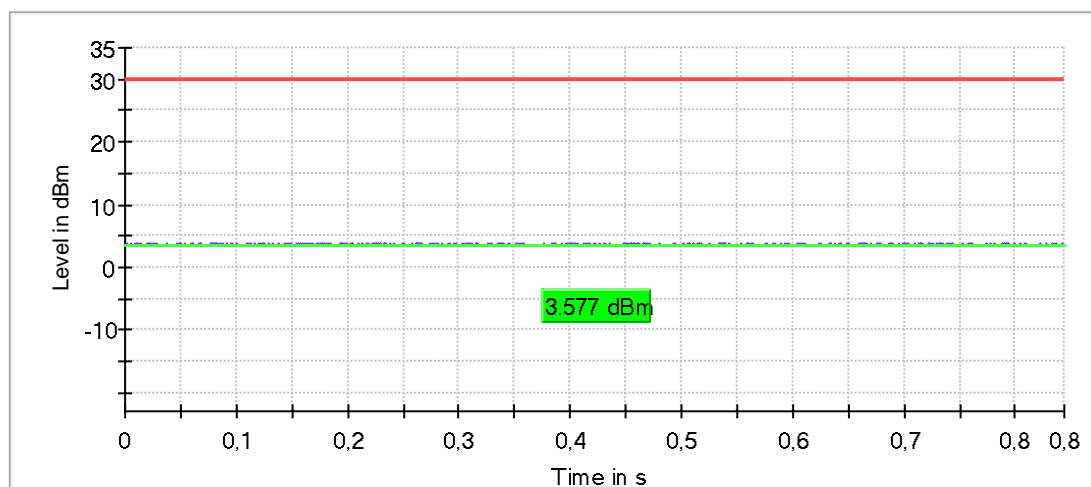

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5180 MHz; n20-mode [MCS3] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.8             | 30.0            | 8.8              | 80.698        | PASS   |

Gated Trace

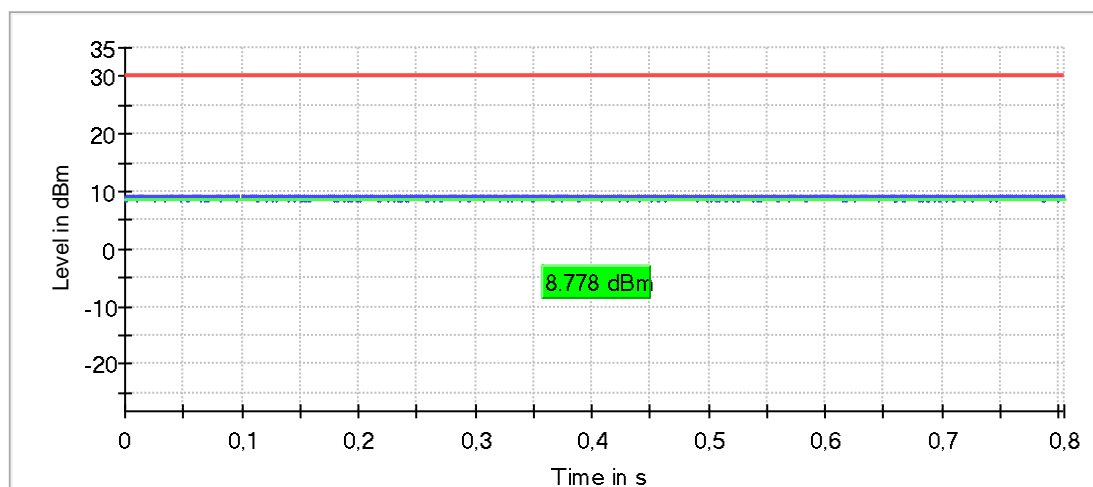

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5200 MHz; n20-mode [MCS3] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.4             | 30.0            | 8.4              | 80.733        | PASS   |

Gated Trace

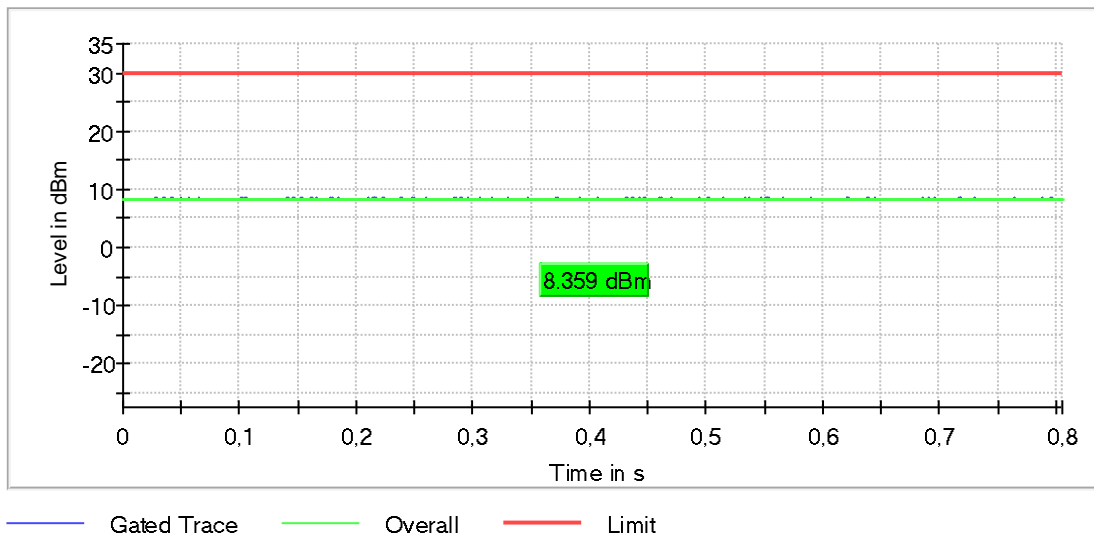

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; n20-mode [MCS3] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.1             | 30.0            | 9.1              | 80.830        | PASS   |

Gated Trace

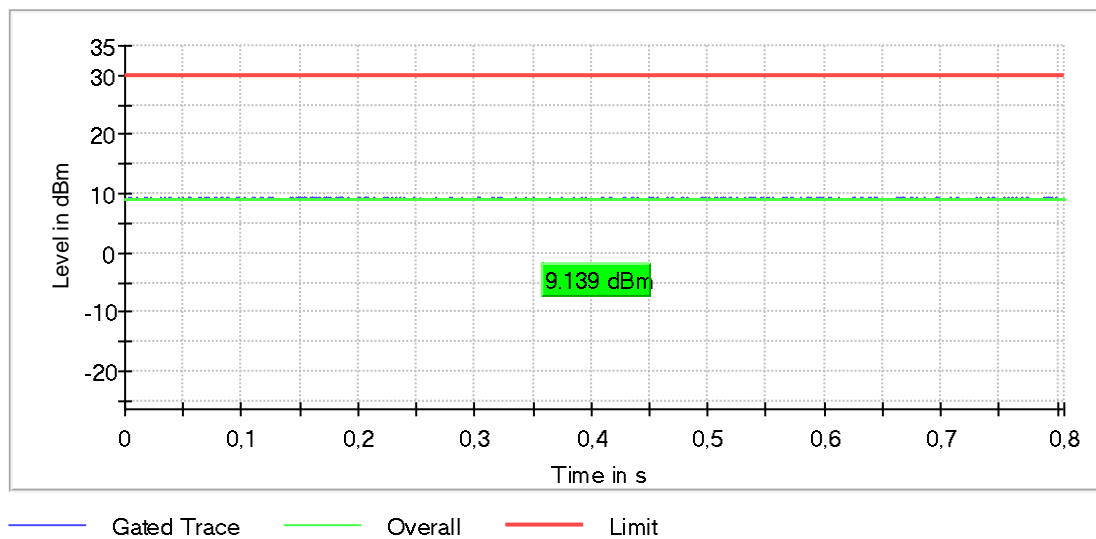

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; n20-mode [MCS3] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.9             | 30.0            | 3.9              | 80.783        | PASS   |

Gated Trace

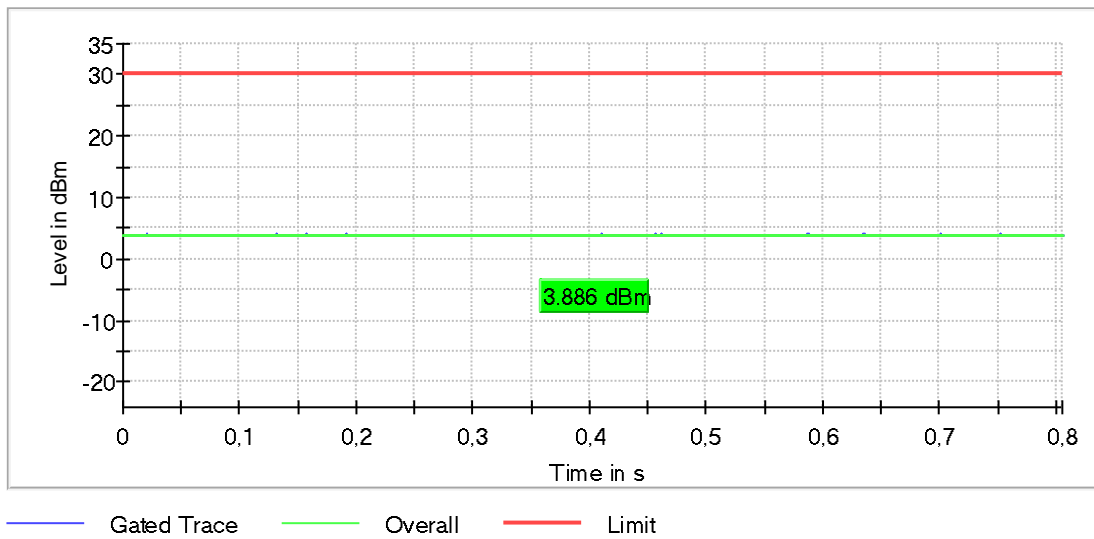

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |




## RF output power (5785 MHz; n20-mode [MCS3] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.3             | 30.0            | 4.3              | 80.697        | PASS   |

Gated Trace

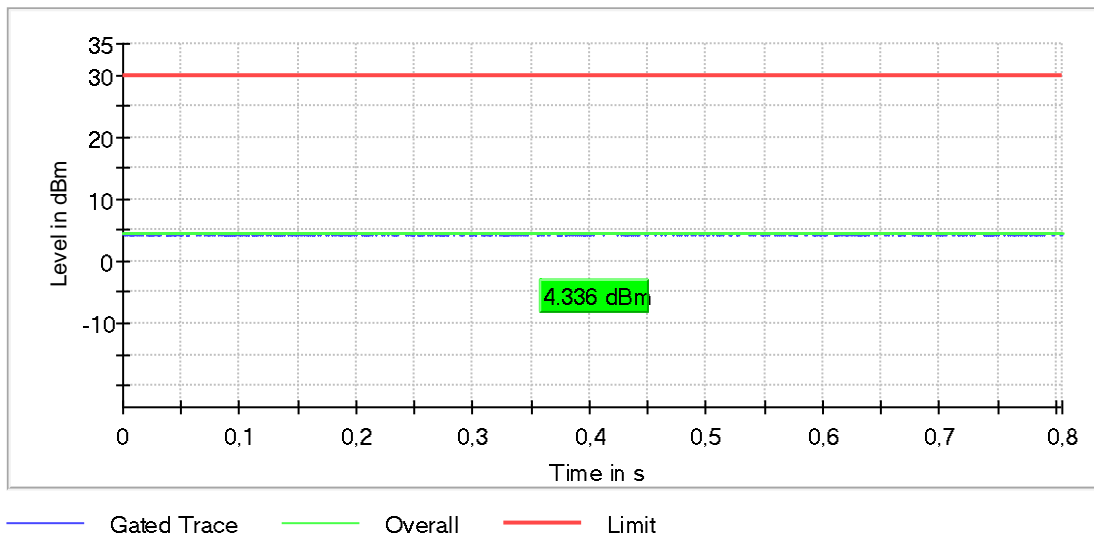

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5825 MHz; n20-mode [MCS3] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.1             | 30.0            | 4.1              | 80.788        | PASS   |

Gated Trace

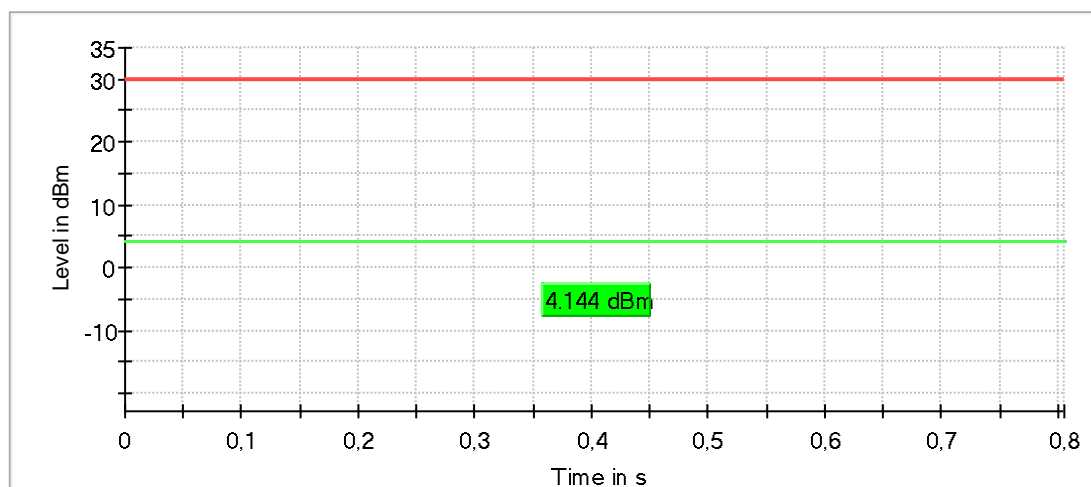

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5180 MHz; n20-mode [MCS4] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.8             | 30.0            | 8.8              | 74.205        | PASS   |

Gated Trace

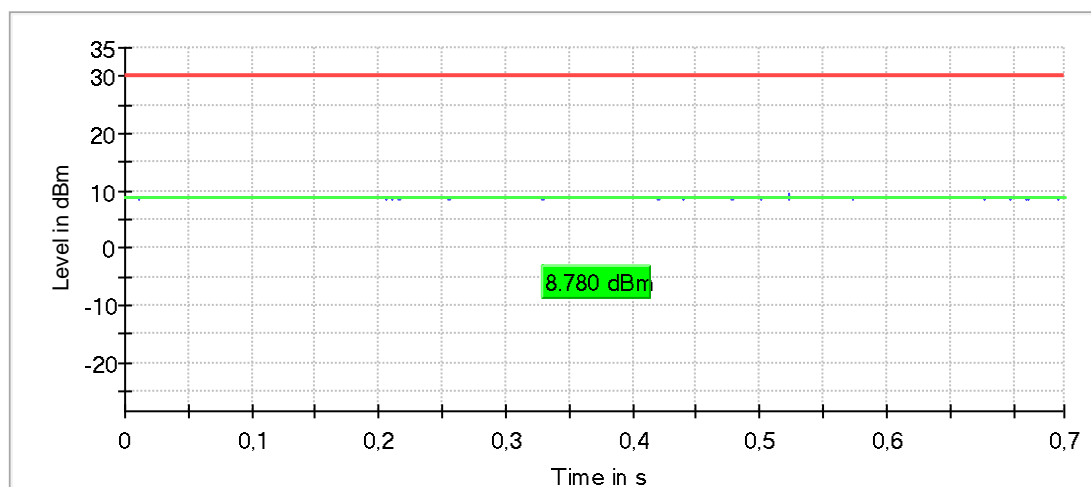

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5200 MHz; n20-mode [MCS4] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.4             | 30.0            | 8.4              | 74.388        | PASS   |

Gated Trace

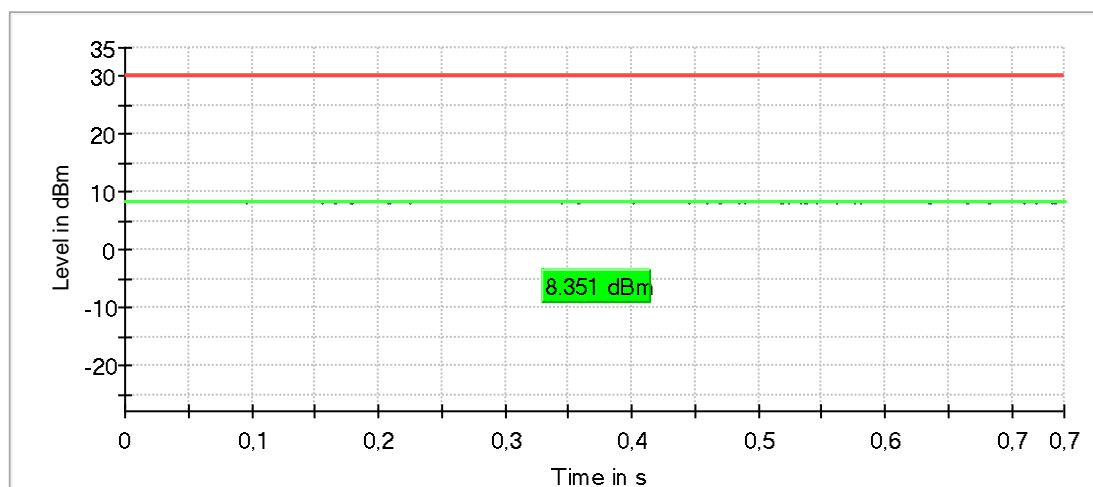

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5240 MHz; n20-mode [MCS4] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.1             | 30.0            | 9.1              | 74.336        | PASS   |

Gated Trace

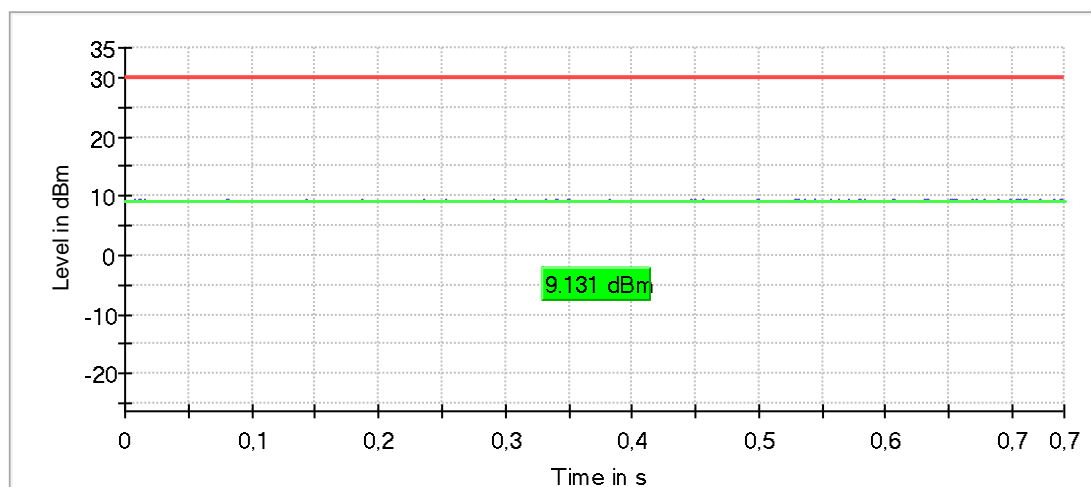

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; n20-mode [MCS4] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.9             | 30.0            | 3.9              | 74.532        | PASS   |

Gated Trace

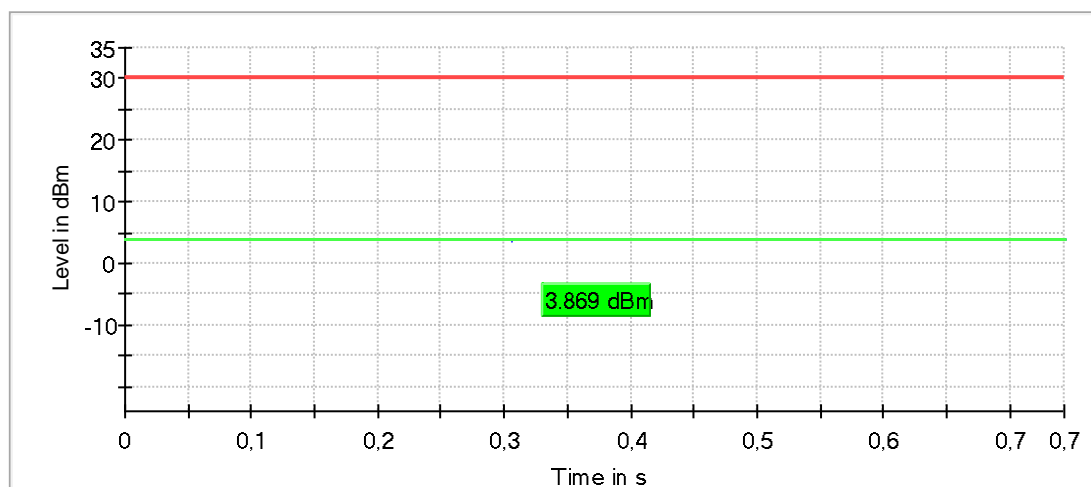

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5785 MHz; n20-mode [MCS4] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.3             | 30.0            | 4.3              | 74.503        | PASS   |

Gated Trace

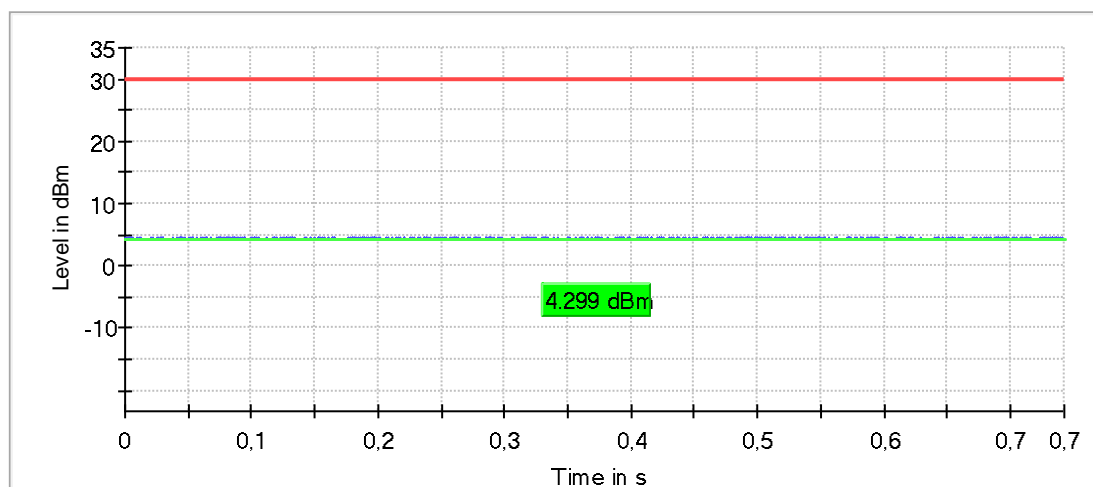

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5825 MHz; n20-mode [MCS4] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.1             | 30.0            | 4.1              | 74.389        | PASS   |

Gated Trace

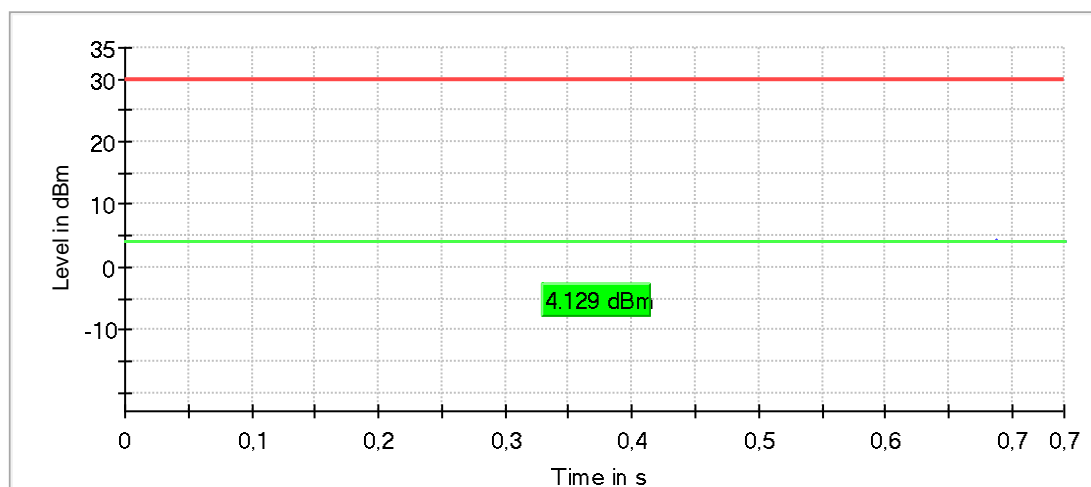

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |




## RF output power (5180 MHz; n20-mode [MCS5] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.8             | 30.0            | 8.8              | 69.186        | PASS   |

Gated Trace

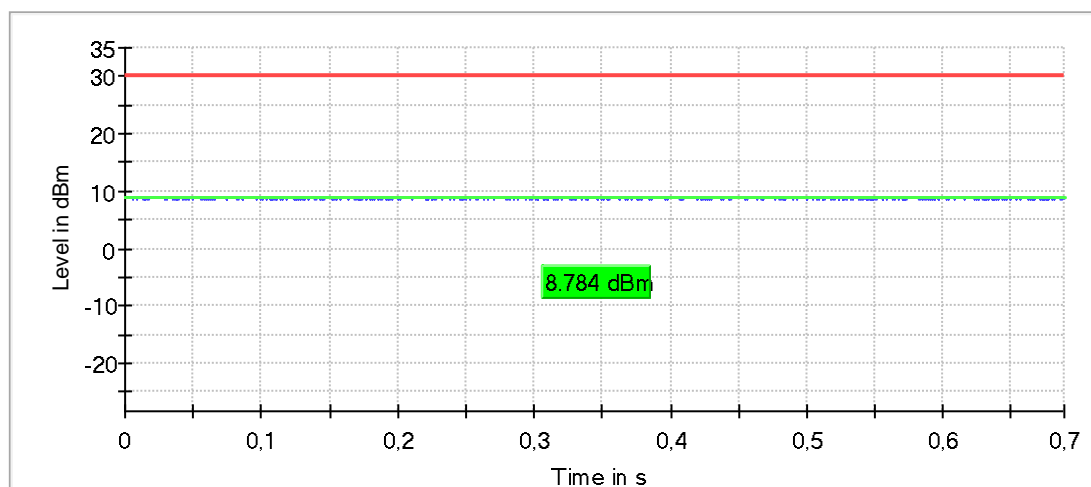

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5200 MHz; n20-mode [MCS5] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.4             | 30.0            | 8.4              | 69.100        | PASS   |

Gated Trace

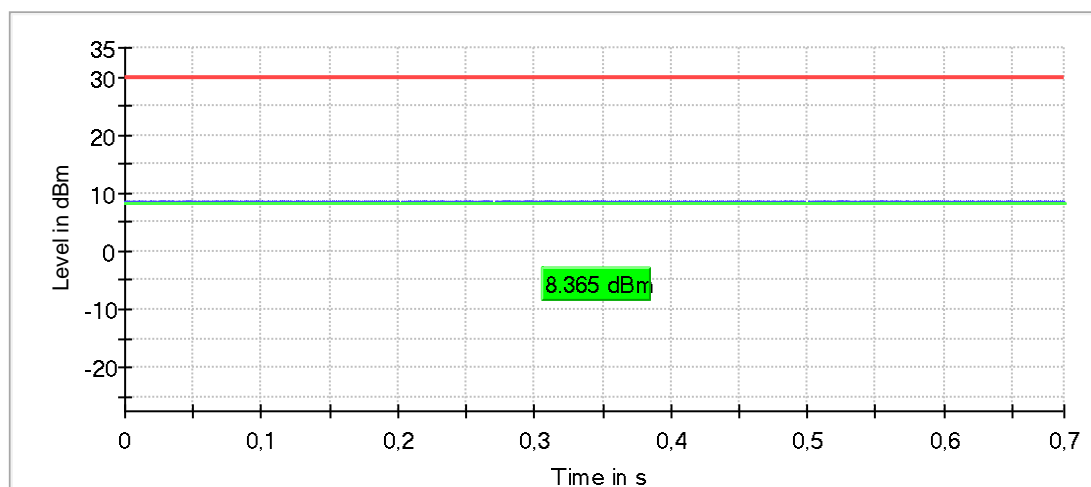

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; n20-mode [MCS5] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.1             | 30.0            | 9.1              | 68.931        | PASS   |

Gated Trace

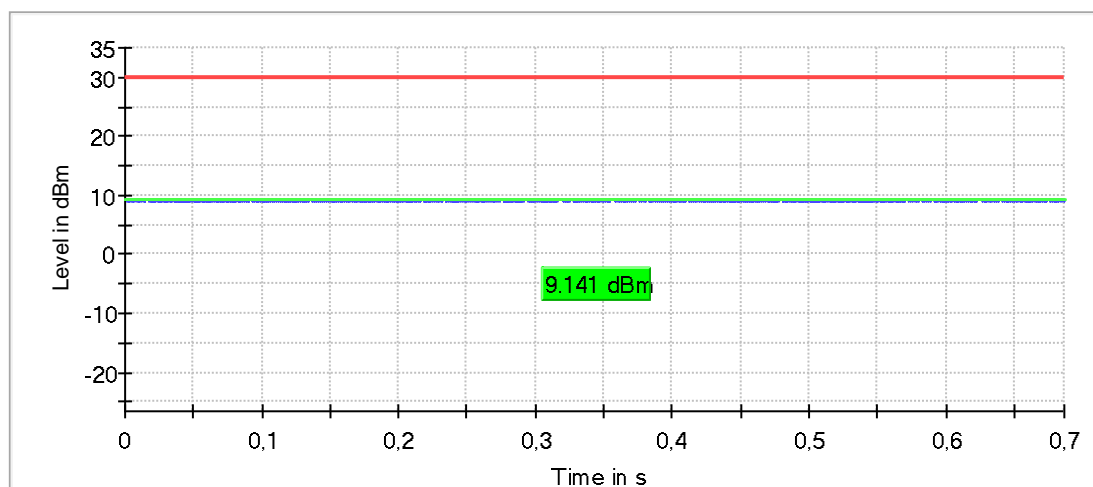

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; n20-mode [MCS5] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 5.9             | 30.0            | 5.9              | 68.687        | PASS   |

Gated Trace

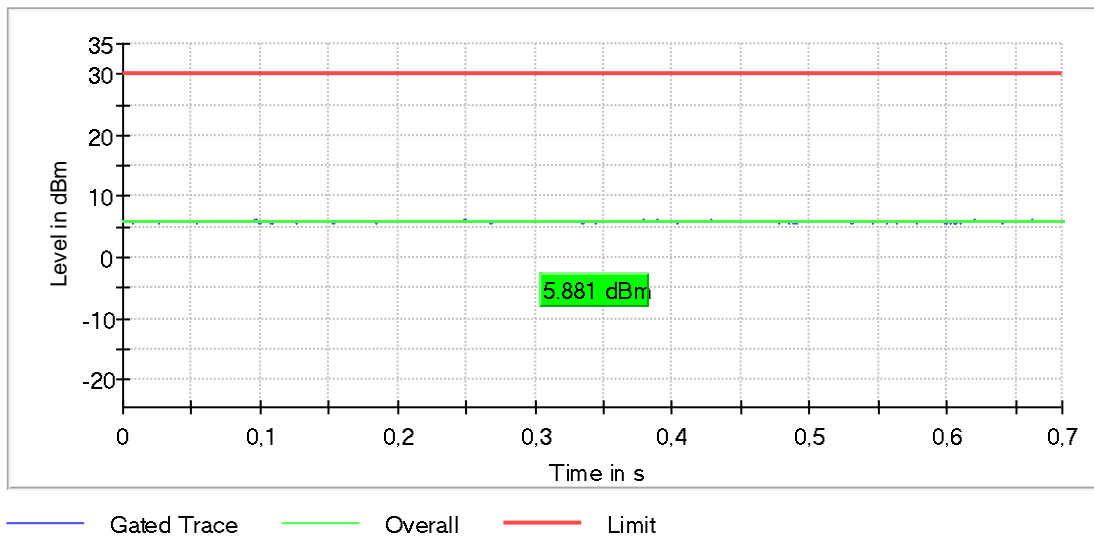

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5785 MHz; n20-mode [MCS5] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.3             | 30.0            | 4.3              | 69.314        | PASS   |

Gated Trace

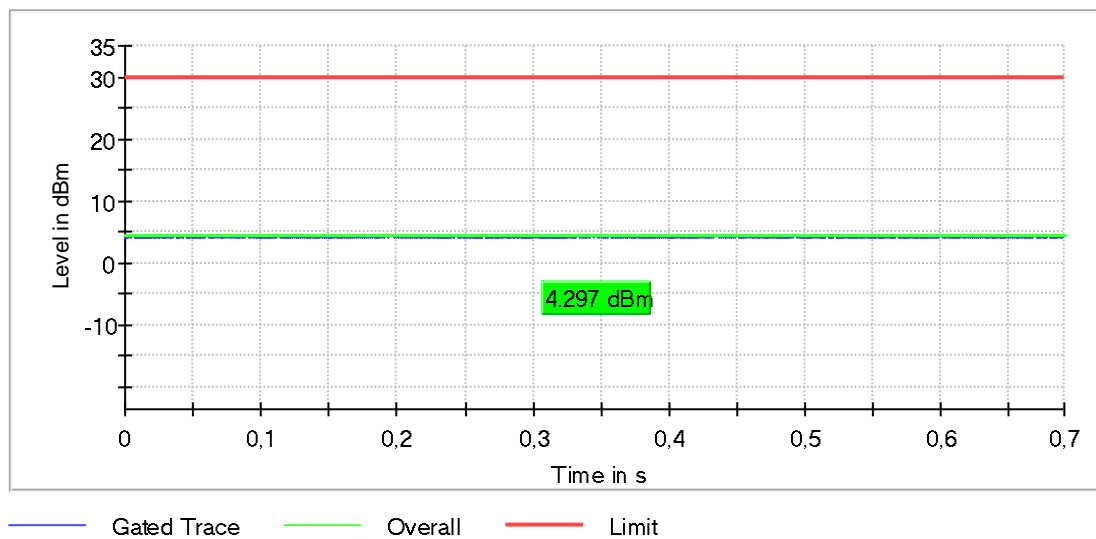

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5825 MHz; n20-mode [MCS5] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.1             | 30.0            | 4.1              | 69.321        | PASS   |

Gated Trace

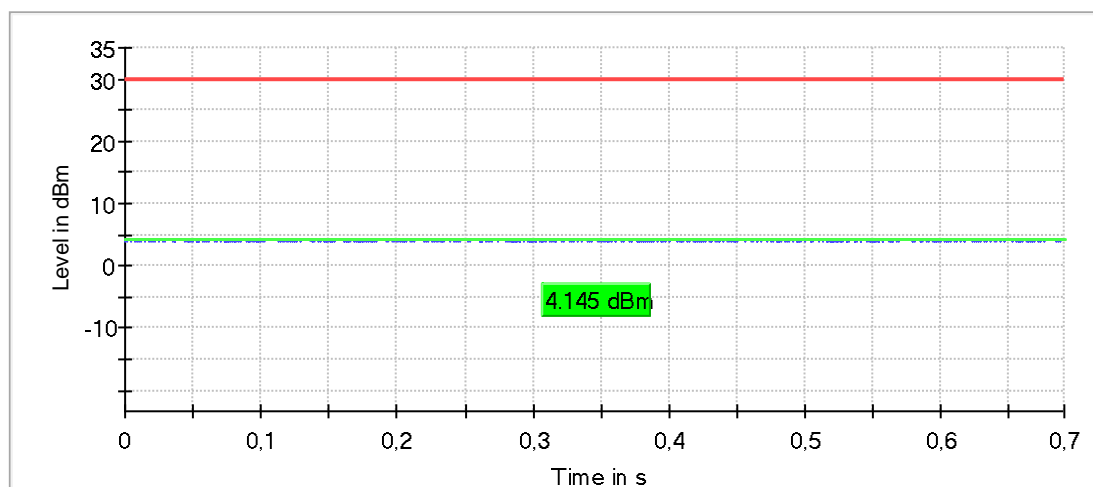

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5180 MHz; n20-mode [MCS6] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.8             | 30.0            | 8.8              | 67.252        | PASS   |

Gated Trace

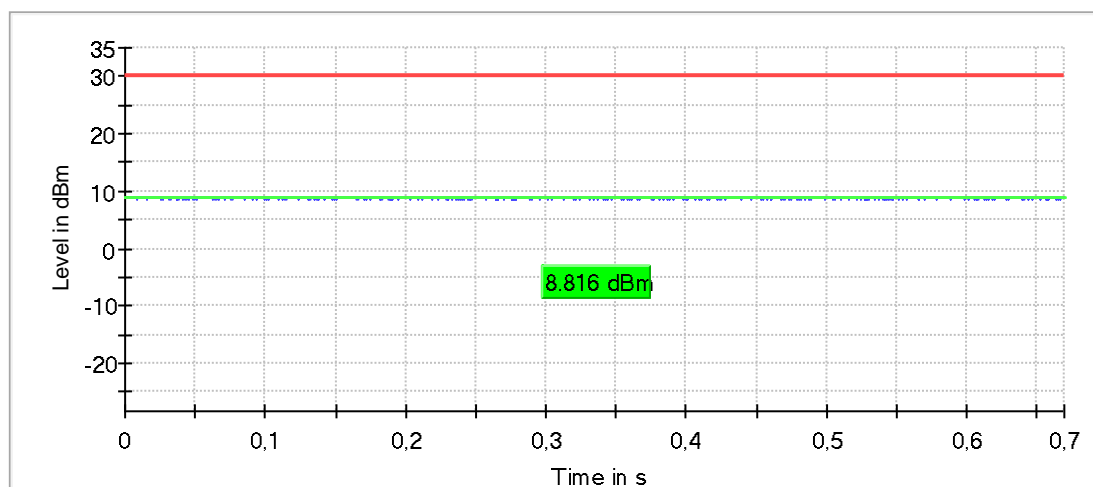

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |


## RF output power (5200 MHz; n20-mode [MCS6] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.4             | 30.0            | 8.4              | 67.246        | PASS   |

Gated Trace

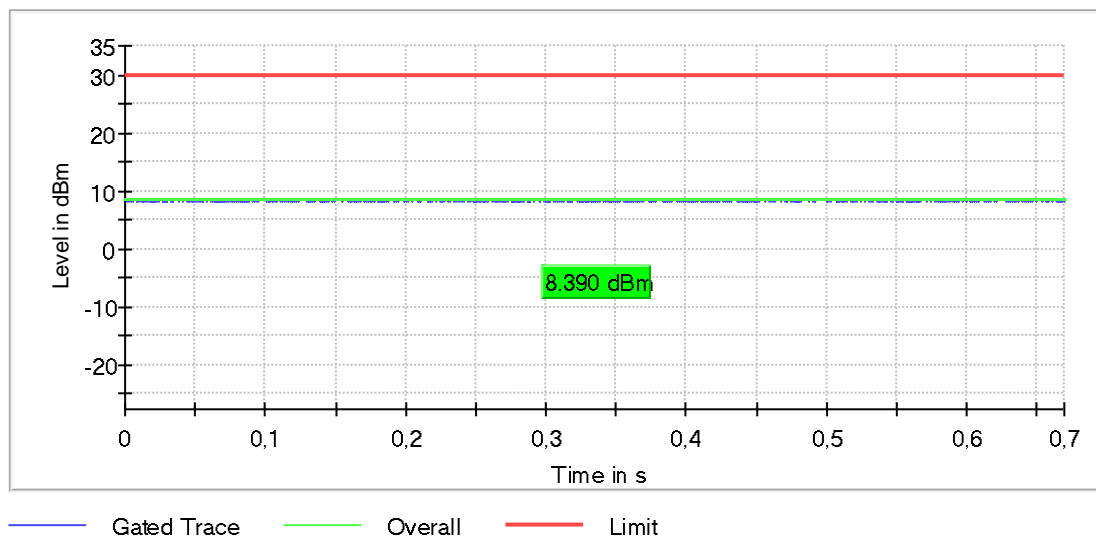

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |




## RF output power (5240 MHz; n20-mode [MCS6] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.2             | 30.0            | 9.2              | 67.092        | PASS   |

Gated Trace

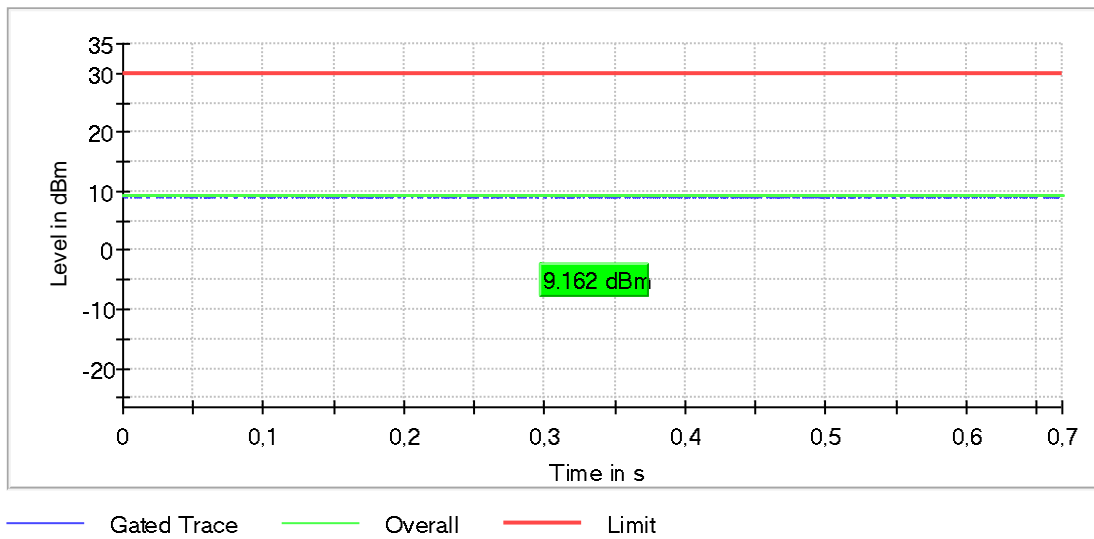

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; n20-mode [MCS6] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.9             | 30.0            | 3.9              | 67.285        | PASS   |

Gated Trace

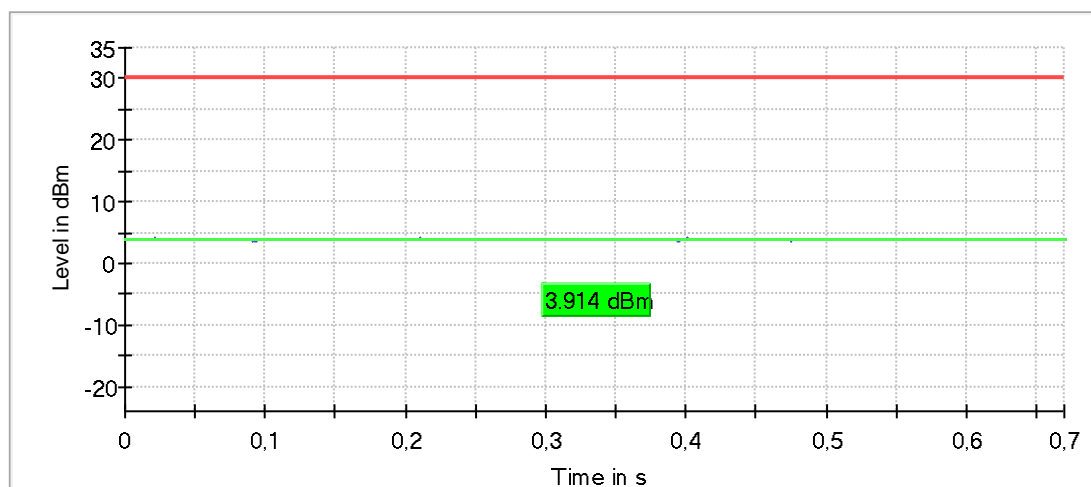

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |


## RF output power (5785 MHz; n20-mode [MCS6] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.3             | 30.0            | 4.3              | 67.338        | PASS   |

Gated Trace

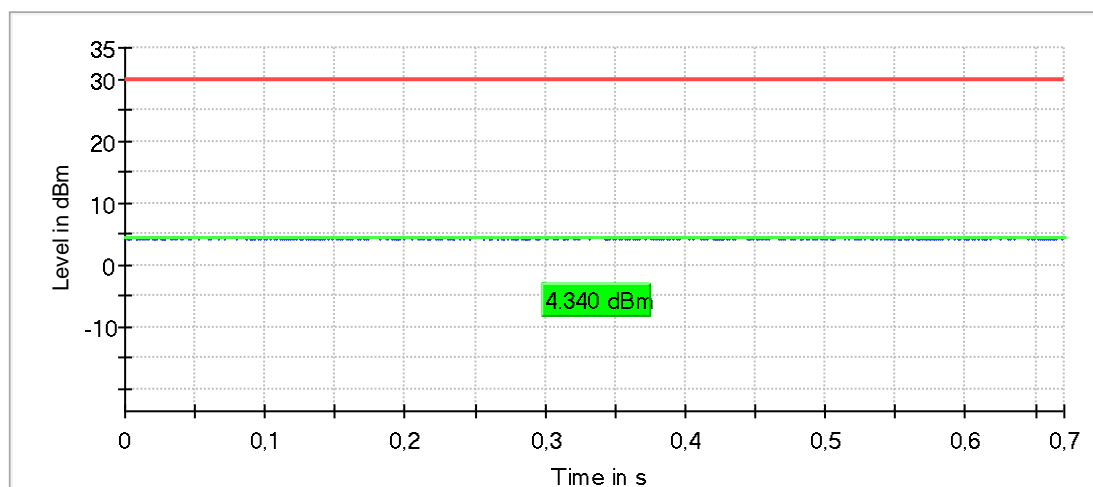

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5825 MHz; n20-mode [MCS6] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.2             | 30.0            | 4.2              | 67.207        | PASS   |

Gated Trace

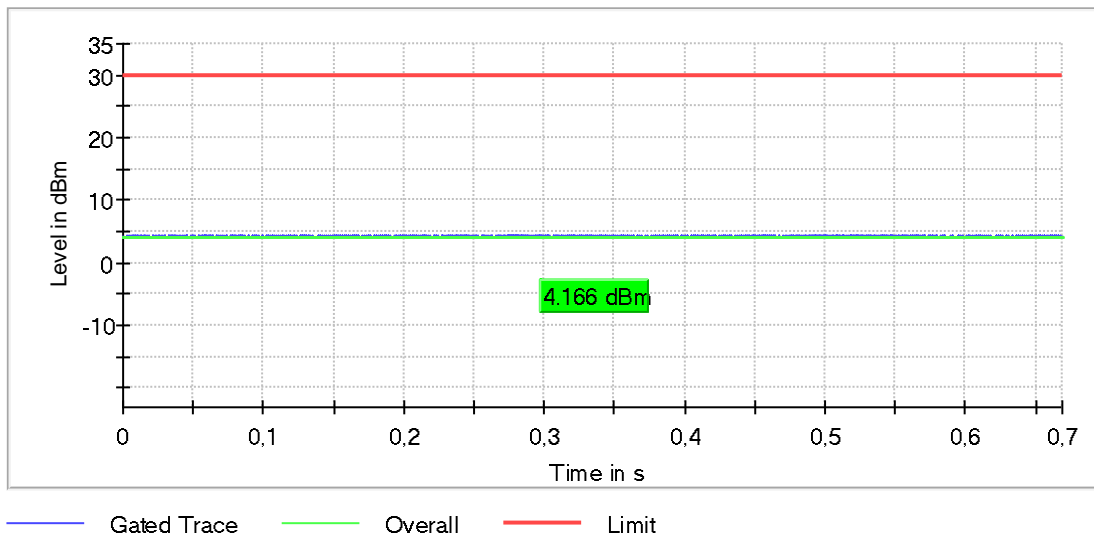

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5180 MHz; n20-mode [MCS7] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5180.000000         | 8.8             | 30.0            | 8.8              | 65.281        | PASS   |

Gated Trace

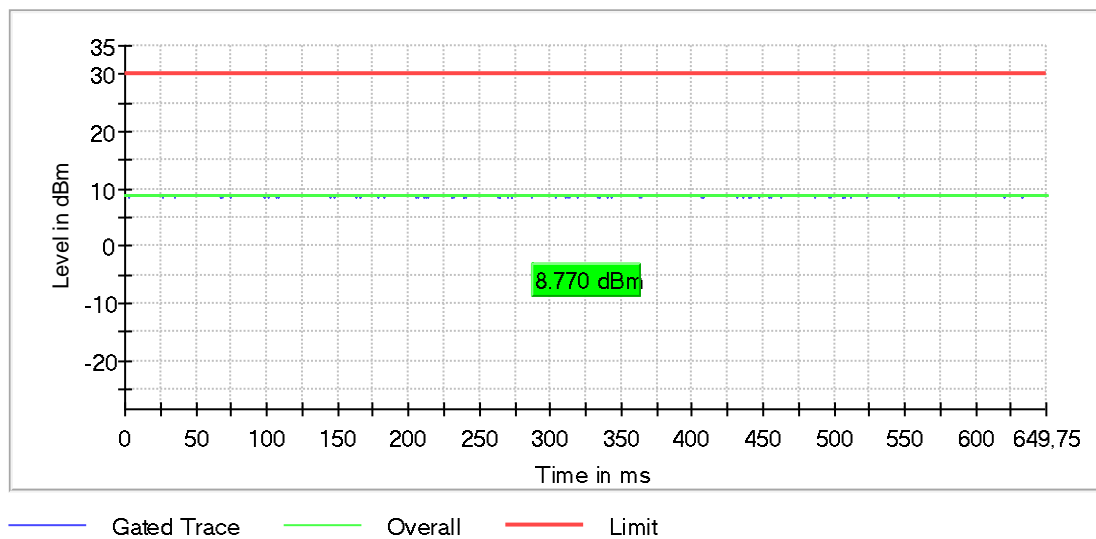

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5200 MHz; n20-mode [MCS7] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5200.000000         | 8.3             | 30.0            | 8.3              | 65.282        | PASS   |

Gated Trace

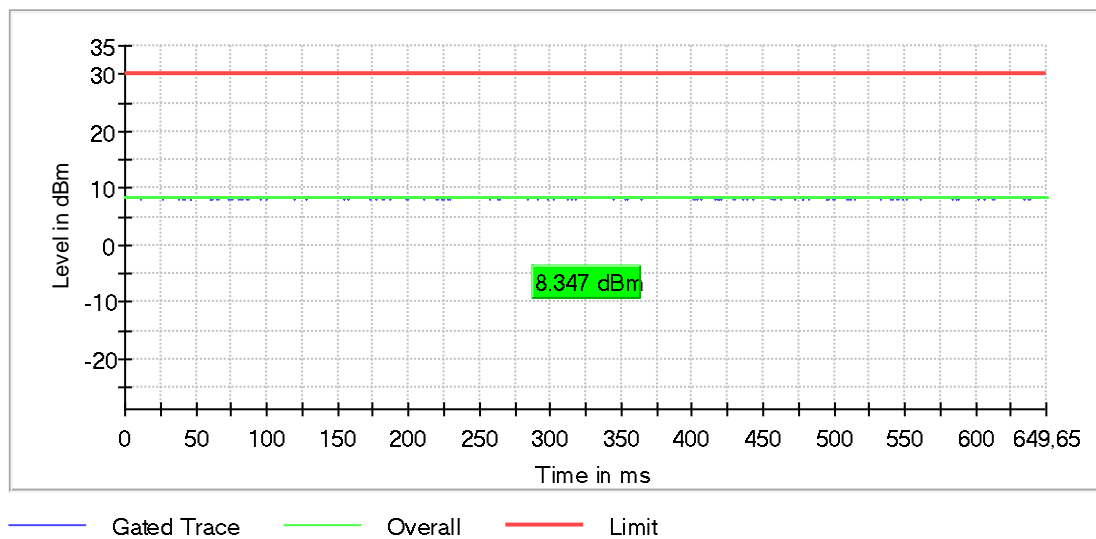

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5240 MHz; n20-mode [MCS7] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5240.000000         | 9.1             | 30.0            | 9.1              | 65.324        | PASS   |

Gated Trace

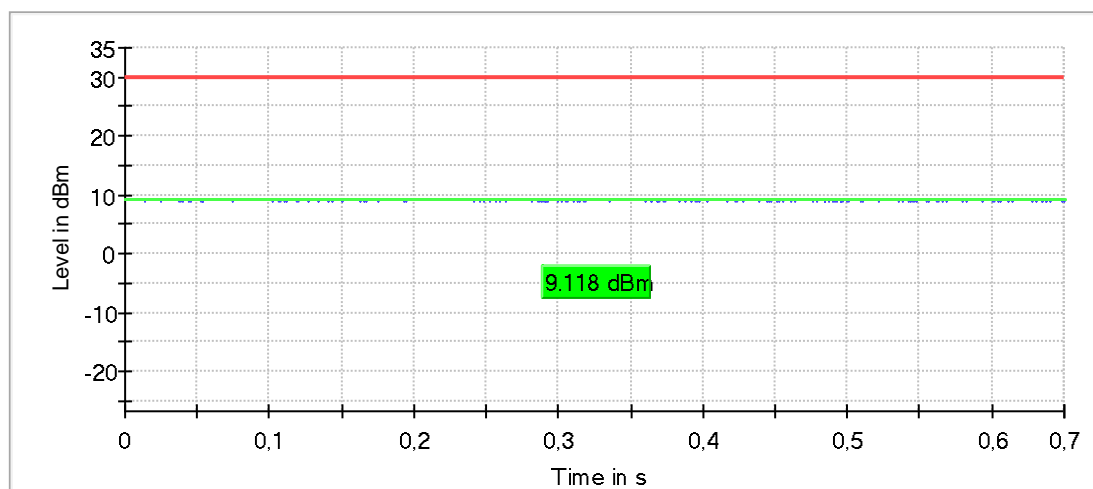

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5745 MHz; n20-mode [MCS7] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 3.8             | 30.0            | 3.8              | 65.352        | PASS   |

Gated Trace

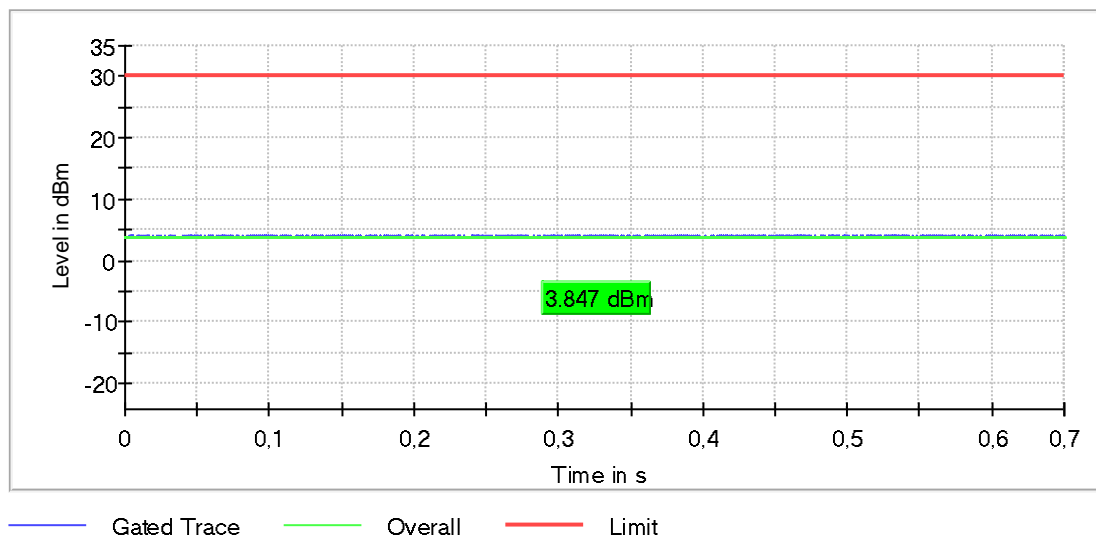

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |




## RF output power (5785 MHz; n20-mode [MCS7] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 4.3             | 30.0            | 4.3              | 65.606        | PASS   |

Gated Trace

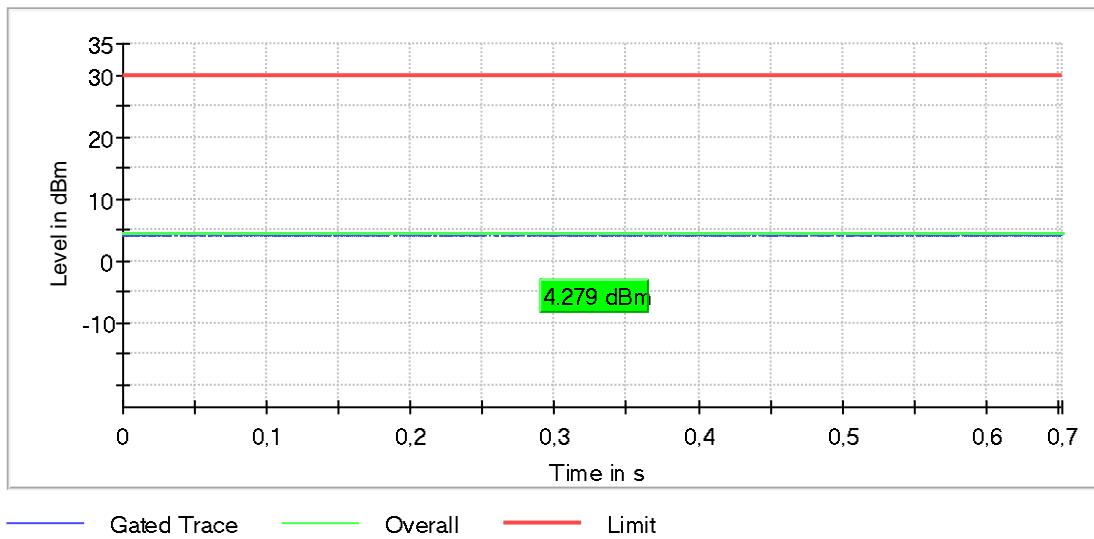

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 µs         | 1.000 µs     |


## RF output power (5825 MHz; n20-mode [MCS7] (20 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5825.000000         | 4.1             | 30.0            | 4.1              | 65.714        | PASS   |

Gated Trace

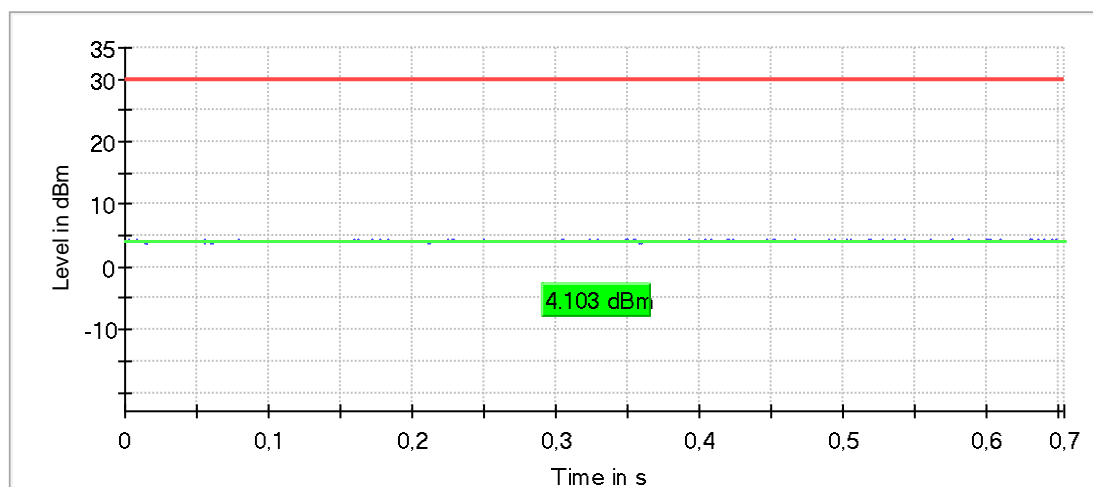

— Gated Trace — Overall — Limit

### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value |
|------------------|------------------|--------------|
| Measurement Time | 1.000 s          | 1.000 s      |
| Points           | 1000000          | 1000000      |
| Time resolution  | 1.000 μs         | 1.000 μs     |