

# Partial Test Report

## 22-1-0030601T046a



Deutsche  
Akreditierungsstelle  
D-PL-12047-01-01  
D-PL-12047-01-03  
D-PL-12047-01-04

<b>Number of pages:</b>	28	<b>Date of Report:</b>	2023-Feb-16
<b>Testing company:</b>	cetecom advanced GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	<b>Applicant:</b>	Continental Automotive Technologies GmbH
<b>Product:</b>	<b>Telematic Control Unit</b>		
<b>Model:</b>	<b>BSRF_EA_RWO</b>		
<b>FCC ID:</b>	KR5-BSRFEARWO	<b>IC:</b>	--
<b>Testing has been carried out in accordance with:</b>	<p><b>FCC Regulations</b></p> <p><b>Title 47 CFR, Chapter I, Subchapter A</b> Part 15, Subpart C Intentional Radiators; § 15.209 Radiated emission limits; general requirements</p> <p><b>Title 47 CFR, Chapter I, Subchapter B</b> Part 22, Subpart H Cellular Radiotelephone Service Part 24, Subpart E Paging and Radiotelephone Service Part 27, Subpart C Miscellaneous Wireless Communications Services</p> <p><b>Title 47 CFR, Chapter I, Subchapter D</b> Part 90, Subpart I, General technical standards; Subpart S Private Land Mobile Radio Services</p> <p><b>ISED-Regulations, Radio Standards Specification</b></p> <p><b>RSS-Gen, Issue 5</b> General Requirements for Compliance of Radio Apparatus</p> <p><b>RSS-132, Issue 3</b> Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz</p> <p><b>RSS-133, Issue 6, Amendment 1</b> 2 GHz Personal Communications Services</p> <p><b>RSS-139, Issue 3</b> Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz</p>		
<b>Tested Technology:</b>	LTE		
<b>Test Results:</b>	<p><input checked="" type="checkbox"/> <b>The EUT complies with the requirements in respect of selected parameters subject to the test.</b></p> <p>The test results relate only to devices specified in this document</p>		
<b>Signatures:</b>			
	Dipl.-Ing. Ninovic Perez Test Lab Manager Authorization of test report		M. Sc. Patrick Marzotko Test Manager Responsible of test report

## Table of Contents

Table of Annex.....	3
1 General information .....	4
1.1 Disclaimer and Notes.....	4
1.2 Attestation.....	4
1.3 Summary of Test Results .....	5
1.4 Summary of Test Methods .....	7
2 Administrative Data.....	8
2.1 Identification of the Testing Laboratory.....	8
2.2 General limits for environmental conditions.....	8
2.3 Test Laboratories sub-contracted.....	8
2.4 Organizational Items .....	8
2.5 Applicant’s details .....	8
2.6 Manufacturer’s details .....	8
2.7 Equipment under Test (EUT) .....	9
2.8 Untested Variant (VAR) .....	9
2.1 Auxiliary Equipment (AE).....	9
2.2 Connected cables (CAB).....	9
2.3 Software (SW).....	10
2.4 EUT set-ups.....	10
2.5 EUT operation modes .....	10
3 Equipment under test (EUT) .....	11
3.1 General Data of Main EUT as Declared by Applicant.....	11
3.2 Detailed Technical data of Main EUT as Declared by Applicant .....	11
3.3 Worst case identification.....	12
3.4 Modifications on Test sample.....	12
4 Measurements.....	13
4.1 Conducted RF output power .....	13
4.2 Radiated field strength emissions below 30 MHz .....	15
4.3 Radiated spurious emissions .....	19
4.4 Radiated Band Edge.....	22
4.5 Equipment lists .....	24
5 Results from external laboratory.....	26
6 Opinions and interpretations.....	26
7 List of abbreviations .....	26
8 Measurement Uncertainty valid for conducted/radiated measurements .....	27
9 Versions of test reports (change history) .....	28

<b>Table of Annex</b>			
<b>Annex No.</b>	<b>Contents</b>	<b>Reference Description</b>	<b>Total Pages</b>
<b>Annex 1</b>	Test result diagrams	<b>TR22-1-0030601T046a_A1</b>	47
<b>Annex 2</b>	Internal photographs of EUT	--	--
<b>Annex 3</b>	External photographs of EUT	<b>TR22-1-0030601T046a_A3</b>	9
<b>Annex 4</b>	Test set-up photographs	<b>TR22-1-0030601T046a_A4</b>	4
The listed attachments are separate documents.			

# 1 General information

## 1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. cetecom advanced does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced.

The testing service provided by cetecom advanced has been rendered under the current "General Terms and Conditions for cetecom advanced".

cetecom advanced will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced test report include or imply any product or service warranties from cetecom advanced, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced.

All rights and remedies regarding vendor's products and services for which cetecom advanced has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at cetecom advanced.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

## 1.2 Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All of the above requirements are met in accordance with enumerated standards.

### 1.3 Summary of Test Results

Test case in LTE2 band	Reference Clause FCC	Reference Clause ISED	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen, Issue 5:§8.8	--	--	N/A
Conducted RF output power	§2.1046(a)	RSS-133:4.1/6.4 + SRSP-510:5.1.2	13	--	PASSED
Radiated RF output power	§24.232(c), §2.1046(a)	RSS-133:6.4 + SRSP-510:5.1.2	--	--	NP
26dB Emission bandwidth	§24.238(b), §2.1049(h)	RSS-Gen, Issue 5:§6.6	--	--	NP
Occupied Channel Bandwidth 99%	§24.238(b), §2.1049(h)	RSS-Gen, Issue 5:§6.6	--	--	NP
<a href="#">Radiated Band Edge</a>	§24.238(a)(b), §2.1053(a), §2.1057(a)	RSS-133, Issue 6: §6.5.1(i)(ii)	23	--	PASSED
Conducted RF Band Edge	§24.238(a)(b), §2.1051	RSS-133, Issue 6: §6.5.1(i)(ii)	--	--	NP
Peak to Average ratio (PAPR)	§2.1046(a)	RSS-133:4.1/6.4 + SRSP-510:5.1.2	--	--	NP
<a href="#">Radiated field strength emissions below 30 MHz</a>	§15.205, §15.209	RSS-Gen: Issue 5: §8.9 Table 6	18	--	PASSED
Spurious emissions at antenna terminals	§24.238(a)(b), §2.1051	RSS-133, Issue 6: §6.5.1(i)(ii)	--	--	NP
<a href="#">Radiated spurious emissions</a>	§24.238(a)(b), §2.1053(a)	RSS-133, Issue 6: §6.5.1(i)(ii)	21	--	PASSED
Frequency stability, temperature variation	§24.235, §2.1055(a)(1)	RSS-133: 6.3	--	--	NP
Frequency stability, voltage variation	§24.235, §2.1055(a)(1)	RSS-133: 6.3	--	--	NP

Test case in LTE4 band	Reference Clause FCC	Reference Clause ISCED	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen, Issue 5:§8.8	--	--	N/A
Conducted RF output power	§27.50(d)(4), §2.1046	RSS-139, Issue 3:§6.5	13	--	PASSED
Radiated RF output power	§27.50(d)(4), §2.1046(a)	RSS-139, Issue 3: 6.5 + SRSP-513	--	--	NP
26dB Emission bandwidth	§27.53(h)(3), §2.202(a)	RSS-Gen, Issue 5:§6.6	--	--	NP
Occupied Channel Bandwidth 99%	§27.53(h)(3), §2.202(a)	RSS-Gen, Issue 5:§6.6	--	--	NP
<a href="#">Radiated Band Edge</a>	§27.53(h), §2.1053(a) §2.1057(a)	RSS-139, Issue 3: 6.6 (i)(ii)	23	--	PASSED
Conducted RF Band Edge	§27.53(h), §2.1051	RSS-139, Issue 3: §6.6 (i)(ii)	--	--	NP
Peak to Average ratio (PAPR)	§27.50(d)(4), §2.1046	RSS-139, Issue 3:§6.5	--	--	NP
<a href="#">Radiated field strength emissions below 30 MHz</a>	§15.205, §15.209	RSS-Gen: Issue 5: §8.9 Table 6	18	--	PASSED
Spurious emissions at antenna terminals	§27.53(h), §2.1051	RSS-139, Issue 3: §6.6 (i)(ii)	--	--	NP
<a href="#">Radiated spurious emissions</a>	§27.53(h), §2.1053(a)	RSS-139, Issue 3: §6.6 (i)(ii)	21	--	PASSED
Frequency stability, temperature variation	§27.54, §2.1055(a)(1)	RSS-139, Issue 3:§6.4	--	--	NP
Frequency stability, voltage variation	§27.54, §2.1055(a)(1)	RSS-139, Issue 3:§6.4	--	--	NP

Test case in LTE5 band	Reference Clause FCC	Reference Clause ISCED	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen, Issue 5:§8.8	--	--	N/A
Conducted RF output power	§22.913(a)(5), §2.1046	RSS-132:5.4 + SRSP 503:5.1.3	13	--	PASSED
Radiated RF output power	§22.913, §2.1046(a)	RSS-132: 5.4 + SRSP 503:5.1.3	--	--	NP
26dB Emission bandwidth	§22.917(b), §2.1049(h)	RSS-Gen, Issue 5:§6.6	--	--	NP
Occupied Channel Bandwidth 99%	§22.917(b), §2.1049(h)	RSS-Gen, Issue 5:§6.6	--	--	NP
<a href="#">Radiated Band Edge</a>	§22.917(a)(b), §2.1053(a), §2.1057(a)	RSS-132, Issue 3: §5.5(i)(ii)	23	--	PASSED
Conducted RF Band Edge	§22.917(a)(b), §2.1051	RSS-132, Issue 3: §5.5(i)(ii)	--	--	NP
Peak to Average ratio (PAPR)	§22.913(a)(5), §2.1046	RSS-132:5.4 + SRSP 503:5.1.3	--	--	NP
<a href="#">Radiated field strength emissions below 30 MHz</a>	§15.205, §15.209	RSS-Gen: Issue 5: §8.9 Table 6	18	--	PASSED
Spurious emissions at antenna terminals	§22.917(a)(b), §2.1051	RSS-132, Issue 3: §5.5(i)(ii)	--	--	NP
<a href="#">Radiated spurious emissions</a>	§22.917(a)(b), §2.1053(a)	RSS-132, Issue 3: §5.5(i)(ii)	21	--	PASSED
Frequency stability, temperature variation	§22.355, §2.1055(a)(1)	RSS-132: 5.3	--	--	NP
Frequency stability, voltage variation	§22.355, §2.1055(a)(1)	RSS-132: 5.3	--	--	NP

Test case in LTE7 band	Reference Clause FCC	Reference Clause ISSED	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen, Issue 5:§8.8	--	--	N/A
Conducted RF output power	§27.50(h)(2), §2.1046	RSS-139, Issue 3:§6.5	13	--	PASSED
Radiated RF output power	§27.50(d)(4) §2.1046(a)	RSS-139, Issue 3: 6.5 + SRSP-513	--	--	NP
26dB Emission bandwidth	§27.53(h)(3) §2.202(a)	RSS-Gen, Issue 5: §6.6	--	--	NP
Occupied Channel Bandwidth 99%	§27.53(h)(3), §2.202(a)	RSS-Gen, Issue 5:§6.6	--	--	NP
<a href="#">Radiated Band Edge</a>	§27.53(h), §2.1053(a) §2.1057(a)	RSS-139, Issue 3:§ 6.6 (i)(ii)	23	--	PASSED
Conducted RF Band Edge	§27.53(l), §2.1051	RSS-139, Issue 3: §6.6 (i)(ii)	--	--	NP
Peak to Average ratio (PAPR)	§27.50(h)(2), §2.1046	RSS-139, Issue 3:§6.5	--	--	NP
<a href="#">Radiated field strength emissions below 30 MHz</a>	§15.205, §15.209	RSS-Gen: Issue 5: §8.9 Table 6	18	--	PASSED
Spurious emissions at antenna terminals	§27.53(h), §2.1051	RSS-139, Issue 3: §6.6 (i)(ii)	--	--	NP
<a href="#">Radiated spurious emissions</a>	§27.53(l), §2.1053(a)	RSS-139, Issue 3: §6.6 (i)(ii)	21	--	PASSED
Frequency stability, temperature variation	§27.54, §2.1055(a)(1)	RSS-139, Issue 3:§6.4	--	--	NP
Frequency stability, voltage variation	§27.54, §2.1055(a)(1)	RSS-139, Issue 3:§6.4	--	--	NP

PASSED The EUT complies with the essential requirements in the standard.  
 FAILED The EUT does not comply with the essential requirements in the standard.  
 N/A Test case does not apply to the test object.  
 NP The test was not performed by the cetecom advanced Laboratory.

Decision Rule: cetecom advanced GmbH follows [ILAC G8:2019 chapter 4.2.1 \(Simple Acceptance Rule\)](#).

Remarks:

- Please check the module report “W7L-P20210616-2RF04, W7L-P20210616-2RF05 and W7L-P20210616-2RF06” for not performed Measurements by the cetecom advanced laboratory.

### 1.4 Summary of Test Methods

Test case	Test method
AC-Power Lines Conducted Emissions	ANSI C63.4-2014, §7, ANSI C63.10-2013 §6.2
Conducted RF output power	ANSI C63.26:2015, §5.2, KDB 971168 D01 v03r01
Radiated RF output power	ANSI C63.26:2015, §5.2.7, KDB 971168 D01 v03r01
Occupied Channel Bandwidth 99%	ANSI C63.26:2015, §5.4.4, KDB 971168 D01 v03r01
26dB Emission bandwidth	ANSI C63.26:2015, §5.4.3, KDB 971168 D01 v03r01
Modulation characteristics	ANSI C63.26:2015, §5.3
Radiated Band Edge	ANSI C63.26:2015, §5.5, KDB 971168 D01 v03r01
Conducted RF Band Edge	ANSI C63.26:2015, §5.7, KDB 971168 D01 v03r01
Peak to Average ratio (PAPR)	ANSI C63.26:2015, §5.2.6
Result calculated with measured conducted RF-power value and stated/measured antenna gain for band of interest	
Radiated field strength emissions below 30 MHz	ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1
Spurious emissions at antenna terminals	ANSI C63.26:2015, §5.7, KDB 971168 D01 v03r01
Radiated spurious emissions	ANSI C63.26:2015, §5.5, KDB 971168 D01 v03r01, ANSI C63.26.1:2018

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory

Company name:	cetecom advanced GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Ninovic Perez
Accreditation scope:	<b>DAkkS Webpage:</b> <a href="#">FCC ISED</a>
IC Lab company No. / CAB ID:	3462D / DE0005
Test location:	Im Teelbruch 116; 45219 Essen

### 2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

### 2.3 Test Laboratories sub-contracted

Company name:	--
---------------	----

### 2.4 Organizational Items

Responsible test manager:	M. Sc. Patrick Marzotko
Receipt of EUT:	2022-Oct-24
Date(s) of test:	2022-Dec-04 to 2022-Dec-21
Version of template:	22.1101

### 2.5 Applicant's details

Applicant's name:	Continental Automotive Technologies GmbH
Address:	Siemensstraße 12 93055 Regensburg Bavaria Germany
Contact Person:	Kelvin Fongang
Contact Person's Email:	kelvin.fongang@continental-corporation.com

### 2.6 Manufacturer's details

Manufacturer's name:	Continental Automotive Technologies GmbH
Address:	Siemensstraße 12 93055 Regensburg Germany



## 2.7 Equipment under Test (EUT)

EUT No. *)	Sample No.	Product	Model	Type	SN	HW	SW
EUT 1	22-1-00306S58_C01	Telematic Control Unit	BSRF_EA_RW0	-	22991129087081	C4.2	V19.06
EUT 2	22-1-00306S139_C01	Telematic Control Unit	BSRF_EA_RW0	-	22990129087075	C4.2	V19.06

\*) EUT short description is used to simplify the identification of the EUT in this test report.

## 2.8 Untested Variant (VAR)

VAR No. *)	Sample No.	Product	Model	Type	SN	HW	SW
------------	------------	---------	-------	------	----	----	----

\*) The listed additional untested model variant(s) (VAR) is/are not object of evaluation of compliance. For further information please see Annex 5: Declaration of applicant of model differences.

If the table above does not show any other line than the headline, no untested variants are available.

## 2.1 Auxiliary Equipment (AE)

AE No. *)	Sample No.	Auxiliary Equipment	Model	SN	HW	SW
AE 1	22-1-00836S61_C01	Backup Battery	N/A	N/A	N/A	N/A
AE 2	22-1-00836S62_C01	E-call button Box	Shielded load box for E-call and A-Call	N/A	N/A	N/A
AE 3	22-1-00836S66_C01	Microphone	KHM0090-010010 Peugeot Citroen 9832955480 00	N/A	N/A	N/A
AE 4	22-1-00836S67_C01	Loudspeaker	ASK 900065001	N/A	N/A	N/A
AE 5	22-1-00836S89_C01	RF shielded load box with load for AM/FM	N/A	N/A	N/A	N/A
AE 6	22-1-00836S90_C01	RF shielded load box with load for FM/DAB	N/A	N/A	N/A	N/A
AE 7	22-1-00836S130_C01	Orig. LTE1/LTE2/GNSS antenna	LTE1/LTE2/GNSS patch antennas	0014	N/A	N/A
AE 8	22-1-00306S140_C01	HP Laptop	N/A	5CG8080WXB	N/A	N/A

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report. If the table above does not show any other line than the headline, no AE was used during testing nor was taken into account for evaluation

## 2.2 Connected cables (CAB)

CAB No. *)	Sample No.	Cable Type	Connectors / Details	Length
CAB 1	22-1-00836S40_C01	EMC harness	EMC Harness 2m	2 m
CAB 2	22-1-00836S109_C01	External antenna cable GNSS/LTE	FAKRA cables SMB/SMB between patch antenna and BSRF EA	--
CAB 3	22-1-00836S110_C01	External antenna cable GNSS/LTE	FAKRA cables SMB/SMB between patch antenna and BSRF EA	--

\*) CAB short description is used to simplify the identification of the connected cables in this test report. If the table above does not show any other line than the headline, no cable was used during testing nor was taken into account for evaluation

### 2.3 Software (SW)

SW No. *)	Sample No.	SW Name	Description	SW Status
-----------	------------	---------	-------------	-----------

\*) SW short description is used to simplify the identification of the used software in this test report. If the table above does not show any other line than the headline, no SW was used during testing nor was taken into account for evaluation.

### 2.4 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
1	EUT 1 + AE 1 + AE 2 + AE 3 + AE 4 + AE 5 + AE 6 + AE 7 + CAB 1 + CAB 2 + CAB 3	Used for radiated and conducted measurements
2	EUT 2 + AE 1 + AE 2 + AE 3 + AE 4 + AE 5 + AE 6 + AE 7 + CAB 1 + CAB 2 + CAB 3	Used for radiated measurements

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 2.5 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
1	TXRX (Signalling mode)	Full communication link Band LTE FDD 2 to base station. Details about operational mode on measurement diagram
2		Full communication link Band LTE FDD 4 to base station. Details about operational mode on measurement diagram
3		Full communication link Band LTE FDD 5 to base station. Details about operational mode on measurement diagram
4		Full communication link Band LTE FDD 7 to base station. Details about operational mode on measurement diagram

\*) EUT operating mode no. is used to simplify the test report.

### 3 Equipment under test (EUT)

#### 3.1 General Data of Main EUT as Declared by Applicant

<b>Firmware</b>	<input type="checkbox"/> for normal use	<input checked="" type="checkbox"/> Special version for test execution	
<b>Power supply</b>	<input type="checkbox"/> AC Mains	-	
	<input checked="" type="checkbox"/> DC Mains	12 V	
	<input type="checkbox"/> Battery	-	
<b>Operational conditions</b>	T <sub>nom</sub> = +21 °C	T <sub>min</sub> = n/a	T <sub>max</sub> = n/a
<b>EUT sample type</b>	<b>Pre-Production</b>		
<b>Weight</b>	0.400 kg		
<b>Size [LxWxH]</b>	18.5 cm x 11.0 cm x 2.0 cm		
<b>Interfaces/Ports</b>	--		
<b>For further details refer Applicants Declaration &amp; following technical documents</b>			

#### 3.2 Detailed Technical data of Main EUT as Declared by Applicant

<b>TX Frequency range [MHz] and Number of channels</b>	<input checked="" type="checkbox"/> LTE 2	1850 - 1910 (UL), 1930 - 1990 (DL)	UARFCN range 18600 - 19199
	<input checked="" type="checkbox"/> LTE 4	1710 - 1755 (UL), 2110 - 2155 (DL)	UARFCN range 19950 - 20399
	<input checked="" type="checkbox"/> LTE 5	824 - 849 (UL), 869 - 894 (DL)	UARFCN range 20400 - 20649
	<input checked="" type="checkbox"/> LTE 7	2505 - 2565 (UL), 2625 - 2685 (DL)	UARFCN range 20775 - 21350
	<input type="checkbox"/> LTE 12	699 - 716 (UL), 2625 - 2685 (DL)	UARFCN range 23010 - 23179
	<input type="checkbox"/> LTE 13	782 - 782 (UL), 751 - 751 (DL)	UARFCN range 23205 - 23230
	<input type="checkbox"/> LTE 17	704 - 716 (UL), 734 - 746 (DL)	UARFCN range 23755 - 23800
	<input type="checkbox"/> LTE 25	1850 - 1915 (UL), 1930 - 1995 (DL)	UARFCN range 26040 - 26689
	<input type="checkbox"/> LTE 26	814 - 848.9 (UL), 859 - 893.9 (DL)	UARFCN range 26690 - 27039
	<input type="checkbox"/> LTE 28	708 - 743 (UL), 763 - 798 (DL)	UARFCN range 27225 - 27645
	<input type="checkbox"/> LTE 41	2501 - 2685 (UL), 2501 - 2685 (DL)	UARFCN range 39675 - 41490
	<input type="checkbox"/> LTE 66	1710 - 1780 (UL), 2110 - 2200 (DL)	UARFCN range 131972 - 132671
<b>Antenna Type</b>	<input checked="" type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input type="checkbox"/> External, separate RF-connector		
<b>Antenna gain</b>	LTE band 2: -6.0 dBi		
	LTE band 4: -4.0 dBi		
	LTE band 5: -6.0 dBi		
	LTE band 7: -2.0 dBi		
<b>FCC label attached</b>	No		
<b>Test firmware / software and storage location</b>	EUT 1/2		
<b>For further details refer Applicants Declaration &amp; following technical documents</b>			
<b>Description of Reference Document (supplied by applicant)</b>		<b>Version</b>	<b>Total Pages</b>
BSRF EA Homologation Test Setup Manual		V1.0	82

### 3.3 Worst case identification

LTE Band	Details
LTE B02	BW 20 MHz QPSK high channel 19100 MHz 1RB@0
LTE B04	BW 20 MHz QPSK high channel 20300 MHz 1RB@0
LTE B05	BW 10 MHz QPSK low channel 20450 MHz 1RB@0
LTE B07	BW 20 MHz QPSK low channel 20850 MHz 1RB@50

### 3.4 Modifications on Test sample

Additions/deviations or exclusions	
	--

## 4 Measurements


### 4.1 Conducted RF output power

#### 4.1.1 Description of the general test setup and methodology, see below example:

Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5).

The measurements were performed with the integrated power measurement function of the communication test-unit. (5).

#### Schematic:

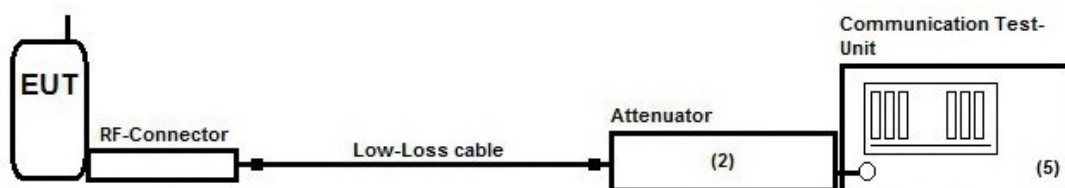

#### Testing method:

The measurement is made according to relevant reference clauses:  
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

#### EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.  
The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band within the designated range within the allowed channel bandwidths. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance

#### 4.1.2 Measurement Location

Test site	120911 - Radio Laboratory 2
-----------	-----------------------------

#### 4.1.3 Limit

Operation band	Frequency Range [MHz]	FCC Limit [W] ☒	ISED Limit [W] ☒
LTE2	1850 - 1910	2 EIRP (33 dBm)	2 EIRP (33 dBm)
LTE4	1710 - 1755	1 EIRP (30dBm)	1 EIRP (30dBm)
LTE5	824 - 849	7 ERP (38.5 dBm)	7 ERP (38.5 dBm)
LTE7	2502.5 - 2567.5	2 EIRP (33 dBm)	2 EIRP (33 dBm)

**4.1.4 Result**

LTE Band Configuration					CETECOM tested power, Modulation: QPSK					Certified module power, Modulation: QPSK		
LTE Band	Bandwidth [MHz]	Channel	ARFCN-Frequency [MHz]	Antenna Gain [dBi]	RB	Start RB	RMS Power at Antenna Port [dBm]	E.I.R.P [dBm]	E.R.P [dBm]	RMS Power at Antenna Port [dBm]	E.I.R.P [dBm]	E.R.P [dBm]
2	20	18700	1860.00	-6.00	1	0	21.51	15.51	17.66	23.15	17.15	19.30
2	20	18900	1880.00	-6.00	1	0	21.44	15.44	17.59	23.13	17.13	19.28
2	20	19100	1900.00	-6.00	1	0	21.72	15.72	17.87	23.02	17.02	19.17
4	20	20050	1720.00	-4.00	1	0	21.36	17.36	19.51	23.61	19.61	21.76
4	20	20175	1732.50	-4.00	1	0	21.62	17.62	19.77	23.45	19.45	21.60
4	20	20300	1745.00	-4.00	1	0	21.91	17.91	20.06	23.49	19.49	21.64
5	10	20450	829.00	-6.00	1	0	22.20	16.20	18.35	23.39	17.39	19.54
5	10	20525	836.50	-6.00	1	0	21.97	15.97	18.12	23.10	17.10	19.25
5	10	20600	844.00	-6.00	1	0	22.09	16.09	18.24	23.14	17.14	19.29
7	20	20850	2510.00	-2.00	1	50	20.66	18.66	20.81	23.30	21.30	23.45
7	20	21100	2535.00	-2.00	1	50	20.64	18.64	20.79	23.23	21.23	23.38
7	20	21350	2560.00	-2.00	1	50	20.39	18.39	20.54	23.16	21.16	23.31


## 4.2 Radiated field strength emissions below 30 MHz

### 4.2.1 Description of the general test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

#### Schematic:

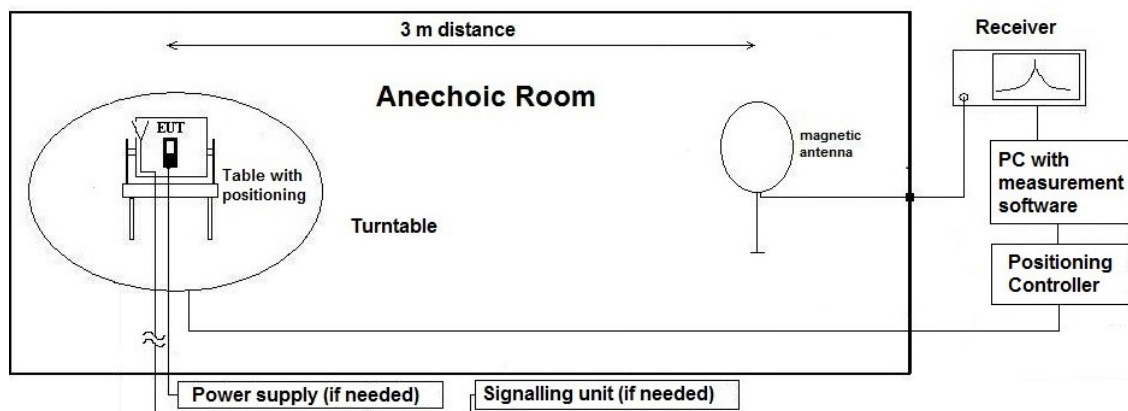

#### Testing method:

The measurement is made according to relevant reference clauses:  
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

#### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

#### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C<sub>L</sub> = Cable loss

D<sub>F</sub> = Distance correction factor (if used)

E<sub>C</sub> = Electrical field – corrected value

E<sub>R</sub> = Receiver reading

G<sub>A</sub> = Gain of pre-amplifier (if used)

L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**4.2.2 Sample calculation**

Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss	Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
19.83	18.9	-70.75	0.18	--	-51.67	-31.83	30 to 3 m correction used according ANSI C63.10-2013

Remark: This calculation is based on an example value at 458 kHz



### 4.2.3 Correction factors due to reduced meas. distance (f < 30 MHz):

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according to Extrapolation formulas valid for EUT's with maximum dimension of  $0.625 \times \lambda$ . Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

Frequency Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas < Dnear-field)	2nd Condition (Limit distance bigger dnear-field)	Distance Correction accord. Formula
kHz	9	33333.33	5305.17	300	fulfilled	not fulfilled	-80.00
	10	30000.00	4774.65		fulfilled	not fulfilled	-80.00
	20	15000.00	2387.33		fulfilled	not fulfilled	-80.00
	30	10000.00	1591.55		fulfilled	not fulfilled	-80.00
	40	7500.00	1193.66		fulfilled	not fulfilled	-80.00
	50	6000.00	954.93		fulfilled	not fulfilled	-80.00
	60	5000.00	795.78		fulfilled	not fulfilled	-80.00
	70	4285.71	682.09		fulfilled	not fulfilled	-80.00
	80	3750.00	596.83		fulfilled	not fulfilled	-80.00
	90	3333.33	530.52		fulfilled	not fulfilled	-80.00
	100	3000.00	477.47		fulfilled	not fulfilled	-80.00
	125	2400.00	381.97		fulfilled	not fulfilled	-80.00
	200	1500.00	238.73		fulfilled	fulfilled	-78.02
	300	1000.00	159.16		fulfilled	fulfilled	-74.49
	400	750.00	119.37		fulfilled	fulfilled	-72.00
	490	612.24	97.44		fulfilled	fulfilled	-70.23
	500	600.00	95.49		fulfilled	not fulfilled	-40.00
	600	500.00	79.58		fulfilled	not fulfilled	-40.00
	700	428.57	68.21		fulfilled	not fulfilled	-40.00
	800	375.00	59.68		fulfilled	not fulfilled	-40.00
900	333.33	53.05	fulfilled	not fulfilled	-40.00		
MHz	1.00	300.00	47.75	30	fulfilled	not fulfilled	-40.00
	1.59	188.50	30.00		fulfilled	not fulfilled	-40.00
	2.00	150.00	23.87		fulfilled	fulfilled	-38.02
	3.00	100.00	15.92		fulfilled	fulfilled	-34.49
	4.00	75.00	11.94		fulfilled	fulfilled	-32.00
	5.00	60.00	9.55		fulfilled	fulfilled	-30.06
	6.00	50.00	7.96		fulfilled	fulfilled	-28.47
	7.00	42.86	6.82		fulfilled	fulfilled	-27.13
	8.00	37.50	5.97		fulfilled	fulfilled	-25.97
	9.00	33.33	5.31		fulfilled	fulfilled	-24.95
	10.00	30.00	4.77		fulfilled	fulfilled	-24.04
	10.60	28.30	4.50		fulfilled	fulfilled	-23.53
	11.00	27.27	4.34		fulfilled	fulfilled	-23.21
	12.00	25.00	3.98		fulfilled	fulfilled	-22.45
	13.56	22.12	3.52		fulfilled	fulfilled	-21.39
	15.00	20.00	3.18		fulfilled	fulfilled	-20.51
	15.92	18.85	3.00		fulfilled	fulfilled	-20.00
	17.00	17.65	2.81		not fulfilled	fulfilled	-20.00
	18.00	16.67	2.65		not fulfilled	fulfilled	-20.00
	20.00	15.00	2.39		not fulfilled	fulfilled	-20.00
21.00	14.29	2.27	not fulfilled	fulfilled	-20.00		
23.00	13.04	2.08	not fulfilled	fulfilled	-20.00		
25.00	12.00	1.91	not fulfilled	fulfilled	-20.00		
27.00	11.11	1.77	not fulfilled	fulfilled	-20.00		
29.00	10.34	1.65	not fulfilled	fulfilled	-20.00		
30.00	10.00	1.59	not fulfilled	fulfilled	-20.00		

#### 4.2.4 Measurement Location

Test site	120901 - SAC - Radiated Emission <1GHz
-----------	--

#### 4.2.5 Limit

Radiated emissions limits (3 meters)					
Frequency Range [MHz]	Limit [ $\mu\text{V}/\text{m}$ ]	Limit [ $\text{dB}\mu\text{V}/\text{m}$ ]	Distance [m]	Detector	RBW [kHz]
0.009 – 0.09	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.09 – 0.11	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Quasi peak	0.2
0.11 – 0.15	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.15 – 0.49	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	9
0.49 – 1.705	24000 / f [kHz]	87.6 – 20Log(f) (kHz)	30	Quasi peak	9
1.705 - 30	30	29.5	30	Quasi peak	9

\*Remark: In Canada same limits apply, just unit reference is different

#### 4.2.6 Result

Diagram	Band	Mode	Maximum Level [ $\text{dB}\mu\text{V}/\text{m}$ ] Frequency Range 0.009 – 30 MHz	Result
2.201	2	1	No peaks found	Passed
2.401	4	2	No peaks found	Passed
2.501	5	3	No peaks found	Passed
2.701	7	4	No peaks found	Passed


Remark: for more information and graphical plot see annex A1 TR22-1-0030601T046a\_A1

## 4.3 Radiated spurious emissions

### 4.3.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

#### Schematic:

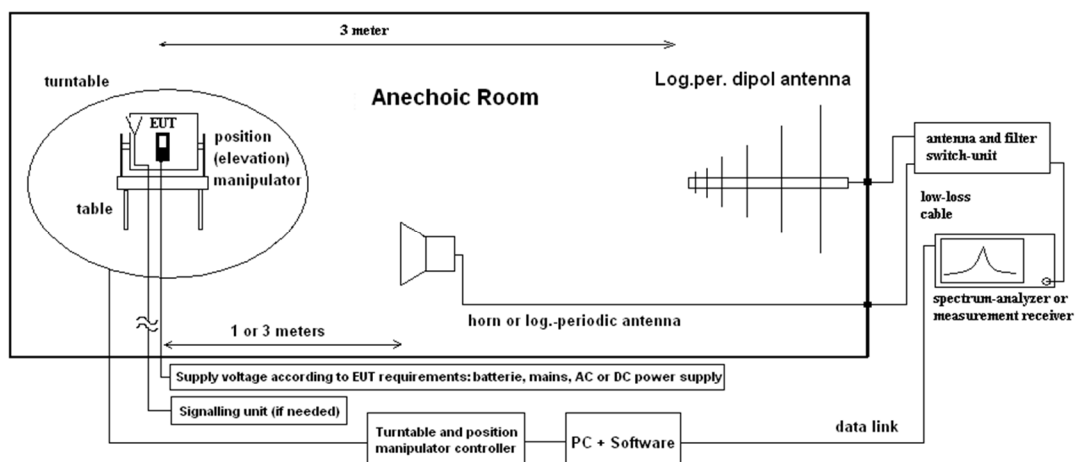

#### Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

#### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

#### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

**Formula:**

$$P_{EIRP} = P_{MEAS} + C_L + FSL - G_{PreA} - G_{ANT} \quad (1)$$

$P_{MEAS}$  = measured power at instrument

M = Margin

$L_T$  = Limit

FSL = Free Space loss = Function(frequency, measurement distance)

$$M = L_T - P_{EIRP}$$

$C_L$  = cable loss

$G_{PreA}$  = Gain of pre-amplifier (if used)

$G_{ANT}$  = Gain of antenna in [dBi]

All units are dB-units, positive margin means value is below limit.

**4.3.2 Measurement Location**

Test site	120904 - FAC1 - Radiated Emissions
Test site	120907 - FAC2 - Radiated Emissions

**4.3.3 Limit**

Operation band	Frequency Range [MHz]	Limit [dBm]	Detector [MaxHold]	RBW / VBW [MHz]
LTE2	30 - 19100	-13	Peak	3 / 3
LTE4	30 - 17500	-13	Peak	3 / 3
LTE5	30 - 8500	-13	Peak	3 / 3
LTE7	30 - 25700	-13	Peak	3 / 3

#### 4.3.4 Result

Diagram	Band	Mode	30 MHz to 15 GHz	15 GHz to 18 GHz	18 GHz to 19.5 GHz	Result
8.02a	2	1	No peaks found	--	--	Passed
8.03a	2	1 (EUT laying, Ant hor)	--	No peaks found	--	Passed
8.03b	2	1 (EUT standing, Ant hor)	--	No peaks found	--	Passed
8.03c	2	1 (EUT laying, Ant ver)	--	No peaks found	--	Passed
8.03d	2	1 (EUT standing, Ant ver)	--	No peaks found	--	Passed
8.04a	2	1 (EUT laying, Ant hor)	--	--	No peaks found	Passed
8.04b	2	1 (EUT standing, Ant hor)	--	--	No peaks found	Passed
8.04c	2	1 (EUT laying, Ant ver)	--	--	No peaks found	Passed
8.04d	2	1 (EUT standing, Ant ver)	--	--	No peaks found	Passed

Diagram	Band	Mode	30 MHz to 15 GHz	15 GHz to 18 GHz	Result
8.05	4	2	No peaks found	--	Passed
8.06a	4	2 (EUT laying, Ant hor)	--	No peaks found	Passed
8.06b	4	2 (EUT standing, Ant ver)	--	No peaks found	Passed
8.06c	4	2 (EUT laying, Ant ver)	--	No peaks found	Passed
8.06d	4	2 (EUT standing, Ant ver)	--	No peaks found	Passed

Diagram	Band	Mode	30 MHz to 9 GHz	Result
8.07a	5	3	No peaks found	Passed

Diagram	Band	Mode	30 MHz to 2.8 GHz	2.8 GHz to 15 GHz	15 GHz to 18 GHz	18 GHz to 26 GHz	Result
8.08	7	4	No peaks found	--	--	--	Passed
8.09	7	4	--	No peaks found	--	--	Passed
8.10a	7	4 (EUT laying, Ant hor)	--	--	No peaks found	--	Passed
8.10b	7	4 (EUT standing, Ant hor)	--	--	No peaks found	--	Passed
8.10c	7	4 (EUT laying, Ant ver)	--	--	No peaks found	--	Passed
8.10d	7	4 (EUT standing, Ant ver)	--	--	No peaks found	--	Passed
8.11a	7	4 (EUT laying, Ant hor)	--	--	--	No peaks found	Passed
8.11b	7	4 (EUT standing, Ant hor)	--	--	--	No peaks found	Passed
8.11c	7	4 (EUT laying, Ant ver)	--	--	--	No peaks found	Passed
8.11d	7	4 (EUT standing, Ant ver)	--	--	--	No peaks found	Passed


Remark: for more information and graphical plot see annex A1 TR22-1-0030601T046a\_A1

## 4.4 Radiated Band Edge

### 4.4.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT

#### Schematic:

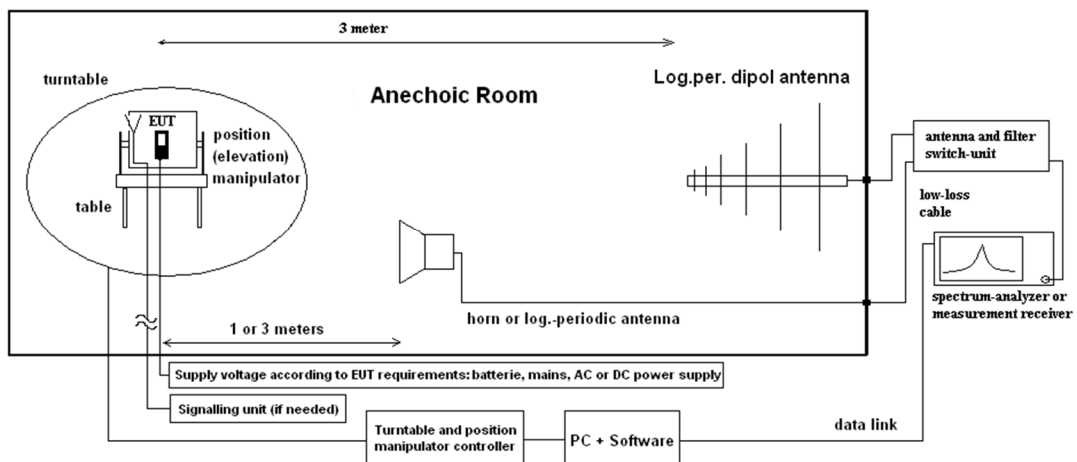

#### Testing method:

The measurement is made according to relevant reference clauses:  
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

See chapter Radiated Spurious Emission for Test method.

### 4.4.2 Measurement Location

Test site	120904 - FAC1 - Radiated Emissions
-----------	------------------------------------

### 4.4.3 Limit

Operation band	Frequency Range [MHz]	Limit [dBm]	Detector [MaxHold]	RBW / VBW [MHz]
LTE2	Below 1850 and above 1910	-13	Peak	0.03 / 0.3
LTE4	Below 1710 and above 1755	-13	Peak	0.03 / 0.3
LTE5	Below 824 and above 849	-13	Peak	0.02 / 0.2
LTE7	2496 - 2499 2499 - 2500 2570 - 2571 2571 - 2575	-10 (RBW = 1 MHz, VBW = 3 MHz) -10 (RBW = 500 kHz, VBW = 2 MHz) -10 (RBW = 500 kHz, VBW = 2 MHz) -10 (RBW = 1 MHz, VBW = 3 MHz)	Peak	0.03 / 0.3

#### 4.4.4 Result

Diagram	Band	Mode	Edge [Low / High]	Value [dBm]	Result
9.201	2	1	Low_1RB	-37.23	Passed
9.202	2	1	Low_full	-38.196	Passed
9.203	2	1	High_1RB	-36.66	Passed
9.204	2	1	High_full	-36.28	Passed

Diagram	Band	Mode	Edge [Low / High]	Value [dBm]	Result
9.401	4	2	Low_1RB	-29.68	Passed
9.402	4	2	Low_full	-29.47	Passed
9.403	4	2	High_1RB	-29.88	Passed
9.204	4	2	High_full	-29.98	Passed

Diagram	Band	Mode	Edge [Low / High]	Value [dBm]	Result
9.501	5	3	Low_1RB	-38.12	Passed
9.502	5	3	Low_full	-40.05	Passed
9.503	5	3	High_1RB	-38.32	Passed
9.504	5	3	High_full	-39.563	Passed

Diagram	Band	Mode	Edge [Low / High]	Value [dBm]	Result
9.701	7	4	Low_1RB	-32.69	Passed
9.702	7	4	Low_full	-32.60	Passed
9.703	7	4	High_1RB	-29.82	Passed
9.704	7	4	High_full	-32.08	Passed

Remark: for more information and graphical plot see annex A1 **TR22-1-0030601T046a\_A1**

### 4.5 Equipment lists

ID	Description	Manufacturer	SerNo	CheckType	Last Check	Interval	Next Check
	120901 - SAC - Radiated Emission <1GHz			calchk	cal: 2015-Jul-21 chk: 2021-Jul-27	cal: 10Y chk: 12M	cal: 2025-Jul-21 chk: 2022-Jul-27
20442	Semi Anechoic Chamber	ETS-Lindgren GmbH / Taufkirchen	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20482	filter matrix Filter matrix SAR 1	CETECOM GmbH	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20574	Biconilog Hybrid Antenna BTA-L	Frankonia GmbH / Heideck	980026L	cal	cal: 2022-Jun-15	cal: 36M	cal: 2025-Jun-15
20620	Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100362	cal	cal: 2022-Jun-08	cal: 12M	cal: 2023-Jun-08
20885	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
25038	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH / Memmingen	879824/13	cal	cal: 2022-Jul-04	cal: 24M	cal: 2024-Jul-04
	120904 - FAC1 - Radiated Emissions			chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20020	Horn Antenna 3115 (Subst 1)	EMCO Elektronik GmbH	9107-3699	calchk	cal: 2021-Aug-17 chk: 2013-Apr-20	cal: 36M chk: 12M	cal: 2024-Aug-17
20066	Notch Filter WRCT 1900/2200-5/40-10EEK	Wainwright Instruments GmbH	5	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20121	Notch Filter WRCB 1879.5/1880,5EE	Wainwright Instruments GmbH	15	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20122	Notch Filter WRCB 1747/1748	Wainwright Instruments GmbH	12	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20254	High Pass Filter 5HC 2600/12750-1.5KK	Trilithic	23042	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20287	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-3S-10P	Miteq Inc.	379418	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20290	Notch Filter WRCA 901,9/903,1S5	Wainwright Instruments GmbH	3RR	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20291	High Pass Filter WHJ 2200-4EE	Wainwright Instruments GmbH	14	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20338	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH / Glottertal	81650455	cal	cal: 2022-May-18	cal: 24M	cal: 2024-May-18
20439	Ultrabroadband-Antenna HL562	Rohde & Schwarz Messgerätebau GmbH	100248	calchk	cal: 2017-Mar-10	cal: 72M chk: 12M	cal: 2023-Mar-10
20448	Notch Filter WRCT 1850.0/2170.0-5/40-10SSK	Wainwright Instruments GmbH	5	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20449	Notch Filter WRCT 824.0/894.0-5/40-8SSK	Wainwright Instruments GmbH	1	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20484	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20489	Test Receiver ESU40	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100030	cal	cal: 2022-Jul-20	cal: 12M	cal: 2023-Jul-20
20512	Notch Filter WRCA 800/960-02/40-6EEK (GSM 850)	Wainwright Instruments GmbH	24	chk	chk: 2022-Jun-30	chk: 12M	chk: 2023-Jun-30
20549	Log. Per. Antenna HL025	Rohde & Schwarz Messgerätebau GmbH	1000060	calchk	cal: 2021-Aug-18	cal: 36M chk: 12M	cal: 2024-Aug-18
20558	Fully Anechoic Chamber 1	ETS-Lindgren GmbH / Taufkirchen	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20611	Power Supply E3632A	Agilent Technologies Deutschland GmbH	KR 75305854	cpu			
20670	Radio Communication Tester CMU200	Rohde & Schwarz Messgerätebau GmbH / Memmingen	106833	cal	cal: 2022-May-10	cal: 24M	cal: 2024-May-10
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	cal	cal: 2021-May-20	cal: 24M	cal: 2023-May-20
20720	Measurement Software EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	V10.xx	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20868	High Pass Filter AFH-07000	AtlanTecRF	16071300004	chk	chk: 2021-Jun-11	chk: 12M	chk: 2022-Jun-11
	120907 - FAC2 - Radiated Emissions			chk	chk: 2021-Aug-30	chk: 12M	chk: 2023-Jan-31
20005	AC - LISN 50 Ohm/50µH ESH2-Z5	Rohde & Schwarz Messgerätebau GmbH / Memmingen	861741/005	cal	cal: 2022-May-19	cal: 12M	cal: 2023-May-19
20133	Horn Antenna 3115 (Meas 1)	EMCO Elektronik GmbH	9012-3629	cal	cal: 2020-Apr-08	cal: 36M	cal: 2023-Apr-08
20302	Horn Antenna BBHA9170 (Meas 1)	Schwarzbeck Mess-Elektronik OHG / Schönau	155	cpu	chk: 2020-Apr-15	chk: 12M	
20412	Fully Anechoic Chamber 2	ETS-Lindgren GmbH / Taufkirchen	without	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20729	FS-Z140	Rohde & Schwarz Messgerätebau GmbH	101004	cal	cal: 2020-May-26	cal: 36M	cal: 2023-May-26
20730	FS-Z110	Rohde & Schwarz Messgerätebau GmbH	101468	cal	cal: 2020-Jun-19	cal: 36M	cal: 2023-Jun-19
20731	FS-Z75	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101022	cal	cal: 2022-May-18	cal: 36M	cal: 2025-May-18
20732	Signal- and Spectrum Analyzer FSW67	Rohde & Schwarz Messgerätebau GmbH / Memmingen	104023	cal	cal: 2022-Jun-08	cal: 12M	cal: 2023-Jun-08
20733	Harmonic Mixer FS-Z220	RPG-Radiometer Physics GmbH	101009	cal	cal: 2021-May-27	cal: 36M	cal: 2024-May-27
20734	Harmonic Mixer FS-Z325	RPG-Radiometer Physics GmbH	101005	cal	cal: 2021-May-27	cal: 36M	cal: 2024-May-27
20765	Pickett-Potter Horn Antenna FH-PP 40-60	RPG-Radiometer Physics GmbH / Meckenheim	010001	cal	cal: 2020-Sep-15	cal: 36M	cal: 2023-Sep-15
20767	Pickett-Potter Horn Antenna FH-PP 140-220	RPG-Radiometer Physics GmbH / Meckenheim	010011	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20811	Horn Antenna ASY-SGH-124-SMA	Antenna Systems Solutions S.L	29F14182337	cal	cal: 2021-Oct-20	cal: 36M	cal: 2024-Oct-20
20812	Pickett-Potter Horn Antenna FH-PP-325	RPG-Radiometer Physics GmbH	10024	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20813	Pickett-Potter Horn Antenna FH-PP 075	RPG-Radiometer Physics GmbH / Meckenheim	10006	cal	cal: 2020-Sep-09	cal: 36M	cal: 2023-Sep-09
20814	Pickett-Potter Horn Antenna FH-PP 140	RPG-Radiometer Physics GmbH	10008	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20815	Pickett-Potter Horn Antenna FH-PP 110	RPG-Radiometer Physics GmbH	10014	cal	cal: 2020-Sep-04	cal: 36M	cal: 2023-Sep-04
20816	SGH Antenna SGH-26-WR10	Antenal S.L.	1144	cnn	cal: -	cal: -	cal: -



ID	Description	Manufacturer	SerNo	CheckType	Last Check	Interval	Next Check
					chk: -	chk: -	chk: -
20817	Waveguide Rectangular Horn Antenna SAR-2309-22-52	ERAVAN	13254-01	cal	cal: 2020-Jul-29	cal: 36M	cal: 2023-Jul-29
20836	1-18 GHz Amplifier	Wright Technologies, Inc., Inc.	0001	chk		chk: 36M	
20877	JS42-08001800-16-8P Verstärker	Miteq Inc.	2079991 / 2079992	chk	chk: 2020-Feb-27	chk: 36M	chk: 2023-May-27
20907	Waveguide WR-15 attenuator STA-30-15-M2	SAGE Millimeter Inc.	13256-01	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20908	Waveguide WR 10 attenuator STA-30-10-M2	SAGE Millimeter Inc.	13256-01	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20909	Waveguide Horn Antenna PE9881-24	Pasternack Enterprises, Inc.	37/2016	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20910	Frequency Multiplier 936VF-10/385	MI-Wave, Millimeter Wave Products Inc.	142	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20911	Frequency Multiplier 938WF-10/387	MI-Wave, Millimeter Wave Products Inc.	141	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20912	Low noise Amplifier Module 0.5-4GHz	RF-Lambda Europe GmbH	19041200083	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20913	Phase Amplitude Stable Cable Assembly DC-40GHz	RF-Lambda Europe GmbH	AC19040001	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
25457	DRG Horn Antenna SAS-574	A.H. Systems, Inc. / Chatsworth	383	cal	cal: 2022-Mar-28	cal: 36M	cal: 2025-Mar-28

Tools used in 'P1M1'

### 4.5.1 Legend

Note / remarks	Interval of calibration & Verification
12M	12 months
24M	24 months
36M	36 months
10Y	10 Years

Abbreviation Check Type	Description
cnn	Calibration and verification not necessary
cal	Calibration
calchk	Calibration plus intermediate Verification
chk	Verification
cpu	Verification before usage

## 5 Results from external laboratory

None

-

## 6 Opinions and interpretations

None

-

## 7 List of abbreviations

None

-

## 8 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

Measurement type	Frequency range of measurement		Calculated Uncertainty based on confidence level of 95.54%	Remarks
	Start [MHz]	Stop [MHz]		
Magnetic field strength	0.009	30	4.86	Magnetic loop antenna, Pre-amp on
RF-Output power (eirp) Unwanted emissions (eirp) [dB]	30	100	4.57	without Pre-Amp
	30	100	4.91	with PreAmp
	100	1000	4.02	without Pre-Amp
	100	1000	4.26	with PreAmp
	1000	18000	4.36	without Pre-Amp
	1000	18000	5.23	with PreAmp
	18000	33000	4.92	Schwarzbeck BBHA9170 (#20302) Antenna set-up non-waveguide antenna)
	33000	50000	4.17	Set-up for Q-Band (WR-22), non-wave guide antenna
	40000	60000	4.69	Set-up U-Band (WR-19), non-waveguide antenna
	50000	75000	4.06	External Mixer set-up V-Band (WR-15)
	75000	110000	4.17	External Mixer set-up W-Band (WR-6)
	90000	140000	5.49	External Mixer set-up F-Band (WR-8)
	140000	225000	6.22	External Mixer set-up G-Band (WR-5)
	225000	325000	7.04	External Mixer set-up (WR-3)
325000	500000	8.84	External Mixer set-up (WR-2.2)	
Radiated Blocking [dB]	1000	18000	2.85	Typical set-up with microwave generator and antenna, value for 7GHz calculated
	18000	33000	4.66	Typical set-up with microwave generator and antenna
	33000	50000	3.48	WR-22 set-up
	50000	75000	3.73	WR-15 set-up
	75000	110000	4.26	WR-6 set-up
Frequency Error [kHz]	40000	77000	276.19	calculated for 77 GHz (FMCW) carrier
	6000	7000	33.92	calculated for 6.5GHz UWB Ch.5
TS 8997 conducted Parameters	30	6000	1.11	1. Power measurement with Fast-sampling-detector
	30	6000	1.20	2. Power measurement with Spectrum-Analyzer
	30	6000	1.20	3. Power Spectrum-Density measurement
	30	7500	1.20	4. Conducted Spurious emissions:
	0.009	30	2.56	5. Conducted Spurious emissions:
	2.4	2.48	1.95 ppm	6a. Bandwidth / 2-Marker Method for 2.4GHz ISM
	5.18	5.825	7.180 ppm	6b. Bandwidth / 2-Marker Method for 5GHz WLAN
	5.18	5.825	1.099 ppm	7 Frequency (Marker method) for 5GHz WLAN
	30	6000	0.11561µs	8 Medium-Utilization factor / Timing
	30	6000	1.85	9 Blocking-Level of companion device
	30	6000	1.62	9 Blocking Generator level
Conducted emissions	0.009	30	3.57	

## 9 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2023-Feb-16
--	--	--
--	--	--

**End Of Test Report**