




Test Report No.: W7L-P20210616-2RF06

LTE B7

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	5082.000	-48.93	-57.70	-25.00	-23.93	8.77	Peak	Horizontal
2	7605.000	-49.98	-61.38	-25.00	-24.98	11.40	Peak	Horizontal

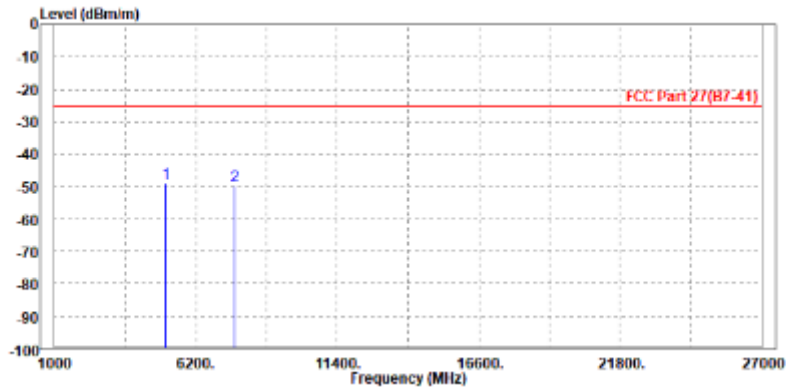




**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5082.000	-47.41	-57.28	-25.00	-22.41	9.87	Peak	Vertical
2	7605.000	-48.20	-60.98	-25.00	-23.20	12.78	Peak	Vertical

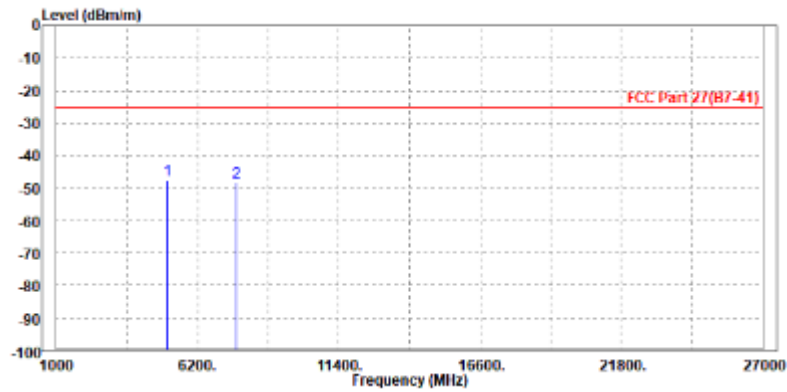




**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

**CHANNEL BANDWIDTH: 10MHz / QPSK
CH21100**

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5882.000	-47.99	-56.76	-25.00	-22.99	8.77	Peak	Horizontal
2	7685.000	-49.20	-60.60	-25.00	-24.20	11.40	Peak	Horizontal

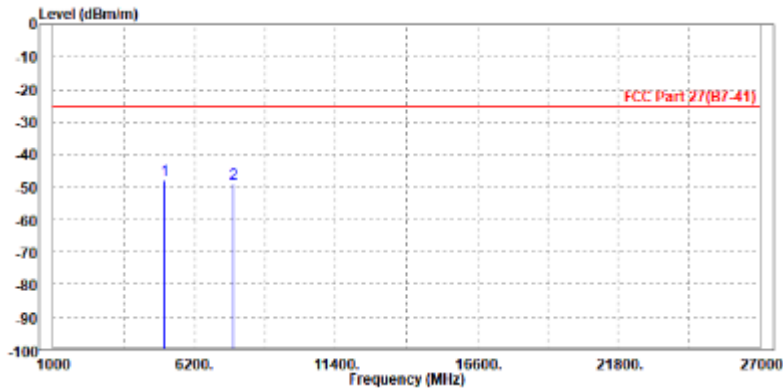




Test Report No.: W7L-P20210616-2RF06

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read	Limit	Over	Remark	Pol/Phase
			Level	Line	Limit		
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	5082.000	-47.81	-57.68	-25.00	-22.81	9.87	Peak Vertical
2 PP	7695.000	-47.22	-60.00	-25.00	-22.22	12.78	Peak Vertical

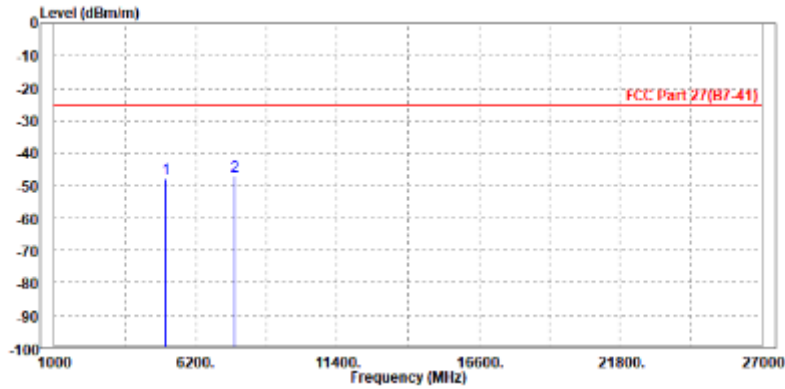




Test Report No.: W7L-P20210616-2RF06

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1 PP 5082.000	-48.64	-57.41	-25.00	-23.64	8.77	Peak Horizontal
2 7605.000	-50.09	-61.49	-25.00	-25.09	11.40	Peak Horizontal

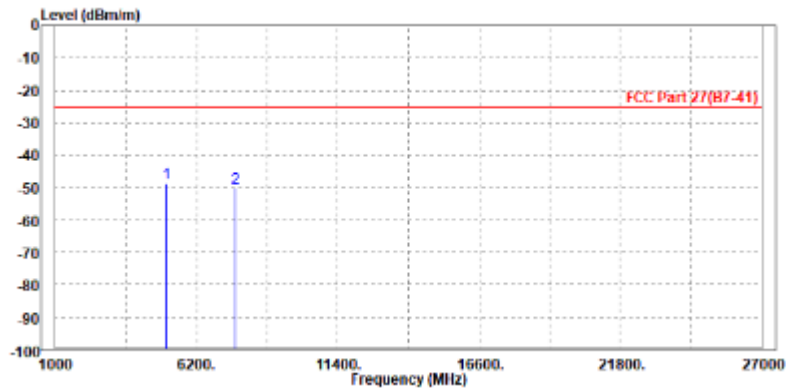




**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5082.000	-48.26	-58.13	-25.00	-23.26	9.87	Peak	Vertical
2	7605.000	-48.91	-61.69	-25.00	-23.91	12.78	Peak	Vertical

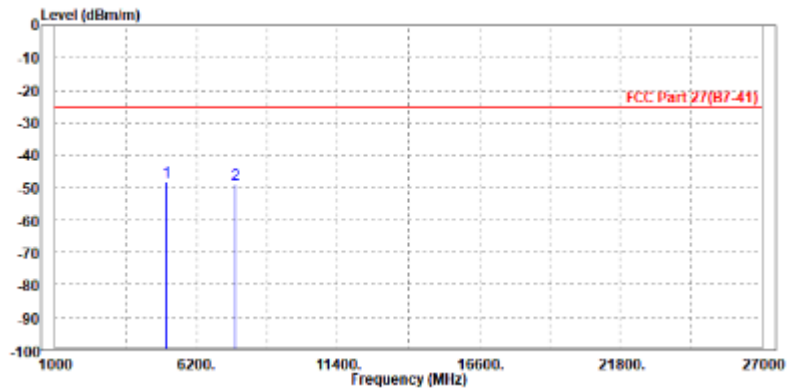




Test Report No.: W7L-P20210616-2RF06

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 5082.000	-48.93	-57.70	-25.00	-23.93	8.77	Peak	Horizontal
2	7605.000	-49.53	-60.93	-25.00	-24.53	11.40	Peak	Horizontal

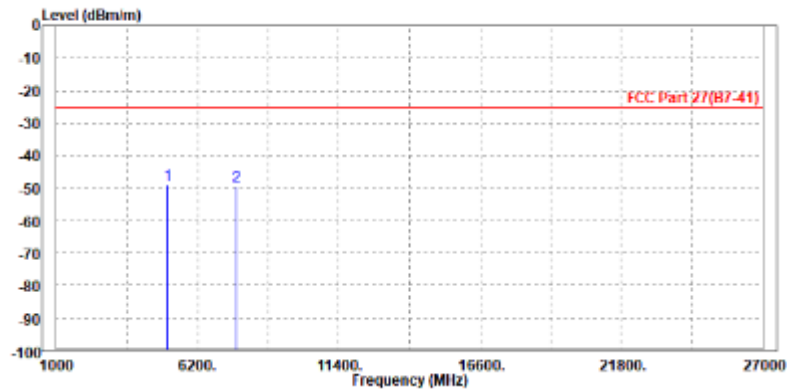




Test Report No.: W7L-P20210616-2RF06

MODE	TX channel 21100	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	EUT 4.0V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	PP 5082.000	-48.05	-57.92	-25.00	-23.05	9.87	Peak Vertical
2	7605.000	-48.58	-61.36	-25.00	-23.58	12.78	Peak Vertical

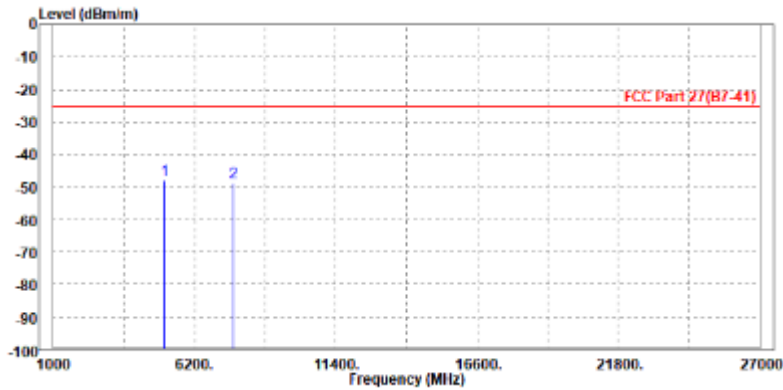


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

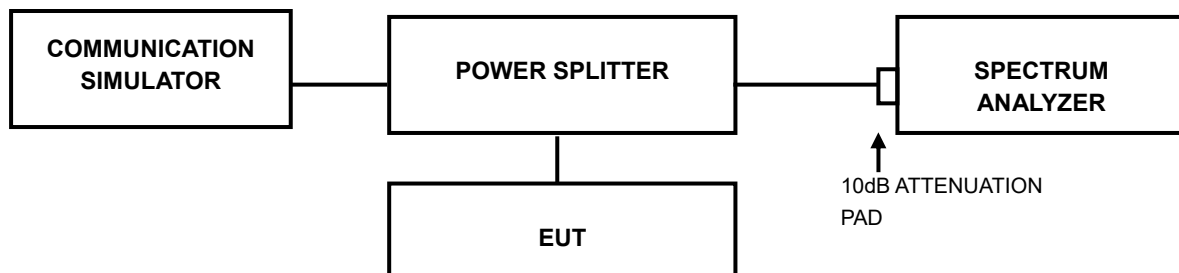

3.7.3 TEST PROCEDURES


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: W7L-P20210616-2RF06

3.7.4 TEST RESULTS
WCDMA Band IV


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
1312	1712.4	3.13

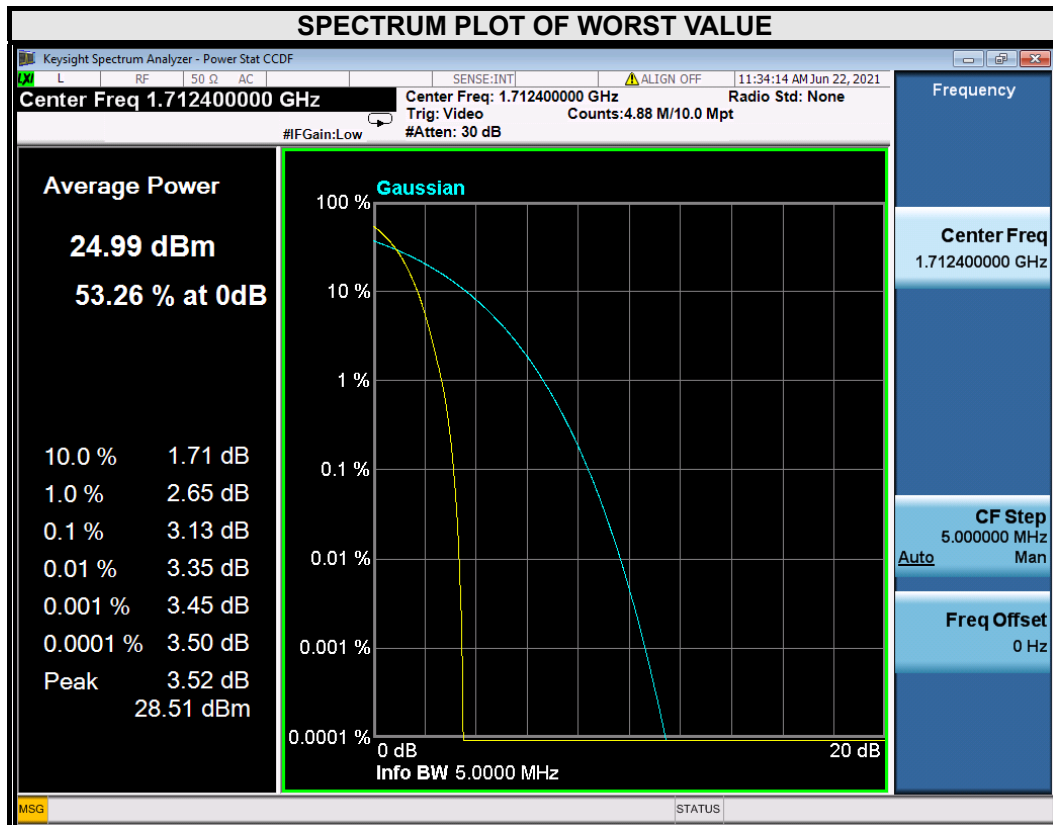



Test Report No.: W7L-P20210616-2RF06


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
1413	1732.6	3.15

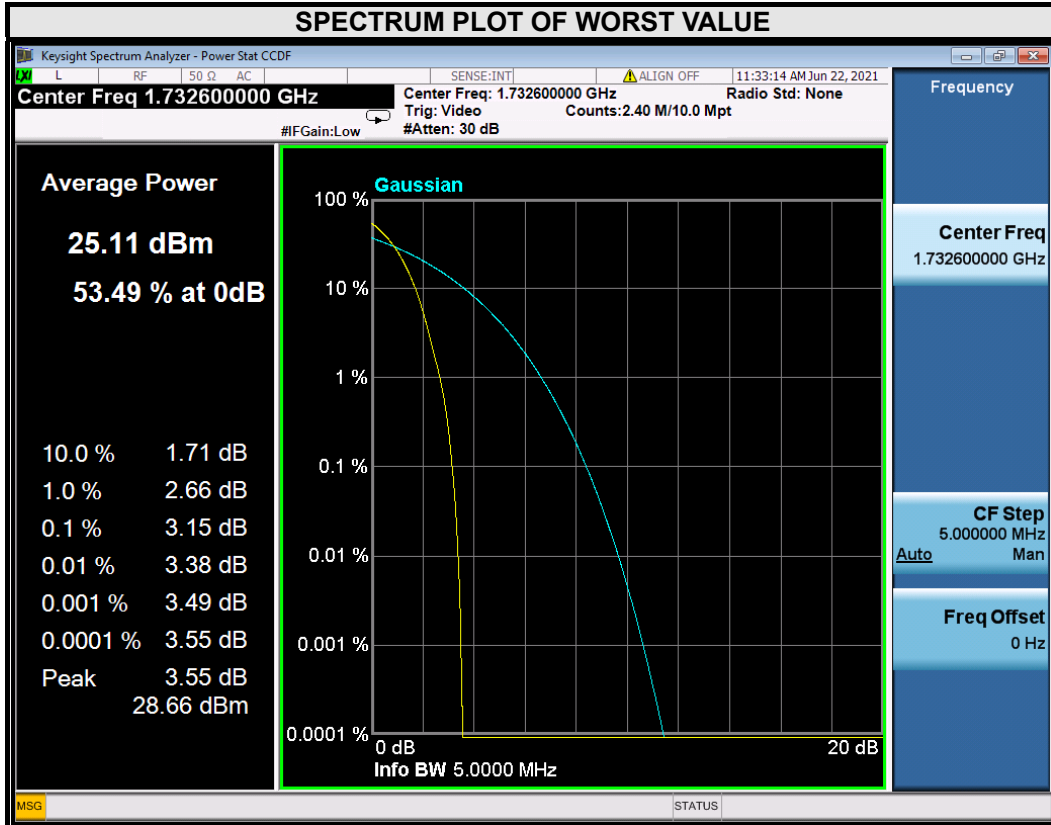



Test Report No.: W7L-P20210616-2RF06

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
1513	1752.6	2.92

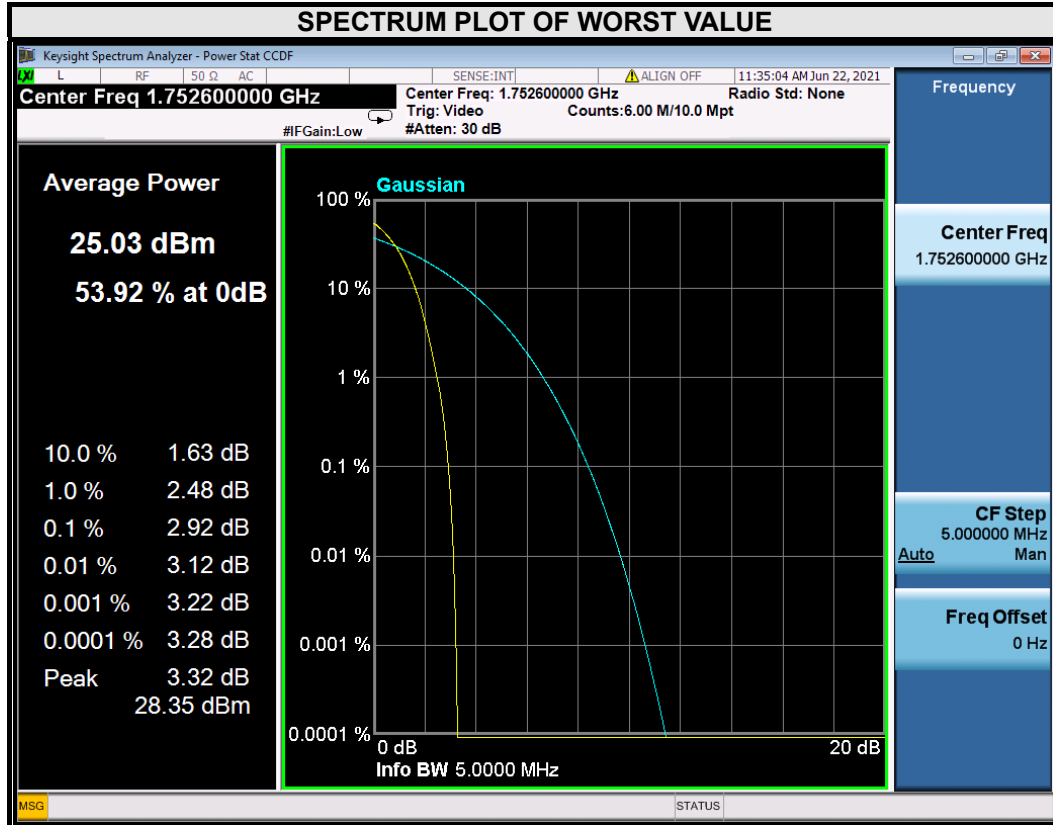




**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
19957	1710.7	5.23	6.10
20175	1732.5	5.09	5.98
20393	1754.3	4.83	5.73

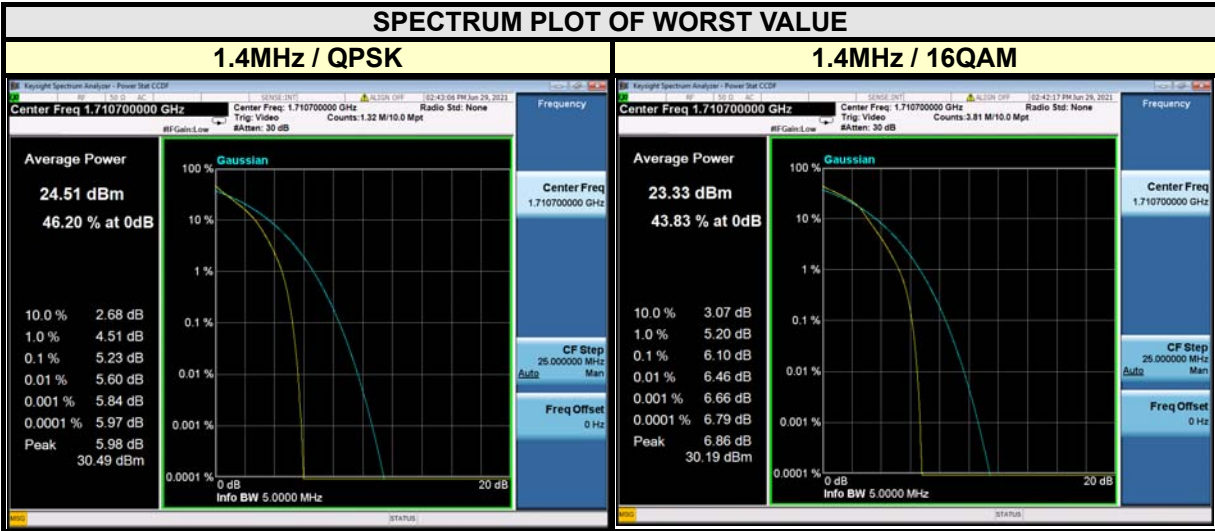




**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

CHANNEL BANDWIDTH: 3MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
19965	1711.5	5.29	6.15
20175	1732.5	5.21	6.07
20385	1753.5	4.96	5.81

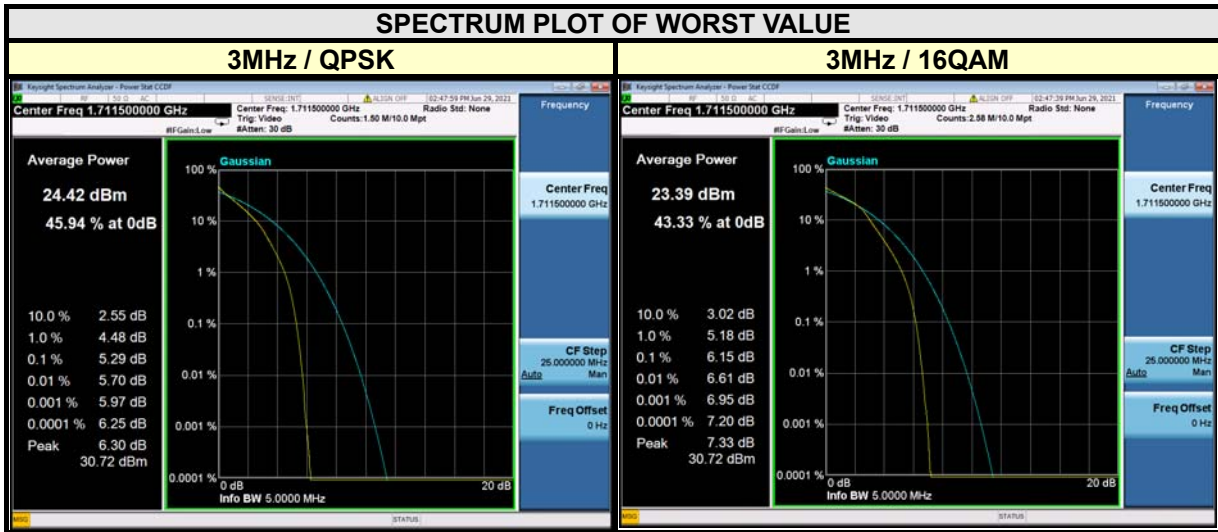



**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
19975	1712.5	5.24	6.13
20175	1732.5	5.19	6.05
20375	1752.5	5.03	5.87







**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20000	1715	5.17	6.06
20175	1732.5	5.21	6.02
20350	1750	4.99	5.84

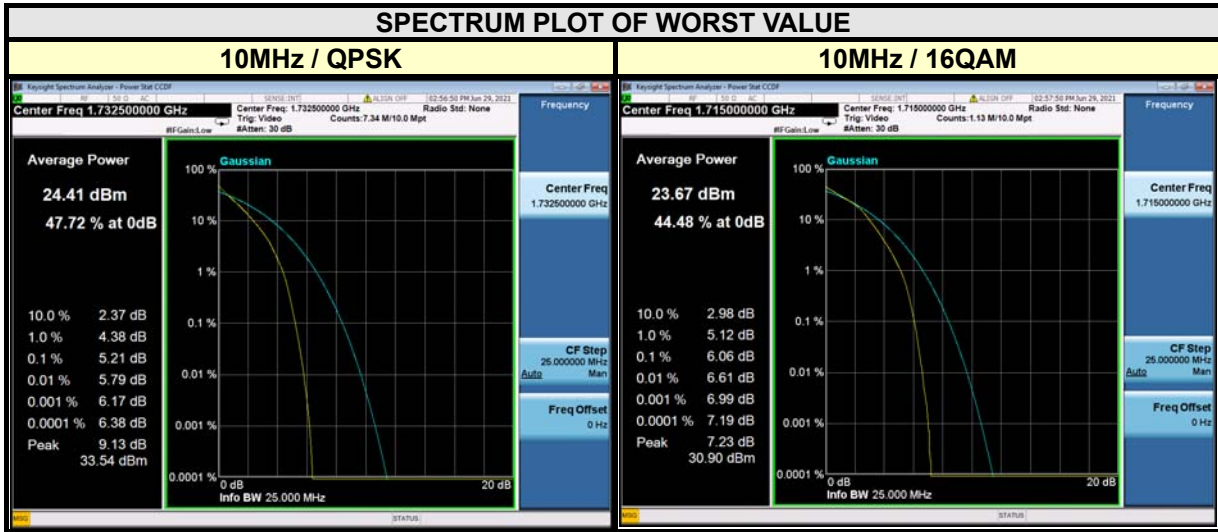

CHANNEL BANDWIDTH: 15MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20025	1717.5	5.29	6.09
20175	1732.5	5.35	6.08
20325	1747.5	5.20	5.99

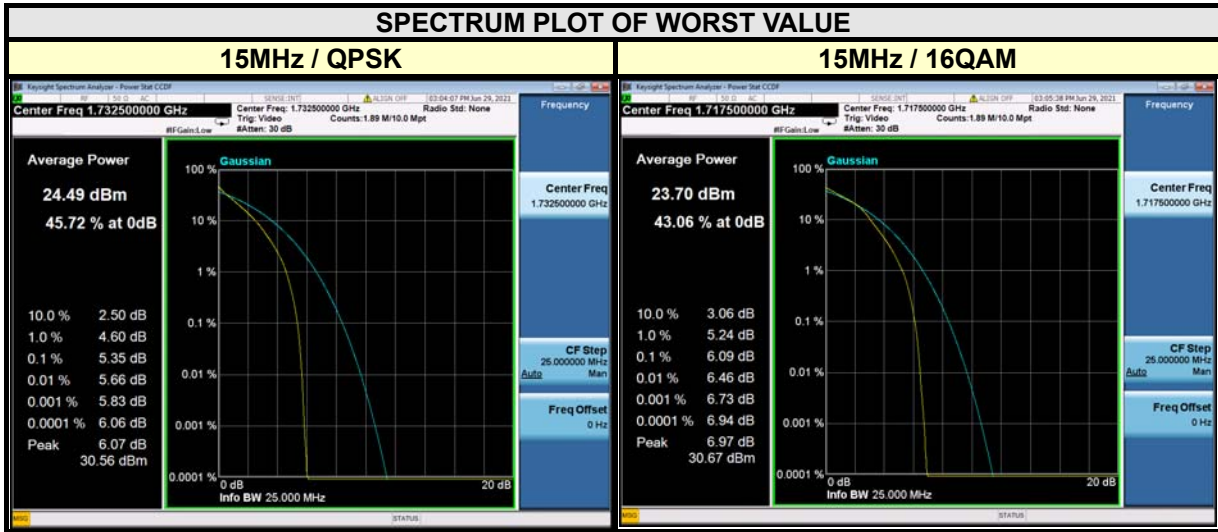



**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

CHANNEL BANDWIDTH: 20MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20050	1720	5.09	5.99
20175	1732.5	5.13	6.01
20300	1745	5.06	5.94






**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

LTE BAND 7

CHANNEL BANDWIDTH: 5MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20775	2502.5	4.95	5.77
21100	2535	5.02	5.82
21425	2567.5	5.05	5.85

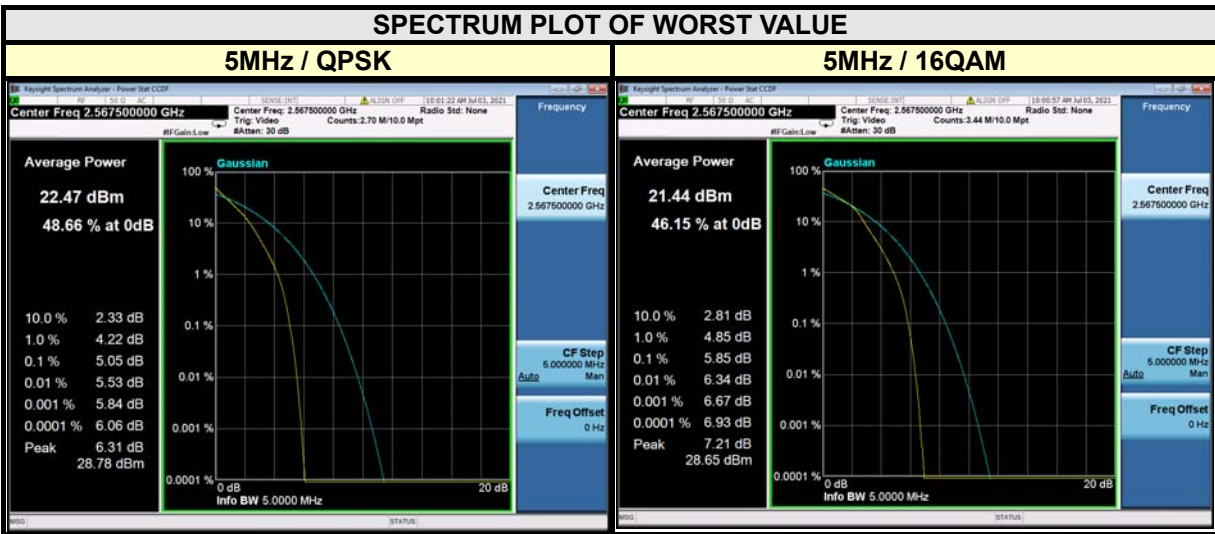





**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20800	2505	4.84	5.64
21100	2535	4.94	5.75
21400	2565	4.91	5.71

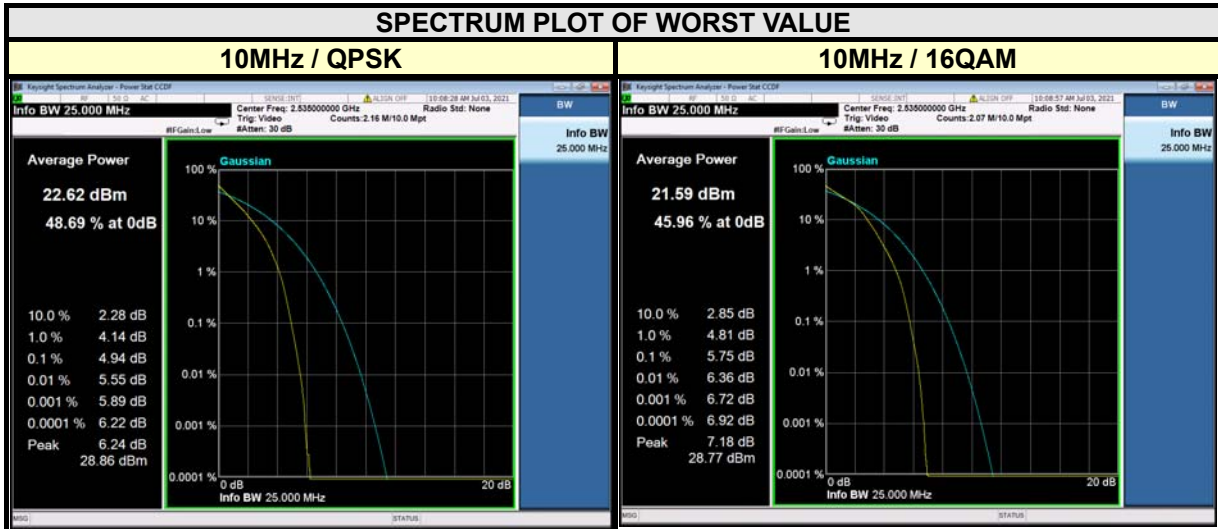

CHANNEL BANDWIDTH: 15MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20825	2507.5	5.07	5.76
21100	2535	5.16	5.85
21375	2562.5	5.08	5.80

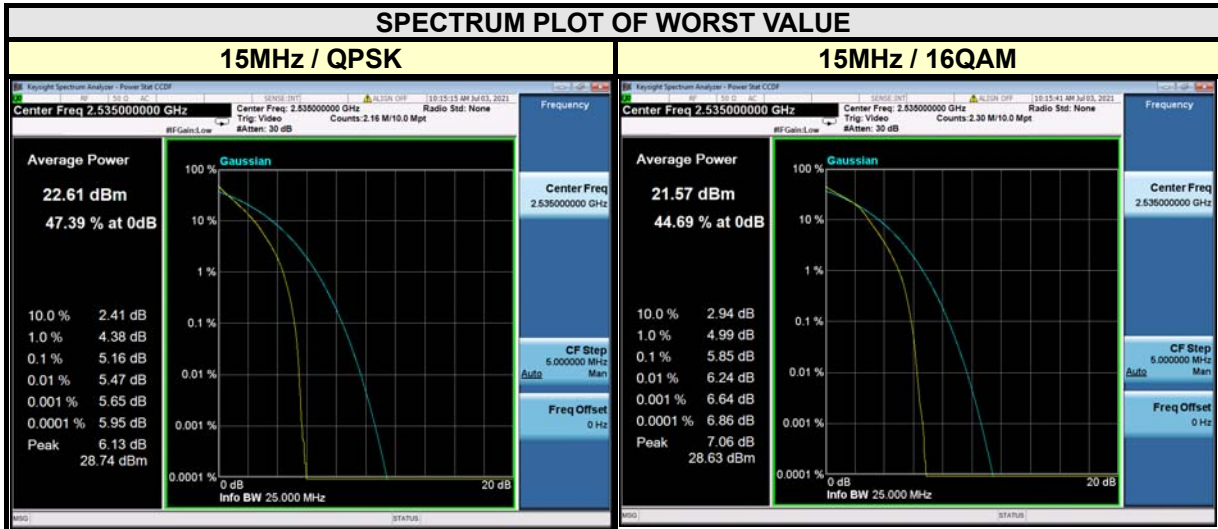




**BUREAU
VERITAS**

Test Report No.: W7L-P20210616-2RF06

CHANNEL BANDWIDTH: 20MHz			
CHANNEL	Frequency (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM
20850	2510	4.87	5.71
21100	2535	4.97	5.77
21350	2560	4.89	5.73

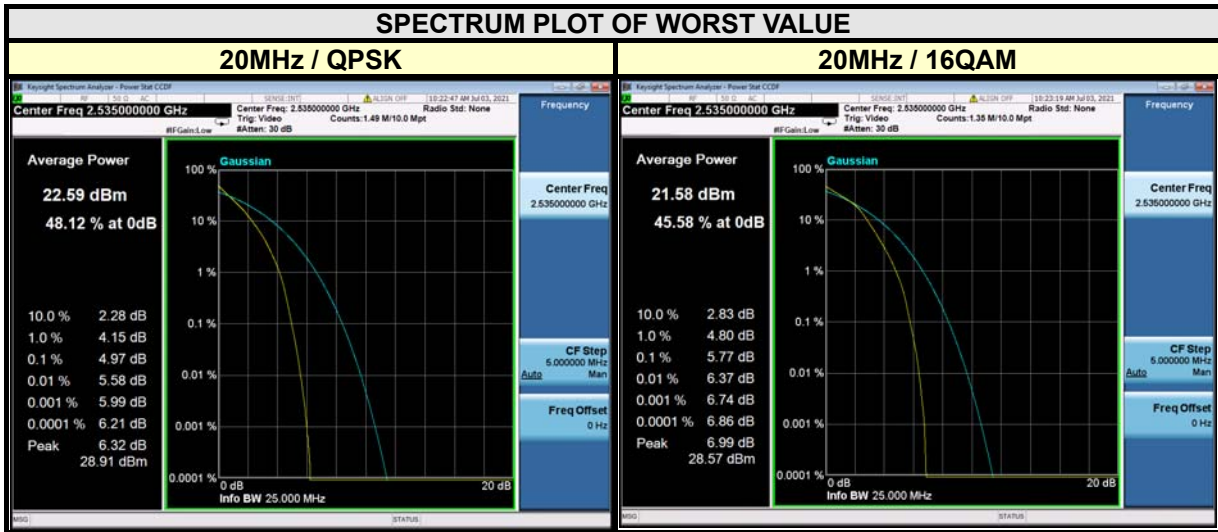



Test Report No.: W7L-P20210616-2RF06

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-P20210616-2RF06

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---