


Block diagram of the R230 remote control transmitter

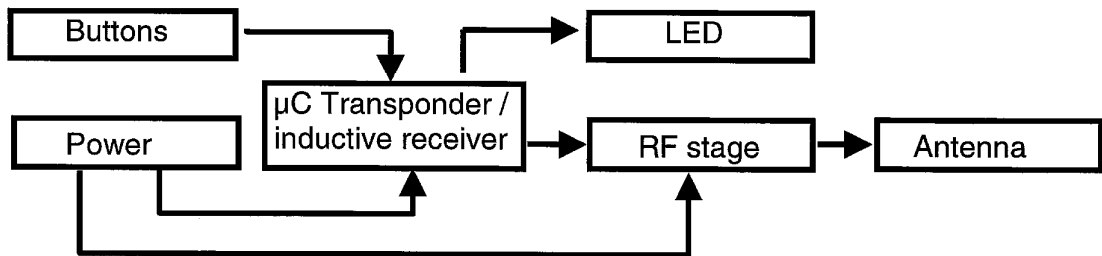

Technical Data:

Carrier frequency ECE:	433.92 MHz ± 90 kHz
Carrier frequency USA:	315 MHz ± 75 kHz
Output power/field strength:	< 10 mW
Type of modulation:	FSK
Method of frequency generation:	Crystal
Number of channels:	1
Power supply:	battery (CR 2025)
Type of battery:	lithium
Transmission range:	< 5m

Label design