

FCC ID: KR55WK49622

## EMI -- TEST REPORT

<b>Test Report No. :</b> <b>T31920-00-00KJ</b>	31. July 2007
	Date of issue

**Type / Model Name** : 5WK49622

**Product Description** : Radio Frequency Transmitter

**Applicant** : Siemens VDO Automotive AG

**Address** : Siemensstrasse 12

93055 Regensburg, Germany

**Manufacturer** : Siemens VDO Automotive AG

**Address** : Siemensstrasse 12

93055 Regensburg, Germany

**Licence holder** : Siemens VDO Automotive AG

**Address** : Siemensstrasse 12

93055 Regensburg, Germany

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>POSITIVE</b>
--	-----------------



The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

# Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b>3</b>
<b>2</b>	<b><u>SUMMARY</u></b>	<b>4</b>
<b>3</b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b>5</b>
3.1	PHOTO DOCUMENTATION OF THE EUT	5
3.2	POWER SUPPLY SYSTEM UTILISED	8
3.3	SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	8
<b>4</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>9</b>
4.1	ADDRESS OF THE TEST LABORATORY	9
4.2	ENVIRONMENTAL CONDITIONS	9
4.3	STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
4.4	MEASUREMENT PROTOCOL	9
<b>5</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>11</b>
5.1	CONDUCTED EMISSIONS	11
5.2	RADIATED POWER OF THE FUNDAMENTAL WAVE	12
5.3	SPURIOUS EMISSIONS (MAGNETIC FIELD) 9 KHZ – 30 MHZ	14
5.4	RADIATED EMISSIONS (ELECTRIC FIELD) 30 MHZ – 18 GHZ	16
5.5	EMISSION BANDWIDTH	20
5.6	SIGNAL DEACTIVATION	22
<b>6</b>	<b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>	<b>24</b>

## **1 TEST STANDARDS**

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart C - Intentional Radiators (October 01, 2006)

Part 15, Subpart C, Section 15.231

Periodic operation in the band 40.66-40.70 MHz and above 70 MHz  
§15.231(a) Signal deactivation  
§15.231(b) Radiated emissions, Fundamental & Harmonics  
§15.231(c) Emission Bandwidth

Part 15, Subpart C, Section 15.209(a)

Radiated emissions, general requirements

mikes

## 2 SUMMARY

### GENERAL REMARKS:

None

### FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 25. July 2007

Testing concluded on : 26. July 2007

Checked by:

Tested by:

---

Klaus Gegenfurtner  
Dipl.-Ing.(FH)  
Manager: Radio Group

---

Josef Knab

FCC ID: KR55WK49622

### **3 EQUIPMENT UNDER TEST**

#### **3.1 Photo documentation of the EuT**

**5WK49622**  
T31920-00-00KJ

External Photo  
Top view



**5WK49622**  
T31920-00-00KJ

External Photo  
Rear view



FCC ID: KR55WK49622

**5WK49622**  
T31920-00-00KJ

Internal Photo  
Open case



**5WK49622**  
T31920-00-00KJ


Internal Photo  
Battery



FCC ID: KR55WK49622

**5WK49622**  
T31920-00-00KJ

Internal Photo  
Top view of PCB

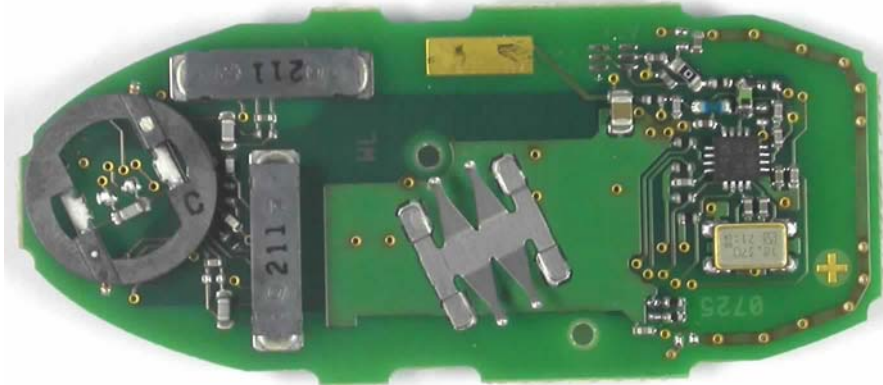

**5WK49622**  
T31920-00-00KJ

Internal Photo  
Rear view of PCB



### 3.2 Power supply system utilised

Power supply voltage : 3.0 V / DC

### 3.3 Short description of the Equipment under Test (EuT)

The EuT is a wireless handheld transmitter of a keyless entry system for vehicles.

Number of tested samples: 1  
Serial number: Prototype

#### EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- cont. transmission at 315 MHz

- standby

-

#### EuT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

#### The following peripheral devices and interface cables were connected during the measurements:

- \_\_\_\_\_ Model : \_\_\_\_\_

- \_\_\_\_\_ Model : \_\_\_\_\_

- \_\_\_\_\_ Model : \_\_\_\_\_

- \_\_\_\_\_ Model : \_\_\_\_\_

- \_\_\_\_\_ Model : \_\_\_\_\_

- \_\_\_\_\_ Model : \_\_\_\_\_



## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

**mikes-testingpartners gmbh**  
**Ohmstrasse 2-4**  
**94342 Strasskirchen**  
**Germany**

### **4.2 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### **4.3 Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 /11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### **4.4 Measurement Protocol**

#### **4.4.1 GENERAL INFORMATION**

##### **4.4.1.1 Test Methodology**

Conducted and radiated disturbance testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

In compliance with 47 CFR Part 15 Subpart A Section 15.38 testing for FCC compliance may be done following the ANSI C63.4-2003 procedures and using the CISPR 22 Limits.

#### 4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

#### 4.4.2 **DETAILS OF TEST PROCEDURES**

##### General Standard Information

The test methods used comply with CISPR Publication 22, EN 55022 - " Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4-2003 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

mikes

## **5 TEST CONDITIONS AND RESULTS**

### **5.1 Conducted emissions**

For test instruments and accessories used see section 6 Part A 4.

#### **5.1.1 Description of the test location**

Test location:                 None

#### **5.1.2 Photo documentation of the test set-up**

#### **5.1.3 Description of Measurement**

The final level, expressed in dB $\mu$ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit.

To convert between dB $\mu$ V and  $\mu$ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 $\Omega$ /50  $\mu$ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

#### **5.1.4 Test result**

**Remarks:**     The measurement is not applicable because the EuT is battery powered.  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

## 5.2 Radiated power of the fundamental wave

For test instruments and accessories used see section 6 Part CPR 2.

### 5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

### 5.2.2 Photo documentation of the test set-up



### 5.2.3 Description of Measurement

The radiated power of the fundamental wave from the EUT is measured in the frequency range of 30 to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization`s and the EuT are rotated 360 degrees.

The final level, expressed in dBµV/m, is arrived by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The resolution bandwidth during the measurement is as follows:  
30 MHz – 1000 MHz: ResBW: 120 kHz

### 5.2.4 Test result

Frequency [MHz]	L: QP [dBµV]	L: AV [dBµV]	Bandwidth [kHz]	Correct. [dB]	L: QP [dBµV/m]	L: AV [dBµV/m]	Limit [dBµV/m]	Delta [dB]
314.97	59.1	58.3	120	16.3	75.4	74.6	75.6	-0.2

Limit according to FCC Subpart 15.231(b)

Frequency (MHz)	Fieldstrength of fundamental		Fieldstrength of spurious emissions	
	(µV/m)	dB (µV/m)	(µV/m)	dB (µV/m)
40,66 – 40,70	2250	67	225	47
70 - 130	1250	62	125	42
130 - 174	1250 to 3750*	62 to 71,4*	125 to 375*	42 to 51,4*
174 - 260	3750	71,4	375	51,4
<b>260 - 470</b>	<b>3750 to 12500*</b>	<b>71,4 to 81,9*</b>	<b>375 to 1250*</b>	<b>51,4 to 61,9*</b>
Above 470	12500	81,9	1250	61,9

\*Linear interpolations

The requirements are **FULFILLED**.

Remarks:

---



---



---



---

### 5.3 Spurious emissions (Magnetic field) 9 kHz – 30 MHz

For test instruments and accessories used see section 6 Part SER 1.

#### 5.3.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

#### 5.3.2 Photo documentation of the test set-up



**5.3.3 Description of Measurement**

The spurious emissions from the EuT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions. In the case where larger measuring distances are required the results will extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dBµV/m, is arrived at by taking the reading from the EMI receiver (Level dBµV) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Example:

Frequency (MHz)	Level (dBµV)	+	Factor (dB)	=	Level (dBµV/m)	Limit (dBµV/m)	=	Delta (dB)
1.705	5	+	20	=	25	30	=	5

**5.3.4 Test result**

Frequency [MHz]	L: PK [dBµV]	L: AV [dBµV]	L: QP [dBµV]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	L: QP [dBµV/m]	Limit [dBµV/m]	Delta [dB]
0.009-0.15	< -10			20.0	< 10				
0.15-30.0	< -10			20.0	< 10				

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	µV/m	dB (µV/m)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

**Remarks:** All unwanted emissions in the frequency range from 9 kHz to 30 MHz are below 10 dBµV/m at a test distance of 3 metres.

---



---



---

## 5.4 Radiated emissions (electric field) 30 MHz – 18 GHz

For test instruments and accessories used see section 6 Part SER 2, SER 3.

### 5.4.1 Description of the test location

Test location: OATS1  
Test distance: 3 metres

Test location: Anechoic Chamber A2  
Test distance: 3 metres

### 5.4.2 Photo documentation of the test set-up





FCC ID: KR55WK49622



### 5.4.3 Description of Measurement

Radiated spurious emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

**FCC ID: KR55WK49622**

The final level, expressed in dBµV/m, is arrived by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EuT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3 horizontally from the EuT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 1 MHz. All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EuT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: ResBW: 120 kHz  
 1000 MHz – 18000 MHz ResBW: 1 MHz

**5.4.4 Test result**

**Testresult in detail:(<1GHz)**

Frequency [MHz]	L: QP [dBµV]	Bandwidth [kHz]	Correct. [dB]	L: QP [dBµV/m]	Limit [dBµV/m]	Delta [dB]
629.95	23.2	120	23.4	46.6	55.6	-9.0
944.92	24.0	120	27.8	51.8	55.6	-3.8

**Testresult in detail:(>1GHz)**

Frequency [MHz]	L: PK [dBµV]	Corr. Duty Cycle [dB]	L: AV [dBµV]	Band width [kHz]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	Limit AV [dBµV/m]	Delta [dB]
1258	51.3	-	-	1000	-14.6	36.7	-	55.6	-18.9
1894	58.7	-	-	1000	-11.8	46.9	-	55.6	-8.7
2206	54.7	-	-	1000	-10.4	44.3	-	54.0	-9.7
2518	51.1	-	-	1000	-9.7	41.4	-	55.6	-14.2

FCC ID: KR55WK49622

Limit according to FCC Subpart 15.231(b) Subpart 15.209(a) / Subpart 15.205(a)

Frequency (MHz)	Fieldstrength of fundamental		Fieldstrength of spurious emissions	
	( $\mu\text{V/m}$ )	dB ( $\mu\text{V/m}$ )	( $\mu\text{V/m}$ )	dB ( $\mu\text{V/m}$ ) <sup>2518</sup>
40,66 – 40,70	2250	67	225	47
70 - 130	1250	62	125	42
130 - 174	1250 to 3750*	62 to 71,4*	125 to 375*	42 to 51,4*
174 - 260	3750	71,4	375	51,4
<b>260 - 470</b>	<b>3750 to 12500*</b>	<b>71,4 to 81,9*</b>	<b>375 to 1250*</b>	<b>51,4 to 61,9*</b>
Above 470	12500	81,9	1250	61,9

\*Linear interpolations

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in the table above or to the general limits shown in the table below according to § 15.209, whichever limit permits a higher field strength.

Frequency [MHz]	15.209 Limits [ $\mu\text{V/m}$ ]	15.209 Limits [dB $\mu\text{V/m}$ ]
30-88	100	40
88-216	150	43,5
<b>216-960</b>	<b>200</b>	<b>46</b>
<b>Above 960</b>	<b>500</b>	<b>54</b>

Besides is a limit according to §15.35(b) on the radio frequency emissions, as measured with a peak detector, corresponding to 20 dB above the maximum permitted average limits.

#### Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209

MHz	MHz	GHz
25.5 – 25.67	960 – 1240	4.5 – 5.15
37.5 – 38.25	1300 – 1427	5.35 – 5.46
73 – 74.6	1435 – 1626.5	7.25 – 7.75
74.8 – 75.2	1645.5 – 1646.5	8.025 – 8.5
108 – 121.94	1660 – 1710	9.0 – 9.2
123 – 138	1718.8 – 1722.2	9.3 – 9.5
149.9 – 150.05	2200 – 2300	10.6 – 12.7
156.52475 – 156.52525	2310 – 2390	13.25 – 13.4
156.7 – 156.9	2483.5 – 2500	14.47 – 14.5
162.0125 – 167.17	2655 – 2900	15.35 – 16.2
167.72 – 173.2	3260 – 3267	17.7 – 21.4
240 – 285	3332 – 3339	22.01 – 23.12
322 – 335.4	3345.8 – 3358	23.6 – 24.0
399.9 – 410	3600 – 4400	31.2 – 31.8
608 – 614		36.43 – 36.5

The requirements are

**Remarks:** During the test, the Eut was set into continuous transmitting mode.

The measurement was performed up to the 10<sup>th</sup> harmonic (3150MHz).

## 5.5 Emission Bandwidth

For test instruments and accessories used see section 6 Part MB.

### 5.5.1 Description of the test location

Test location: AREA4

### 5.5.2 Photo documentation of the test set-up



### 5.5.3 Test result

Fundamental [MHz]	Duty Cycle	20dB Bandwidth F1 [MHz]	20dB Bandwidth F2 [MHz]	Measured Bandwidth [MHz]	LIMIT Fundamental f*0,0025
314.9742	-	314.9514	315.0456	0.094	0.787

Limit according to FCC Part 15 Subpart 15.231(c):

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

The requirements are

**Remarks:** For detailed results, please see the test protocol below.

---



---



---

5.5.4 Test protocol

**Emission Bandwidth**  
FCC Part 15 Subpart 15.231(c)




\*RBW 10 kHz      Marker 1 [T1 ]  
 VBW 30 kHz      66.39 dBuV  
 SWT 5 ms      314.974200000 MHz

Ref 87 dBuV

\*Att 10 dB

1 PK  
VIEW

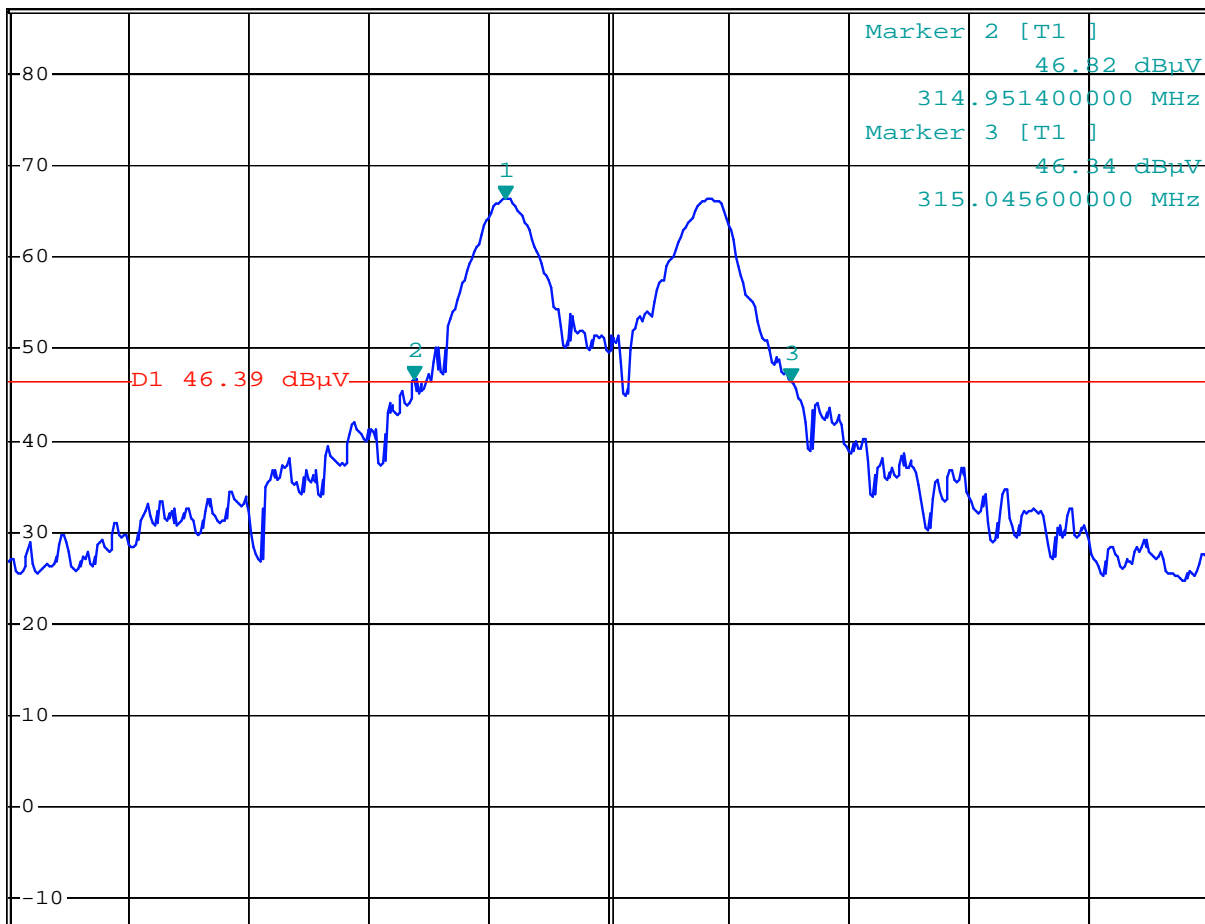

Center 315 MHz

30 kHz/

Span 300 kHz

## 5.6 Signal deactivation

For test instruments and accessories used see section 6 Part MB.

### 5.6.1 Description of the test location

Test location: AREA4

### 5.6.2 Photo documentation of the test set-up



### 5.6.3 Test result

The duration of the transmission is 586 milliseconds each time the button is pushed which meets the requirement of ceasing transmission within 5 seconds of the button being released.

Limit according to FCC Part 15 Subpart 15.231(a):

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released and a transmitter activated automatically shall cease transmission within 5 seconds after activation.

The requirements are **FULFILLED**.

**Remarks:** For detailed test results, please see the test protocol below.

---

---

---

5.6.4 Test protocol

**Signal deactivation**  
FCC Part 15 Subpart 15.231(a)




RBW 10 kHz    Marker 1 [T1 ]  
VBW 30 kHz    49.26 dBμV  
SWT 1 s        -5.881797 as

Ref 87 dBμV

\*Att 10 dB

1 PK  
MAXH

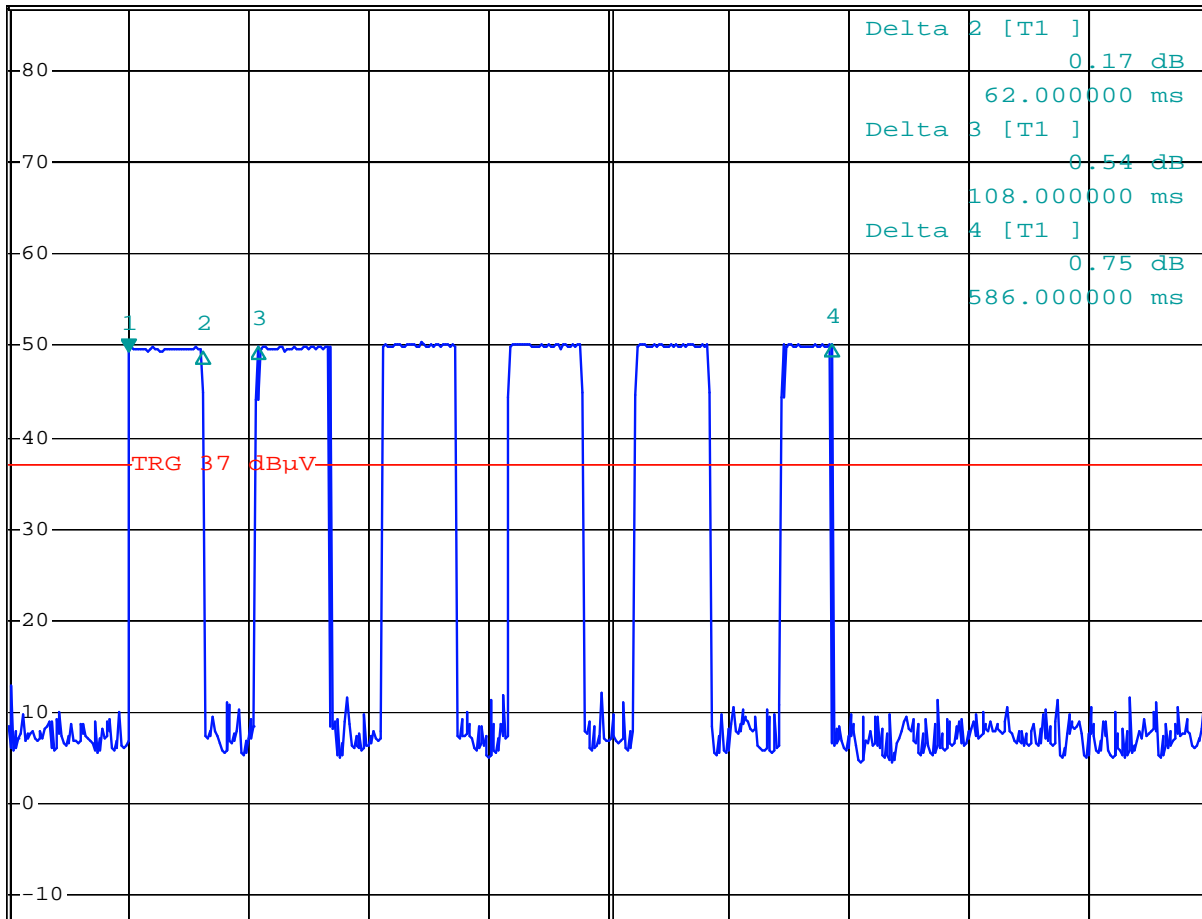

Center 315 MHz

100 ms/

## 6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

The calibration intervals and the calibration history will be given out on request.

Test ID	Model / Type	Kind of Equipment	Manufacturer	Equipment No.
CPR 2	ESVS 30	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-006
	VULB 9168	Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-005
	S10162-B/+11N-50-10-5/+11N	RF Cable 33m	Huber + Suhner	02-02/50-05-031
	KK-EF393-21N-16	RF Cable 20m	Huber + Suhner	02-02/50-05-033
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
MB	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-005
	THS730A	Handheld Scope	Tektronix GmbH	02-02/13-05-001
	RF Antenna 6543A	Broad-Band Antenna	mikes-testingpartners gmbh	02-02/24-05-032
		Power Supply	HP Hewlett-Packard	02-02/50-05-157
SER 1	FMZB 1516	Magnetic Field Antenna	Schwarzbeck Mess-Elektronik	01-02/24-01-018
	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-005
SER 2	ESVS 30	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-006
	VULB 9168	Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-005
	S10162-B/+11N-50-10-5/+11N	RF Cable 33m	Huber + Suhner	02-02/50-05-031
	KK-EF393-21N-16	RF Cable 20m	Huber + Suhner	02-02/50-05-033
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113
SER 3	FSP 30	Spectrum Analyzer	Rohde & Schwarz München	02-02/11-05-001
	AFS4-01000400-10-10P-4	RF Amplifier 1-4 GHz	PARZICH GMBH	02-02/17-05-003
	AMF-4F-04001200-15-10P	RF Amplifier 4-12 GHz	PARZICH GMBH	02-02/17-05-004
	AFS5-12001800-18-10P-6	RF Amplifier 12-18 GHz	PARZICH GMBH	02-02/17-06-002
	3117	Horn Antenna 1-18 GHz	EMCO Elektronik GmbH	02-02/24-05-009
	Sucoflex N-1600-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-073
	Sucoflex N-2000-SMA	RF Cable	novotronik Signalverarbeitung	02-02/50-05-075