

Test Report

22-1-0050301T005a



Number of pages: 14 **Date of Report:** 2023-Mar-02

Testing company: CETECOM GmbH
Im Teelbruch 116
45219 Essen Germany
Tel. + 49 (0) 20 54 / 95 19-0
Fax: + 49 (0) 20 54 / 95 19-150

Applicant: Continental Automotive Technologies GmbH

Product: Body Controller
Model: BCMS400

FCC ID: KR5BCMS400 **IC:** 7812D-BCMS400

Testing has been carried out in accordance with:

FCC Regulations
Title 47 CFR, Chapter I, Subchapter A, Part 15
Subpart B Unintentional Radiators
§ 15.107 Conducted limits
§ 15.109 Radiated emission limits

ISED-Regulations
Radio Standards Specification
RSS-Gen, Issue 5
General Requirements for Compliance of Radio Apparatus
ICES-003, Issue 7
Information Technology Equipment (including Digital Apparatus)

Test Results: **The EUT complies with the requirements in respect of all parameters subject to the test.**
The test results relate only to devices specified in this document

Signatures:


Dipl.-Ing. Ninovic Perez
Test Lab Manager
Authorization of test report


Hicham Laayouni
Test Manager
Responsible of test report

Table of Contents

Table of Annex.....	3
1 General information	4
1.1 Disclaimer and Notes.....	4
1.2 Attestation.....	4
1.3 Summary of Test Results	5
1.4 Summary of Test Methods	5
2 Administrative Data	6
2.1 Identification of the Testing Laboratory.....	6
2.2 General limits for environmental conditions.....	6
2.3 Test Laboratories sub-contracted.....	6
2.4 Organizational Items	6
2.5 Applicant’s details	6
2.6 Manufacturer’s details	6
2.7 Equipment under Test (EUT)	7
2.8 Untested Variant (VAR)	7
2.9 Auxiliary Equipment (AE).....	7
2.10 Connected cables (CAB).....	7
2.11 Software (SW).....	7
2.12 EUT set-ups.....	7
2.13 EUT operation modes	7
3 Equipment under test (EUT)	8
3.1 General Data of Main EUT as Declared by Applicant.....	8
3.2 Modifications on Test sample.....	8
4 Measurements.....	9
4.1 Radiated field strength emissions 30 MHz – 1 GHz	9
5 Results from external laboratory	12
6 Opinions and interpretations.....	12
7 List of abbreviations	12
8 Measurement Uncertainty valid for conducted/radiated measurements	13
9 Versions of test reports (change history)	14

Table of Annex

Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	TR22-1-0050301T005a-A1	2
Annex 2	Internal photographs of EUT	--	--
Annex 3	External photographs of EUT	TR22-1-0050301T005a-A3	3
Annex 4	Test set-up photographs	TR22-1-0050301T005a-A4	2

The listed attachments are separate documents.

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.2 Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All of the above requirements are met in accordance with enumerated standards.

1.3 Summary of Test Results

Test case	Reference in FCC ☒	Reference in ISED ☒	Reference in RSS-GEN ☒	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.107	ICES-003, Issue 7	RSS Gen, Issue 5, Chapter 8.8	--	--	N/A
Radiated field strength emissions 30 MHz – 1 GHz	§15.109 §15.33 §15.35	ICES-003, Issue 7	RSS-Gen., Issue 5 Chapter 8.9, Chapter 7.3	9	--	PASS
Radiated field strength emissions above 1 GHz	§15.109 §15.33 §15.35	ICES-003, Issue 7	RSS-Gen., Issue 5 Chapter 8.9, Chapter 7.3	--	--	N/A

PASSED The EUT complies with the essential requirements in the standard.
 FAILED The EUT does not comply with the essential requirements in the standard.
 N/A Test case does not apply to the test object.
 NP The test was not performed by the CETECOM Laboratory.

Decision Rule: CETECOM GmbH follows [ILAC G8:2019 chapter 4.2.1 \(Simple Acceptance Rule\)](#).

1.4 Summary of Test Methods

Test case	Test method
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 chapter 7
Radiated field strength emissions 30 MHz – 1 GHz	ANSI C63.4-2014 chapter 8.2.3
Radiated field strength emissions above 1 GHz	ANSI C63.4-2014 chapter 8.3

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Ninovic Perez
Accreditation scope:	DAkkS Webpage: FCC ISED
IC Lab company No. / CAB ID:	3462D / DE0005
Test location:	CETECOM GmbH; Im Teelbruch 116; 45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:	--
---------------	----

2.4 Organizational Items

Responsible test manager:	Hicham Laayouni
Receipt of EUT:	25.11.2022
Date(s) of test:	2023-Feb-07 to 2023-Feb-07
Version of template:	22.0901

2.5 Applicant's details

Applicant's name:	Continental Automotive Technologies GmbH
Address:	Siemensstraße 12 93055 Regensburg Bavaria Germany
Contact Person:	Lothar Weigert
Contact Person's Email:	lothar.weigert@continental-corporation.com

2.6 Manufacturer's details

Manufacturer's name:	Continental Automotive Technologies GmbH
Address:	Siemensstraße 12 93055 Regensburg Germany

2.7 Equipment under Test (EUT)

EUT No. *)	Sample No.	Product	Model	Type	SN	HW	SW
EUT 1	22-1-00503S19_C01	Body Controller	BCMS400	-	22987423731111	C sample 433,92MHz	SW6.2

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Untested Variant (VAR)

VAR No. *)	Sample No.	Product	Model	Type	SN	HW	SW
------------	------------	---------	-------	------	----	----	----

*) The listed additional untested model variant(s) (VAR) is/are not object of evaluation of compliance. For further information please see Annex 5: Declaration of applicant of model differences.

If the table above does not show any other line than the headline, no untested variants are available.

2.9 Auxiliary Equipment (AE)

AE No. *)	Sample No.	Auxiliary Equipment	Model	SN	HW	SW
-----------	------------	---------------------	-------	----	----	----

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report. If the table above does not show any other line than the headline, no AE was used during testing nor was taken into account for evaluation

2.10 Connected cables (CAB)

CAB No. *)	Sample No.	Cable Type	Connectors / Details	Length
CAB 1	22-1-00503S16_C01	Power cable		80cm

*) CAB short description is used to simplify the identification of the connected cables in this test report. If the table above does not show any other line than the headline, no cable was used during testing nor was taken into account for evaluation

2.11 Software (SW)

SW No. *)	Sample No.	SW Name	Description	SW Status
-----------	------------	---------	-------------	-----------

*) SW short description is used to simplify the identification of the used software in this test report. If the table above does not show any other line than the headline, no SW was used during testing nor was taken into account for evaluation.

2.12 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
1	EUT 1 + CAB 1	--

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.13 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
1	RX mode	Receive mode active during the measurements

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Firmware	<input checked="" type="checkbox"/> for normal use	<input type="checkbox"/> Special version for test execution	
Power supply	<input type="checkbox"/> AC Mains	--	
	<input checked="" type="checkbox"/> DC Mains	12 V DC	
	<input type="checkbox"/> Battery	--	
Operational conditions	T _{nom} =-- °C	T _{min} =-- °C	T _{max} =-- °C
EUT sample type	Engineering Samples		
Weight	0.300 kg		
Size [LxWxH]	17.0 cm x 17.0 cm x 3.0 cm		
Interfaces/Ports			
For further details refer Applicants Declaration & following technical documents			

3.2 Modifications on Test sample

Additions/deviations or exclusions	--
---	----


4 Measurements

4.1 Radiated field strength emissions 30 MHz – 1 GHz

4.1.1 Description of the general test setup and methodology, see below example:

Test site: Measurements between 30 MHz and 1 GHz are performed in the NSA compliant Semi Anechoic Chamber (SAC) according to EMC basic standard. The test site is compliant to CISPR 16-1-4:2019 chap. 5.3 and ANSI C63.4:2014 chap. 5.4.2 to 5.4.4.

Schematic below 1 GHz:

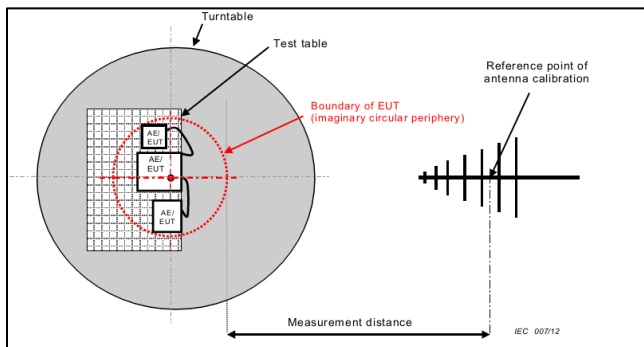

Testing method below 1 GHz:

Step 1:

Pre-measurement, variation of turntable positions: The EUT is set in the worst case operating mode determined. The tests are also carried out as a pre-measurement with peak detector (PK), repetitive scan and max-hold mode. Azimuth step of turntable = 90°, antenna heights = 1.0 m & 1.82 m, both polarisations (H/V). If the mounting/usual operating position is defined, the under and the top side of the EUT/test set-up will not be measured. The results are documented in a diagram. The peak values shown in this graphic are not finally maximized. Peak values closer than 6 dB to the limit line are displayed explicitly in a table. If no critical frequencies are found (margin to limit >6 dB) the final measurement will be omitted.

Step 2:

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc. either on 10 m OATS or 5 m or 3 m semi-anechoic room.

Final measurement: For the critical frequencies a maximum search is done with PK and CISPR QP detectors: First a frequency zoom within +/- 1.2 MHz (= 10*IF-BW) of the critical frequencies, then the EUT/test set-up is rotated continuously (if applicable, the EUT orientation will be changed to measure the under and the top side) and the antenna height changed between 1 m & 4 m in order to find the worst case position. The final measurement with the QP detector is carried out in this position and the values are stored in the final result table, which can be found after the diagram.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

AF = Antenna factor
 C_L = Cable loss
 D_F = Distance correction factor (if used)
 E_C = Electrical field – corrected value
 E_R = Receiver reading
 G_A = Gain of pre-amplifier (if used)
 L_T = Limit
 M = Margin

All units are dB-units, positive margin means value is below limit.

4.1.2 Test receiver settings

Detector	Peak	Quasi peak
Min. attenuation	0 dB	0 dB
Resolution bandwidth	120 kHz	120 kHz
Dector Meas-time	10 ms	1 s
Step size	40 kHz	Selected frequencies
Preamp	Off	Off

4.1.3 Measurement Protocol(s)

Measurement No.	P1M1
Environmental conditions	Temperature: 20.0 °C Humidity: 40.0% rH
Test date	2023-Feb-07
Operator	Hicham Laayouni
EuT power supply:	DC +12.0 V
Operating mode	01
Setup	--
Remarks	--

Diagram	Measurement Details	Result
301	<input checked="" type="checkbox"/> standing <input type="checkbox"/> laying <input type="checkbox"/> Mounting position / usual operating position is defined (under and top side of EUT are not measured) <input type="checkbox"/> Mounting position / usual operating position undefined (under and top side of EUT are measured)	PASS
	Critical frequencies found: <input checked="" type="checkbox"/> no, margin to limit > 10 dB (only Step 1 carried out) <input type="checkbox"/> yes, final measurement (Step 2 carried out)	

Remark: for more information and graphical plot see annex A1 **TR22-1-0050301T005a-A1**

4.1.4 Limits

Frequency Range [MHz]	Class B <input checked="" type="checkbox"/> (3 meters)		Class A <input type="checkbox"/> (10 meters)	
	Limit [µV/m]	Limit [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]
30 - 88	100	40.0	90	39.0
88 - 216	150	43.5	150	43.5
216 - 960	200	46.0	210	46.4
960 - 1000	500	54.0	300	49.5

4.1.5 Result

Test case	Reference in FCC <input checked="" type="checkbox"/>	Reference in ISSED <input checked="" type="checkbox"/>	Reference in RSS-GEN <input checked="" type="checkbox"/>	Remark	Result
Radiated field strength emissions 30 MHz – 1 GHz	\$15.109 \$15.33 \$15.35	ICES-003, Issue 7	RSS-Gen., Issue 5 Chapter 8.9, Chapter 7.3	--	Pass / OK

4.1.6 Measurement Location and Equipment list

ID	Description	Manufacturer	SerNo	CheckType	Last Check	Interval	Next Check
	120901 - SAC - Radiated Emission <1GHz			calchk	cal: 2015-Jul-21 chk: 2021-Jul-27	cal: 10Y chk: 12M	cal: 2025-Jul-21 chk: 2022-Jul-27
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH / Glottertal	81650455	cal	cal: 2022-May-18	cal: 24M	cal: 2024-May-18
20442	Semi Anechoic Chamber	ETS-Lindgren GmbH / Taufkirchen	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20482	filter matrix Filter matrix SAR 1	CETECOM GmbH	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20574	Biconilog Hybrid Antenna BTA-L	Frankonia GmbH / Heideck	980026L	cal	cal: 2022-Jun-15	cal: 36M	cal: 2025-Jun-15
20620	Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100362	cal	cal: 2022-Jun-08	cal: 12M	cal: 2023-Jun-08
20885	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
25038	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH / Memmingen	879824/13	cal	cal: 2022-Jul-04	cal: 24M	cal: 2024-Jul-04

Tools used in *P1M1*

4.1.7 Legend

Note / remarks	Interval of calibration & Verification
2W	2 weeks
12M	12 months
24M	24 months
36M	36 months
10Y	10 Years

Abbreviation Check Type	Description
cnn	Calibration and verification not necessary
cal	Calibration
calchk	Calibration plus intermediate Verification
chk	Verification
cpu	Verification before usage

5 Results from external laboratory

None

-

6 Opinions and interpretations

None

-

7 List of abbreviations

None

-

8 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

Measurement type	Frequency range of measurement		Calculated Uncertainty based on confidence level of 95.54%	Remarks
	Start [MHz]	Stop [MHz]		
Magnetic field strength	0.009	30	4.86	Magnetic loop antenna, Pre-amp on
RF-Output power (eirp) Unwanted emissions (eirp) [dB]	30	100	4.57	without Pre-Amp
	30	100	4.91	with PreAmp
	100	1000	4.02	without Pre-Amp
	100	1000	4.26	with PreAmp
	1000	18000	4.36	without Pre-Amp
	1000	18000	5.23	with PreAmp
	18000	33000	4.92	Schwarzbeck BBHA9170 (#20302) Antenna set-up non-waveguide antenna)
	33000	50000	4.17	Set-up for Q-Band (WR-22), non-wave guide antenna
	40000	60000	4.69	Set-up U-Band (WR-19), non-waveguide antenna
	50000	75000	4.06	External Mixer set-up V-Band (WR-15)
	75000	110000	4.17	External Mixer set-up W-Band (WR-6)
	90000	140000	5.49	External Mixer set-up F-Band (WR-8)
	140000	225000	6.22	External Mixer set-up G-Band (WR-5)
	225000	325000	7.04	External Mixer set-up (WR-3)
325000	500000	8.84	External Mixer set-up (WR-2.2)	
Radiated Blocking [dB]	1000	18000	2.85	Typical set-up with microwave generator and antenna, value for 7GHz calculated
	18000	33000	4.66	Typical set-up with microwave generator and antenna
	33000	50000	3.48	WR-22 set-up
	50000	75000	3.73	WR-15 set-up
	75000	110000	4.26	WR-6 set-up
Frequency Error [kHz]	40000	77000	276.19	calculated for 77 GHz (FMCW) carrier
	6000	7000	33.92	calculated for 6.5GHz UWB Ch.5
TS 8997 conducted Parameters	30	6000	1.11	1. Power measurement with Fast-sampling-detector
	30	6000	1.20	2. Power measurement with Spectrum-Analyzer
	30	6000	1.20	3. Power Spectrum-Density measurement
	30	7500	1.20	4. Conducted Spurious emissions:
	0.009	30	2.56	5. Conducted Spurious emissions:
	2.4	2.48	1.95 ppm	6a. Bandwidth / 2-Marker Method for 2.4GHz ISM
	5.18	5.825	7.180 ppm	6b. Bandwidth / 2-Marker Method for 5GHz WLAN
	5.18	5.825	1.099 ppm	7 Frequency (Marker method) for 5GHz WLAN
	30	6000	0.11561µs	8 Medium-Utilization factor / Timing
	30	6000	1.85	9 Blocking-Level of companion device
30	6000	1.62	9 Blocking Generator level	
Conducted emissions	0.009	30	3.57	

9 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2023-Mar-02
--	--	--
--	--	--

End Of Test Report