



EMC - TEST REPORT

Type / Model Name : BMW FBD5

Product Description : UWB+BLE CAN gateway for comfort access function in vehicles

Applicant : Continental Automotive GmbH

Address : Siemensstraße 12
93055 REGENSBURG, GERMANY

Manufacturer : Continental Automotive GmbH

Address : Siemensstraße 12
93055 REGENSBURG, GERMANY

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------

Test Report No. : T46614-00-04FX	18. November 2020 Date of issue
---	------------------------------------



Deutsche
Akkreditierungsstelle
D-PL-12030-01-01
D-PL-12030-01-02

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>SUMMARY</u>	4
2.1	General remarks	4
2.2	Summary for all EMC tests	4
2.3	Final assessment	4
3	<u>EQUIPMENT UNDER TEST</u>	5
3.1	Information provided by the Client	5
3.2	Sampling	5
3.1	Photo documentation of the EUT – Detailed photos see ATTACHMENT A1 and A2	5
3.2	Power supply system utilised	5
3.3	Highest internal frequency	5
3.4	Short description of the Equipment under Test (EUT)	5
3.5	EUT operation mode	5
3.6	EUT configuration	6
4	<u>TEST ENVIRONMENT</u>	7
4.1	Address of the test laboratory	7
4.2	Environmental conditions	7
4.3	Statement of the measurement uncertainty	7
4.4	Conformity Decision Rule	7
4.5	Measurement protocol for FCC and ISED	7
5	<u>TEST CONDITIONS AND RESULTS</u>	12
5.1	Conducted emission	12
5.2	Radiated emission < 1 GHz (electric field)	17
5.3	Radiated emission > 1 GHz (electric field)	19
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	23
7	<u>DETAILED MEASUREMENT UNCERTAINTY</u>	24
7.1	Overview	24
7.2	Definitions and symbols	24
7.3	Measurement uncertainty	24

2 SUMMARY

2.1 General remarks

2.2 Summary for all EMC tests

FCC Rule Part	ISED Standard	Description
15.107	ICES-003/RSS-Gen	AC power line conducted emissions
15.109	ICES-003/RSS-Gen	Radiated Emissions

Type of test	Test result
Emission:	
A4 Conducted emission (AC mains power / DC power)	passed
A5 Radiated emission (< 1 GHz)	passed
SER 3 Radiated emission (> 1 GHz)	passed

2.3 Final assessment

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 02 September 2020

Testing concluded on : 04 September 2020

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Franz-Xaver Schrettenbrunner
Radio Team

3 EQUIPMENT UNDER TEST

3.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

3.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

3.1 Photo documentation of the EUT – Detailed photos see ATTACHMENT A1 and A2

3.2 Power supply system utilised

Power supply voltage : 12 VDC (battery powered)

All tests were carried out with a supply voltage of 120 V, 60 Hz unless otherwise stated.

3.3 Highest internal frequency

Highest internal frequency : 55.2 MHz (internal oscillator) / 8.5 GHz (UWB)

3.4 Short description of the Equipment under Test (EUT)

The FBD5 is a wireless UWB and BLE transceiver with CAN gateway for comfort access function in vehicles. 2 FBD5 anchors are mounted under the headliner of a vehicle. UWB is used for ranging, BLE for data transfer and security features. 4 further anchors (FBD5s) are mounted at the outer body of a vehicle and provide UWB functionality for ranging purposes. The anchors are connected to a central control unit and paired with a smartphone or wearable ID tag. The FBD5 can also communicate among each other for an initialization procedure. After initialization and training procedure the distance between FBD5 and smartphone or ID tag is measured and the position in relation to the vehicle is determined. The vehicle is unlocked, locked or started in case the smartphone or ID tag is in a permitted area around or inside the vehicle.

Number of tested samples: 1
Serial number: LM792 (App Mode/Normal Mode)

3.5 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- App Mode/Normal Mode: UWB and BLE in stand-by mode (waiting for BLE signal for activating)

3.6 EUT configuration

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- DC feed cable, pin plug Model : ---

Port	Cable	Screening	Transmission	Status	Length
1	DC power line	unshielded	analogue	active	1.0 m

Modifications during the EMC test: None

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 2011 + A1 / 2014 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Conformity Decision Rule

The conformity decision rule is based on the ILAC G8 published at the time of reporting.

4.5 Measurement protocol for FCC and ISED

4.5.1 General information


CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

**FCC: DE 0011
ISED: DE0009**

4.5.2 Details of test procedures

4.5.2.1 Conducted emission

Test setup according ANSI C63.4

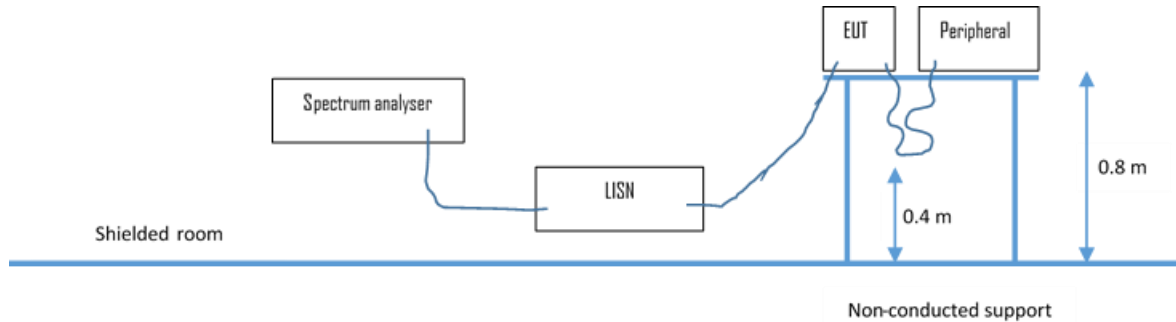

Description of measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$


$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

4.5.2.2 Radiated emission

4.5.2.2.1 OATS1 test site (30 MHz - 1 GHz)

Test setup according ANSI C63.4

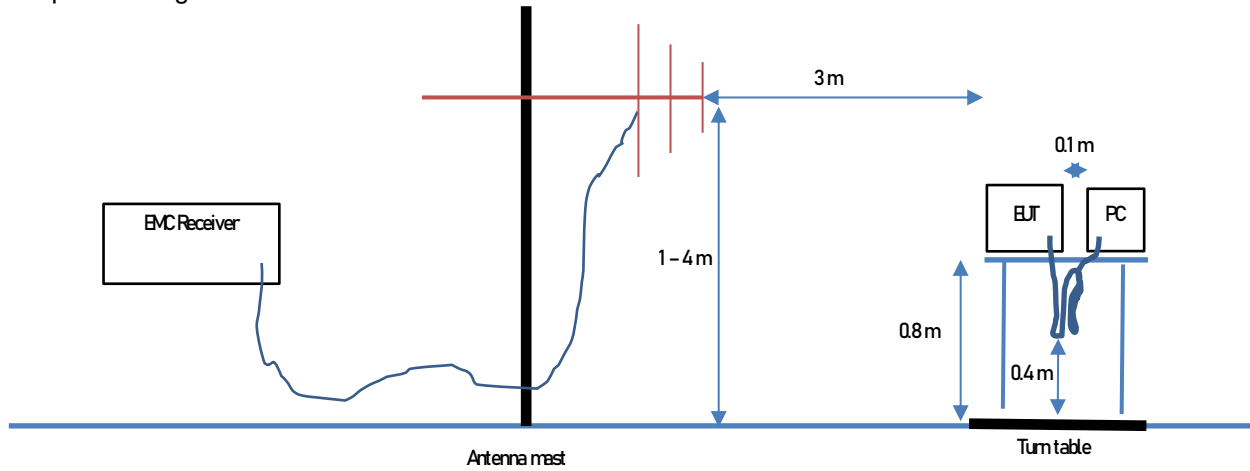

Description of measurement

Spurious emission from the EUT is measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 metre non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The setup of the equipment under test is established in accordance with ANSI C63.4. Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center of the table in a non-conducted support fashion so that they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screened room located outside the test area. The antenna is positioned 3 or 10 metres horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres, measurement scans are made with both horizontal and vertical antenna polarization planes and the EUT is rotated 360 degrees.

The final level is calculated in a calculation sheet by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (Factor dB) on to it. The limit is subtracted from this result in order to provide the limit margin listed in the measurement protocols.

Example:

Frequency (MHz)	Reading (dBµV)	+	Correction* (dB/m)	=	Level (dBµV/m)	-	Limit (dBµV/m)	=	Dlimit (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4

*Correction Factor = Antenna Factor + Cable Attenuation = 30 dB/m + 2.6 dB = 32.6 dB/m


The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: RBW: 120 kHz

FCC ID: KR5FBD5 IC: 7812D-FBD5

4.5.2.2.2 Anechoic chamber 1, 1000 MHz – 18000 MHz

Test setup according ANSI C63.4

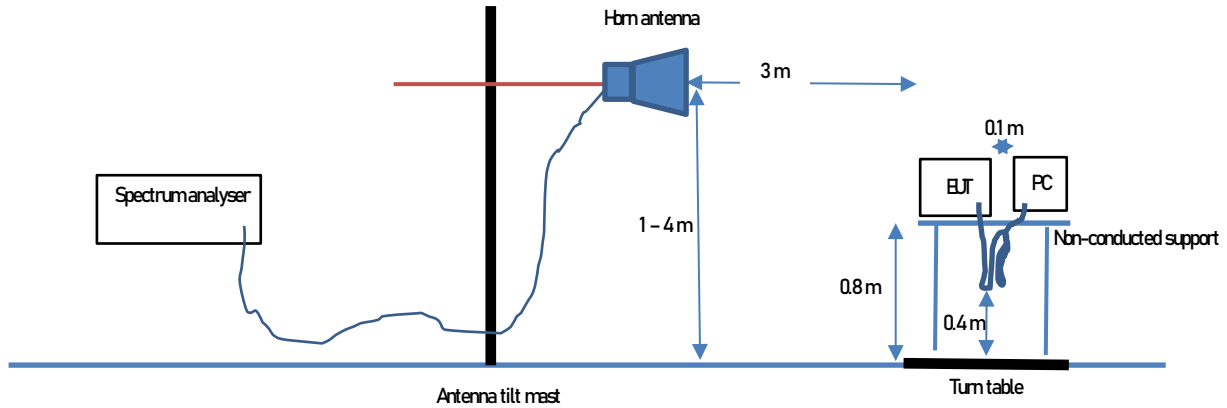

Description of measurement


Radiated emission from the EUT are measured in the frequency range of 1 GHz to the maximum frequency as specified in 47 CFR Part 15 Subpart A section 15.33, using a tuned receiver (spectrum analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 0.65 X 1.0 metre non-conducting table 80 centimetres above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12).

The interface cables that are closer than 40 centimetres to the ground plane are bundled in the centre in a serpentine fashion, so they are at least 40 centimetres from the ground plane. Measurements are made in both the horizontal and vertical polarization planes in a fully anechoic room using a spectrum analyser set to a peak detector function and a RBW= 1 MHz and VBW = 3 MHz. All tests are performed at a test distance of 3 metres. Hand-held or body-worn devices are rotated around three orthogonal axes in order to determine the position, angle and configuration having the maximum emission. The antenna height is then adjusted from 1 m to 4 m maximizing the measured value. The antenna is mounted to a boresight axis, so the antenna centre always points to the EUT. The turntable is rotated 360° until the spectrum analyser displays the maximum level at the observed frequency. The antenna height is then adjusted from 1 m to 4 m maximizing the measured value. The turntable is re-adjusted to re-affirm the maximum emission value which is then recorded. This procedure is repeated for all frequencies of interest.

FCC ID: KR5FBD5 IC: 7812D-FBD5

4.5.2.2.3 Anechoic chamber 1, 18 GHz – 40 GHz

Test setup according ANSI C63.4

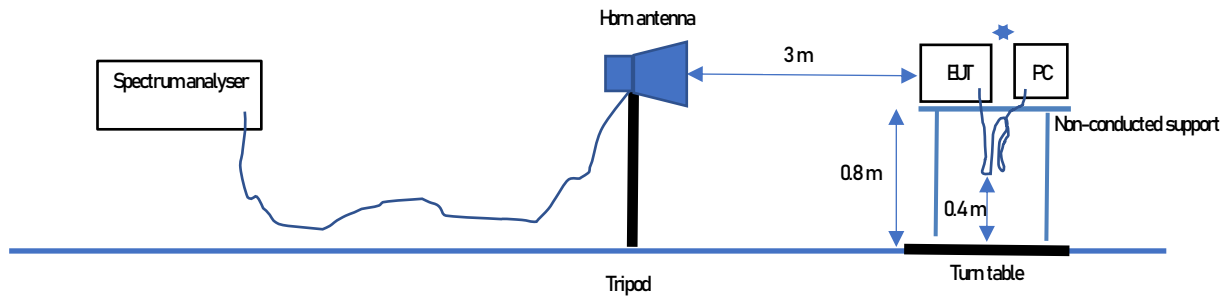

Description of measurement

Radiated emission from the EUT are measured in the frequency range of 1 GHz to the maximum frequency as specified in 47 CFR Part 15 Subpart A section 15.33, using a tuned receiver (spectrum analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 0.65 X 1.0 metre non-conducting table 80 centimetres above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12).

The interface cables that are closer than 40 centimetres to the ground plane are bundled in the centre in a serpentine fashion, so they are at least 40 centimetres from the ground plane. Measurements are made in both the horizontal and vertical polarization planes in a fully anechoic room using a spectrum analyser set to a peak detector function and an RBW= 1 MHz and VBW = 3 MHz. All tests are performed at a test distance of 3 metres. Hand-held or body-worn devices are rotated around three orthogonal axes in order to determine the position, angle and configuration having the maximum emission. The turntable is rotated 360° until the spectrum analyser displays the maximum level at the observed frequency, the maximum emission value is then recorded. This procedure is repeated for all frequencies of interest.

Where appropriate in frequency range 18 GHz - 40 GHz, the test distance may be reduced to 1 m in order to reduce the noise level to hold a minimum distance between noise level and limit. The limit will be adopted to the measurement distance.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emission

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test setup



5.1.3 Test result

Frequency range: 0.15 MHz - 30 MHz
Min. limit margin -23.7 dB at 25.293 MHz

The requirements are **FULFILLED**.

Remarks: For detailed results, please see the following page(s).

For description of the measurement see 4.5.2


FCC ID: KR5FBD5 IC: 7812D-FBD5

5.1.4 Test protocol

Test point: L1
 Operation mode: App Mode/Normal Mode
 Remarks: None
 Date: 03.09.2020
 Tested by: Josef Knab

Result: passed

- FCC/FCC Part 15B (15.107) B - Average/
- FCC/FCC Part 15B (15.107) B - QPeak/
- Meas.Peak (Phase 1)
- Mes. CISPR AVG (Phase 1)
- QuasiPeak (Finals) (Phase 1)
- CISPR AV (Finals) (Phase 1)

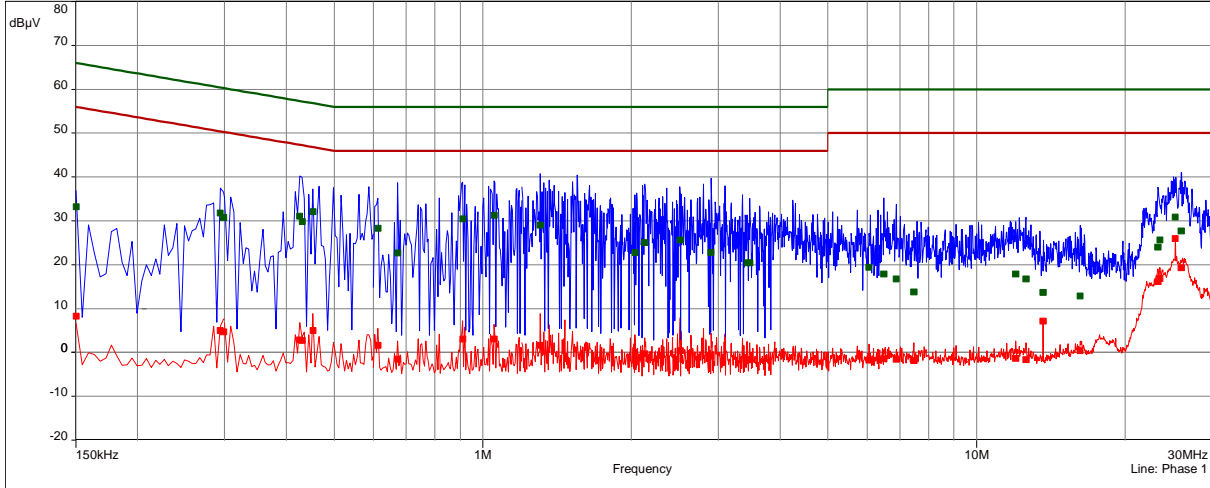

FCC/FCC Part 15B (15.107)B

FCC ID: KR5FBD5 IC: 7812D-FBD5

freq	QP	margin	limit	AV	margin	limit	corr
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB	dB
0.150	33.3	-32.7	66.0	8.4	-47.7	56.0	10.1
0.294	31.9	-28.5	60.4	5.1	-45.3	50.4	10.1
0.299	30.9	-29.4	60.3	4.7	-45.6	50.3	10.1
0.426	31.2	-26.2	57.3	2.9	-44.4	47.3	10.2
0.431	29.9	-27.4	57.2	2.8	-44.5	47.2	10.2
0.453	32.2	-24.7	56.8	5.1	-41.7	46.8	10.2
0.614	28.3	-27.7	56.0	1.7	-44.3	46.0	10.2
0.672	22.8	-33.3	56.0	-1.5	-47.5	46.0	10.2
0.911	30.5	-25.5	56.0	3.1	-42.9	46.0	10.2
1.055	31.3	-24.7	56.0	3.1	-42.9	46.0	10.2
1.308	29.1	-26.9	56.0	1.7	-44.3	46.0	10.3
2.033	22.8	-33.2	56.0	-1.5	-47.5	46.0	10.3
2.127	25.1	-30.9	56.0	-0.2	-46.2	46.0	10.3
2.513	25.7	-30.3	56.0	0.5	-45.5	46.0	10.3
2.900	22.9	-33.1	56.0	-0.8	-46.8	46.0	10.3
3.426	20.6	-35.5	56.0	-1.6	-47.6	46.0	10.4
3.476	20.5	-35.6	56.0	-1.6	-47.6	46.0	10.4
6.056	19.5	-40.5	60.0	-1.7	-51.7	50.0	10.5
6.488	17.9	-42.1	60.0	-1.4	-51.4	50.0	10.6
6.884	16.9	-43.2	60.0	-1.5	-51.5	50.0	10.6
7.464	13.9	-46.1	60.0	-1.8	-51.8	50.0	10.6
12.008	18.0	-42.1	60.0	-1.3	-51.3	50.0	10.9
12.602	16.9	-43.1	60.0	-1.6	-51.6	50.0	11.0
13.637	13.8	-46.2	60.0	7.2	-42.8	50.0	11.1
16.233	13.0	-47.0	60.0	0.5	-49.5	50.0	11.3
23.304	24.1	-35.9	60.0	16.2	-33.8	50.0	11.6
23.511	25.7	-34.3	60.0	16.9	-33.1	50.0	11.6
25.293	31.0	-29.1	60.0	26.1	-23.9	50.0	11.7
25.959	27.8	-32.2	60.0	19.3	-30.7	50.0	11.7


The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: KR5FBD5 IC: 7812D-FBD5

Test point: N
 Operation mode: App Mode/Normal Mode
 Remarks: None
 Date: 03.09.2020
 Tested by: Josef Knab

Result: passed

- FCC/FCC Part 15B (15.107) B - Average/
- FCC/FCC Part 15B (15.107) B - QPeak/
- Meas.Peak (Neutral)
- Mes. CISPR AVG (Neutral)
- QuasiPeak (Finals) (Neutral)
- CISPR AV (Finals) (Neutral)

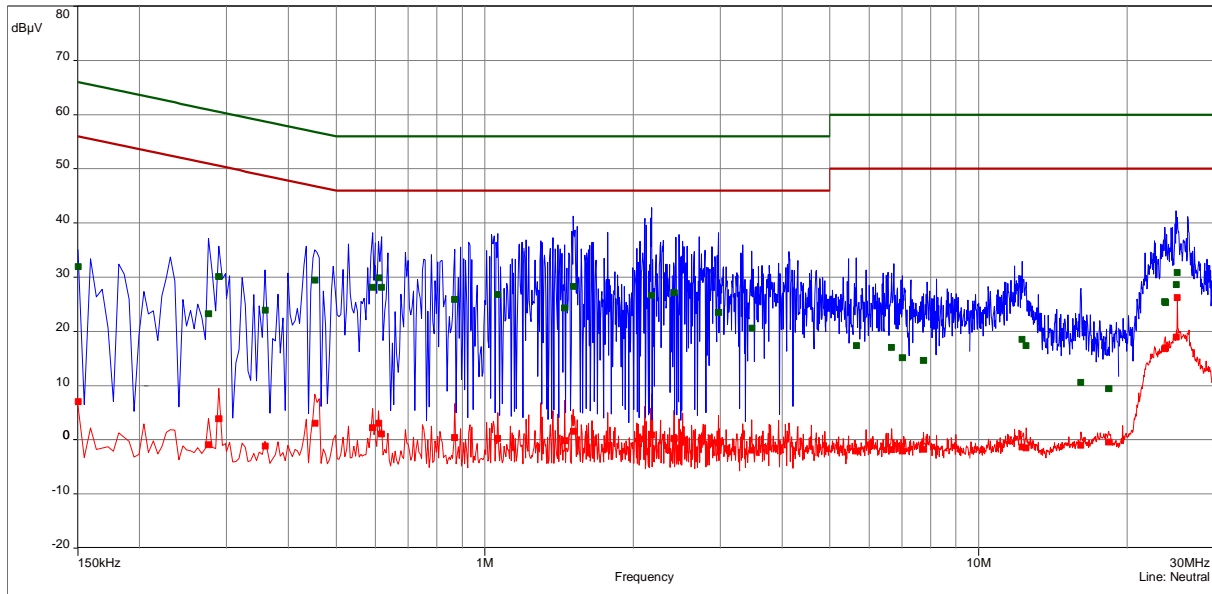

FCC/FCC Part 15B (15.107)B

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: KR5FBD5 IC: 7812D-FBD5

freq	QP	margin	limit	AV	margin	limit	corr
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB	dB
0.150	32.0	-34.0	66.0	7.1	-48.9	56.0	10.1
0.276	23.3	-37.7	60.9	-0.9	-51.8	50.9	10.1
0.290	30.2	-30.4	60.5	3.9	-46.6	50.5	10.1
0.359	24.0	-34.8	58.8	-1.1	-49.9	48.8	10.2
0.453	29.5	-27.4	56.8	3.1	-43.7	46.8	10.2
0.593	28.2	-27.8	56.0	2.3	-43.7	46.0	10.2
0.609	30.0	-26.0	56.0	3.1	-42.9	46.0	10.2
0.618	28.2	-27.8	56.0	1.1	-44.9	46.0	10.2
0.870	25.9	-30.1	56.0	0.4	-45.6	46.0	10.2
1.064	26.9	-29.2	56.0	0.3	-45.7	46.0	10.2
1.452	24.4	-31.6	56.0	-0.1	-46.1	46.0	10.3
1.511	28.3	-27.7	56.0	1.6	-44.4	46.0	10.3
2.177	26.7	-29.3	56.0	0.9	-45.1	46.0	10.3
2.418	27.2	-28.8	56.0	0.3	-45.8	46.0	10.3
2.972	23.5	-32.5	56.0	-0.5	-46.5	46.0	10.3
3.471	20.6	-35.4	56.0	-1.8	-47.8	46.0	10.4
5.651	17.4	-42.6	60.0	-2.0	-52.0	50.0	10.5
6.663	17.1	-42.9	60.0	-1.8	-51.8	50.0	10.6
7.005	15.2	-44.8	60.0	-2.1	-52.1	50.0	10.6
7.734	14.7	-45.3	60.0	-1.7	-51.7	50.0	10.6
12.246	18.5	-41.5	60.0	-1.3	-51.3	50.0	10.8
12.480	17.4	-42.6	60.0	-1.4	-51.4	50.0	10.9
16.116	10.6	-49.4	60.0	-1.0	-51.0	50.0	11.1
18.366	9.4	-50.6	60.0	-0.4	-50.4	50.0	11.2
23.822	25.6	-34.4	60.0	16.8	-33.2	50.0	11.3
23.867	25.4	-34.6	60.0	17.0	-33.0	50.0	11.3
25.140	28.7	-31.3	60.0	19.0	-31.0	50.0	11.3
25.293	30.9	-29.1	60.0	26.3	-23.7	50.0	11.2

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: KR5FBD5 IC: 7812D-FBD5


5.2 Radiated emission < 1 GHz (electric field)

For test instruments and accessories used see section 6 Part A 5.

5.2.1 Description of the test location

Test location: OATS 1
Test distance: 10 m

5.2.2 Photo documentation of the test setup

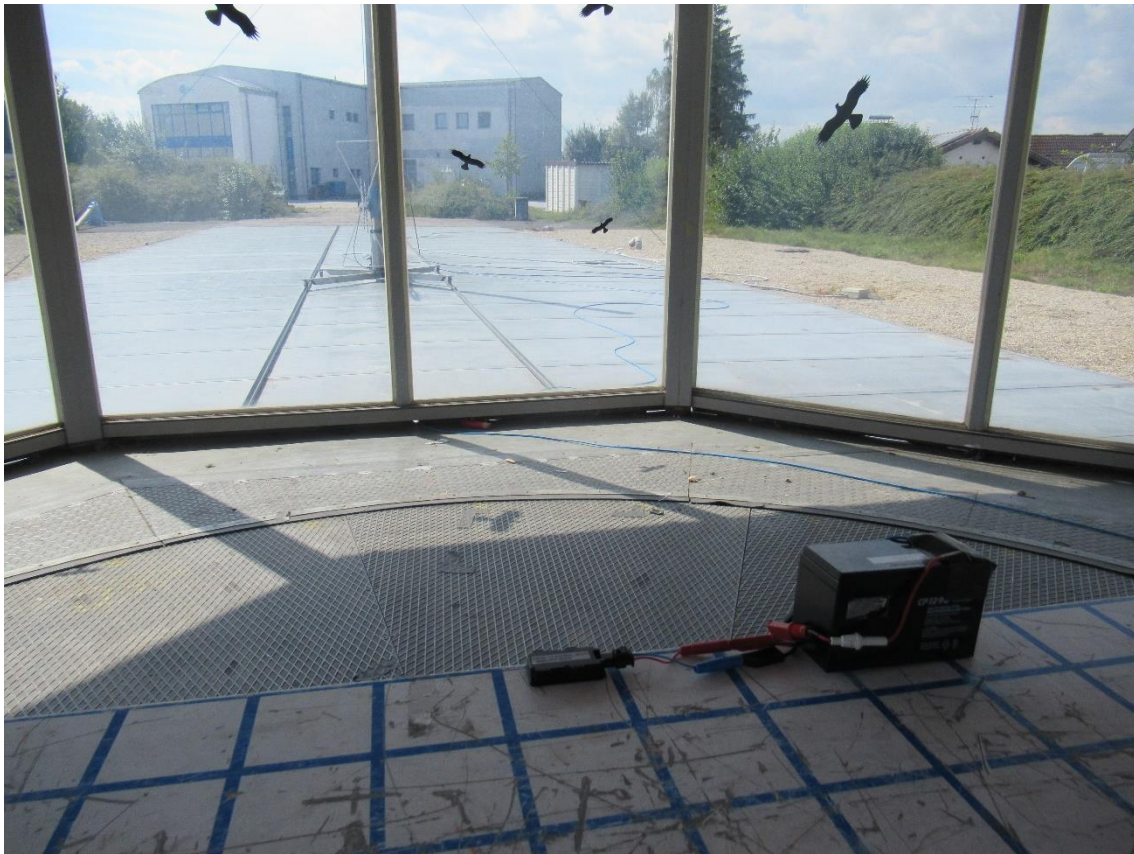

5.2.3 Test result

The requirements are **FULFILLED**.

Remarks: For detailed results, please see the following page(s).

For description of the measurement see 4.5.2.


FCC ID: KR5FBD5 IC: 7812D-FBD5

5.2.4 Test protocol

Operation mode: App Mode/Normal Mode Result: passed
 Remarks: None
 Date: 03.09.2020
 Tested by: Josef Knab

Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB/m)	Correct. Hor. (dB/m)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
65.89	6.3	-1.5	11.0	11.0	17.3	9.5	30.0	-12.7
200.00	7.4	3.7	12.8	12.8	20.2	16.5	30.0	-9.8
450.00	-3.0	-0.8	20.2	20.2	17.2	19.4	37.0	-17.6
600.00	-2.4	-2.1	23.6	23.6	21.2	21.5	37.0	-15.5
750.00	-2.8	-2.7	25.3	25.3	22.5	22.6	37.0	-14.4

Note: No emissions above the noise level could be detected.

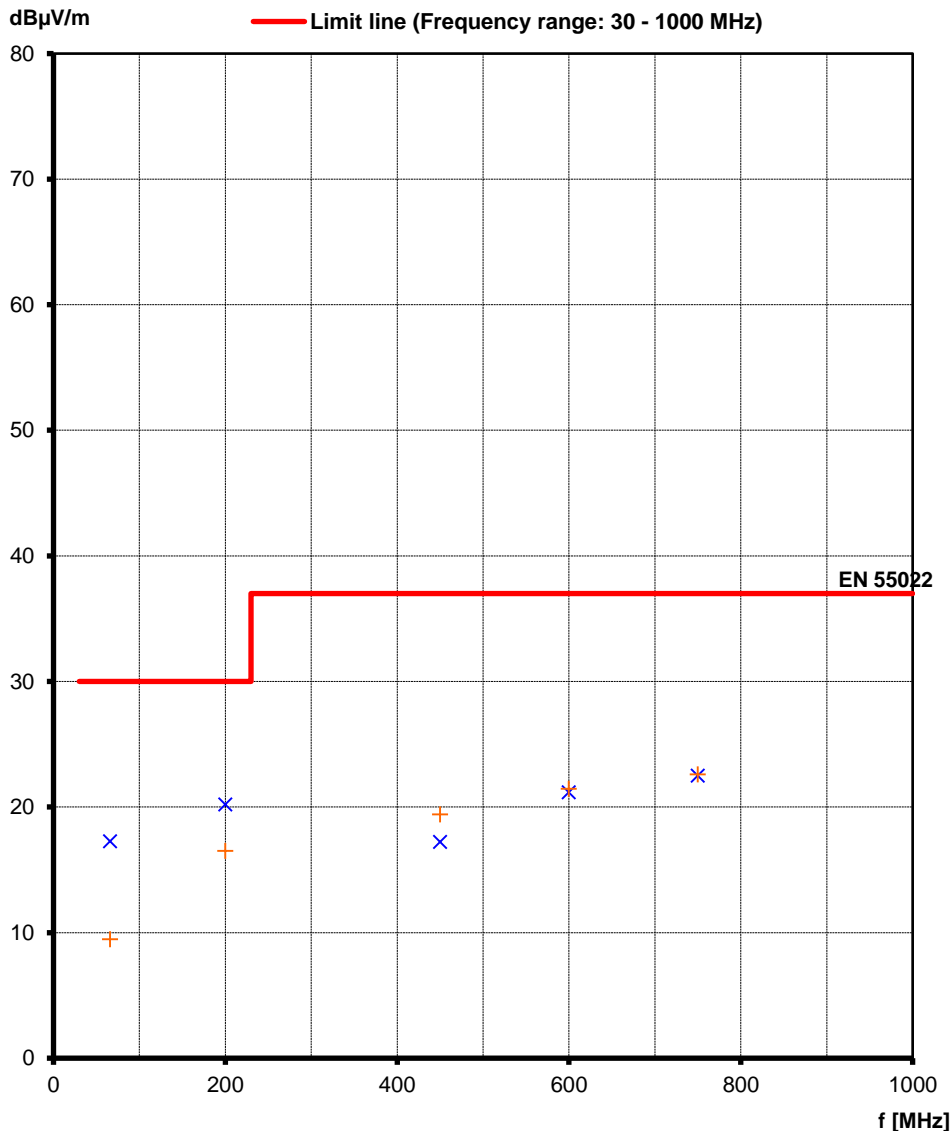

FCC ID: KR5FBD5 IC: 7812D-FBD5


5.3 Radiated emission > 1 GHz (electric field)

For test instruments and accessories used see section 6 Part SER 3.


5.3.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 3 m (f < 18 GHz)
1 m (f >18 GHz)

5.3.2 Photo documentation of the test setup

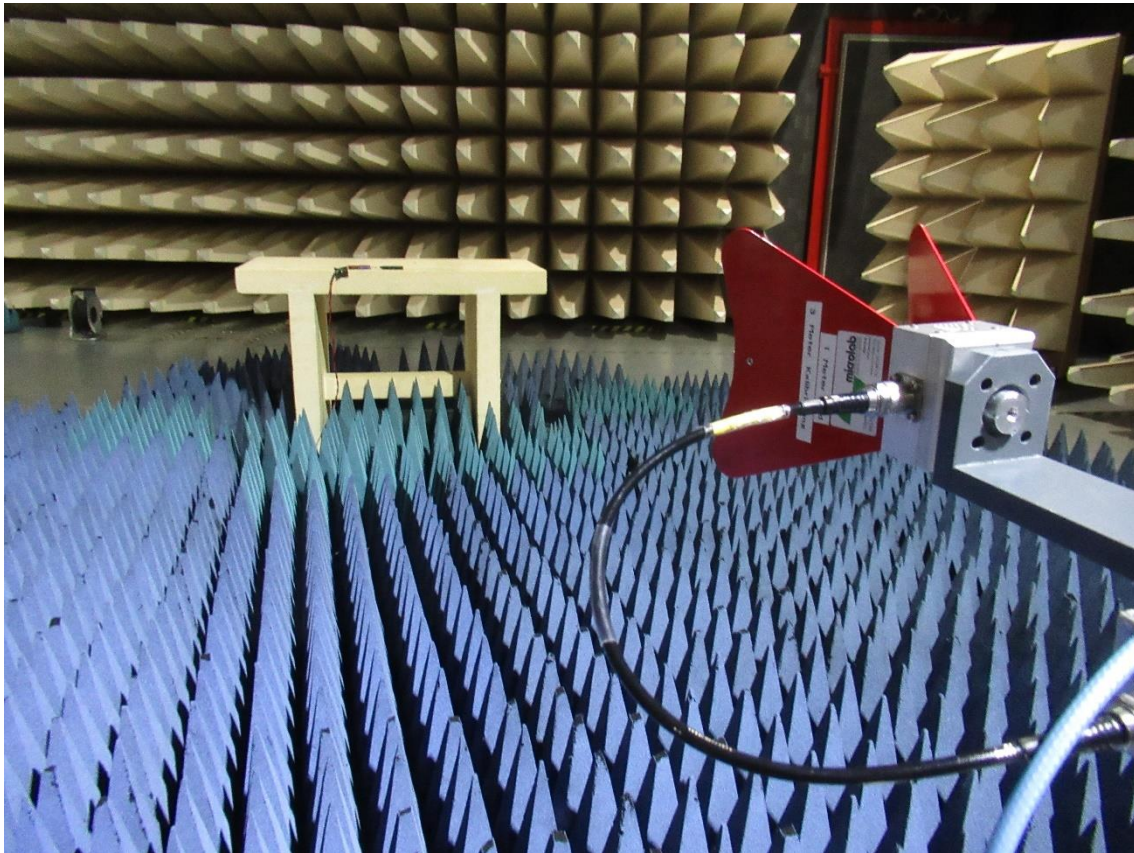

FCC ID: KR5FBD5 IC: 7812D-FBD5

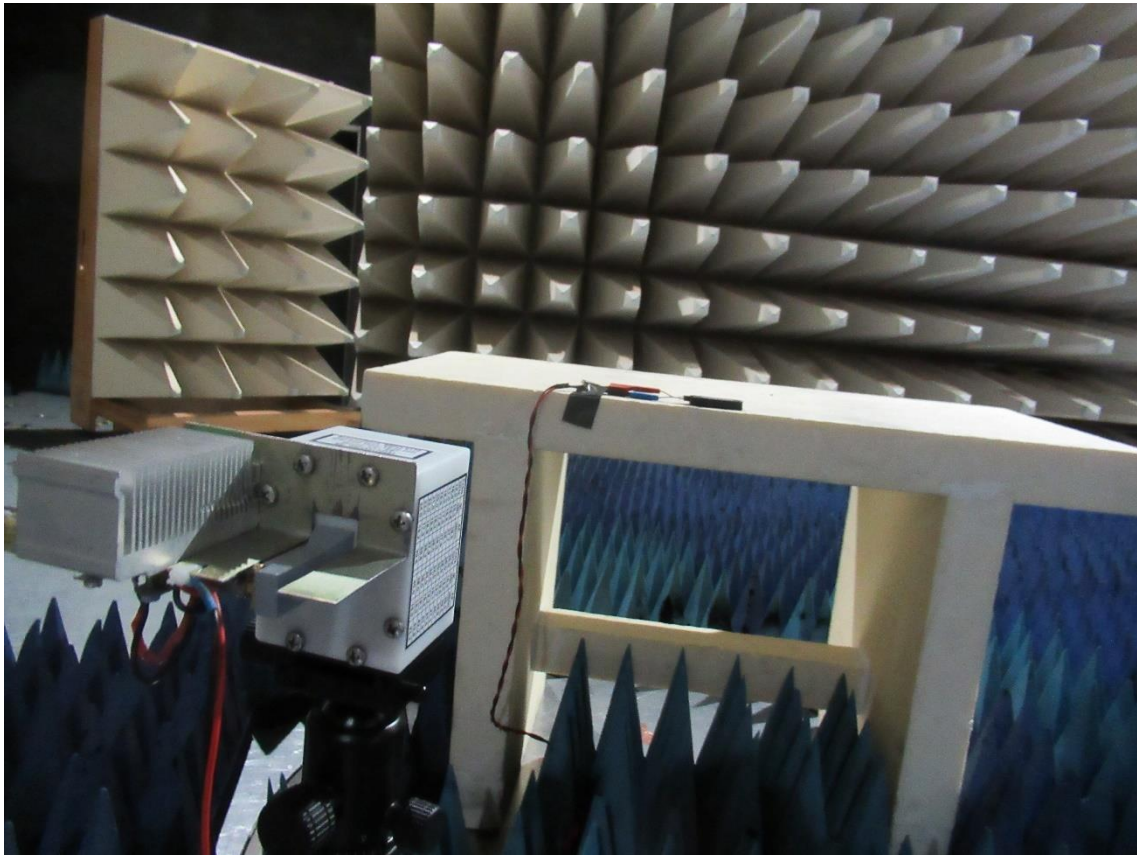

5.3.3 Test result

The requirements are **FULFILLED**.

Remarks: For detailed results, please see the following page(s).



For description of the measurement see 4.5.2.

5.3.4 Test protocol

Operation mode: App Mode/Normal Mode
 Remarks: None
 Date: 04.09.2020
 Tested by: Josef Knab



Result: passed

horizontal:

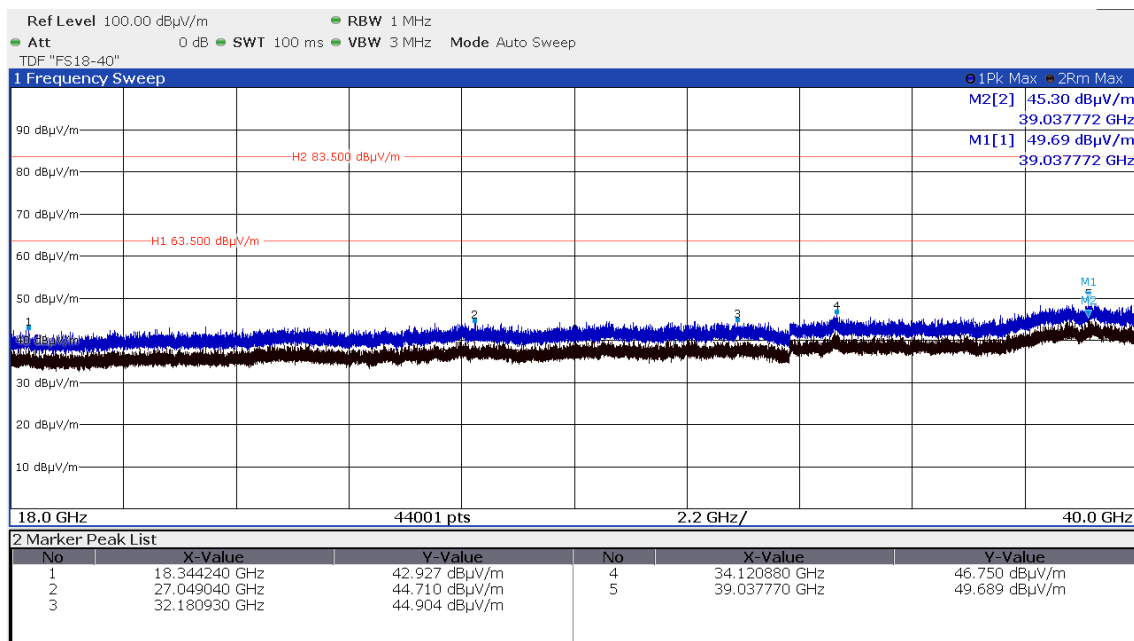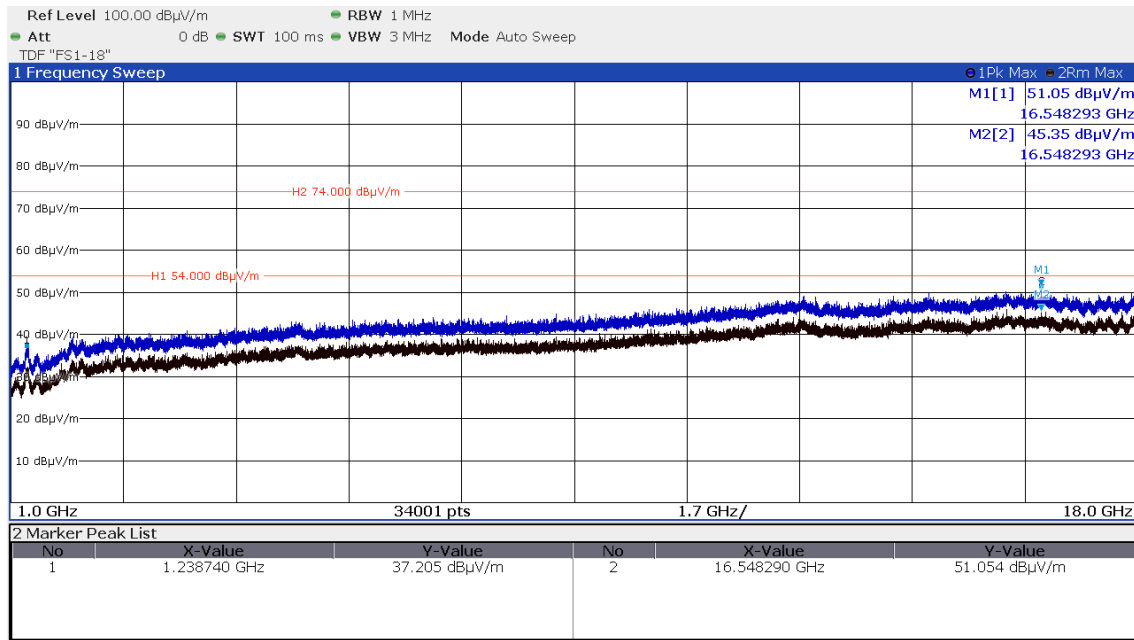

FCC ID: KR5FBD5 IC: 7812D-FBD5

vertical:

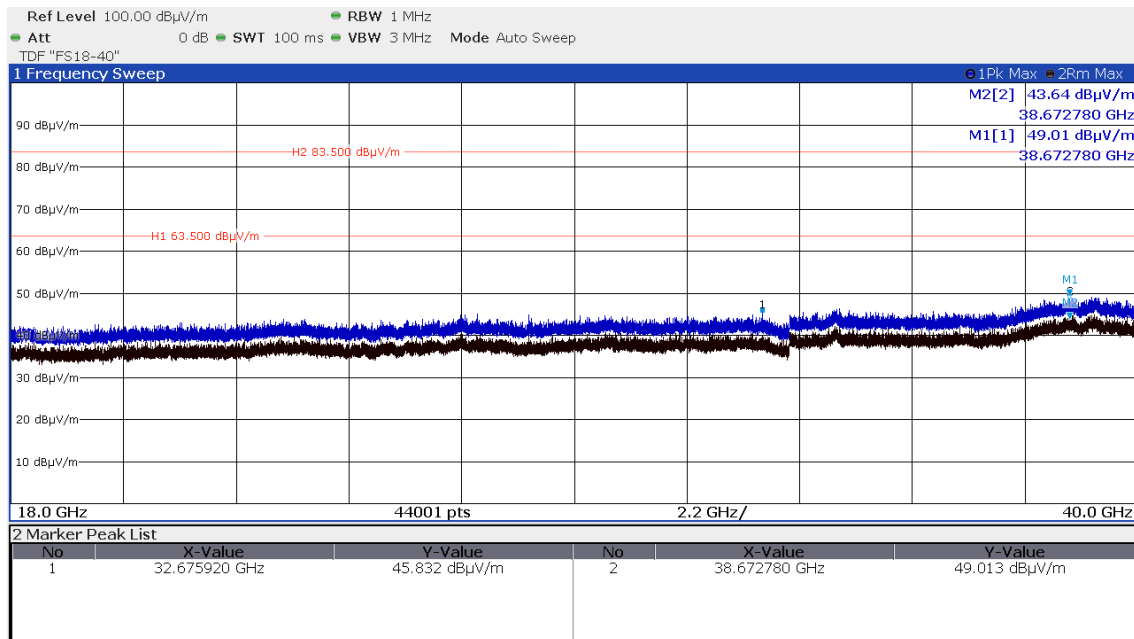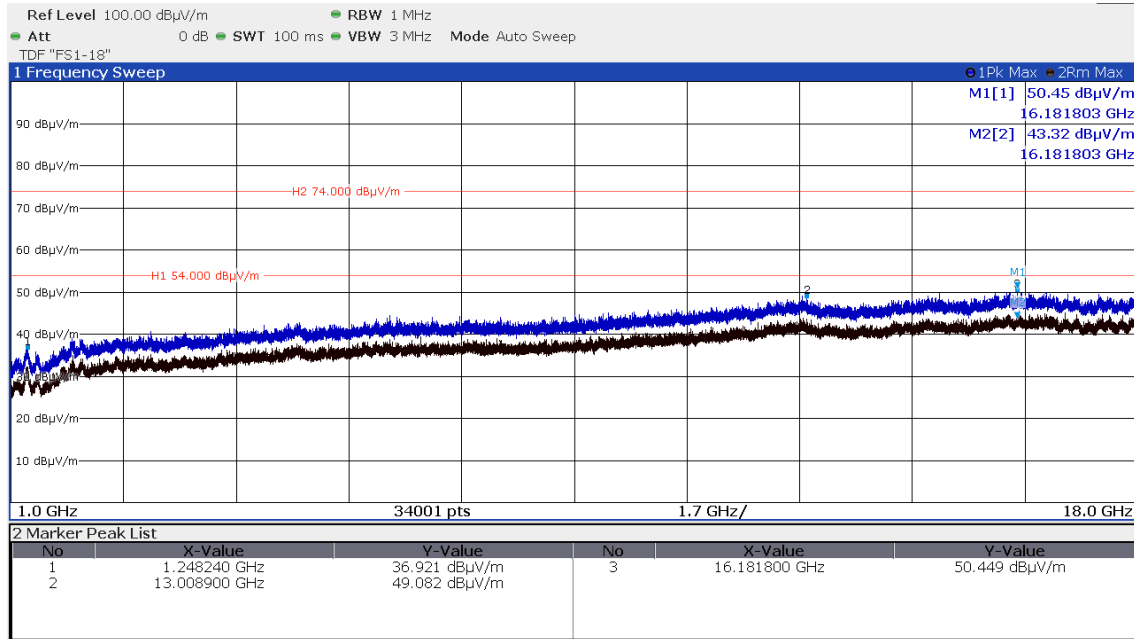

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

Test ID	Model Type	Kind of Equipment	Manufacturer	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	BAT-EMC 3.19.1.24	Nexio Software	EMCO Elektronik GmbH	01-02/68-13-001				
	ESCI	EMI Test Receiver	Rohde & Schwarz München	02-02/03-15-001	24/06/2021	24/06/2020		
	ESH 2 - Z 5	LISN	Rohde & Schwarz München	02-02/20-05-004	31/10/2021	31/10/2019	04/11/2020	04/05/2020
	N-4000-BNC	RF Cable	CSA Group Bayern GmbH	02-02/50-05-138				
	N-1500-N	RF Cable	CSA Group Bayern GmbH	02-02/50-05-140				
	ESH 3 - Z 2	Pulse Limiter	Rohde & Schwarz München	02-02/50-05-155	13/11/2022	13/11/2019	12/11/2020	12/05/2020
A 5	ESVS 30	EMI Test Receiver	Rohde & Schwarz München	02-02/03-05-006	15/07/2021	15/07/2020		
	VULB 9168	Trilog Broadband Antenn	Schwarzbeck Mess-Elektron	02-02/24-05-005	19/09/2020	19/07/2019		
	NW-2000-NB	RF Cable	Huber + Suhner	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	RF Cable 20m	Huber + Suhner	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	RF Cable 33 m	Huber + Suhner AG	02-02/50-15-028				
SER 3	FSW43	Spectrum Analyser	Rohde & Schwarz München	02-02/11-15-001	02/04/2021	02/04/2020		
	AMF-6D-01002000-22-10P	RF Amplifier MITEQ, Inc.	02-02/17-15-004					
	LNA-40-18004000-33-5P	Amplifier 18-40 GHz	MITEQ, Inc.	02-02/17-20-002				
	3117	Horn Antenna 1 - 18 GH	EMCO Elektronik GmbH	02-02/24-05-009	18/06/2021	18/06/2020		
	BBHA 9170	SHF-EHF Horn Antenna	Schwarzbeck Mess-Elektron	02-02/24-05-013	19/05/2023	19/05/2020	14/01/2021	14/01/2020
	18N-20	Coax Attenuator 20dB	Tactron Elektronik	02-02/50-17-003				
	BAM 4.5-P	Antenna Mast	maturu GmbH	02-02/50-17-024				
	NCD	Controller for Antenna M	maturu GmbH	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	RF Cable	Huber + Suhner	02-02/50-18-016				
BAT-EMC 3.19.1.24	Nexio Software	EMCO Elektronik GmbH	02-02/68-13-001					

7 Detailed measurement uncertainty

7.1 Overview

Measurement instrumentation uncertainty shall be taken into account when determining compliance or non-compliance with a disturbance limit.

The measurement instrumentation uncertainty for a test laboratory shall be evaluated. The standard uncertainty $u(x_i)$ in decibels and the sensitivity coefficient c_i shall be evaluated for the estimate x_i of each quantity. The combined standard uncertainty $u_c(y)$ of the estimate y of the measurand shall be calculated as

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

The expanded measurement instrumentation uncertainty U_{lab} for a test laboratory shall be calculated as $U_{lab} = 2 u_c(y)$

$$U_{lab} = 2 u_c(y)$$

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} in the table below, then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} in the table below, then:

- compliance is deemed to occur if no measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.
- non-compliance is deemed to occur if any measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

7.2 Definitions and symbols

X_i	Input quantity
x_i	estimate of X_i
$u(x_i)$	standard uncertainty of x_i
c_i	sensitivity coefficient
$u_c(y)$	(combined) standard uncertainty of y
Y	result of a measurement, (the estimate of the measured), corrected for all recognised significant systematic effects
U	expanded uncertainty of y

7.3 Measurement uncertainty

Measurement	U_{lab} [dB]
Conducted disturbance	+ 2.53 / - 2.77
Radiated disturbance (electric field)	
- 10 m test distance	+ 3.16 / - 3.22
- 3 m test distance	+ 3.16 / - 3.22
- Frequency range: 30 MHz – 200 MHz	
Radiated disturbance (electric field)	
- 10 m test distance	+ 4.51 / - 4.51
- 3 m test distance	+ 4.51 / - 4.51
- Frequency range: 200 MHz – 1000 MHz	
Radiated disturbance (electric field)	
- 3 m test distance	+ 5.07 / - 3.70
- Frequency range: 1 GHz – 30 GHz	