

FCC ID: KR5FBD5S IC: 7812D-FBD5S

5 TEST CONDITIONS AND RESULTS

5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up



5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

5.1.4 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.10 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: KR5FBD5S IC: 7812D-FBD5S


5.2 UWB Bandwidth

For test instruments and accessories used see section 6 Part **CPR 3**.

5.2.1 Description of the test location

Test location: Anechoic chamber 1

5.2.2 Photo documentation of the test set-up

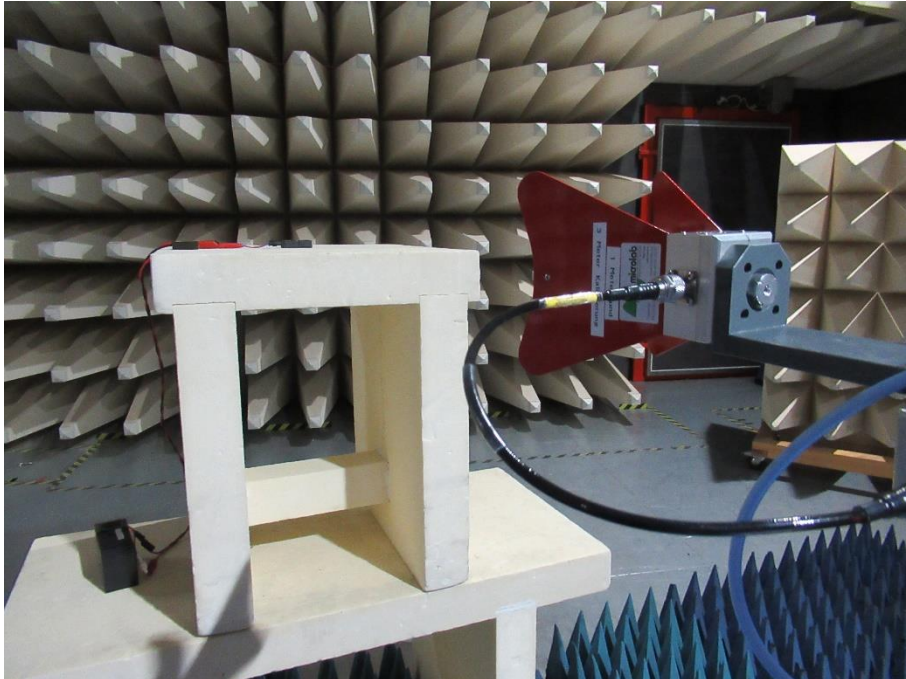

5.2.3 Applicable standard

According to FCC Part 15, Section 15.519(b):

The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

According to FCC Part 15, Section 15.503(d):

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

5.2.4 Description of Measurement

The measurement was performed radiated at a distance of 3 m. The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -10 dB.

Spectrum analyser settings:

RBW: 1 MHz, VBW: 3 MHz, Detector: Peak

FCC ID: KR5FBD5S IC: 7812D-FBD5S


5.3 Radiated Emissions 9 kHz to 40 GHz

For test instruments and accessories used see section 6 Part **SER 2** and **SER 3**.

5.3.1 Description of the test location

Test location: OATS 1
Test location: Anechoic chamber 1

5.3.2 Photo documentation of the test set-up

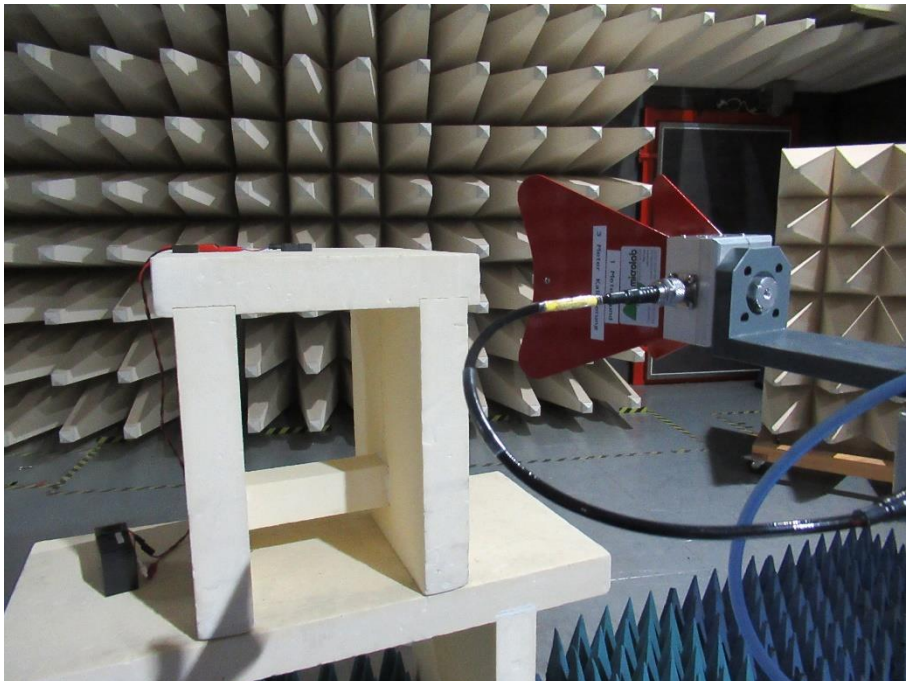

FCC ID: KR5FBD5S IC: 7812D-FBD5S



5.3.3 Applicable standard

According to FCC Part 15, Section 15.519(c):

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

5.3.4 Analyser settings

9 kHz – 150 kHz	RBW: 200 Hz			
150 kHz - 30 MHz	RBW: 9 kHz			
30 MHz – 960 MHz	RBW: 120 kHz	Detector: QP		
960 MHz – 40 GHz	RBW: 1 MHz	VBW: 3 MHz	Detector: RMS	Sweeptime: 1ms per MHz

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: KR5FBD5S IC: 7812D-FBD5S


5.4 Radiated Emissions at 1164-1240 MHz and 1559-1610 MHz

For test instruments and accessories used see section 6 Part **SER 3**.

5.4.1 Description of the test location

Test location: Anechoic chamber 1

5.4.2 Photo documentation of the test set-up

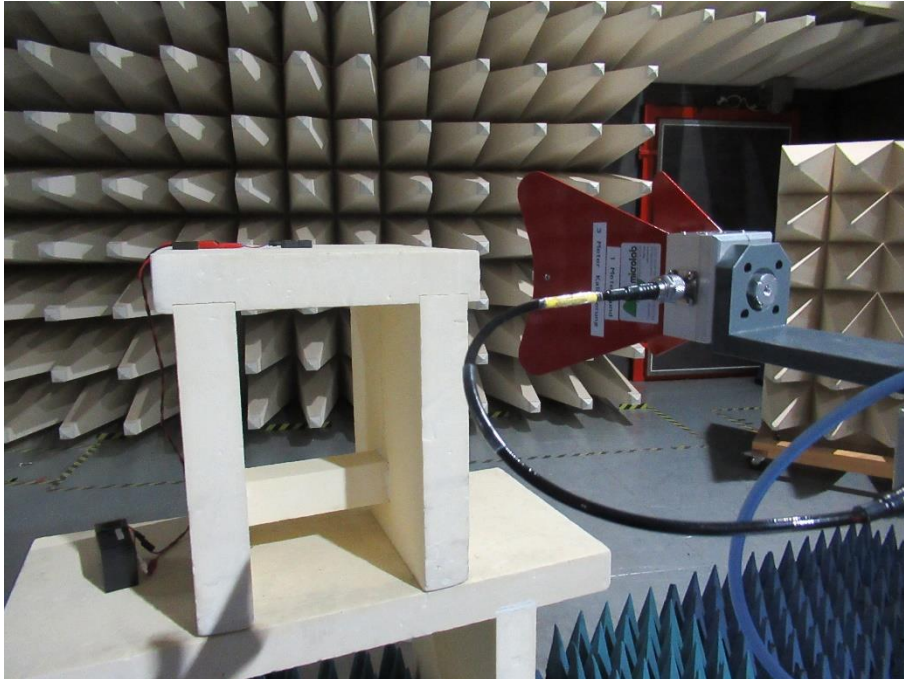

5.4.3 Applicable standard

According to FCC Part 15, Section 15.519(d):

In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz.

5.4.4 Analyser settings

RBW: 1 kHz, VBW: 3 kHz, Detector: RMS, Sweep time: 1 ms/1kHz,

FCC ID: KR5FBD5S IC: 7812D-FBD5S


5.5 Peak Power radiated

For test instruments and accessories used see section 6 Part **CPR 3**.

5.5.1 Description of the test location

Test location: Anechoic chamber 1

5.5.2 Photo documentation of the test set-up

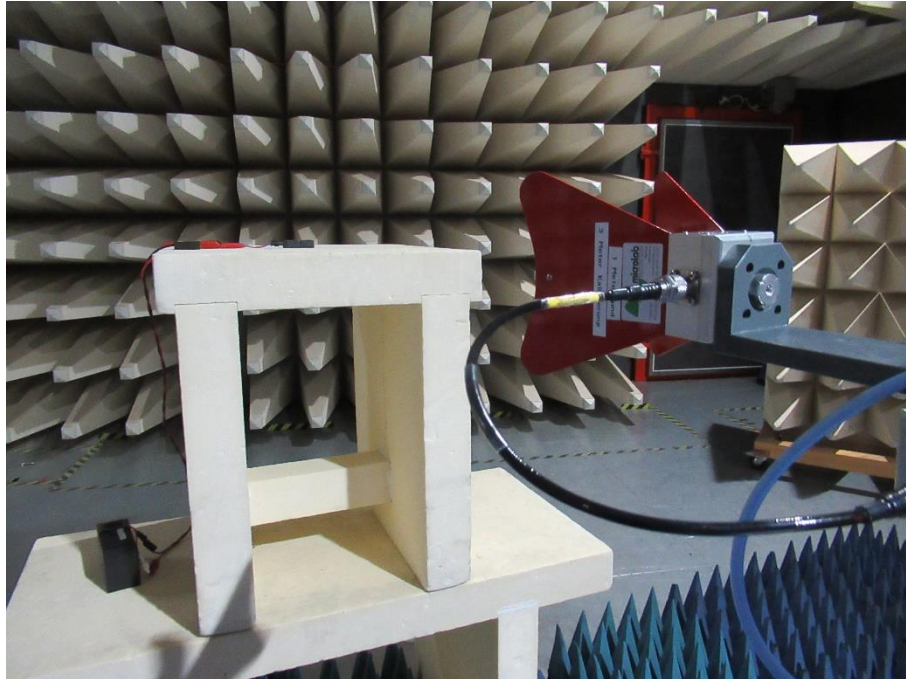

5.5.3 Applicable standard

According to FCC Part 15, Section 15.519(e):

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_m . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

5.5.4 Analyser settings

RBW: 50 MHz, VBW: 80 MHz, Detector: Peak, Trace Mode: Max hold

FCC ID: KR5FBD5S IC: 7812D-FBD5S


5.6 Signal deactivation

For test instruments and accessories used see section 6 Part **MB**.

5.6.1 Description of the test location

Test location: Shielded room S6

5.6.2 Photo documentation of the test set-up

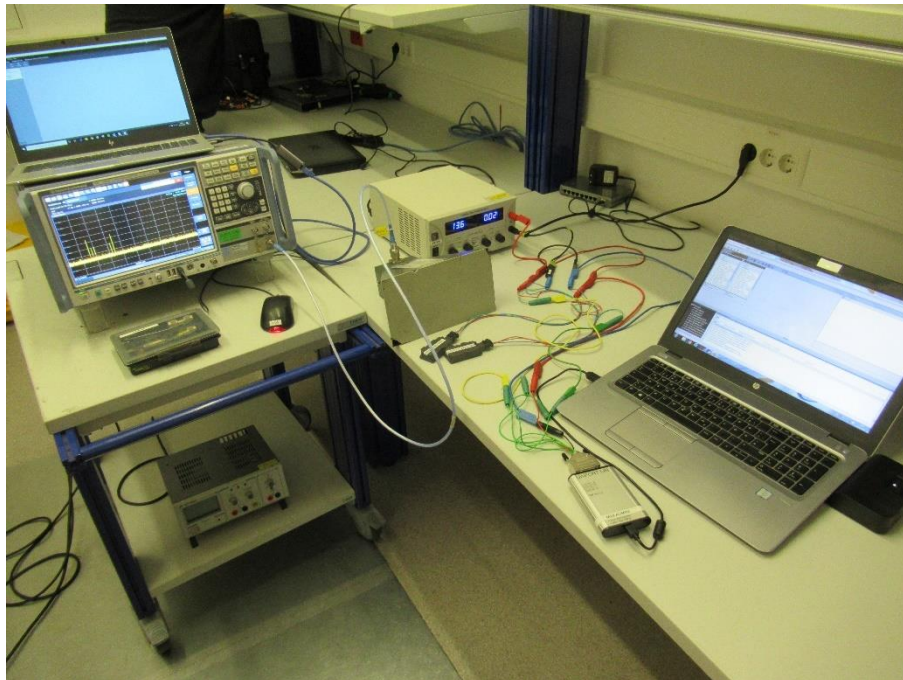

5.6.3 Applicable standard

According to FCC Part 15, Section 15.519(a)(1):

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

According to KDB 393764 D01 UWB FAQ v02 section 4:

An acknowledgement of reception must continue to be received by the UWB device at least once every 10 seconds, or else the device shall cease transmission of any information other than periodic signals for use in the establishment or re-establishment of a communications link with an associated receiver.

5.6.4 Description of Measurement

The measurement was performed radiated.

Spectrum analyser settings:

RBW: 80 MHz, VBW: 80 MHz, Detector: peak, zero span