

FCC Measurement/Technical Report on Hardware for enhanced remote-, mobility- and emergency services Hermes 2.1 LFT2

FCC ID: KR5HERMES2
IC: 7812D-HERMES2

Test Report Reference: MDE_CONTI_1732_FCCb

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	3
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary / Signatures	5
2	Administrative Data	12
2.1	Testing Laboratory	12
2.2	Project Data	12
2.3	Applicant Data	12
2.4	Manufacturer Data	12
3	Test object Data	13
3.1	General EUT Description	13
3.2	EUT Main components	14
3.3	Ancillary Equipment	14
3.4	Auxiliary Equipment	15
3.5	EUT Setups	15
3.6	Operating Modes	15
3.7	Product labelling	16
4	Test Results	17
4.1	26 dB Bandwidth	17
4.2	6 dB Bandwidth	21
4.3	99 % Bandwidth	24
4.4	Maximum Conducted Output Power	28
4.5	Peak Power Spectral Density	33
4.6	Undesirable Emissions; General Field Strength Limits	39
4.7	Band Edge	49
5	Test Equipment	54
6	Antenna Factors, Cable Loss and Sample Calculations	57
6.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	57
6.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	58
6.3	Antenna R&S HL562 (30 MHz – 1 GHz)	59
6.4	Antenna R&S HF907 (1 GHz – 18 GHz)	60
6.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	61
6.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	62
7	Setup Drawings	63
8	Measurement Uncertainties	64
9	Photo Report	64

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-17 Edition) and 15 (10-1-17 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

Note:

The tests were selected and performed with reference to the FCC Public Notice “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures v02r01, 2017-12-14”.

ANSI C63.10-2013 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 (“new rules”) is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

1.2 FCC-IC CORRELATION TABLE

**Correlation of measurement requirements for
UNII / LE-LAN (e.g. WLAN 5 GHz) equipment
from
FCC and IC**

UNII equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5: 8.8
Occupied bandwidth	§ 15.403 (i) (26 dB) / § 15.407 (e) (6 dB)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1 (99%) RSS-247 Issue 2: 6.2.4.1 (6 dB)
Maximum conducted output power	§ 15.407 (a) (1),(2),(3),(4)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Maximum power spectral density	§ 15.407 (a) (1),(2),(3),(5)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	§ 15.407 (b) § 15.209 (a)	RSS-Gen Issue 5: 6.13/8.9/8.10; RSS-247 Issue 2: 3.3/6.2 6.2.1.2, 6.2.2.2, 6.2.3.2, 6.2.4.2
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 5: 6.11/8.11
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-247 Issue 2: 6.2.2.1, 6.2.3.1, 6.3
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5: 8.3
Receiver spurious emissions	-	-

1.3 MEASUREMENT SUMMARY / SIGNATURES

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.31, §15.403 (i)

26 dB Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN a, high, U-NII-1	S01_AH02	Performed	N/A
WLAN a, high, U-NII-3	S01_AH02	Performed	N/A
WLAN a, low, U-NII-1	S01_AH02	Performed	N/A
WLAN a, low, U-NII-3	S01_AH02	Performed	N/A
WLAN a, mid, U-NII-1	S01_AH02	Performed	N/A
WLAN a, mid, U-NII-3	S01_AH02	Performed	N/A
WLAN ac 20 MHz, high, U-NII-1	S01_AH02	Performed	N/A
WLAN ac 20 MHz, high, U-NII-3	S01_AH02	Performed	N/A
WLAN ac 20 MHz, low, U-NII-1	S01_AH02	Performed	N/A
WLAN ac 20 MHz, low, U-NII-3	S01_AH02	Performed	N/A
WLAN ac 20 MHz, mid, U-NII-1	S01_AH02	Performed	N/A
WLAN ac 20 MHz, mid, U-NII-3	S01_AH02	Performed	N/A
WLAN ac 40 MHz, high, U-NII-1	S01_AH02	Performed	N/A
WLAN ac 40 MHz, high, U-NII-3	S01_AH02	Performed	N/A
WLAN ac 40 MHz, low, U-NII-1	S01_AH02	Performed	N/A
WLAN ac 40 MHz, low, U-NII-3	S01_AH02	Performed	N/A
WLAN ac 80 MHz, mid, U-NII-1	S01_AH02	Performed	N/A
WLAN ac 80 MHz, mid, U-NII-3	S01_AH02	Performed	N/A
WLAN n 20 MHz, high, U-NII-1	S01_AH02	Performed	N/A
WLAN n 20 MHz, high, U-NII-3	S01_AH02	Performed	N/A
WLAN n 20 MHz, low, U-NII-1	S01_AH02	Performed	N/A
WLAN n 20 MHz, low, U-NII-3	S01_AH02	Performed	N/A
WLAN n 20 MHz, mid, U-NII-1	S01_AH02	Performed	N/A
WLAN n 20 MHz, mid, U-NII-3	S01_AH02	Performed	N/A
WLAN n 40 MHz, high, U-NII-1	S01_AH02	Performed	N/A
WLAN n 40 MHz, high, U-NII-3	S01_AH02	Performed	N/A
WLAN n 40 MHz, low, U-NII-1	S01_AH02	Performed	N/A
WLAN n 40 MHz, low, U-NII-3	S01_AH02	Performed	N/A

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.31, §15.407 (e)

6 dB Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN a, high, U-NII-3	S01_AH02	Passed	Passed
WLAN a, low, U-NII-3	S01_AH02	Passed	Passed
WLAN a, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 20 MHz, high, U-NII-3	S01_AH02	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

FCC §15.31, §15.407 (e)

6 dB Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN ac 20 MHz, low, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 40 MHz, low, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, low, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz, low, U-NII-3	S01_AH02	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.31, IC RSS 247 Ch.
6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN a, high, U-NII-1	S01_AH02	N/A	Performed
WLAN a, high, U-NII-3	S01_AH02	N/A	Performed
WLAN a, low, U-NII-1	S01_AH02	N/A	Performed
WLAN a, low, U-NII-3	S01_AH02	N/A	Performed
WLAN a, mid, U-NII-1	S01_AH02	N/A	Performed
WLAN a, mid, U-NII-3	S01_AH02	N/A	Performed
WLAN ac 20 MHz, high, U-NII-1	S01_AH02	N/A	Performed
WLAN ac 20 MHz, high, U-NII-3	S01_AH02	N/A	Performed
WLAN ac 20 MHz, low, U-NII-1	S01_AH02	N/A	Performed
WLAN ac 20 MHz, low, U-NII-3	S01_AH02	N/A	Performed
WLAN ac 20 MHz, mid, U-NII-1	S01_AH02	N/A	Performed
WLAN ac 20 MHz, mid, U-NII-3	S01_AH02	N/A	Performed
WLAN ac 40 MHz, high, U-NII-1	S01_AH02	N/A	Performed
WLAN ac 40 MHz, high, U-NII-3	S01_AH02	N/A	Performed
WLAN ac 40 MHz, low, U-NII-1	S01_AH02	N/A	Performed
WLAN ac 40 MHz, low, U-NII-3	S01_AH02	N/A	Performed
WLAN ac 80 MHz, mid, U-NII-1	S01_AH02	N/A	Performed
WLAN ac 80 MHz, mid, U-NII-3	S01_AH02	N/A	Performed
WLAN n 20 MHz, high, U-NII-1	S01_AH02	N/A	Performed
WLAN n 20 MHz, high, U-NII-3	S01_AH02	N/A	Performed
WLAN n 20 MHz, low, U-NII-1	S01_AH02	N/A	Performed
WLAN n 20 MHz, low, U-NII-3	S01_AH02	N/A	Performed
WLAN n 20 MHz, mid, U-NII-1	S01_AH02	N/A	Performed
WLAN n 20 MHz, mid, U-NII-3	S01_AH02	N/A	Performed
WLAN n 40 MHz, high, U-NII-1	S01_AH02	N/A	Performed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.31, IC RSS 247 Ch.
6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

WLAN n 40 MHz, high, U-NII-3

WLAN n 40 MHz, low, U-NII-1

WLAN n 40 MHz, low, U-NII-3

Setup

S01_AH02

S01_AH02

S01_AH02

FCC

N/A

N/A

N/A

IC

Performed

Performed

Performed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-1

WLAN a, high, U-NII-3

WLAN a, low, U-NII-1

WLAN a, low, U-NII-3

WLAN a, mid, U-NII-1

WLAN a, mid, U-NII-3

WLAN ac 20 MHz MIMO, high, U-NII-1

WLAN ac 20 MHz MIMO, high, U-NII-3

WLAN ac 20 MHz MIMO, low, U-NII-1

WLAN ac 20 MHz MIMO, low, U-NII-3

WLAN ac 20 MHz MIMO, mid, U-NII-1

WLAN ac 20 MHz MIMO, mid, U-NII-3

WLAN ac 20 MHz, high, U-NII-1

WLAN ac 20 MHz, high, U-NII-3

WLAN ac 20 MHz, low, U-NII-1

WLAN ac 20 MHz, low, U-NII-3

WLAN ac 20 MHz, mid, U-NII-1

WLAN ac 20 MHz, mid, U-NII-3

WLAN ac 40 MHz MIMO, high, U-NII-1

WLAN ac 40 MHz MIMO, high, U-NII-3

WLAN ac 40 MHz MIMO, low, U-NII-1

WLAN ac 40 MHz MIMO, low, U-NII-3

WLAN ac 40 MHz, high, U-NII-1

WLAN ac 40 MHz, high, U-NII-3

WLAN ac 40 MHz, low, U-NII-1

WLAN ac 40 MHz, low, U-NII-3

WLAN ac 80 MHz MIMO, mid, U-NII-1

WLAN ac 80 MHz MIMO, mid, U-NII-3

WLAN ac 80 MHz, mid, U-NII-1

WLAN ac 80 MHz, mid, U-NII-3

WLAN n 20 MHz MIMO, high, U-NII-1

WLAN n 20 MHz MIMO, high, U-NII-3

Setup

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

S01_AH02

FCC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

IC

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407

FCC §15.31, §15.407 (a)(1)

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Subband			
WLAN n 20 MHz MIMO, low, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz MIMO, low, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz MIMO, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, high, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz, low, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz MIMO, high, U-NII-1	S01_AH02	Passed	N/A
WLAN n 40 MHz MIMO, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-1	S01_AH02	Passed	N/A
WLAN n 40 MHz MIMO, low, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz, high, U-NII-1	S01_AH02	Passed	N/A
WLAN n 40 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AH02	Passed	N/A
WLAN n 40 MHz, low, U-NII-3	S01_AH02	Passed	Passed

47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407

FCC §15.31, §15.407 (a)
(1),(5)

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Subband			
WLAN a, high, U-NII-1	S01_AH02	Passed	N/A
WLAN a, high, U-NII-3	S01_AH02	Passed	Passed
WLAN a, low, U-NII-1	S01_AH02	Passed	N/A
WLAN a, low, U-NII-3	S01_AH02	Passed	Passed
WLAN a, mid, U-NII-1	S01_AH02	Passed	N/A
WLAN a, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 20 MHz MIMO, high, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 20 MHz MIMO, high, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 20 MHz MIMO, low, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 20 MHz MIMO, low, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 20 MHz MIMO, mid, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 20 MHz MIMO, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 20 MHz, high, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 20 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 20 MHz, low, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-1	S01_AH02	Passed	N/A

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.31, §15.407 (a)
(1),(5)**

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode

Radio Technology, Operating Frequency, Subband

	Setup	FCC	IC
WLAN ac 20 MHz, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 40 MHz MIMO, high, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 40 MHz MIMO, high, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 40 MHz MIMO, low, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 40 MHz MIMO, low, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 40 MHz, high, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 40 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 40 MHz, low, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 80 MHz MIMO, mid, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 80 MHz MIMO, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1	S01_AH02	Passed	N/A
WLAN ac 80 MHz, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz MIMO, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz MIMO, low, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz MIMO, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, high, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz, low, U-NII-3	S01_AH02	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1	S01_AH02	Passed	N/A
WLAN n 20 MHz, mid, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz MIMO, high, U-NII-1	S01_AH02	Passed	N/A
WLAN n 40 MHz MIMO, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-1	S01_AH02	Passed	N/A
WLAN n 40 MHz MIMO, low, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz, high, U-NII-1	S01_AH02	Passed	N/A
WLAN n 40 MHz, high, U-NII-3	S01_AH02	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AH02	Passed	N/A
WLAN n 40 MHz, low, U-NII-3	S01_AH02	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.407 (b),
(1),(2),(3),(4); FCC §15.205,
§15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Measurement range, Subband			
WLAN a, high, 1GHz - 26GHz, U-NII-1	S01_AF02	Passed	N/A
WLAN a, high, 1GHz - 26GHz, U-NII-3	S01_AF02	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-1	S01_AF02	Passed	N/A
WLAN a, low, 1GHz - 26GHz, U-NII-3	S01_AF02	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-1	S01_AF02	Passed	N/A
WLAN a, mid, 1GHz - 26GHz, U-NII-3	S01_AF02	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-1	S01_AF02	Passed	N/A
WLAN a, mid, 30MHz - 1GHz, U-NII-3	S01_AF02	Passed	Passed
WLAN a, mid, 9kHz - 30MHz, U-NII-1	S01_AF02	Passed	N/A
WLAN a, mid, 9kHz - 30MHz, U-NII-3	S01_AF02	Passed	Passed
WLAN n 20 MHz MIMO, mid, 1GHz - 26GHz, U-NII-1 Remark: 1-18GHz tested	S01_AF02	Passed	N/A
WLAN n 20 MHz MIMO, mid, 1GHz - 26GHz, U-NII-3 Remark: 1-18GHz tested	S01_AF02	Passed	Passed
WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-1 Remark: 1-18GHz tested	S01_AF02	Passed	N/A
WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-3 Remark: 1-18GHz tested	S01_AF02	Passed	Passed
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-1 Remark: 1-18GHz tested	S01_AF02	Passed	N/A
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-3 Remark: 1-18GHz tested	S01_AF02	Passed	Passed
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-1 Remark: 1-18GHz tested	S01_AF02	Passed	N/A
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-3 Remark: 1-18GHz tested	S01_AF02	Passed	Passed
WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-1	S01_AF02	Passed	N/A
WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-3	S01_AF02	Passed	Passed
WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-1	S01_AF02	Passed	N/A
WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-3	S01_AF02	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.407 (b),
(1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Subband			
WLAN a, high, U-NII-3	S01_AF02	Passed	Passed
WLAN a, low, U-NII-1	S01_AF02	Passed	N/A
WLAN a, low, U-NII-3	S01_AF02	Passed	Passed
WLAN ac 20 MHz, high, U-NII-3	S01_AF02	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1	S01_AF02	Passed	N/A

**47 CFR CHAPTER I FCC PART 15 Subpart E
§15.407**

**FCC §15.407 (b),
(1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10

Final Result

OP-Mode	Setup	FCC	IC
Radio Technology, Operating Frequency, Subband			
WLAN ac 20 MHz, low, U-NII-3	S01_AF02	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3	S01_AF02	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1	S01_AF02	Passed	N/A
WLAN ac 40 MHz, low, U-NII-3	S01_AF02	Passed	Passed
WLAN ac 80 MHz MIMO, mid, U-NII-1	S01_AF02	Passed	N/A
WLAN ac 80 MHz, mid, U-NII-1	S01_AF02	Passed	N/A
WLAN ac 80 MHz, mid, U-NII-3	S01_AF02	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-3	S01_AF02	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-1	S01_AF02	Passed	N/A
WLAN n 20 MHz MIMO, low, U-NII-3	S01_AF02	Passed	Passed
WLAN n 20 MHz, high, U-NII-3	S01_AF02	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AF02	Passed	N/A
WLAN n 20 MHz, low, U-NII-3	S01_AF02	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-1	S01_AF02	Passed	N/A
WLAN n 40 MHz, high, U-NII-3	S01_AF02	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AF02	Passed	N/A
WLAN n 40 MHz, low, U-NII-3	S01_AF02	Passed	Passed

N/A: Not applicable

N/P: Not performed

Only band edge measurement 5825-5830 MHz for IC band limit.



(responsible for accreditation scope)
Dipl.-Ing. Wolfgang Richter



(responsible for testing and report)
Dipl.-Ing. Daniel Gall



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

2 ADMINISTRATIVE DATA

2.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the ISED and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-00
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146

Responsible for accreditation scope: Dipl.-Ing. Wolfgang Richter
Report Template Version: 2018-01-10

2.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Daniel Gall
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2018-10-15
Testing Period: 2018-05-10 to 2018-08-07

2.3 APPLICANT DATA

Company Name: Continental Automotive GmbH
Address: Vahrenwalder Str. 9
30165 Hannover
Germany
Contact Person: Mr. Frank Maurer

2.4 MANUFACTURER DATA

Company Name: please see applicant data
Address:
Contact Person:

3 TEST OBJECT DATA

3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Hardware for Enhanced Remote-, Mobility- & Emergency Services
Product name	HERMES 2.1 LFT2
Type	HERMES 2.1 LFT2
Declared EUT data by the supplier	
Voltage Type	DC
Voltage Level	12 V
Tested Modulation Type	OFDM:BPSK
General product description	The EUT is a Hardware for Enhanced Remote-, Mobility- & Emergency Services. It provides different telematic services and is the interface between different types of Daimler car headunits and the public network. It supports WLAN in the 2.4 and 5 GHz band
Specific product description	WLAN mode a, n20/40 and ac20/40/80 MHz are supported in the 5 GHz band by the device. Since DFS is not supported, only the bands 1 and 3 are supported. Band 1 is not supported for IC.
Ports of the device	Cellular Main Cellular Diversity GNSS Cable Harness incl. DC
Antenna 1	Integral / 4 dBi (For calculation in test results an antenna gain of 4.4 dBi was used for both antennas (worse case))
Antenna 2	Integral / 4.4 dBi
Tested Datarates	WLAN a: 6 Mbps WLAN n/ac: MCS0
Special software used for testing	The ADB shell was used to start a local TX script on the EUT provided by the applicant.
Special software used for testing	The EUT is a Hardware for Enhanced Remote-, Mobility- & Emergency Services. It provides different telematic services and is the interface between different types of Daimler car headunits and the public network. It supports WLAN in the 2.4 and 5 GHz band

The main components of the EUT are listed and described in chapter 3.2 EUT Main components.

3.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT AF02	DE1260001af02	FCC radiated test sample_#01
Sample Parameter	Value	
Serial No.	I0001948	
HW Version	D sample (HW 17/51)	
SW Version	E334.20A	
Comment	radiated sample North America/USA	
Integral Antenna	4.4 dBi	

Sample Name	Sample Code	Description
EUT AH02	DE1260001ah02	Conducted sample
Sample Parameter	Value	
Serial No.	I0002481	
HW Version	D sample (HW 17/51)	
SW Version	E334.20A	
Comment	conducted sample North America/USA	
Integral Antenna	Replaced by temporary antenna connector	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, HW, SW, S/N)	Description
AUX 1	Mercedes-Benz A 156 905 09 02, 500110114217809278	Cellular Antenna
AUX 2	Mercedes-Benz A 156 905 09 02, 500110114217809176	Cellular Antenna
AUX 3	UBLOX ANN-MS-0-005, -, -, 410094	GNSS Antenna
AUX 4	USB HUB	USB HUB for communication to laptop

3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AF02	EUT AF02, AUX1 to AUX4	Radiated Setup
S01_AH02	EUT AH02, AUX4	Conducted Setup

3.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

3.6.1 TEST CHANNELS

U-NII-Subband 1 5150 - 5250 MHz			U-NII-Subband 3 5725 - 5850 MHz			Nom. BW
low	mid	high	low	mid	high	20 MHz
36	44	48	149	157	165	Ch.-No.
5180	5220	5240	5745	5785	5825	MHz

low	mid	high	low	mid	high	40 MHz
38	-	46	151	-	159	Ch.-No.
5190	-	5230	5755	-	5795	MHz
low	mid	high	low	mid	high	80 MHz
-	42	-	-	155	-	Ch.-No.
-	5210	-	-	5775	-	MHz

3.7 PRODUCT LABELLING

3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

4 TEST RESULTS

4.1 26 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): initially approx. 1 % of nominal emission bandwidth
- Video Bandwidth (VBW): > RBW
- Span: 40 / 80 / 160 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: at least 1000
- Sweeptime: Auto
- Detector: Peak

4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII subbands 1, 2A and 2C. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.

4.1.3 TEST PROTOCOL

Ambient temperature: 23 °C
 Air Pressure: 1010 hPa
 Humidity: 47 %

Radio Technology	Operating Frequency	Subband	26 dB Bandwidth [MHz]
WLAN a	low	U-NII-1	21.4
WLAN a	mid	U-NII-1	21.4
WLAN a	high	U-NII-1	21.4
WLAN a	low	U-NII-3	21.6
WLAN a	mid	U-NII-3	21.6
WLAN a	high	U-NII-3	21.4
WLAN n 20 MHz	low	U-NII-1	21.8
WLAN n 20 MHz	mid	U-NII-1	21.8
WLAN n 20 MHz	high	U-NII-1	22.0
WLAN n 20 MHz	low	U-NII-3	22.2
WLAN n 20 MHz	mid	U-NII-3	22.0
WLAN n 20 MHz	high	U-NII-3	21.8
WLAN n 40 MHz	low	U-NII-1	40.2
WLAN n 40 MHz	high	U-NII-1	40.2
WLAN n 40 MHz	low	U-NII-3	40.2
WLAN n 40 MHz	high	U-NII-3	40.2
WLAN ac 20 MHz	low	U-NII-1	22.0
WLAN ac 20 MHz	mid	U-NII-1	21.8
WLAN ac 20 MHz	high	U-NII-1	22.2
WLAN ac 20 MHz	low	U-NII-3	21.8
WLAN ac 20 MHz	mid	U-NII-3	21.8
WLAN ac 20 MHz	high	U-NII-3	22.0
WLAN ac 40 MHz	low	U-NII-1	40.2
WLAN ac 40 MHz	high	U-NII-1	40.2
WLAN ac 40 MHz	low	U-NII-3	40.2
WLAN ac 40 MHz	high	U-NII-3	40.2
WLAN ac 80 MHz	mid	U-NII-1	84.0
WLAN ac 80 MHz	mid	U-NII-3	83.0


Remark: Please see next sub-clause for the measurement plot.

4.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband = U-NII-1 (S01_AH02)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5240.000000	22.200000	---	---	5228.900000	5251.100000	-6.0	PASS

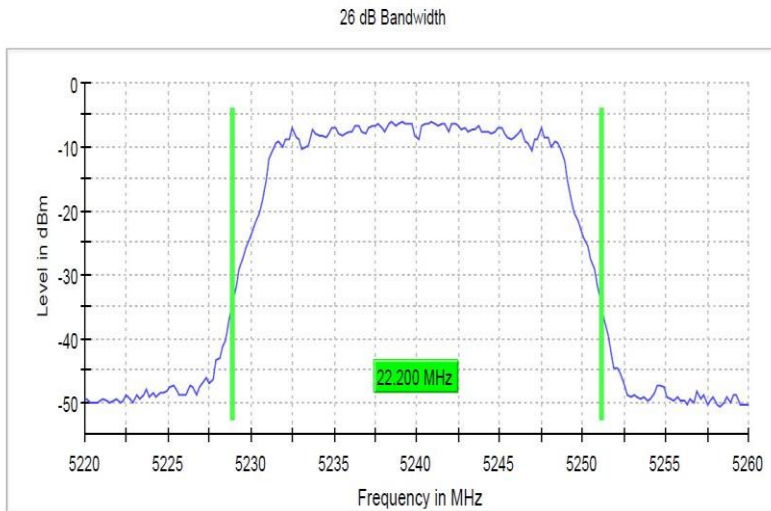


Setting	Instrument Value
Start Frequency	5.22000 GHz
Stop Frequency	5.26000 GHz
Span	40.000 MHz
RBW	200.000 kHz
VBW	1.000 MHz
SweepPoints	200
Sweeptime	28.443 μ s
Reference Level	-20.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	53 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-1 (S01_AH02)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5190.000000	40.149812	---	---	5169.925094	5210.074906	-7.1	PASS

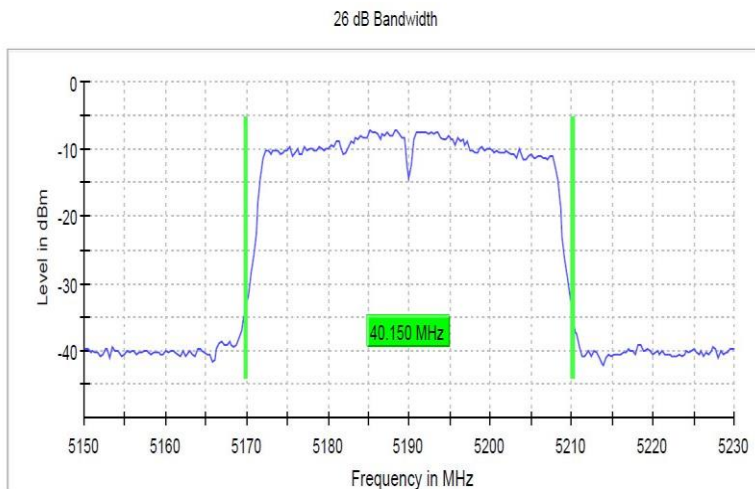


Setting	Instrument Value
Start Frequency	5.15000 GHz
Stop Frequency	5.23000 GHz
Span	80.000 MHz
RBW	300.000 kHz
VBW	1.000 MHz
SweepPoints	267
Sweeptime	31.603 μ s
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	72 / max. 150
Stable	5 / 5
Max Stable Difference	0.23 dB

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-1 (S01_AH02)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5210.000000	84.000000	---	---	5167.500000	5251.500000	-4.7	PASS

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
SweepPoints	160
Sweeptime	22.754 μ s
Reference Level	-10.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
Sweeptype	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	32 / max. 150
Stable	5 / 5
Max Stable Difference	0.20 dB

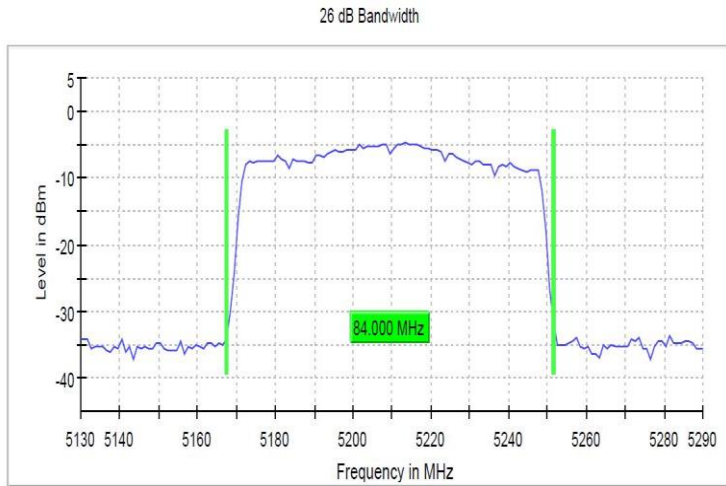

4.1.5 TEST EQUIPMENT USED

- R&S TS8997

4.2 6 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 40 / 80 MHz (for 20 / 40 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: at least 1000
- Sweeptime: Auto
- Detector: Peak

4.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.407 (e)

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

4.2.3 TEST PROTOCOL

Ambient temperature: 23 °C
 Air Pressure: 1010 hPa
 Humidity: 47 %

Radio Technology	Operating Frequency	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]	Min. 6 dB Frequency [MHz]	Max. 6 dB Frequency [MHz]
WLAN a	low	16.5	0.5	16.0	5736.75	5753.25
WLAN a	mid	16.5	0.5	16.0	5776.75	5793.25
WLAN a	high	16.5	0.5	16.0	5816.75	5833.25
WLAN n 20 MHz	low	17.7	0.5	17.2	5736.15	5753.85
WLAN n 20 MHz	mid	17.7	0.5	17.2	5776.15	5793.85
WLAN n 20 MHz	high	17.7	0.5	17.2	5816.15	5833.85
WLAN n 40 MHz	low	35.9	0.5	35.4	5737.15	5773.05
WLAN n 40 MHz	high	35.9	0.5	35.4	5777.05	5812.95
WLAN ac 20 MHz	low	17.7	0.5	17.2	5736.15	5753.85
WLAN ac 20 MHz	mid	17.7	0.5	17.2	5776.15	5793.85
WLAN ac 20 MHz	high	17.7	0.5	17.2	5816.15	5833.85
WLAN ac 40 MHz	low	35.9	0.5	35.4	5737.15	5773.05
WLAN ac 40 MHz	high	35.9	0.5	35.4	5777.05	5812.95
WLAN ac 80 MHz	mid	75.8	0.5	75.3	5737.15	5812.95


Remark: Please see next sub-clause for the measurement plot.

4.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-3 (S01_AH02)

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	16.500000	0.500000	--	5736.750000	5753.250000	-8.0	PASS

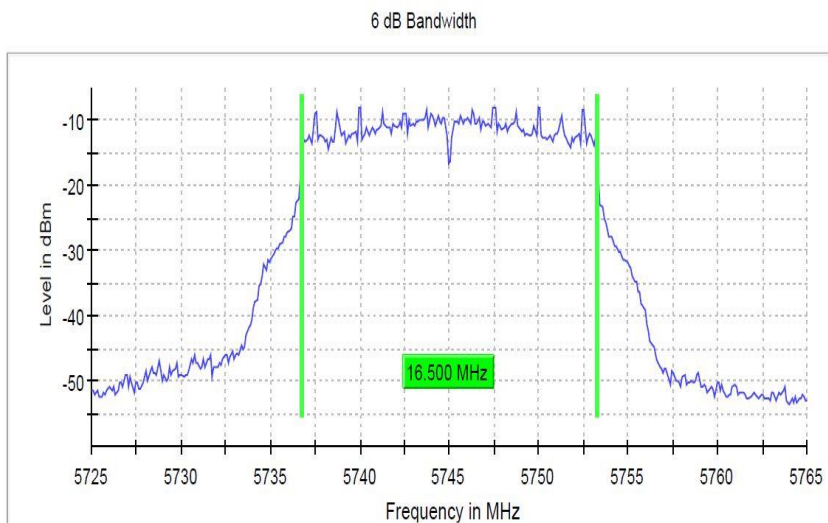

Setting	Instrument Value
Start Frequency	5.72500 GHz
Stop Frequency	5.76500 GHz
Span	40.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	400
Sweeptime	56.886 μ s
Reference Level	-20.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	21 / max. 150
Stable	5 / 5
Max Stable Difference	0.03 dB

4.2.5 TEST EQUIPMENT USED

- R&S TS8997

4.3 99 % BANDWIDTH

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): approx. ≥ 1 % of the span, but not below
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Span: 40 / 80 / 160 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: at least 1000
- Sweep time: Auto
- Detector: Peak

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

4.3.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

4.3.3 TEST PROTOCOL

Ambient temperature: 23 °C
Air Pressure: 1010 hPa
Humidity: 47 %

Radio Technology	Operating Frequency	Subband	99% Bandwidth [MHz]
WLAN a	low	U-NII-1	16.6
WLAN a	mid	U-NII-1	16.8
WLAN a	high	U-NII-1	16.6
WLAN a	low	U-NII-3	16.6
WLAN a	mid	U-NII-3	16.6
WLAN a	high	U-NII-3	16.6
WLAN n 20 MHz	low	U-NII-1	17.8
WLAN n 20 MHz	mid	U-NII-1	17.8
WLAN n 20 MHz	high	U-NII-1	18.0
WLAN n 20 MHz	low	U-NII-3	18.0
WLAN n 20 MHz	mid	U-NII-3	17.8
WLAN n 20 MHz	high	U-NII-3	17.8
WLAN n 40 MHz	low	U-NII-1	36.3
WLAN n 40 MHz	high	U-NII-1	36.0
WLAN n 40 MHz	low	U-NII-3	36.0
WLAN n 40 MHz	high	U-NII-3	36.0
WLAN ac 20 MHz	low	U-NII-1	17.8
WLAN ac 20 MHz	mid	U-NII-1	17.8
WLAN ac 20 MHz	high	U-NII-1	18.0
WLAN ac 20 MHz	low	U-NII-3	17.8
WLAN ac 20 MHz	mid	U-NII-3	18.0
WLAN ac 20 MHz	high	U-NII-3	17.8
WLAN ac 40 MHz	low	U-NII-1	36.3
WLAN ac 40 MHz	high	U-NII-1	36.3
WLAN ac 40 MHz	low	U-NII-3	36.3
WLAN ac 40 MHz	high	U-NII-3	36.0
WLAN ac 80 MHz	mid	U-NII-1	76.0
WLAN ac 80 MHz	mid	U-NII-3	76.0

Remark: Please see next sub-clause for the measurement plot.


4.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband = U-NII-1 (S01_AH02)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5240.000000	18.000000	---	---	5230.900000	5248.900000	PASS

Setting	Instrument Value
Start Frequency	5.22000 GHz
Stop Frequency	5.26000 GHz
Span	40.000 MHz
RBW	200.000 kHz
VBW	1.000 MHz
SweepPoints	200
Sweeptime	28.443 μ s
Reference Level	-20.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
Sweeptype	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	23 / max. 150
Stable	5 / 5
Max Stable Difference	0.08 dB

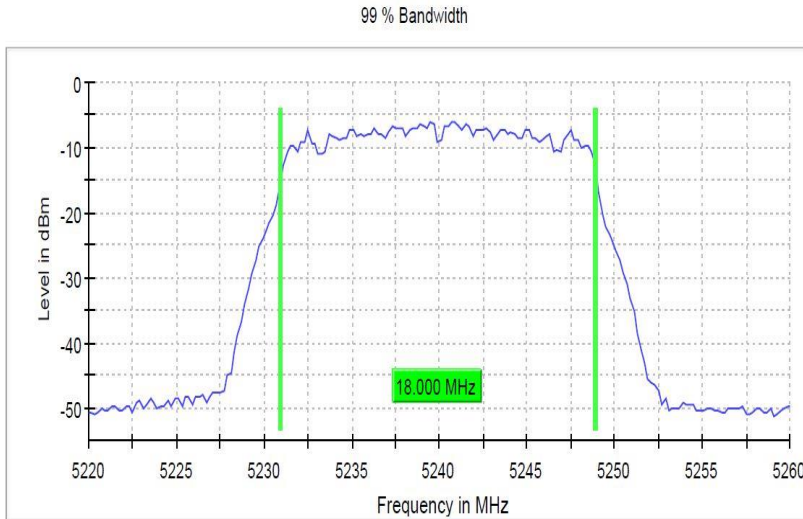


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-1 (S01_AH02)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5190.000000	36.254682	---	---	5171.722846	5207.977528	PASS

Setting	Instrument Value
Start Frequency	5.15000 GHz
Stop Frequency	5.23000 GHz
Span	80.000 MHz
RBW	300.000 kHz
VBW	1.000 MHz
SweepPoints	267
Sweeptime	31.603 μ s
Reference Level	-20.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
Sweeptype	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	65 / max. 150
Stable	5 / 5
Max Stable Difference	0.14 dB

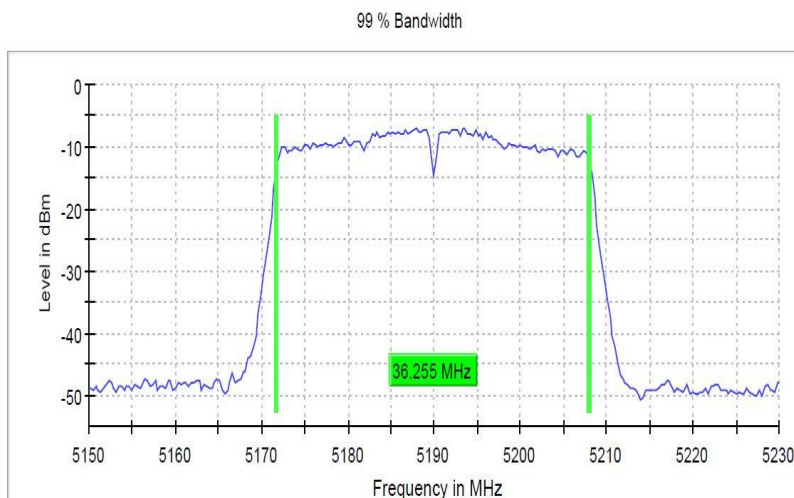


Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-1 (S01_AH02)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5210.000000	76.000000	---	---	5171.750000	5247.750000	PASS

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	500.000 kHz
VBW	2.000 MHz
SweepPoints	320
Sweeptime	37.924 μ s
Reference Level	-20.000 dBm
Attenuation	0.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
Sweeptype	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	68 / max. 150
Stable	5 / 5
Max Stable Difference	0.28 dB

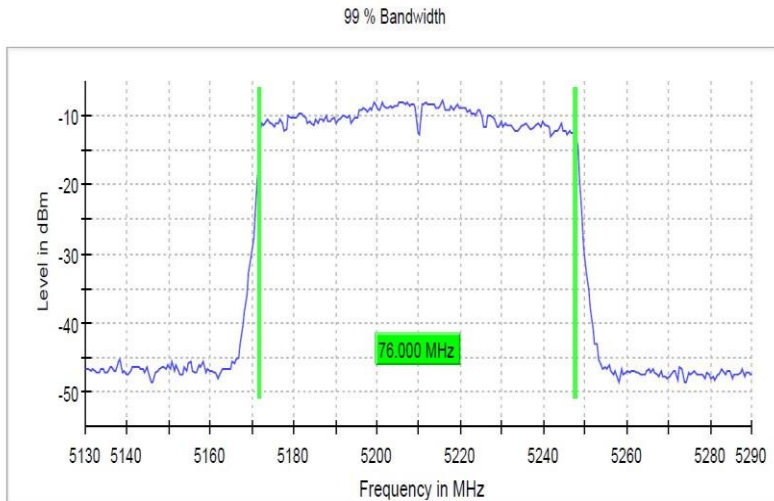

4.3.5 TEST EQUIPMENT USED

- R&S TS8997

4.4 MAXIMUM CONDUCTED OUTPUT POWER

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to a gated average power meter via a short coax cable with a known loss.

4.4.2 TEST REQUIREMENTS / LIMITS

A) FCC

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1)

Limit: 50 mW (17 dBm) or 4 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or 11 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or 17 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (3):

Limit: 1 W (30 dBm).

§15.407 (a) (4):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 200 mW (23 dBm) or $10 + 10 \log_{10} B$ [dBm], whichever power is less.

B is the 99% emission bandwidth in MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B$ [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B$ [dBm], whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or $11 + 10 \log_{10} B$ [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or $17 + 10 \log_{10} B$ [dBm], whichever power is less.

RSS-247, 6.2.4 (1), Band 5725-5825 MHz:

Limits:

Maximum conducted Power: 1W (30 dBm) or $17 + 10 \log_{10} B$ [dBm], whichever power is less.

e.i.r.p.: 4.0 W (36 dBm) or $23 + 10 \log_{10} B$ [dBm], whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

4.4.3 TEST PROTOCOL

Ambient temperature: 23 °C
 Air Pressure: 1010 hPa
 Humidity: 47 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	36	5180	3.9	8.3	30.0	26.1	N/A		N/A	N/A	1)
	44	5220	4.1	8.5	30.0	25.9	N/A		N/A	N/A	1)
	48	5240	4.1	8.5	30.0	25.9	N/A		N/A	N/A	1)
3	149	5745	4.3	8.7	30.0	25.7	30.0	25.7	36.0	27.3	
	157	5785	4.6	9.0	30.0	25.4	30.0	25.4	36.0	27.0	
	165	5825	4.4	8.8	30.0	25.6	30.0	25.6	36.0	27.2	

WLAN n-Mode; 20 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	36	5180	3.7	8.1	30.0	26.3	N/A		N/A	N/A	1)
	44	5220	3.7	8.1	30.0	26.3	N/A		N/A	N/A	1)
	48	5240	3.9	8.3	30.0	26.1	N/A		N/A	N/A	1)
3	149	5745	4.3	8.7	30.0	25.7	30.0	25.7	36.0	27.3	
	157	5785	4.5	8.9	30.0	25.5	30.0	25.5	36.0	27.1	
	165	5825	4.4	8.8	30.0	25.6	30.0	25.6	36.0	27.2	

WLAN n-Mode; 40 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	38	5190	3.6	8.0	30.0	26.4	N/A		N/A	N/A	1)
	46	5230	3.8	8.2	30.0	26.2	N/A		N/A	N/A	1)
3	151	5755	3.8	8.2	30.0	26.2	30.0	26.2	36.0	27.8	
	159	5795	4.0	8.4	30.0	26.0	30.0	26.0	36.0	27.6	

WLAN ac-Mode; 20 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	36	5180	3.7	8.1	30.0	26.3	N/A		N/A	N/A	1)
	44	5220	3.9	8.3	30.0	26.1	N/A		N/A	N/A	1)
	48	5240	4.1	8.5	30.0	25.9	N/A		N/A	N/A	1)
3	149	5745	4.3	8.7	30.0	25.7	30.0	25.7	36.0	27.3	
	157	5785	4.5	8.9	30.0	25.5	30.0	25.5	36.0	27.1	
	165	5825	4.4	8.8	30.0	25.6	30.0	25.6	36.0	27.2	

WLAN ac-Mode; 40 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	38	5190	3.7	8.1	30.0	26.3	N/A		N/A	N/A	1)
	46	5230	3.7	8.1	30.0	26.3	N/A		N/A	N/A	1)
3	151	5755	4.1	8.5	30.0	25.9	30.0	25.9	36.0	27.5	
	159	5795	4.1	8.5	30.0	25.9	30.0	25.9	36.0	27.5	

WLAN ac-Mode; 80 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	42	5210	3.5	7.9	30.0	26.5	N/A		N/A	N/A	1)
3	155	5775	3.6	8.0	30.0	26.4	30.0	26.4	36.0	28.0	

WLAN n-Mode; 20 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	36	5180	7.3	11.7	30.0	22.7	N/A		N/A	N/A	1)
	44	5220	7.1	11.5	30.0	22.9	N/A		N/A	N/A	1)
	48	5240	6.8	11.2	30.0	23.2	N/A		N/A	N/A	1)
3	149	5745	7.2	11.6	30.0	22.8	30.0	22.8	36.0	24.4	
	157	5785	7.0	11.4	30.0	23.0	30.0	23.0	36.0	24.6	
	165	5825	7.0	11.4	30.0	23.0	30.0	23.0	36.0	24.6	

WLAN n-Mode; 40 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	38	5190	6.7	11.1	30.0	23.3	N/A		N/A	N/A	1)
	46	5230	6.8	11.2	30.0	23.2	N/A		N/A	N/A	1)
3	151	5755	7.1	11.5	30.0	22.9	30.0	30.0	36.0	24.5	
	159	5795	6.8	11.2	30.0	23.2	30.0	22.9	36.0	24.8	

WLAN ac-Mode; 20 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	36	5180	7.1	11.5	30.0	22.9	N/A		N/A	N/A	1)
	44	5220	7.4	11.8	30.0	22.6	N/A		N/A	N/A	1)
	48	5240	7.0	11.4	30.0	23.0	N/A		N/A	N/A	1)
3	149	5745	7.1	11.5	30.0	22.9	30.0	22.9	36.0	24.5	
	157	5785	7.0	11.4	30.0	23.0	30.0	23.0	36.0	24.6	
	165	5825	7.1	11.5	30.0	22.9	30.0	22.9	36.0	24.5	

WLAN ac-Mode; 40 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	38	5190	6.5	10.9	30.0	23.5	N/A		N/A	N/A	1)
	46	5230	6.4	10.8	30.0	23.6	N/A		N/A	N/A	1)
3	151	5755	7.2	11.6	30.0	22.8	30.0	30.0	36.0	24.4	
	159	5795	6.8	11.2	30.0	23.2	30.0	22.8	36.0	24.8	

WLAN ac-Mode; 80 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit FCC [dBm]	Margin [dB]	Cond. Limit IC [dBm]	Margin [dB]	EIRP Limit IC [dBm]	Margin [dB]	
1	42	5210	7.3	11.7	30.0	22.7	N/A		N/A	N/A	1)
3	155	5775	6.7	11.1	30.0	23.3	30.0	23.3	36.0	24.9	

Remark: 1) Power is below 21 dBm, no restriction in regards to elevation angle apply.

4.4.4 TEST EQUIPMENT USED

- R&S TS8997

4.5 PEAK POWER SPECTRAL DENSITY

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.5.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements.
The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz (subband 1) / 500 kHz (subband 3)
- Video Bandwidth (VBW): 3 MHz (subband 1) / 2 MHz (subband 3)
- Trace: Max hold
- Sweeps: till stable, at least 9
- Sweep time: 2 s (20/40 MHz BW), 3.2 s (80 MHz BW)
- Detector: RMS

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

4.5.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz.
This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:
Limit (e.i.r.p.): 10 dBm/MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:
Limit: 11 dBm/MHz.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:
Limit: 11 dBm/MHz.

RSS-247, 6.2.4 (1), Band 5725-5850 MHz:
Limit: 30 dBm/500 kHz.

4.5.3 TEST PROTOCOL

Ambient temperature: 23 °C

Air Pressure: 1010 hPa

Humidity: 40 %

WLAN a-Mode; 20 MHz; 6 Mbit/s

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/MHz]
1	36	5180	-6.6	17.0	23.6	N/A	N/A	N/A
	44	5220	-6.8	17.0	23.8	N/A	N/A	N/A
	48	5240	-6.6	17.0	23.6	N/A	N/A	N/A
3	149	5745	-9.6	30.0	39.6	30.0	39.6	
	157	5785	-9.1	30.0	39.1	30.0	39.1	
	165	5825	-9.1	30.0	39.1	30.0	39.1	

WLAN n-Mode; 20 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/MHz]
1	36	5180	-7.0	17.0	24.0	N/A	N/A	N/A
	44	5220	-7.2	17.0	24.2	N/A	N/A	N/A
	48	5240	-7.1	17.0	24.1	N/A	N/A	N/A
3	149	5745	-9.7	30.0	39.7	30.0	39.7	
	157	5785	-9.3	30.0	39.3	30.0	39.3	
	165	5825	-9.3	30.0	39.3	30.0	39.3	

WLAN n-Mode; 40 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/MHz]
1	38	5190	-10.3	17.0	27.3	N/A	N/A	N/A
	46	5230	-10.1	17.0	27.1	N/A	N/A	N/A
3	151	5755	-13.1	30.0	43.1	30.0	43.1	
	159	5795	-12.6	30.0	42.6	30.0	42.6	

WLAN ac-Mode; 20 MHz; MCS0;SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/MHz]
1	36	5180	-7.1	17.0	24.1	N/A	N/A	N/A
	44	5220	-6.9	17.0	23.9	N/A	N/A	N/A
	48	5240	-6.9	17.0	23.9	N/A	N/A	N/A
3	149	5745	-9.6	30.0	39.6	30.0	39.6	
	157	5785	-9.2	30.0	39.2	30.0	39.2	
	165	5825	-9.2	30.0	39.2	30.0	39.2	

WLAN ac-Mode; 40 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/MHz]
1	38	5190	-9.8	17.0	26.8	N/A	N/A	N/A
	46	5230	-10.0	17.0	27.0	N/A	N/A	N/A
3	151	5755	-12.8	30.0	42.8	30.0	42.8	
	159	5795	-12.5	30.0	42.5	30.0	42.5	

WLAN ac-Mode; 80 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/MHz]
1	42	5210	-13.5	17.0	30.5	N/A	N/A	N/A
3	155	5775	-16.3	30.0	46.3	30.0	46.3	

WLAN n-Mode; 20 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/ MHz]
1	36	5180	-3.8	17.0	20.8	N/A	N/A	N/A
	44	5220	-4.0	17.0	21.0	N/A	N/A	N/A
	48	5240	-4.3	17.0	21.3	N/A	N/A	N/A
3	149	5745	-7.6	30.0	37.6	30.0	37.6	
	157	5785	-7.6	30.0	37.6	30.0	37.6	
	165	5825	-7.1	30.0	37.1	30.0	37.1	

WLAN n-Mode; 40 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/ MHz]
1	38	5190	-7.1	17.0	24.1	N/A	N/A	N/A
	46	5230	-7.1	17.0	24.1	N/A	N/A	N/A
3	151	5755	-10.5	30.0	40.5	30.0	40.5	
	159	5795	-10.7	30.0	40.7	30.0	40.7	

WLAN ac-Mode; 20 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/ MHz]
1	36	5180	-4.1	17.0	21.1	N/A	N/A	N/A
	44	5220	-3.9	17.0	20.9	N/A	N/A	N/A
	48	5240	-4.2	17.0	21.2	N/A	N/A	N/A
3	149	5745	-7.6	30.0	37.6	30.0	37.6	
	157	5785	-7.6	30.0	37.6	30.0	37.6	
	165	5825	-7.1	30.0	37.1	30.0	37.1	

WLAN ac-Mode; 40 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/ MHz]
1	38	5190	-7.4	17.0	24.4	N/A	N/A	N/A
	46	5230	-7.6	17.0	24.6	N/A	N/A	N/A
3	151	5755	-10.4	30.0	40.4	30.0	40.4	
	159	5795	-10.7	30.0	40.7	30.0	40.7	


WLAN ac-Mode; 80 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm / MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD [dBm/ MHz]
1	42	5210	-9.1	17.0	26.1	N/A	N/A	N/A
3	155	5775	-14.0	30.0	44.0	30.0	44.0	

Remark: Please see next sub-clause for the measurement plot.

4.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN n 20 MHz MIMO, Operating Frequency = low, Subband = U-NII-1 (S01_AH02)

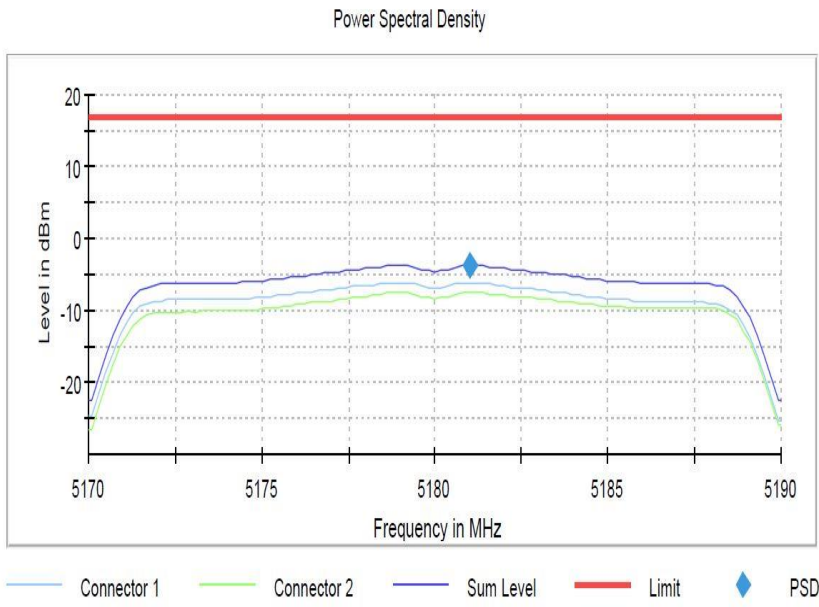


Setting	Instrument Value
Start Frequency	5.17000 GHz
Stop Frequency	5.19000 GHz
Span	20.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
SweepPoints	101
Sweeptime	2.020 s
Reference Level	-20.000 dBm
Attenuation	0.000 dB
Detector	RMS
SweepCount	3
Filter	3 dB
Trace Mode	Max Hold
Sweeptype	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	4 / max. 15
Stable	3 / 3
Max Stable Difference	0.07 dB

Radio Technology = WLAN n 40 MHz MIMO, Operating Frequency = low, Subband = U-NII-1 (S01_AH02)



Setting	Instrument Value
Start Frequency	5.17000 GHz
Stop Frequency	5.21000 GHz
Span	40.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
SweepPoints	101
Sweeptime	2.020 s
Reference Level	-20.000 dBm
Attenuation	0.000 dB
Detector	RMS
SweepCount	3
Filter	3 dB
Trace Mode	Max Hold
Sweeptype	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	4 / max. 15
Stable	3 / 3
Max Stable Difference	0.14 dB

Radio Technology = WLAN ac 80 MHz MIMO, Operating Frequency = mid, Subband = U-NII-1 (S01_AH02)

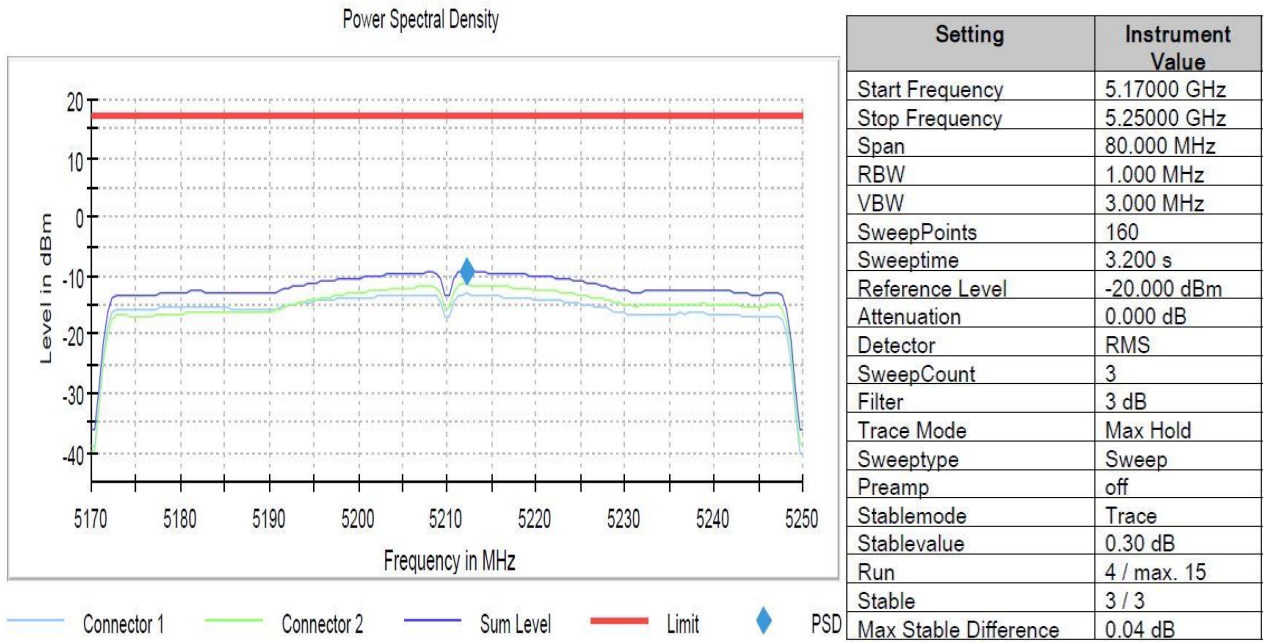

4.5.5 TEST EQUIPMENT USED

- R&S TS8997

4.6 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.6.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 - 1000 MHz

- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 45^{\circ}$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90° .

The turn table step size (azimuth angle) for the preliminary measurement is 45° .

Above 26 GHz the measurement distance is reduced to 1 m.

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instead 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average

- IF Bandwidth = 1 MHz

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / Average

- Measured frequencies: in step 1 determined frequencies

- IF – Bandwidth: 1 MHz

- Measuring time: 1 s

4.6.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5715–5860 MHz and additionally

Limit: -17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5850–5860 MHz.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (2), Emissions outside the band 5150-5250 MHz, indoor operation only:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2 (2), Emissions outside the band 5250-5350 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3 (2), Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

Note: No operation is permitted for the frequency range 5600–5650 MHz.

RSS-247, 6.2.4 (2), Emissions outside the band 5725-5825 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5715–5835 MHz and additionally

Limit: -17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5825–5835 MHz.

C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8

Limit types (in result tables on next page):

RB – Emissions falls into a “Restricted Band” according FCC §§15.205 and 15.209 *)

UE – “Undesirable Emission Limit” according FCC §15.407

BE-RB – Band Edge Limit basing on “Restricted Band Limits”

BE-UE – Band Edge Limit basing on “Undesirable Emission Limit”

*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

4.6.3 TEST PROTOCOL

Ambient temperature: 25 - 27 °C
 Air Pressure: 1007 - 1014 hPa
 Humidity: 30 - 34 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type
36	5180	10360.8	56.9	PEAK	1000	68.2	11.3	UE
44	5220	10442.7	56.9	PEAK	1000	68.2	11.3	UE
48	5240	10482.9	58.5	PEAK	1000	68.2	9.7	UE
149	5745	11489.0	55.7	PEAK	1000	74.0	18.3	RB
149	5745	11490.2	39.2	AV	1000	54.0	14.8	RB
157	5785	6690.5	58.9	PEAK	1000	68.2	9.3	UE
157	5785	11569.9	41.3	AV	1000	54.0	12.7	RB
157	5785	11570.1	56.2	PEAK	1000	74.0	17.8	RB
165	5825	11651.4	53.8	PEAK	1000	74.0	20.2	RB
165	5825	11649.6	39.1	AV	1000	54.0	14.9	RB
44	5220	31.5	27.7	QP	120	40.0	12.3	RB
44	5220	45.1	31.1	QP	120	40.0	8.9	RB
44	5220	53.5	30.7	QP	120	40.0	9.3	RB
44	5220	62.4	31.6	QP	120	40.0	8.4	RB
44	5220	111.6	26.7	QP	120	43.5	16.8	RB
44	5220	164.1	30.6	QP	120	43.5	12.9	RB
44	5220	211.9	26.3	QP	120	43.5	17.2	RB
44	5220	238.6	31.6	QP	120	46.0	14.4	RB
44	5220	241.6	36.4	QP	120	46.0	9.6	RB
44	5220	248.2	35.1	QP	120	46.0	10.9	RB
44	5220	266.7	38.7	QP	120	46.0	7.3	RB
44	5220	479.5	25.7	QP	120	46.0	20.3	RB
44	5220	533.3	28.1	QP	120	46.0	17.9	RB
44	5220	960.0	32.6	QP	120	46.0	13.4	RB
157	5785	31.7	28.6	QP	120	40.0	11.4	RB
157	5785	44.3	31.0	QP	120	40.0	9.0	RB
157	5785	52.6	31.8	QP	120	40.0	8.2	RB
157	5785	63.2	30.6	QP	120	40.0	9.4	RB
157	5785	79.7	25.0	QP	120	40.0	15.0	RB
157	5785	119.3	24.9	QP	120	43.5	18.6	RB
157	5785	162.7	30.3	QP	120	43.5	13.2	RB
157	5785	211.9	27.3	QP	120	43.5	16.2	RB
157	5785	240.0	28.8	QP	120	46.0	17.2	RB
157	5785	246.4	32.8	QP	120	46.0	13.2	RB
157	5785	400.0	29.6	QP	120	46.0	16.4	RB
157	5785	480.0	28.8	QP	120	46.0	17.2	RB
157	5785	533.3	29.4	QP	120	46.0	16.6	RB
157	5785	721.6	29.4	QP	120	46.0	16.6	RB
157	5785	960.0	33.0	QP	120	54.0	21.1	RB

WLAN n-Mode; 20 MHz; MCS0
Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type
36	5180	10361.6	54.0	PEAK	1000	68.2	14.2	UE
44	5220	10438.7	57.6	PEAK	1000	68.2	10.6	UE
149	5745	11489.7	40.4	AV	1000	54.0	13.6	RB
149	5745	11489.7	56.3	PEAK	1000	74.0	17.7	RB
157	5785	11569.9	42.1	AV	1000	54.0	11.9	RB
157	5785	11569.9	57.6	PEAK	1000	74.0	16.4	RB
165	5825	11649.8	55.1	PEAK	1000	74.0	18.9	RB
165	5825	11649.8	40.5	AV	1000	54.0	13.5	RB
48	5240	10480.0	60.0	PEAK	1000	68.2	8.2	UE

WLAN n-Mode; 40 MHz; MCS0
Applied duty cycle correction (AV): 0 dB


Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type
38	5190	10381.0	53.0	PEAK	1000	68.2	15.2	UE
46	5230	10460.0	56.0	PEAK	1000	68.2	12.2	UE

WLAN n-Mode; 20 MHz; MCS0; MIMO
Applied duty cycle correction (AV): 0 dB


Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type
44	5220	10441.2	61.6	PEAK	1000	68.2	6.6	UE
157	5785	11566.6	60.0	PEAK	1000	74.0	14.0	RB
157	5785	11566.6	44.3	AV	1000	54.0	9.7	RB

Remark: Please see next sub-clause for the measurement plot.

4.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

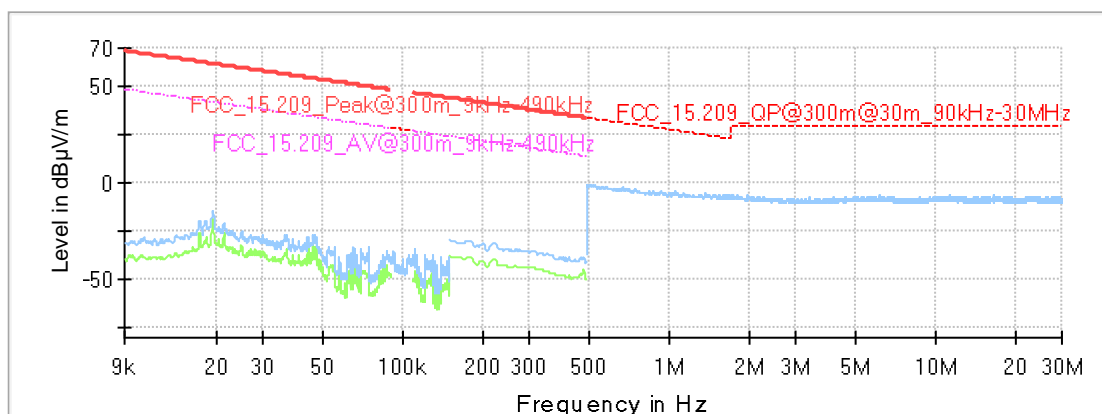


9 kHz – 30 MHz, WLAN a 6Mbps, Ch. 44

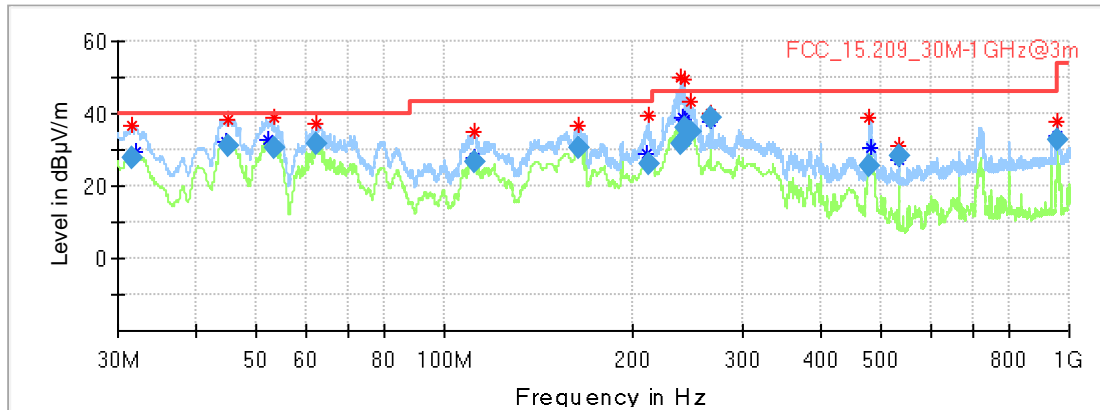

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
31.500000	27.69	40.00	12.31	1000.0	120.000	105.0	V	-147.0	18.3	
45.090000	31.09	40.00	8.91	1000.0	120.000	103.0	V	90.0	10.3	
53.460000	30.69	40.00	9.31	1000.0	120.000	106.0	V	94.0	4.4	
62.370000	31.58	40.00	8.42	1000.0	120.000	120.0	V	54.0	5.5	
111.600000	26.72	43.50	16.78	1000.0	120.000	108.0	V	99.0	11.2	
164.100000	30.59	43.50	12.91	1000.0	120.000	103.0	V	-40.0	8.8	
211.860000	26.31	43.50	17.19	1000.0	120.000	123.0	H	91.0	9.8	
238.620000	31.57	46.00	14.43	1000.0	120.000	139.0	V	101.0	10.8	
241.560000	36.36	46.00	9.64	1000.0	120.000	105.0	V	90.0	11.0	
248.220000	35.07	46.00	10.93	1000.0	120.000	103.0	V	-87.0	11.2	
266.670000	38.73	46.00	7.27	1000.0	120.000	107.0	H	59.0	11.8	
479.490000	25.74	46.00	20.26	1000.0	120.000	132.0	V	-70.0	17.9	
533.310000	28.13	46.00	17.87	1000.0	120.000	102.0	V	-96.0	18.9	
959.970000	32.59	46.00	13.41	1000.0	120.000	118.0	V	-94.0	25.0	

30 MHz – 1 GHz, WLAN a 6Mbps, Ch. 44

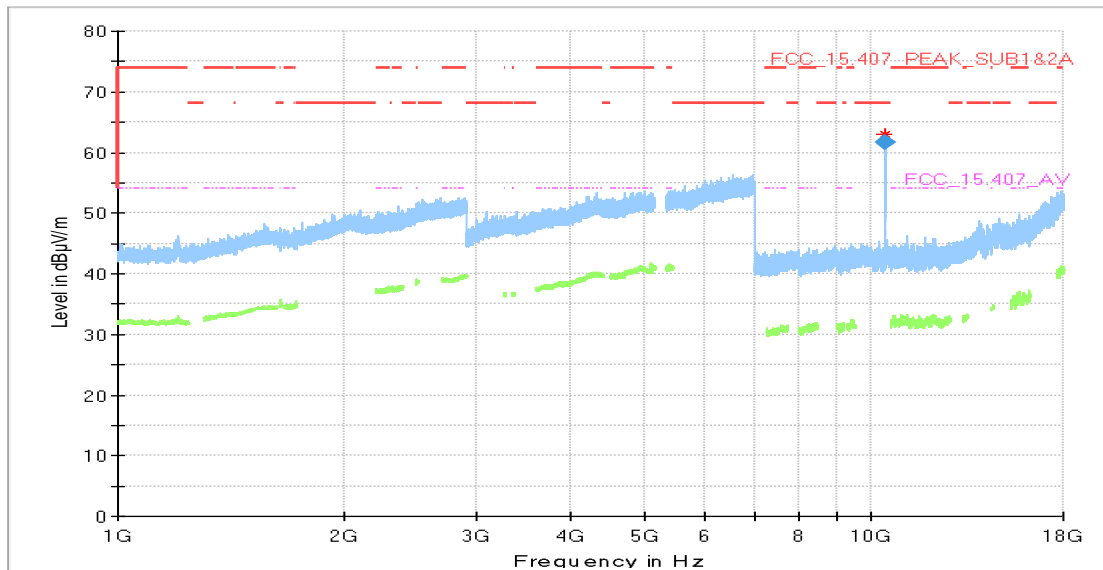


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
10441.188	63.0	---	68.20	5.23	---	---	150.0	V	-7.0	75.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
10441.188	61.6	---	68.20	6.59	1000.0	1000.000	150.0	V	-7.0	75.0

1 GHz – 18 GHz, WLAN n MCS0 MIMO, Ch. 44

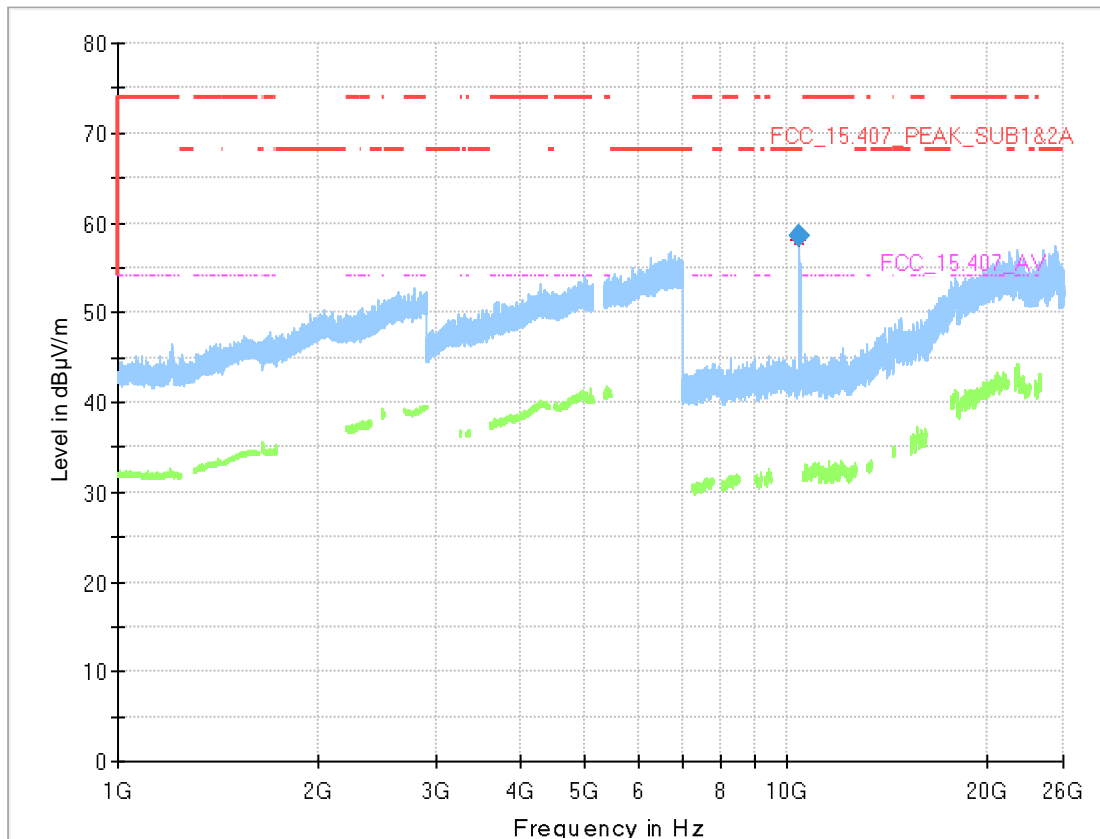


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
10482.850	58.1	---	68.20	10.09	---	---	150.0	H	-3.0	93.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
10482.850	58.5	---	68.20	9.68	1000.0	1000.000	150.0	H	-3.0	93.0

1 GHz – 26 GHz, WLAN a 6 Mbps, Ch. 48

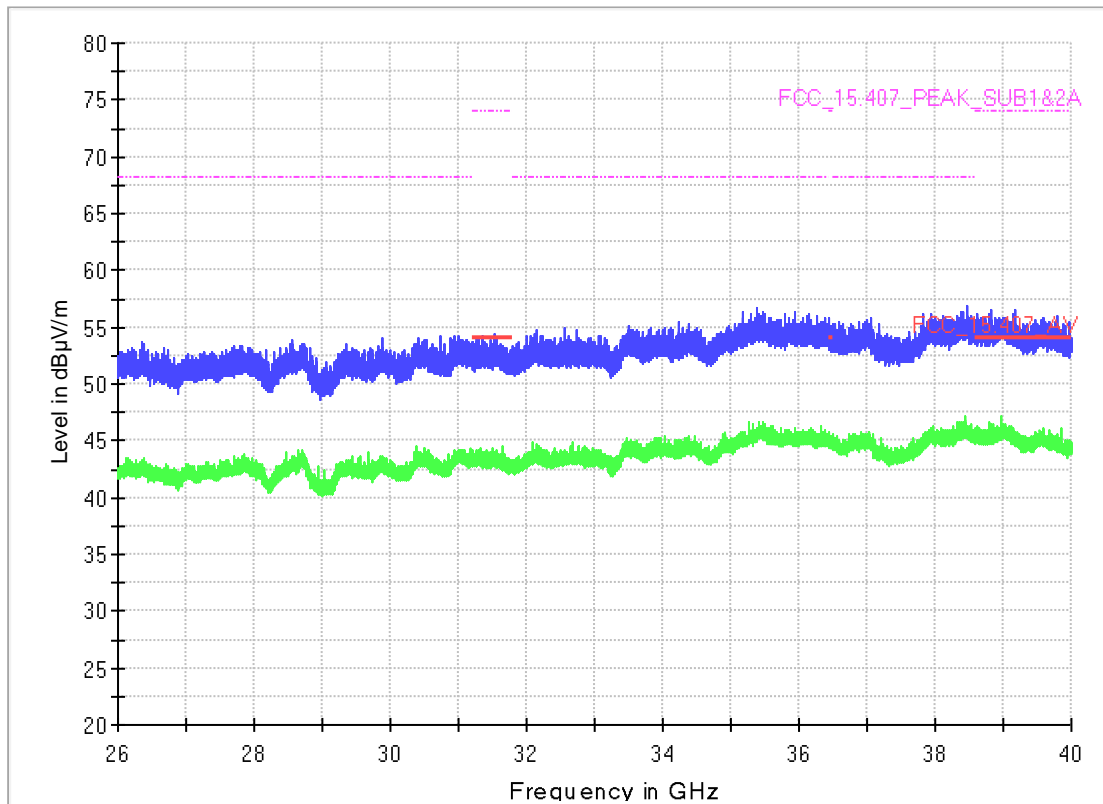

26 GHz – 40 GHz, WLAN a 6 Mbps, Ch. 44

4.6.5 TEST EQUIPMENT USED

- Radiated Emissions

4.7 BAND EDGE

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

4.7.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

4.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limits ($\text{dB}\mu\text{V}/\text{m}$)
0.009 - 0.49	2400/F(kHz)@300m	3	(48.5 - 13.8)@300m
0.49 - 1.705	24000/F(kHz)@30m	3	(33.8 - 23.0)@30m
1.705 - 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limits ($\text{dB}\mu\text{V}/\text{m}$)
30 - 88	100@3m	3	40.0@3m
88 - 216	150@3m	3	43.5@3m
216 - 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V}/\text{m)} = 20 \log (\text{Limit } (\mu\text{V}/\text{m})/1\mu\text{V}/\text{m})$

4.7.3 TEST PROTOCOL

Ambient temperature: 25 - 27 °C
 Air Pressure: 1007 - 1014 hPa
 Humidity: 30 - 34 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	56.8	PEAK	1000	74.0	17.2	BE-RB	FCC
	36	5180	5150.0	43.9	AV	1000	54.0	10.1	BE-RB	FCC
3	149	5745	5725.0	57.6	PEAK	1000	121.0	63.4	BE-UE	FCC&IC
	165	5825	5850.0	57.3	PEAK	1000	121.0	63.7	BE-UE	FCC&IC

WLAN n-Mode; 20 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	56.4	PEAK	1000	74.0	17.6	BE-RB	FCC
	36	5180	5150.0	43.8	AV	1000	54.0	10.2	BE-RB	FCC
3	149	5745	5725.0	62.0	PEAK	1000	121.0	59.0	BE-UE	FCC&IC
	165	5825	5850.0	58.3	PEAK	1000	121.0	62.7	BE-UE	FCC&IC

WLAN n-Mode; 40 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	56.9	PEAK	1000	74.0	17.1	BE-RB	FCC
	38	5190	5150.0	43.5	AV	1000	54.0	10.5	BE-RB	FCC
3	151	5755	5725.0	60.3	PEAK	1000	121.0	60.7	BE-UE	FCC&IC
	159	5795	5850.0	57.1	PEAK	1000	121.0	63.9	BE-UE	FCC&IC

WLAN ac-Mode; 20 MHz; MCS0; SISO
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	56.3	PEAK	1000	74.0	17.7	BE-RB	FCC
	36	5180	5150.0	44.5	AV	1000	54.0	9.5	BE-RB	FCC
3	149	5745	5725.0	59.7	PEAK	1000	121.0	61.3	BE-UE	FCC&IC
	165	5825	5850.0	57.3	PEAK	1000	121.0	63.7	BE-UE	FCC&IC

WLAN ac-Mode; 40 MHz; MCS0; SISO
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	57.2	PEAK	1000	74.0	16.8	BE-RB	FCC
	38	5190	5150.0	44.2	AV	1000	54.0	9.8	BE-RB	FCC
3	151	5755	5725.0	61.2	PEAK	1000	121.0	59.8	BE-UE	FCC&IC
	159	5795	5850.0	57.2	PEAK	1000	121.0	63.8	BE-UE	FCC&IC

WLAN ac-Mode; 80 MHz; MCS0; SISO
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	42	5210	5150.0	56.7	PEAK	1000	74.0	17.3	BE-RB	FCC
	42	5210	5150.0	43.8	AV	1000	54.0	10.2	BE-RB	FCC
3	155	5775	5725.0	59.0	PEAK	1000	121.0	62.0	BE-UE	FCC&IC
	155	5775	5850.0	57.6	PEAK	1000	121.0	63.4	BE-UE	FCC&IC

WLAN n-Mode; 20 MHz; MCS0; MIMO
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	63.5	PEAK	1000	74.0	10.5	BE-RB	FCC
	36	5180	5150.0	45.6	AV	1000	54.0	8.4	BE-RB	FCC
3	149	5745	5725.0	69.9	PEAK	1000	121.0	51.1	BE-UE	FCC&IC
	165	5825	5850.0	63.0	PEAK	1000	121.0	58.0	BE-UE	FCC&IC

WLAN n-Mode; 40 MHz; MCS0; MIMO
Applied duty cycle correction (AV): 0 dB


U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	56.5	PEAK	1000	74.0	17.5	BE-RB	FCC
	38	5190	5150.0	43.9	AV	1000	54.0	10.1	BE-RB	FCC

WLAN ac-Mode; 80 MHz; MCS0; MIMO
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin [dB]	Limit Type	FCC /IC?
1	42	5210	5150.0	60.9	PEAK	1000	74.0	13.1	BE-RB	FCC
	42	5210	5150.0	46.8	AV	1000	54.0	7.2	BE-RB	FCC

Remark: Please see next sub-clause for the measurement plot.

4.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

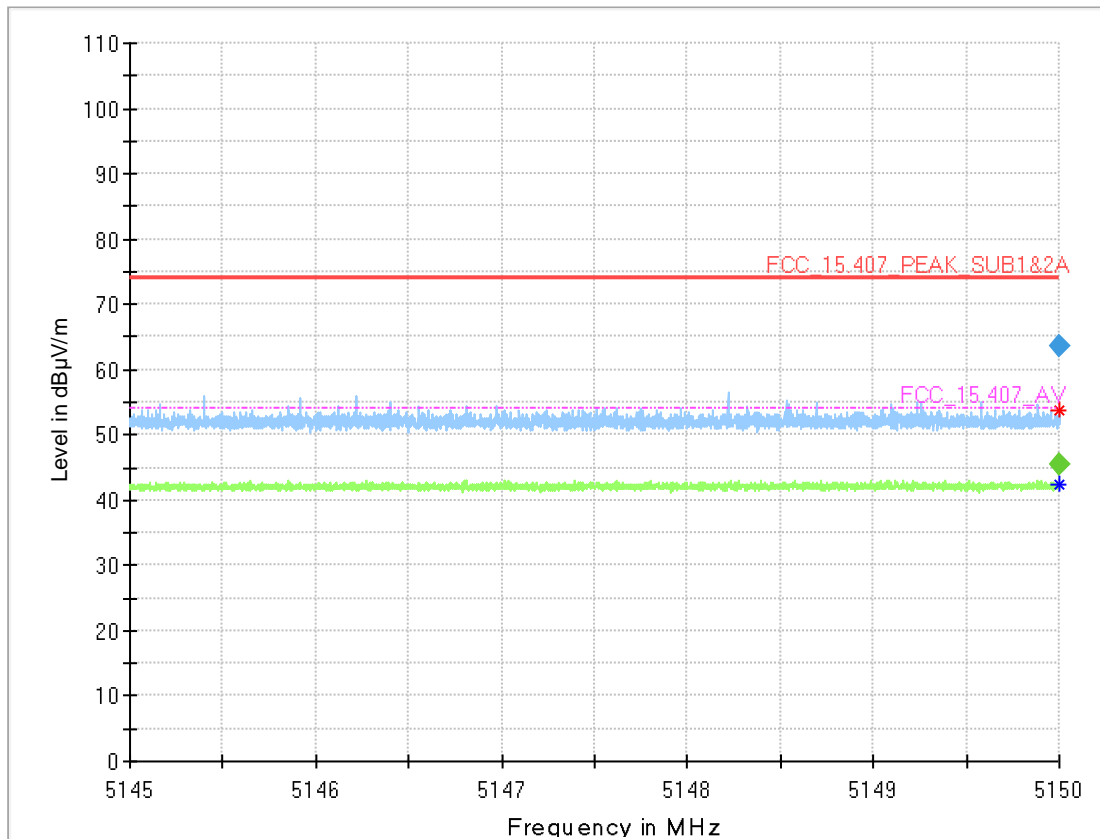


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
5149.999	---	42.5	54.00	11.55	---	---	150.0	V	93.0	92.0
5150.000	53.7	---	74.00	20.25	---	---	150.0	V	85.0	105.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
5149.999	---	45.6	54.00	8.38	1000.0	1000.000	150.0	V	93.0	92.0
5150.000	63.5	---	74.00	10.47	1000.0	1000.000	150.0	V	85.0	105.0

WLAN n MCS0 MIMO, Ch. 36

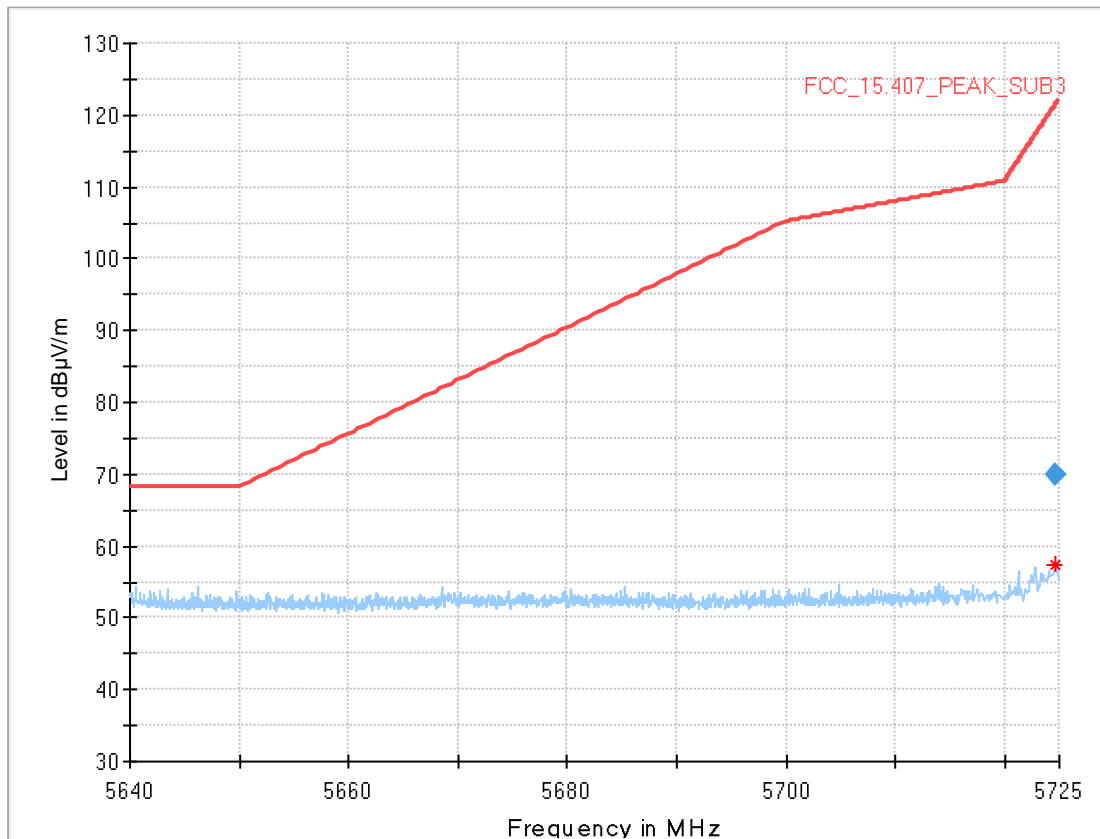

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
5724.700	57.4	---	121.52	64.07	---	---	150.0	V	91.0	105.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
5724.700	69.9	---	121.52	51.57	1000.0	1000.000	150.0	V	91.0	105.0

WLAN n MCS0 MIMO, Ch. 149

4.7.5 TEST EQUIPMENT USED

- Radiated Emissions

5 TEST EQUIPMENT

1 R&S TS8997
EN300328/301893 Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2017-07	2020-07
1.2	MFS	Rubidium Frequency Standard	Datum-Beverly	5489/001	2018-07	2019-07
1.3	1515 / 93459	Broadband Power Divider SMA (Aux)	Weinschel Associates	LN673		
1.4	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2018-04	2020-04
1.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
1.6	VT 4002	Temperature Chamber	Vötsch	58566002150010	2018-04	2020-04
1.7	A8455-4	4 Way Power Divider (SMA)		-		
1.8	Opus10 THI (8152.00)	ThermoHygro Datalogger 03 (Environ)	Lufft Mess- und Regeltechnik GmbH	7482	2017-03	2019-03
1.9	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2016-10	2019-10
1.10	OSP120	Switching Unit with integrated power meter	Rohde & Schwarz	101158	2018-05	2021-05

2 Radiated Emissions
Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2017-10	2018-10
2.2	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2017-04	2019-04
2.3	ESW44	EMI Test Receiver	Rohde & Schwarz GmbH & Co. KG	101603	2018-05	2019-05
2.4	Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	Frankonia	none		
2.5	FS-Z60	Harmonic Mixer 40 - 60 GHz	Rohde & Schwarz Messgerätebau GmbH	100178	2016-12	2019-12
2.6	FS-Z220	Harmonic Mixer 140 - 220 GHz	Rohde & Schwarz Messgerätebau GmbH	101005	2017-03	2020-03

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.7	SGH-05	Standard Gain / Pyramidal Horn Antenna (140 - 220 GHz)		075		
2.8	5HC2700/12750-1.5-KK	High Pass Filter	Trilithic	9942012		
2.9	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
2.10	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2015-06 2018-06	2018-06 2021-06
2.11	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
2.12	HL 562	Ultralog new biconicals	Rohde & Schwarz	830547/003	2015-06 2018-07	2018-06 2021-07
2.13	NRVD	Power Meter	Rohde & Schwarz GmbH & Co. KG	828110/016		
2.14	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
2.15	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2016-12	2018-12
2.16	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
2.17	SGH-19	Standard Gain / Pyramidal Horn Antenna (40 - 60 GHz)		093		
2.18	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright	09		
2.19	4HC1600/12750-1.5-KK	High Pass Filter	Trilithic	9942011		
2.20	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
2.21	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
2.22	TT 1.5 WI	Turn Table	Maturo GmbH	-		
2.23	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz	100609	2016-04	2019-04
2.24	HF 906	Double-ridged horn	Rohde & Schwarz	357357/001	2018-03	2021-03
2.25	FS-Z325	Harmonic Mixer 220 - 325 GHz	Rohde & Schwarz Messgerätebau GmbH	101006	2017-03	2020-03
2.26	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.27	SGH-08	Standard Gain / Pyramidal Horn Antenna (90 - 140 GHz)		064		
2.28	SGH-12	Standard Gain / Pyramidal HornAntenna (60 - 90 GHz)		326		
2.29	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008		
2.30	FS-Z140	Harmonic Mixer 90 -140 GHz	Rohde & Schwarz Messgerätebau GmbH	101007	2017-02	2020-02
2.31	HFH2-Z2	Loop Antenna	Rohde & Schwarz	829324/006	2018-01	2021-01
2.32	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2017-03	2019-03
2.33	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2016-11	2018-11
2.34	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
2.35	AS 620 P	Antenna mast	HD GmbH	620/37		
2.36	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/3790709		
2.37	SGH-03	Standard Gain / Pyramidal Horn Antenna (220 - 325 GHz)		060		
2.38	FS-Z90	Harmonic Mixer 60 - 90 GHz	Rohde & Schwarz Messgerätebau GmbH	101686	2017-03	2020-03
2.39	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2018-01	2020-01
2.40	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
2.41	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324		
2.42	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/11920513		
2.43	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2015-05 2018-07	2018-05 2021-07

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

6.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency MHz	Corr. dB	LISN insertion loss ESH3- Z5 dB	cable loss (incl. 10 dB atten- uator) dB
0.15	10.1	0.1	10.0
5	10.3	0.1	10.2
7	10.5	0.2	10.3
10	10.5	0.2	10.3
12	10.7	0.3	10.4
14	10.7	0.3	10.4
16	10.8	0.4	10.4
18	10.9	0.4	10.5
20	10.9	0.4	10.5
22	11.1	0.5	10.6
24	11.1	0.5	10.6
26	11.2	0.5	10.7
28	11.2	0.5	10.7
30	11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

6.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency MHz	AF HFH-Z2) dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-40 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

6.3 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

($d_{Limit} = 3\text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{Limit} = 10\text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{Limit} / d_{used})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency MHz	AF R&S HF907 dB (1/m)	Corr. dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit, atten- uator & pre-amp) dB	cable loss 4 (to receiver) dB
0.99	0.31	-21.51	0.79
1.44	0.44	-20.63	1.38
1.87	0.53	-19.85	1.33
2.41	0.67	-19.13	1.31
2.78	0.86	-18.71	1.40
2.74	0.90	-17.83	1.47
2.82	0.86	-16.19	1.46

Frequency MHz	AF R&S HF907 dB (1/m)	Corr. dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber) dB	cable loss 2 (inside chamber) dB	cable loss 3 (outside chamber) dB	cable loss 4 (switch unit, atten- uator & pre-amp) dB	cable loss 5 (to receiver) dB	used for FCC 15.247
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency MHz	AF R&S HF907 dB (1/m)	Corr. dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber) dB	cable loss 2 (High Pass) dB	cable loss 3 (pre- amp) dB	cable loss 4 (inside chamber) dB	cable loss 5 (outside chamber) dB	cable loss 6 (to receiver) dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency MHz	AF EMCO 3160-09 dB (1/m)	Corr. dB
18000	40.2	-23.5
18500	40.2	-23.2
19000	40.2	-22.0
19500	40.3	-21.3
20000	40.3	-20.3
20500	40.3	-19.9
21000	40.3	-19.1
21500	40.3	-19.1
22000	40.3	-18.7
22500	40.4	-19.0
23000	40.4	-19.5
23500	40.4	-19.3
24000	40.4	-19.8
24500	40.4	-19.5
25000	40.4	-19.3
25500	40.5	-20.4
26000	40.5	-21.3
26500	40.5	-21.1

cable loss 1 (inside chamber) dB	cable loss 2 (pre- amp) dB	cable loss 3 (inside chamber) dB	cable loss 4 (switch unit) dB	cable loss 5 (to receiver) dB
0.72	-35.85	6.20	2.81	2.65
0.69	-35.71	6.46	2.76	2.59
0.76	-35.44	6.69	3.15	2.79
0.74	-35.07	7.04	3.11	2.91
0.72	-34.49	7.30	3.07	3.05
0.78	-34.46	7.48	3.12	3.15
0.87	-34.07	7.61	3.20	3.33
0.90	-33.96	7.47	3.28	3.19
0.89	-33.57	7.34	3.35	3.28
0.87	-33.66	7.06	3.75	2.94
0.88	-33.75	6.92	3.77	2.70
0.90	-33.35	6.99	3.52	2.66
0.88	-33.99	6.88	3.88	2.58
0.91	-33.89	7.01	3.93	2.51
0.88	-33.00	6.72	3.96	2.14
0.89	-34.07	6.90	3.66	2.22
0.86	-35.11	7.02	3.69	2.28
0.90	-35.20	7.15	3.91	2.36

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

6.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency GHz	AF EMCO 3160-10 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d _{Limit} (meas. distance (limit) m	d _{used} (meas. distance (used) m
26.5	43.4	-11.2	4.4				-15.6	3	0.5
27.0	43.4	-11.2	4.4				-15.6	3	0.5
28.0	43.4	-11.1	4.5				-15.6	3	0.5
29.0	43.5	-11.0	4.6				-15.6	3	0.5
30.0	43.5	-10.9	4.7				-15.6	3	0.5
31.0	43.5	-10.8	4.7				-15.6	3	0.5
32.0	43.5	-10.7	4.8				-15.6	3	0.5
33.0	43.6	-10.7	4.9				-15.6	3	0.5
34.0	43.6	-10.6	5.0				-15.6	3	0.5
35.0	43.6	-10.5	5.1				-15.6	3	0.5
36.0	43.6	-10.4	5.1				-15.6	3	0.5
37.0	43.7	-10.3	5.2				-15.6	3	0.5
38.0	43.7	-10.2	5.3				-15.6	3	0.5
39.0	43.7	-10.2	5.4				-15.6	3	0.5
40.0	43.8	-10.1	5.5				-15.6	3	0.5

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

$$\text{distance correction} = -20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7 SETUP DRAWINGS

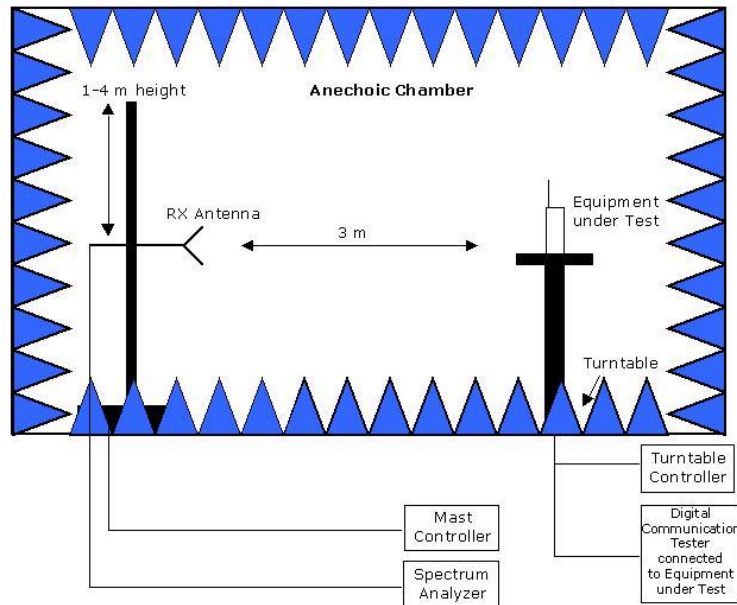

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.

8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

9 PHOTO REPORT

Please see separate photo report.