



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

**FCC PT 90 AMPLIFIER
AND IC RSS-131(i2), RSS-GEN (i3)
TEST REPORT**

APPLICANT	RF TECHNOLOGY PTY. LTD.
ADDRESS	ABN 14 131 764 148 Unit 46, Thornleigh Technology Park 7 Sefton Road Thornleigh NEW SOUTH WALES 2120 AUSTRALIA
FCC ID	KRE-E2-IP-PA500BH
IC LABEL	2005B-E2IPPA500BH
MODEL NUMBER	E2-IP-PA-500BH
PRODUCT DESCRIPTION	POWER AMPLIFIER
DATE SAMPLE RECEIVED	9/18/2012
DATE TESTED	10/2/2012
TESTED BY	Nam Nguyen
APPROVED BY	Mario R. de Aranzeta
TIMCO REPORT NO.	2443AUT12TestReport.doc
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate #0955-01



TABLE OF CONTENTS

ATTESTATION STATEMENT	3
REPORT SUMMARY	4
TEST ENVIRONMENT AND TEST SETUP.....	4
DUT DESCRIPTION.....	5
TEST EQUIPMENT	6
TEST PROCEDURES.....	7
TEST RESULTS.....	9
RF POWER OUTPUT	9
OCCUPIED BANDWIDTH.....	10
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)	13
FIELD STRENGTH OF SPURIOUS EMISSIONS (RADIATED).....	14
POWER LINE CONDUCTED INTERFERENCE	15
INPUT/OUTPUT AMPLITUDE COMPARISON	16

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc



ATTESTATION STATEMENT

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.



Test Certificate #0955-01

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made by me or under my supervision, at Timco Engineering, Inc. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.

Authorized by: Mario R. de Aranzeta



Signature:

Function: Test Lab Supervisor / Engineer

Date: 11/16/2012

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc



REPORT SUMMARY

Disclaimer	The test results relate only to the items tested.
Purpose of Test	To show the DUT in compliance with FCC CFR 47, Part 90 and IC RSS-131 requirements for amplifiers
Test Procedures	ANSI/TIA 603-C: 2004 FCC CFR 47 Part 90 IC RSS-131 issue 2, RSS – Gen issue 3 ANSI C63.4: 2003
Related Approval	N/A

TEST ENVIRONMENT AND TEST SETUP

Test Facility	All tests were conducted by: Timco Engineering Inc. 849 NW State Road 45 Newberry, FL 32669 USA
Laboratory Test Condition	Temperature: 26°C Relative humidity: 50%.
Deviation from the standards	No deviation
Modification to the DUT	No modification was made.
Test Exercise (software etc.)	The DUT was placed in continuous transmitting mode of operation.
System Setup	Stand alone device.

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc



DUT DESCRIPTION

Manufactured by	RF TECHNOLOGY PTY. LTD.
Product Description	POWER AMPLIFIER
FCC ID	KRE-E2-IP-PA500BH
IC Label	2005B-E2IIPPA500BH
M/N	E2-IP-PA500BH
Operating Freq	(450 – 512) MHZ
Max. Output Power	120.0 W
Modulation	N/A Amplifier
Power Source	DC Power 13.8 V
Test Item	Preproduction
Type of DUT	Fixed Amplifier

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IIPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc



TEST EQUIPMENT

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 12/31/11	12/31/13
AC Voltmeter	HP	400FL	2213A14499	CAL 6/12/11	6/12/13
Antenna: Active Loop	ETS-Lindgren	3117	00041534	CAL 10/5/12	10/5/14
Frequency Counter	HP	5385A	2730A03025	CAL 8/17/11	8/17/13
Hygro-Thermometer	Extech	445703	0602	CAL 6/15/11	6/15/13
Modulation Analyzer	HP	8901A	3435A06868	CAL 7/18/11	7/18/13
Digital Multimeter	Fluke	FLUKE-77	35053830	CAL 9/9/11	9/9/13
Power Meter	Boonton Electronics	4531	11793	CAL 11/12/2010	11/12/2012
EMI Receiver	Rohde & Schwarz	ESIB40	100274	CAL 3/16/2012	3/16/2014
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 10/28/11	10/28/13
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 10/28/11	10/28/13
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 10/28/11	10/28/13
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 10/28/11	10/28/13
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 2/22/12	2/22/13
Antenna	ETS	3117	35923	12/7/2011	12/7/2013
Antenna	Electro metrics	LPA-25	1122	5/04/2011	5/04/2013
Antenna	Electro metrics	BIA-25	1096	5/04/2011	5/04/2013

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc


TEST PROCEDURES

Power Line Conducted Interference

The procedure used was ANSI 63.4-2003 using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.


RF Power Output

The RF power output was measured at the antenna feed point using a peak power meter. A 50-ohm, resistive wattmeter was connected to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

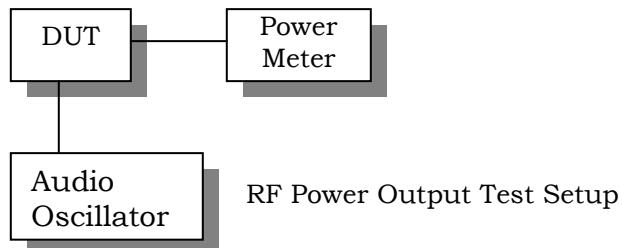

Spurious Emissions At Antenna Terminals (Conducted)

The carrier was modulated 100%. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz. The measurements were made in accordance with standard ANSI/TIA-603-C: 2004

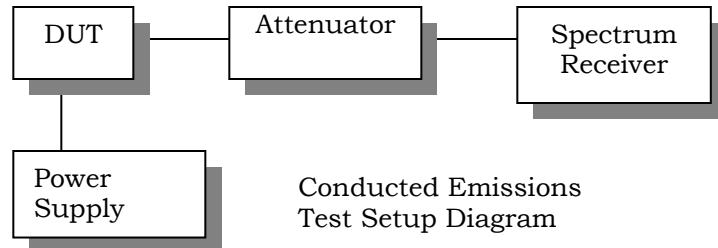

Radiation Interference

The test procedure used was ANSI/TIA-603-C: 2004 and ANSI C63.4-2003 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

Applicant: RF TECHNOLOGY PTY. LTD.
 FCC ID: KRE-E2-IP-PA500BH
 IC: 2005B-E2IPPA500BH
 MODEL #: E2-IP-PA500BH
 Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc

Modulation Characteristic

Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-C: 2004.

Audio Low Pass Filter

The audio low pass filter for voice-modulated equipment was measured in accordance with ANSI/TIA 603-C: 2004.

Audio Input versus modulation


The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Frequency Stability

The frequency stability was measured per ANSI/TIA 603-C: 2004.

Field Strength of Spurious Emissions

The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method.

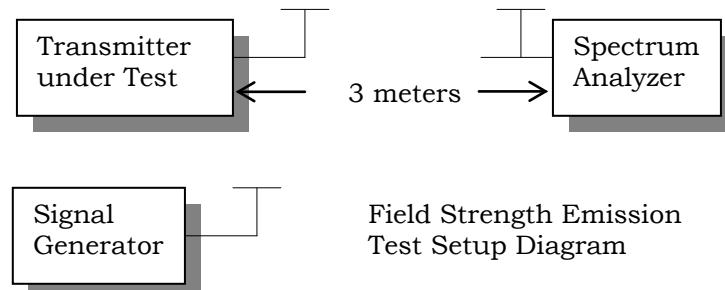

Applicant: RF TECHNOLOGY PTY. LTD.
 FCC ID: KRE-E2-IP-PA500BH
 IC: 2005B-E2IPPA500BH
 MODEL #: E2-IP-PA500BH
 Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc



TEST RESULTS

RF POWER OUTPUT

Rule Part No.: Pt 2.1046(a), Pt 90, Pt 90.210, RSS-131

Requirements: Pt 2.1046(a), Pt 90, Pt 90.210, RSS-131

Test Data: Power = 303.6 Watts

DC Power Consumption

Vdc = 13.8 V

Ic = 22.0 A

Test Frequency (MHz)	Input (dBm)	Output (dBm)	Output (W)
465.0	34.6	50.65	116.1
480.0	34.6	50.69	117.2
495.0	34.5	50.67	116.7

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc



OCCUPIED BANDWIDTH

Rule Parts No: Pt 2.1049, Pt 90.210(b)

Test Requirement:

Part 90.210(i) Emission Mask I - 15 kHz channel BW equipment.

For transmitters that are equipped with an audio low pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) of the transmitter as follows:


- (1) On any frequency from the center of the authorized bandwidth by a displacement frequency of more than 6.8 kHz, but less than 9.0 kHz: At least 25 dB;
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 9.0 kHz but no more than 15 kHz: At least 35 dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 15 kHz: At least $43 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Device is an amplifier.

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc

NOTES:

 RF TECHNOLOGY, LTD. - PA500BH
 OCCUPIED BANDTH PLOT

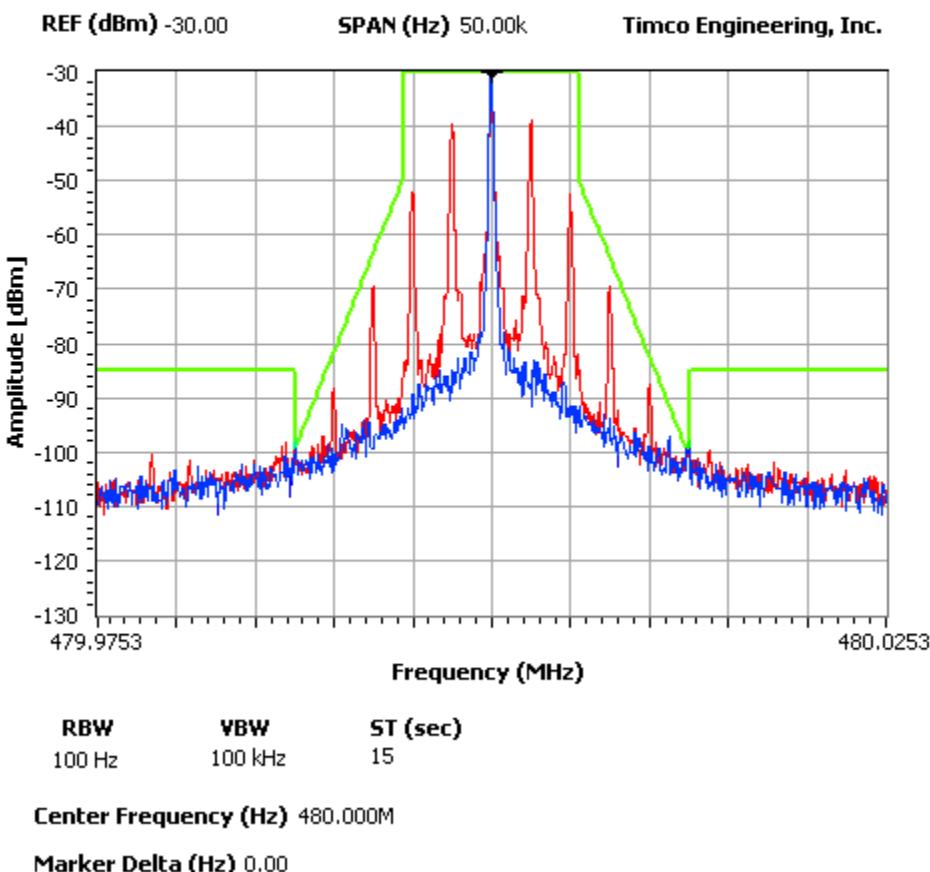
FCC 90.210 Mask D


Applicant: RF TECHNOLOGY PTY. LTD.
 FCC ID: KRE-E2-IP-PA500BH
 IC: 2005B-E2IPPA500BH
 MODEL #: E2-IP-PA500BH
 Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc

NOTES:

OCCUPIED BANDWIDTH PLOT - DIGITAL PA500BH

FCC 90.210 Mask D

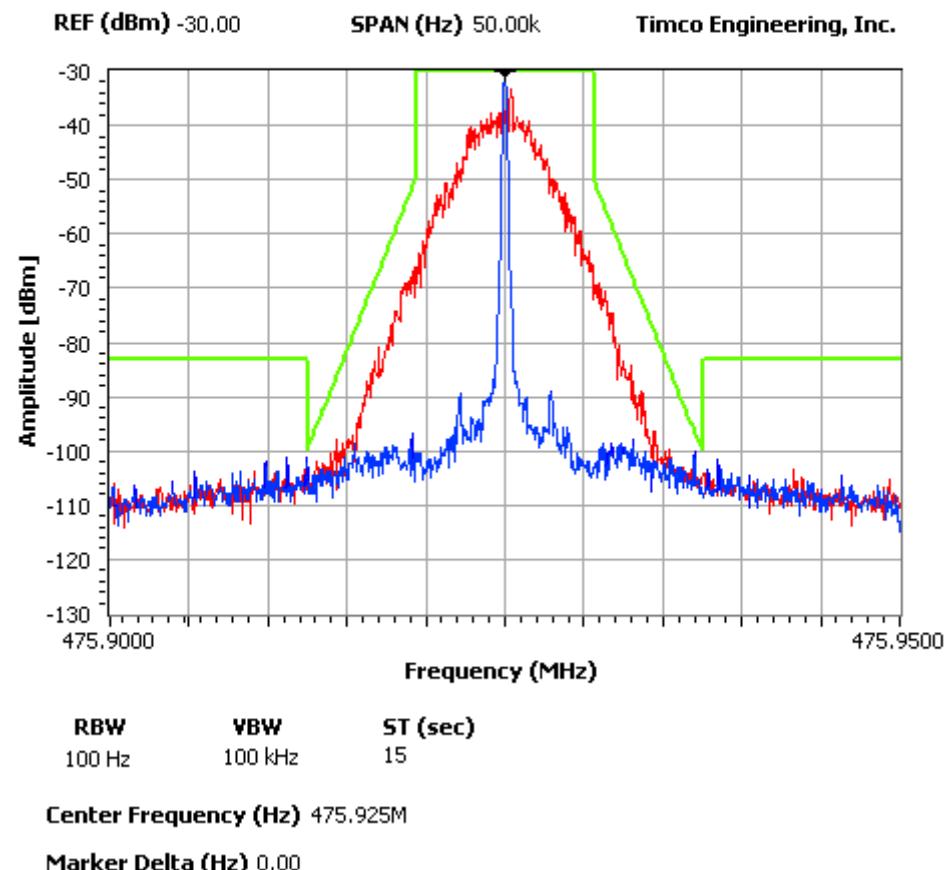

Applicant: RF TECHNOLOGY PTY. LTD.
 FCC ID: KRE-E2-IP-PA500BH
 IC: 2005B-E2IPPA500BH
 MODEL #: E2-IP-PA500BH
 Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc



SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part No.: FCC Pt 2.1051(a), IC RSS-119

Requirements: $50 + 10\log(P_0) = 50 + 10\log(120) = 70 \text{ dB}$

Test Data:

Emission MHz	dBc
465.00	
930.00	99.4
1395.00	100.3
1860.00	100.6
2325.00	100.3
2790.00	104
3255.00	93.9
3720.00	100.9
4185.00	104.4
4650.00	103.3

Emission MHz	dBc
480.00	
965.00	87
1447.50	103.2
1930.00	101.7
2412.50	92.5
2895.00	90
3377.50	91.1
3860.00	92.5
4342.50	92
4825.00	93.9

Emission MHz	dBc
495.00	
990.00	89.9
1485.00	97.9
1980.00	96.6
2475.00	97.2
2970.00	101.6
3465.00	97.2
3960.00	103.1
4455.00	101
4950.00	96.5

* Emissions are in the noise level and not reported.

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc



FIELD STRENGTH OF SPURIOUS EMISSIONS (RADIATED)

Rule Parts. No.: FCC Pt 2.1053, IC RSS-119

Requirements: Same as conducted emissions

Test Data:

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
465.00	0	0
930.00	H	83.9
1395.00	H	96.0
1860.00	V	98.7
2325.00	V	88.7
2790.00	V	96.4
3255.00	H	87.6
3720.00	V	93.0
4185.00	V	100.3
4650.00	H	97.4

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
480.00	0	0
960.00	H	79.8
1440.00	V	88.9
1920.00	V	90.1
2400.00	H	87.4
2880.00	H	95.1
3360.00	V	82.0
3840.00	H	98.2
4320.00	H	101.6
4800.00	H	103.8

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
495.00	0	0
990.00	H	81.0
1485.00	H	96.6
1980.00	H	91.7
2475.00	V	78.3
2970.00	V	85.5
3465.00	H	85.0
3960.00	H	102.6
4455.00	H	98.8
4950.00	V	100.7

* Emissions are in the noise level and not reported.

Applicant: RF TECHNOLOGY PTY. LTD.
FCC ID: KRE-E2-IP-PA500BH
IC: 2005B-E2IPPA500BH
MODEL #: E2-IP-PA500BH
Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: FCC Pt 15.207, IC RSS-GEN

Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50


* Decreases with logarithm of frequency

Test Data: Not applicable DUT is battery operated exclusively.


Applicant: RF TECHNOLOGY PTY. LTD.
 FCC ID: KRE-E2-IP-PA500BH
 IC: 2005B-E2IPPA500BH
 MODEL #: E2-IP-PA500BH
 Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc

INPUT/OUTPUT AMPLITUDE COMPARISON


For Industry Canada

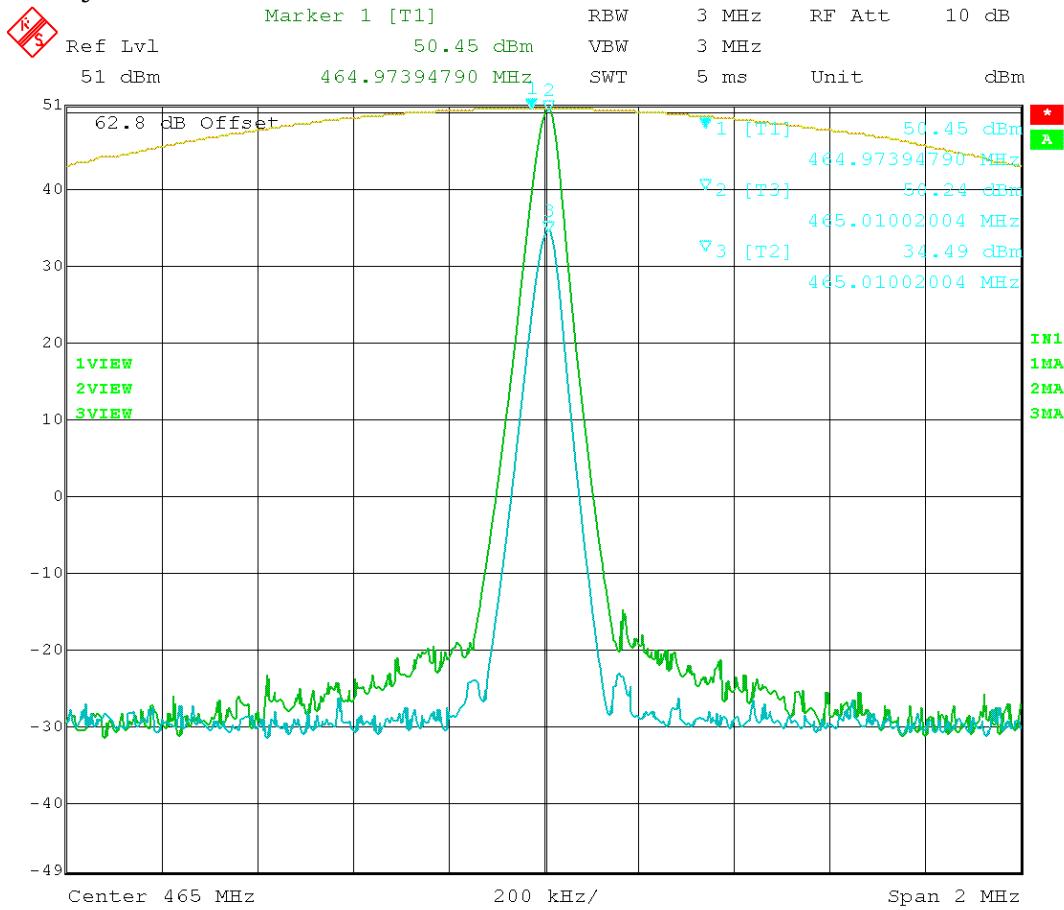

Applicant: RF TECHNOLOGY PTY. LTD.
 FCC ID: KRE-E2-IP-PA500BH
 IC: 2005B-E2IPPA500BH
 MODEL #: E2-IP-PA500BH
 Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc

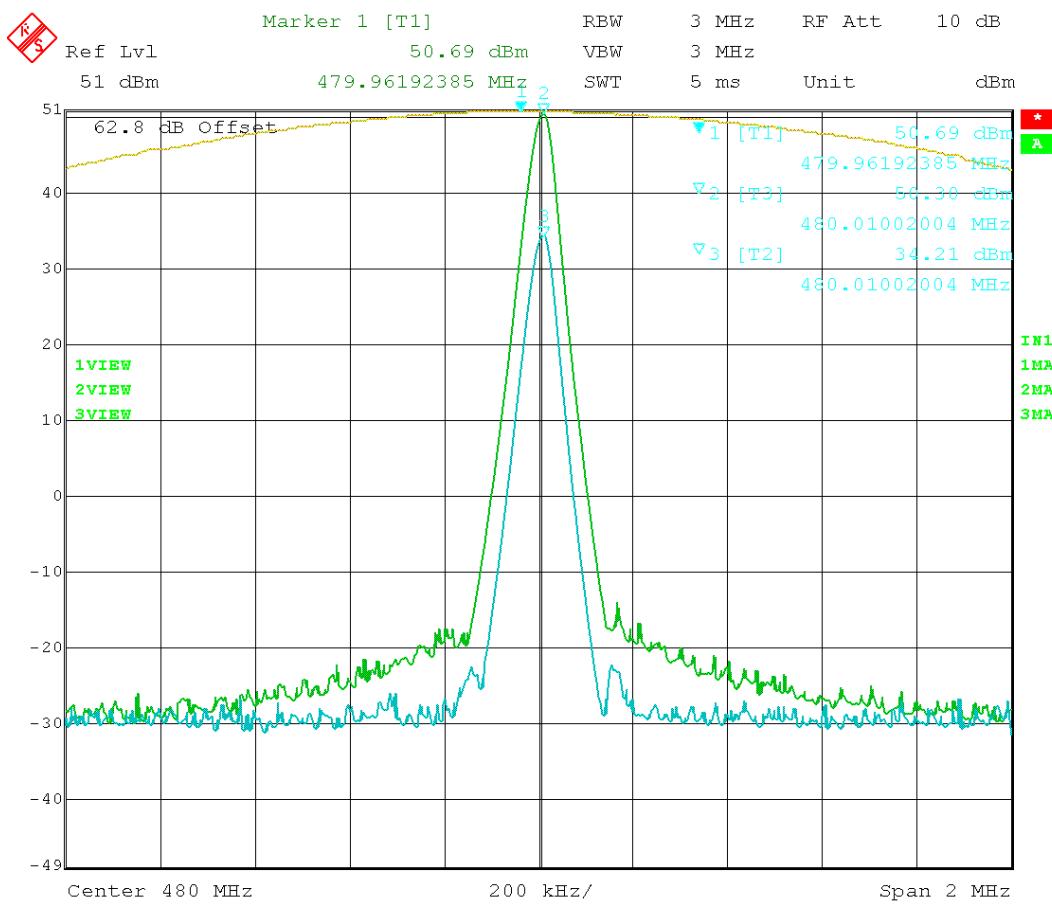

Applicant: RF TECHNOLOGY PTY. LTD.
 FCC ID: KRE-E2-IP-PA500BH
 IC: 2005B-E2IPPA500BH
 MODEL #: E2-IP-PA500BH
 Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc

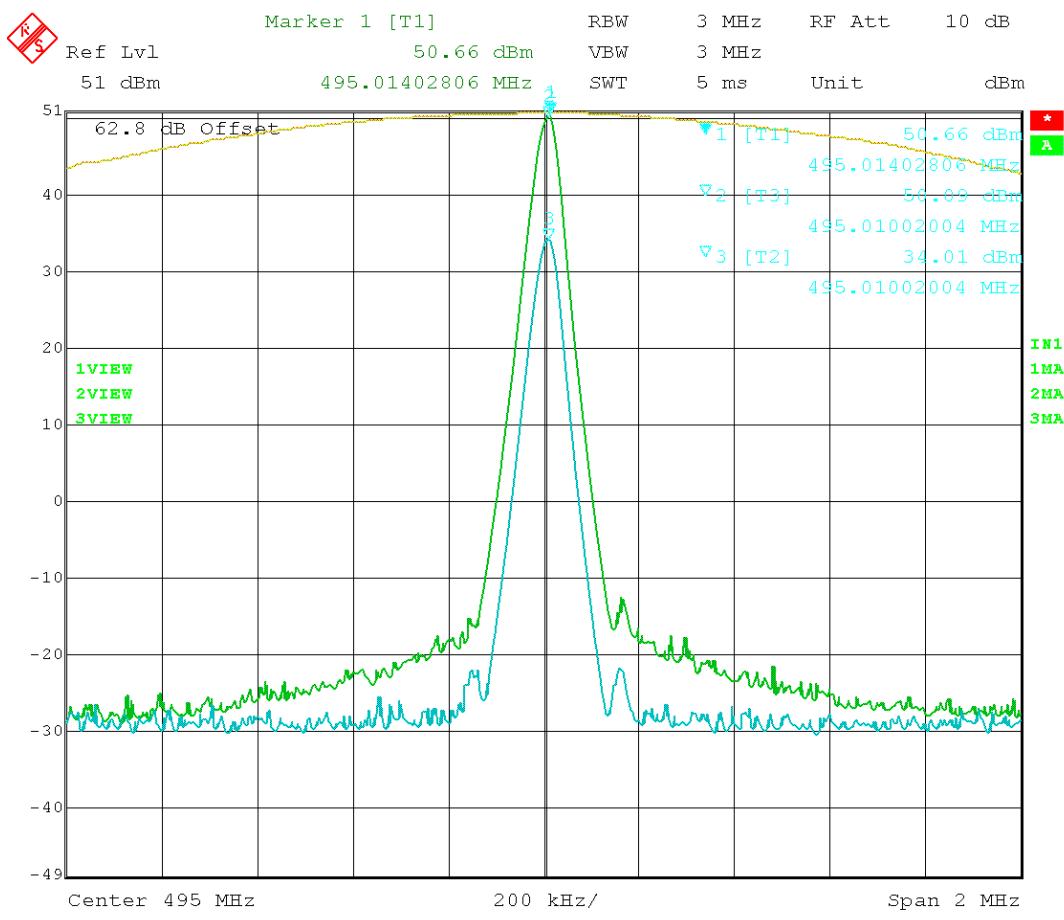

Applicant: RF TECHNOLOGY PTY. LTD.
 FCC ID: KRE-E2-IP-PA500BH
 IC: 2005B-E2IPPA500BH
 MODEL #: E2-IP-PA500BH
 Report: R\RFPTYLTD\2443AUT12\2443AUT12TestReport.doc