

TEST REPORT FOR CERTIFICATION  
On Behalf of  
Chungear Industrial Co., Ltd  
Ceiling Fan Remote Controller (Transmitter)  
Model No.: TR125B  
FCC ID: KUJCE10010

Prepared for : Chungear Industrial Co., Ltd  
106 Kanho Rd., Taichung, Taiwan

Prepared By : AUDIX Technology Corporation  
EMC Department  
No. 53-11, Dingfu, Linkou Dist.,  
New Taipei City 244, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133  
Fax : (02) 2609-9303

File Number : C1M1202274  
Report Number : EM-F1010173  
Date of Test : Feb. 24 ~ Mar. 06, 2012  
Date of Report : Mar. 08, 2012

## TABLE OF CONTENTS

Description	
Page	
TEST REPORT CERTIFICATION .....	3
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT) .....	4
1.2. Description of Test Facility .....	5
1.3. Measurement Uncertainty .....	5
<b>2. CONDUCTED EMISSION MEASUREMENT .....</b>	<b>6</b>
<b>3. RADIATED EMISSION MEASUREMENT .....</b>	<b>7</b>
3.1. Test Equipment .....	7
3.2. Test Setup .....	7
3.3. Radiation Emission Limits (§15.209) .....	9
3.4. Operating Condition of EUT .....	9
3.5. Test Procedure .....	10
3.6. Radiated Emission Noise Measurement Results .....	11
<b>4. FUNDAMENTAL MEASUREMENT .....</b>	<b>13</b>
4.1. Test Equipment .....	13
4.2. Test Setup .....	13
4.3. Radiation Emission Limits (15.231) .....	14
4.4. Operating Condition of EUT .....	14
4.5. Test Procedure .....	14
4.6. Fundamental Measurement Results .....	15
<b>5. EMISSION BANDWIDTH MEASUREMENT .....</b>	<b>16</b>
5.1. Test Equipment .....	16
5.2. Block Diagram of Test Setup .....	16
5.3. Specification Limits (§15.231-(c)) .....	16
5.4. Emission Bandwidth Measurement Results .....	16
<b>6. PERIODIC OPERATED MEASUREMENT .....</b>	<b>18</b>
6.1. Test Equipment .....	18
6.2. Block Diagram of Test Setup .....	18
6.3. Specification Limits [§15.231-(a)-(1)] .....	18
6.4. Periodic Operated Measurement Results .....	18
<b>7. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>20</b>
<b>8. PHOTOGRAPHS .....</b>	<b>21</b>
8.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz) .....	21
8.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz) .....	23
8.3. Photo of Section RF Conducted Measurement .....	25

**TEST REPORT CERTIFICATION**

Applicant : Chungear Industrial Co., Ltd  
 Manufacturer #1 : Chungear Industrial Co., Ltd  
 Manufacturer #2 : Satellite Electronic (Zhongshan) Ltd.  
 Manufacturer #3 : Zhongshan Amity Electronic Ltd.  
 Manufacturer #4 : ZHONGSHAN KONG LUEN WAH HOI ELECTRICAL  
 APPLIANCE CO LTD  
 EUT Description : Ceiling Fan Remote Controller (Transmitter)  
 FCC ID : KIJCE10010  
 (A) Model No. : TR125B  
 (B) Serial No. : N/A  
 (C) Power Supply : DC 9V (Battery)  
 (D) Test Voltage : DC 9V

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, October 2010  
 AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207, §15.209 and §15.231)

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits both radiated and conducted emissions.

The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Feb. 24 ~ Mar. 06, 2012      Date of Report : Mar. 08, 2012

Producer : Annie Yu  
 (Annie Yu/Assistant Administrator)

Signatory: Ben Cheng  
 (Ben Cheng/Manager)

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Description	:	Ceiling Fan Remote Controller (Transmitter)
Model Number	:	TR125B
FCC ID	:	KUJCE10010
Applicant	:	Chungear Industrial Co., Ltd 106 Kanho Rd., Taichung, Taiwan
Manufacturer #1	:	Chungear Industrial Co., Ltd. 106 Kanho Rd., Taichung, Taiwan
Manufacturer #2	:	Satellite Electronic (Zhongshan), Ltd No.15, Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China
Manufacturer #3	:	Zhongshan Amity Electronic Ltd. No. 16 Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China.
Manufacturer #4	:	ZHONGSHAN KONG LUEN WAH HOI ELECTRICAL APPLIANCE CO LTD SCIENCE & TECHNOLOGY DEVELOPMENT ZONE LANG WANG TOWN ZHONGSHAN GUANGDONG CHINA
Fundamental Frequency	:	433.9MHz
Power Supply	:	DC 9V
Date of Receipt of Sample	:	Feb. 23, 2012
Date of Test	:	Feb. 24 ~ Mar. 06, 2012

## \* Ceiling Fan Remote Controller (Transmitter) - Receiver

- (1)Model No.: JY199, FCC by DoC
- (2)Model No.: JY326B, FCC by DoC
- (3)Model No.: JY326D, FCC by DoC
- (4)Model No.: MR36T, FCC by DoC
- (5)Model No.: MR36R, FCC by DoC
- (6)Model No.: MR58A, FCC by DoC
- (7)Model No.: MR56E, FCC by DoC
- (8)Model No.: MR62A, FCC by DoC
- (9)Model No.: MR76T, FCC by DoC

**Remark:**

Antenna requirement: This EUT's transmitter antenna is designed to be soldered on a printed circuit board, comply with §15.203 and inform to user that any change and modify is prohibited.

## 1.2. Description of Test Facility

Name of Firm	:	<b>AUDIX Technology Corporation</b> <b>EMC Department</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan, R.O.C
Test Site (Semi-AC)	:	<b>Semi-Anechoic Chamber</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan, R.O.C. Federal Communication Commission Registration Number: 90993 Date of Renewal: May 14, 2009
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

## 1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.94dB
	Above 1GHz	± 4.35dB

Remark : Uncertainty =  $ku_c(y)$

Test Item	Uncertainty
Emission Bandwidth (20dB)	± 0.2kHz
Periodic Operated	± 0.05s

## **2. CONDUCTED EMISSION MEASUREMENT**

**【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】**

### 3. RADIATED EMISSION MEASUREMENT

#### 3.1. Test Equipment

The following test equipment was used during the radiated emission test:

##### 3.1.1. For Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 11'	Aug. 03, 12'
2.	Test Receiver	R & S	ESCS30	100338	Jul. 12, 11'	Jul. 11, 12'
3.	Amplifier	HP	8447D	2944A06305	Feb. 13, 12'	Feb. 12, 13'
4.	Log Periodic Antenna	Schwarzbeck	UHALP 9108-A	0810	Mar. 08, 11'	Mar. 07, 12'
5.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 08, 11'	Mar. 07, 12'
6.	Coaxial Switch	Anritsu	MP59B	6100226512	Feb. 01, 12'	Jan. 31, 13'

##### 3.1.2. For Frequency Range above 1GHz (Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 11'	Aug. 03, 12'
2.	Amplifier	HP	8449B	3008A00529	Dec. 09, 11'	Dec. 08, 12'
3.	Horn Antenna	EMCO	3115	9112-3775	May 09, 11'	May 08, 12'

#### 3.2. Test Setup


##### 3.2.1. Block Diagram of connection between EUT and simulators

<b>CEILING FAN REMOTE CONTROLLER (TRANSMITTER) (EUT)</b>
--

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

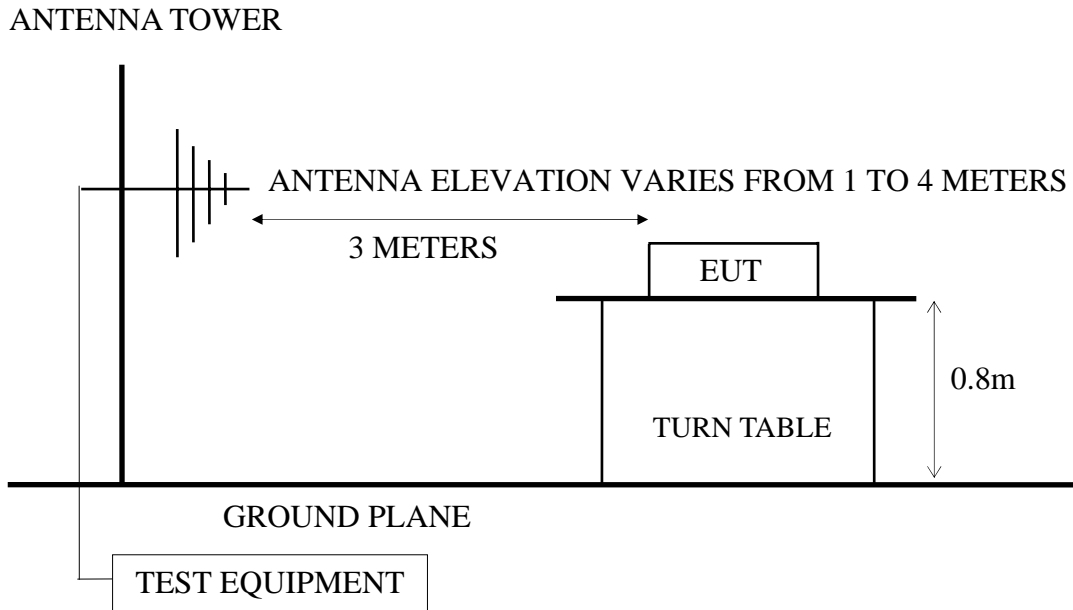

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

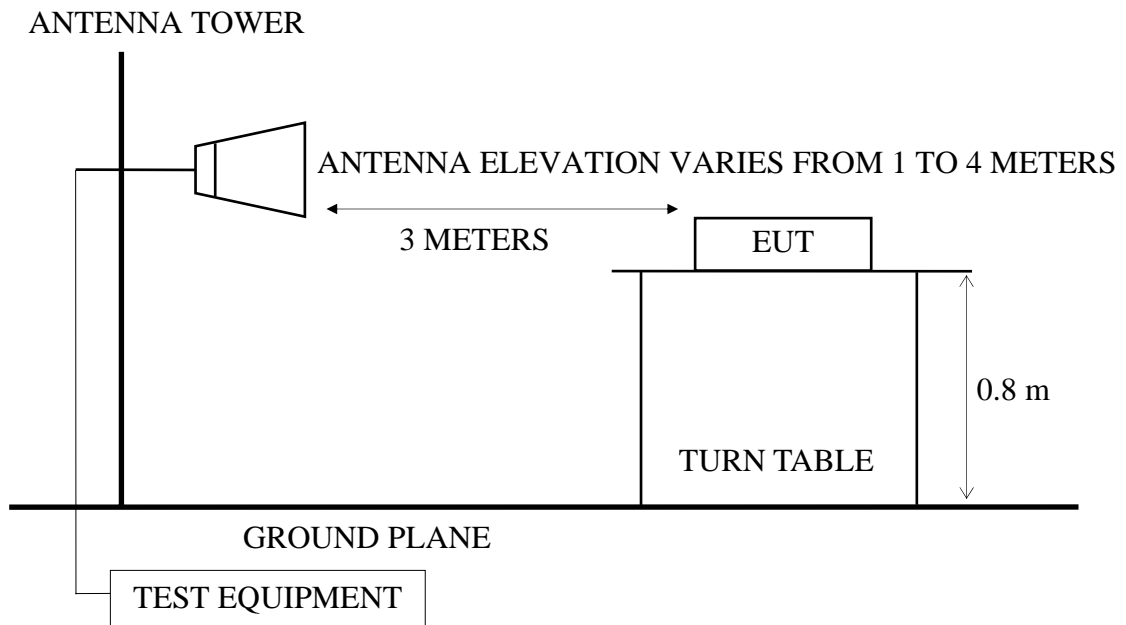



### 3.3. Radiation Emission Limits (§15.209)

#### 3.3.1. Spurious Emission Limit (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	3	100	40.00
88 - 216	3	150	43.50
216 - 960	3	200	46.00
Above 960	3	500	54.00

- Remarks :
- (1) Emission level ( $\text{dB}\mu\text{V/m}$ ) =  $20 \log$  Emission level ( $\mu\text{V/m}$ )
  - (2) The tighter limit applies at the edge between two frequency bands.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 3.4. Operating Condition of EUT

- 3.4.1. Set up the **EUT {Ceiling Fan Remote Controller (Transmitter)}** and simulator as shown on 3.2.
- 3.4.2. Turn on the power.
- 3.4.3. The **EUT {Ceiling Fan Remote Controller (Transmitter)}** emitted the fundamental frequency with data code at the stand, side and lying conditions. (The worst mode is lying)
- 3.4.4. The **EUT {Ceiling Fan Remote Controller (Transmitter)}** was operated on maximum transmitting status during all testing (lying condition).

### 3.5. Test Procedure

The EUT and was placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of test receiver was set at 120kHz for frequencies below 1GHz and resolution bandwidth of spectrum analyzer was set at 1MHz for frequencies above 1GHz.

The frequency range from 30MHz to 1000MHz was measured with Quasi-Peak detector.

The frequency range from 1GHz to up to 10<sup>th</sup> harmonics was pre-scanned with Peak detector.

EUT was tested during radiated measurement and all the test results are listed in section 3.6.

### 3.6. Radiated Emission Noise Measurement Results

#### 3.6.1. Frequency Range 30MHz to 2680GHz Measurement Results: PASSED.

All the emissions not reported below are too low against the FCC part 15 Subpart C limit.

Date of Test : Mar. 06, 2012 Temperature : 24

EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 54%

Test Mode : Operating (lying)

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
------------------------	---------------------	---------------	-------------------------------	----------------------------------	---------------	-----------

Spurious / Harmonic Freq. (Quasi-Peak Value)						
34.59	22.85	1.20	2.52	26.57	40.00	13.43
48.09	17.32	1.40	5.43	24.14	40.00	15.86
102.63	17.40	2.10	4.01	23.50	43.50	20.00
* 869.80	25.71	7.20	27.22	60.13	60.82	0.69
@ 1305.76	25.17	4.85	10.88	40.91	74.00	33.09
@ 1843.36	27.03	6.67	13.59	47.29	74.00	26.71

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
------------------------	---------------------	---------------	-----------------------------	--------------------------------	---------------	-----------

Spurious / Harmonic Freq. (Quasi-Peak Value)						
34.59	22.85	1.20	1.82	25.87	40.00	14.13
56.19	14.11	1.60	10.81	26.53	40.00	13.47
102.63	17.40	2.10	3.31	22.80	43.50	20.70
* 869.80	25.71	7.20	13.29	46.20	60.82	14.62
@ 1843.36	27.03	6.67	13.52	47.22	74.00	26.78

- Remarks :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
  2. Measurement was up to 10th harmonics, but the emission levels were too low against the official limit and not report.
  3. "\*" is Harmonic Frequency, where limit of Harmonic Frequency is calculated by:  $(41.6667(F)-7083.3333)-20\text{dB} = 60.82\mu\text{V/m (QP)}$
  4. "@"The peak measured value complies with the average limit, it is unnecessary to perform an average measurement. (According to ANSI C63.4-2003 section 8.3.1.2)

3.6.2. Frequency Range 2680GHz to up to 10<sup>th</sup> harmonics Measurement Results:  
**PASSED.**

There is no emission be found from 2680GHz to up to 10<sup>th</sup> harmonics.

## 4. FUNDAMENTAL MEASUREMENT

### 4.1. Test Equipment

The following test equipment was used during the radiated emission test:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 11'	Aug. 03, 12'
2.	Test Receiver	R & S	ESCS30	100338	Jul. 12, 11'	Jul. 11, 12'
3.	Amplifier	HP	8447D	2944A06305	Feb. 13, 12'	Feb. 12, 13'
4.	Log Periodic Antenna	Schwarzbeck	UHALP 9108-A	0810	Mar. 08, 11'	Mar. 07, 12'
5.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 08, 11'	Mar. 07, 12'
6.	Coaxial Switch	Anritsu	MP59B	6100226512	Feb. 01, 12'	Jan. 31, 13'

### 4.2. Test Setup

#### 4.2.1. Block Diagram of connection between EUT and simulators

**CEILING FAN REMOTE CONTROLLER  
(TRANSMITTER) (EUT)**

#### 4.2.2. Semi-Anechoic Chamber (3m) Setup Diagram

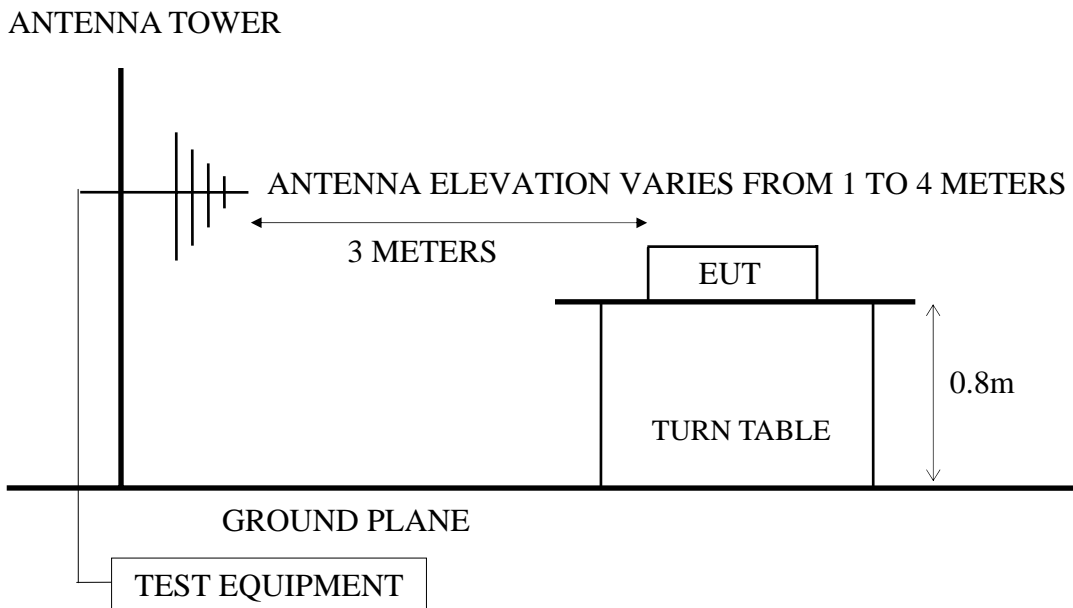

### 4.3. Radiation Emission Limits (15.231)

#### 4.3.1. Fundamental Frequency Emission Limit (§15.231)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
Fundamental Frequency	3	5583.3435	80.82 (Quasi-Peak)
Harmonic	3	558.468	60.82 (Quasi-Peak)

- Remarks :
- (1) Emission level ( $\text{dB}\mu\text{V/m}$ ) =  $20 \log$  Emission level ( $\mu\text{V/m}$ )
  - (2) The tighter limit applies at the edge between two frequency bands.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
  - (4) Where limit of Fundamental Freq. is calculated by:  
 $41.6667 \times 433.9 - 7083.3333 = 10995.85 \mu\text{V/m} = 80.82 \text{dB}\mu\text{V/m}$
  - (5) The limits in this table are based on CFR 47 Part 15.231(b).

### 4.4. Operating Condition of EUT

- 4.4.1. Set up the **EUT {Ceiling Fan Remote Controller (Transmitter)}** and simulator as shown on 4.2.
- 4.4.2. Turn on the power.
- 4.4.3. The **EUT {Ceiling Fan Remote Controller (Transmitter)}** emitted the fundamental frequency with data code at the stand, side and lying conditions. (The worst mode is lying)
- 4.4.4. The **EUT {Ceiling Fan Remote Controller (Transmitter)}** was operated on maximum transmitting status during all testing (lying condition).

### 4.5. Test Procedure


The EUT and was placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna is used as a receiving antenna. Both polarizations horizontal and vertical are set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

EUT was tested during radiated measurement and all the test results are listed in section 4.6.

### 4.6. Fundamental Measurement Results



AUDIX TECHNOLOGY Corp. EMC Laboratory  
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei  
 County, Taiwan R.O.C. Post Code:24443  
 Tel:+886-2-26092133 Fax:+886-2-26099303  
 Email:ttemc@ttemc.com.tw

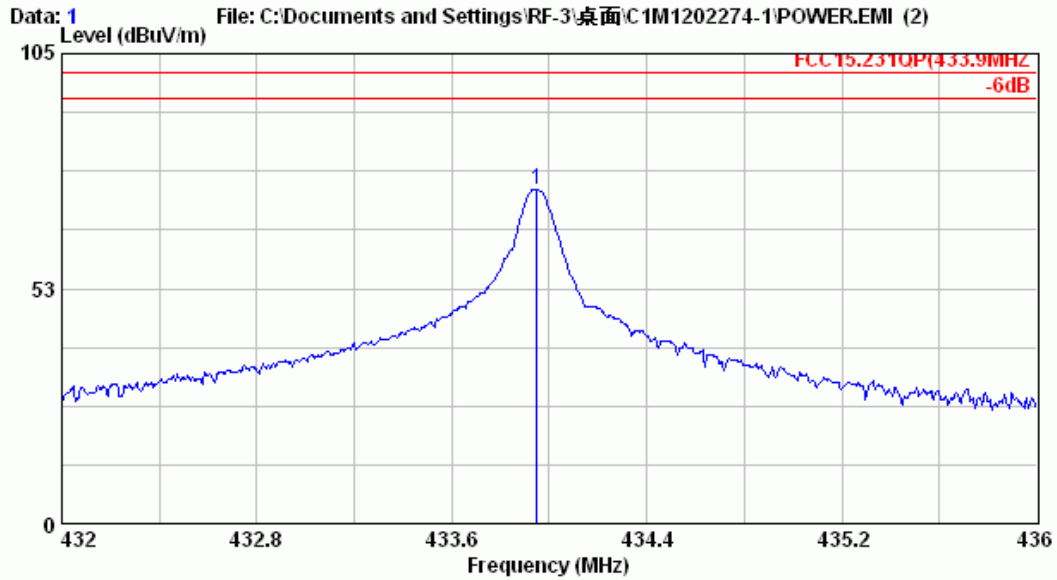

Site no. : A/C Chamber Data no. : 1  
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL  
 Limit : FCC15.231QP(433.9MHZ  
 Env. / Ins. : E4446A 24°C/54% □Jarwei Wang  
 EUT : TR125B  
 Power Rating : DC9V  
 Test Mode : POWER

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV/m)	
-----	1	433.948	17.33	52.06	74.63	QP
-----						

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

**Horizontal is the strongest polarization and QP value has complied with limit, so vertical won't be listed in test report.**

**Because RBW of spectrum is larger than PRF, thus PDCF is no need for finding true peak level.**

## 5. EMISSION BANDWIDTH MEASUREMENT

### 5.1. Test Equipment

The following test equipment was used during the Emission Bandwidth Test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 11'	Aug. 03, 12'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

### 5.2. Block Diagram of Test Setup



### 5.3. Specification Limits (§15.231-(c))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

### 5.4. Emission Bandwidth Measurement Results

**PASS.**

Fundamental Frequency: 433.9MHz


Test Date: Feb. 24, 2012      Temperature: 24      Humidity: 58%

No.	Center Frequency	Bandwidth	Tolerance (%)
1.	433.900MHz	41.0kHz	0.00944%

The bandwidth of emission was measured at the point 20dB down from the center frequency of modulated carrier.



## Graph of Bandwidth Measurement

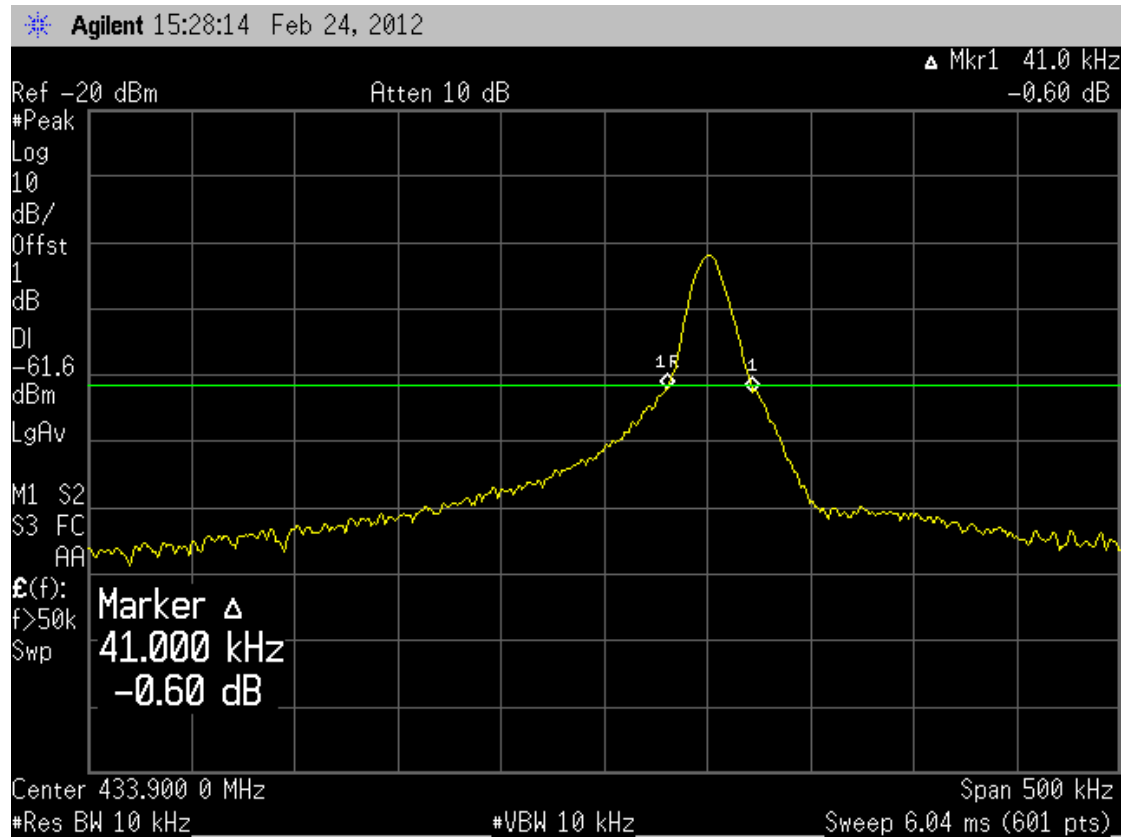

Note: “◇” The line is 20dB from the modulated carrier.

## 6. PERIODIC OPERATED MEASUREMENT

### 6.1. Test Equipment

The following test equipment was used during the periodic operated test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 04, 11'	Aug. 03, 12'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

### 6.2. Block Diagram of Test Setup



### 6.3. Specification Limits [§15.231-(a)-(1)]

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released, Compliance with §15.231 (a)- (1).

### 6.4. Periodic Operated Measurement Results


**PASS.** T = 0.8s. (< 5sec.)

Fundamental Frequency: 433.9MHz

Test Date: Feb. 24, 2012      Temperature: 24      Humidity: 58%

The graph of testing is attached in next page.

## Graph of Periodic Operated Measurement

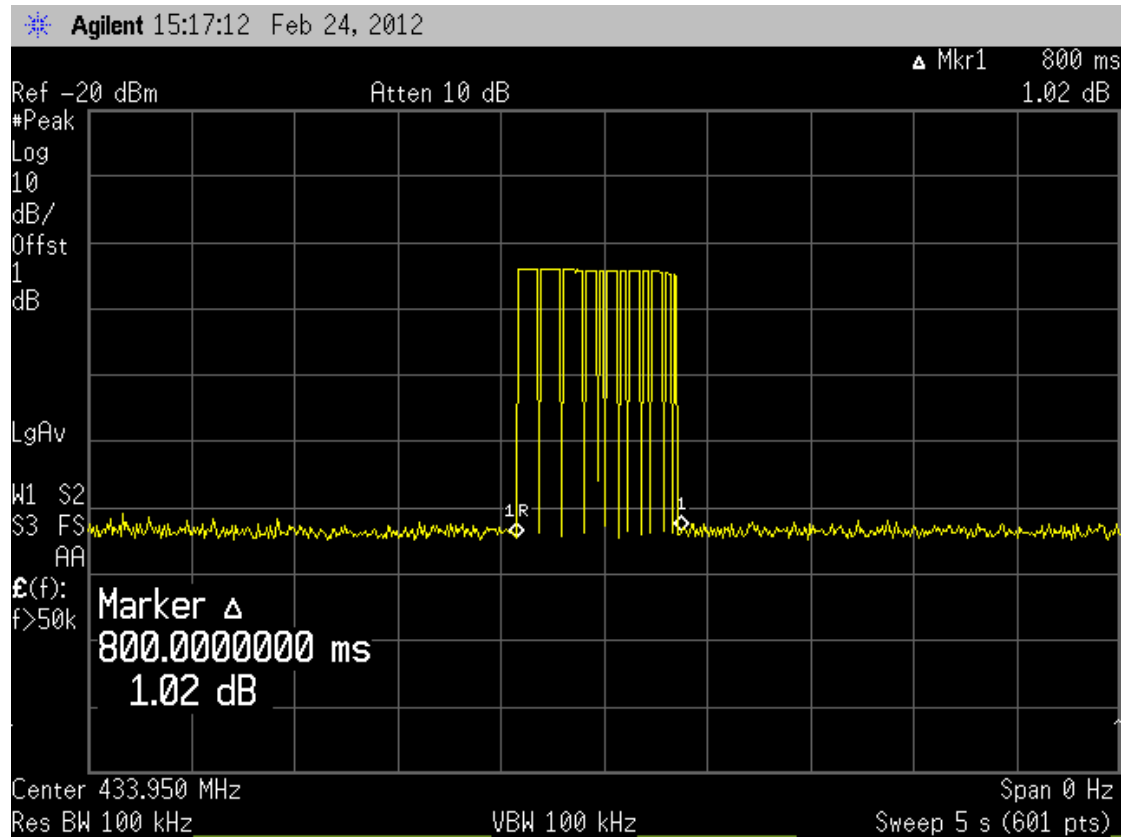

## **7. DEVIATION TO TEST SPECIFICATIONS**

**【NONE】**

## 8. PHOTOGRAPHS

### 8.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz)

EUT on Stand



EUT on Side



EUT on Lying



## 8.2. Photos of Radiated Measurement at Semi-Anechoic Chamber

(Above 1GHz)

EUT on Stand



EUT on Side



EUT on Lying





### 8.3. Photo of Section RF Conducted Measurement

