

TEST REPORT FOR CERTIFICATION
On Behalf of
Chungear Industrial Co., Ltd
Ceiling Fan Remote Controller (Transmitter)
Model No.: (1)JY610C (2)JY610C-L
FCC ID: KUJCE10203

Prepared for : Chungear Industrial Co., Ltd
106 Kanho Rd., Taichung, Taiwan

Prepared By : AUDIX Technology Corporation
EMC Department
No. 53-11, Dingfu, Linkou Dist.,
New Taipei City 244, Taiwan

Tel : (02) 2609-9301, 2609-2133
Fax : (02) 2609-9303

File Number : C1M1307046
Report Number : EM-F1020532
Date of Test : Jul. 08 ~ 30, 2013
Date of Report : Jul. 30, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty	6
2. CONDUCTED EMISSION MEASUREMENT	7
3. RADIATED EMISSION MEASUREMENT	8
3.1. Test Equipment	8
3.2. Test Setup	8
3.3. Radiation Emission Limits (§15.209)	10
3.4. Operating Condition of EUT	10
3.5. Test Procedure	10
3.6. Radiated Emission Noise Measurement Results	11
4. FUNDAMENTAL MEASUREMENT	13
4.1. Test Equipment	13
4.2. Test Setup	13
4.3. Radiation Emission Limits (15.231)	14
4.4. Operating Condition of EUT	14
4.5. Test Procedure	14
4.6. Fundamental Measurement Results	15
5. EMISSION BANDWIDTH MEASUREMENT	17
5.1. Test Equipment	17
5.2. Block Diagram of Test Setup	17
5.3. Specification Limits (§15.231-(c))	17
5.4. Emission Bandwidth Measurement Results	17
6. PERIODIC OPERATED MEASUREMENT	19
6.1. Test Equipment	19
6.2. Block Diagram of Test Setup	19
6.3. Specification Limits [§15.231-(a)-(1)]	19
6.4. Periodic Operated Measurement Results	19
7. DEVIATION TO TEST SPECIFICATIONS	21
8. PHOTOGRAPHS	22
8.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz)	22
8.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz)	23
8.3. Photo of Section RF Near Field Measurement	25

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Ceiling Fan Remote Controller (Transmitter)
Model Number	:	(1)JY610C (2)JY610C-L Above models difference is in control receiver (JY610C is dip switch mode, Y610C-L is learning ID mode), others are the same. After pre-scanning models JY610C and JY610C-L that JY610C is the worst model. The model JY610C is tested all test and model JY610C-L is tested in Conducted test only.
FCC ID	:	KUJCE10203
Applicant	:	Chungear Industrial Co., Ltd 106 Kanho Rd., Taichung, Taiwan
Manufacturer #1	:	Chungear Industrial Co., Ltd. 106 Kanho Rd., Taichung, Taiwan
Manufacturer #2	:	Satellite Electronic (Zhongshan), Ltd No.15, Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China
Manufacturer #3	:	Zhongshan Amity Electronic Ltd. No. 16 Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China.
Fundamental Frequency	:	304MHz
Power Supply	:	DC 9V
Date of Receipt of Sample	:	Jul. 03, 2013
Date of Test	:	Jul. 08 ~ 30, 2013

* Ceiling Fan Remote Controller (Transmitter) - Receiver

- (1)Model No.: JY199, FCC by DoC
- (2)Model No.: JY326B, FCC by DoC
- (3)Model No.: JY326D, FCC by DoC
- (4)Model No.: MR36T, FCC by DoC
- (5)Model No.: MR36R, FCC by DoC
- (6)Model No.: MR58A, FCC by DoC
- (7)Model No.: MR56E, FCC by DoC
- (8)Model No.: MR101D, FCC by DoC
- (9)Model No.: MR62A, FCC by DoC
- (10)Model No.: MR76T, FCC by DoC

Remark:

Antenna requirement: This EUT's transmitter antenna is designed to be soldered on a printed circuit board, comply with §15.203 and inform to user that any change and modify is prohibited.

1.2. Description of Test Facility

Name of Firm	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Site (Semi-AC)	:	Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Federal Communication Commission Registration Number: 90993 Filing on: May 11, 2012
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conduction Test	150kHz~30MHz	±1.73dB
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.94dB
	Above 1GHz	± 4.35dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
Emission Bandwidth (20dB)	± 0.2kHz
Periodic Operated	± 0.05s

2. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission test:

3.1.1. For Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jun. 17, 13'	Jun. 16, 14'
2.	Test Receiver	R&S	ESCS30	100338	Jul. 01, 13'	Jun. 30, 14'
3.	Amplifier	HP	8447D	2944A06305	Feb. 19, 13'	Feb. 18, 14'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 03, 13'	Mar. 02, 14'
5.	Log Periodic Antenna	Schwarzbeck	UHALP910 8-A	0810	Mar. 03, 13'	Mar. 02, 14'

3.1.2. For Frequency Range above 1GHz (Semi-Anechoic Chamber)


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 12'	Aug. 06, 13'
2.	Amplifier	HP	8449B	3008A00529	Jan. 31, 13'	Jan. 30, 14'
3.	Horn Antenna	EMCO	3115	9112-3775	May. 07, 13'	May. 06, 14'

3.2. Test Setup


3.2.1. Block Diagram of connection between EUT and simulators

CEILING FAN REMOTE CONTROLLER (TRANSMITTER) (EUT)
--

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram for 30-1000MHz

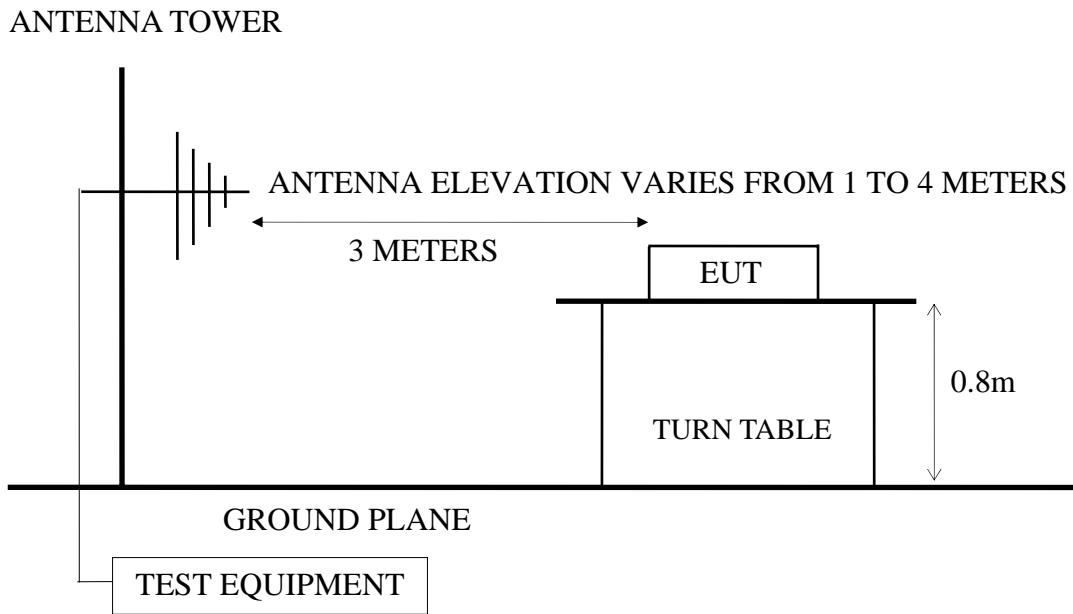

3.2.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

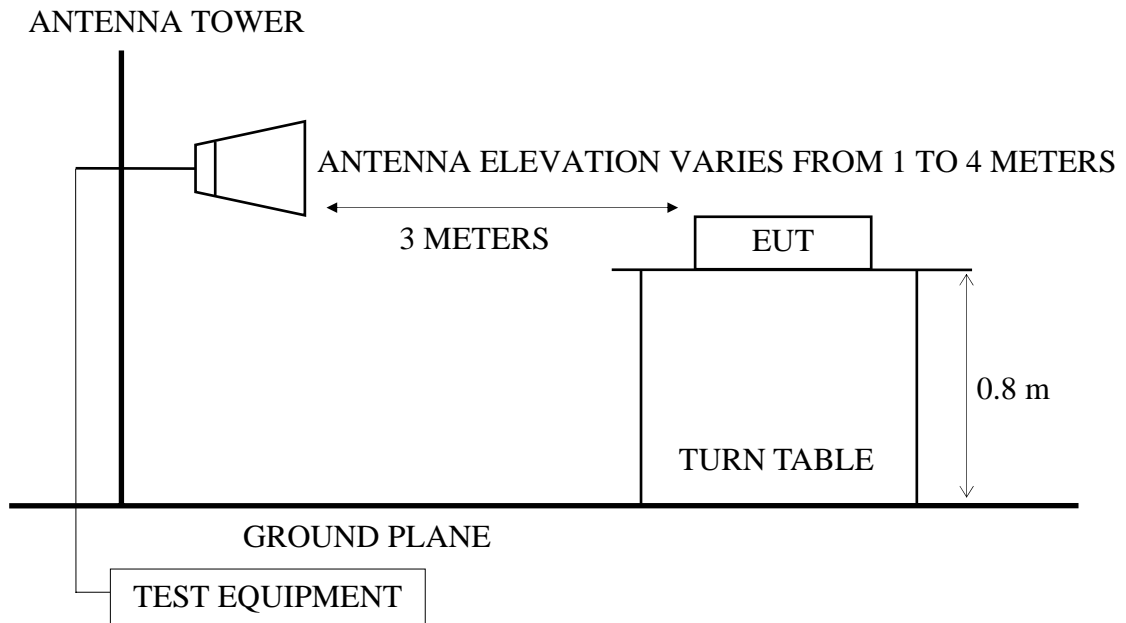

3.3. Radiation Emission Limits (§15.209)

3.3.1. Spurious Emission Limit (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	3	100	40.00
88 - 216	3	150	43.50
216 - 960	3	200	46.00
Above 960	3	500	54.00

- Remarks :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Operating Condition of EUT

- 3.4.1. Set up the **EUT {Ceiling Fan Remote Controller (Transmitter)}** and simulator as shown on 4.2.
- 3.4.2. Turn on the power.
- 3.4.3. The **EUT {Ceiling Fan Remote Controller (Transmitter)}** emitted the fundamental frequency with data code at the stand, side and lying conditions. (The worst mode is lying)
- 3.4.4. The **EUT {Ceiling Fan Remote Controller (Transmitter)}** was operated on maximum transmitting status during all testing (lying condition).

3.5. Test Procedure

The EUT and was placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of test receiver was set at 120kHz for frequencies below 1GHz and resolution bandwidth of spectrum analyzer was set at 1MHz for frequencies above 1GHz.

The frequency range from 30MHz to 1000MHz was measured with Quasi-Peak detector.

The frequency range from 1GHz to up to 10th harmonics was pre-scanned with Peak detector.

EUT was tested during radiated measurement and all the test results are listed in section 3.6.

3.6. Radiated Emission Noise Measurement Results

3.6.1. Frequency Range 30MHz to 1GHz Measurement Results: PASSED.

All the emissions not reported below are too low against the FCC part 15 Subpart C limit.

Test Model :	JY610C		
Date of Test :	Jul. 26, 2013	Temperature :	23
EUT :	Ceiling Fan Remote Controller (Transmitter)	Humidity :	55%

Test Mode :	Operating (lying)					
Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB

Spurious / Harmonic Freq. (Quasi-Peak Value)						
100.74	17.17	2.10	1.49	20.76	43.50	-22.74
169.59	21.01	2.80	0.25	24.06	43.50	-19.44
263.28	24.58	3.60	-0.23	27.94	46.00	-18.06
608.00	21.47	6.20	17.18	44.85	46.00	-1.15

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB

Spurious / Harmonic Freq. (Quasi-Peak Value)						
54.84	14.39	1.50	10.04	25.93	40.00	-14.07
257.34	24.36	3.50	0.28	28.15	46.00	-17.85
608.00	21.47	6.20	16.44	44.11	46.00	-1.89

- Remarks : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics, but the emission levels were too low against the official limit and not report.

3.6.2. Frequency Range 1GHz to up to 10th harmonics Measurement Results:
PASSED.

There is no emission be found from 1GHz to up to 10th harmonics.

4. FUNDAMENTAL MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the radiated emission test:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jun. 17, 13'	Jun. 16, 14'
2.	Test Receiver	R&S	ESCS30	100338	Jul. 01, 13'	Jun. 30, 14'
3.	Amplifier	HP	8447D	2944A06305	Feb. 19, 13'	Feb. 18, 14'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 03, 13'	Mar. 02, 14'
5.	Log Periodic Antenna	Schwarzbeck	UHALP910 8-A	0810	Mar. 03, 13'	Mar. 02, 14'

4.2. Test Setup

4.2.1. Block Diagram of connection between EUT and simulators



4.2.2. Semi-Anechoic Chamber (3m) Setup Diagram

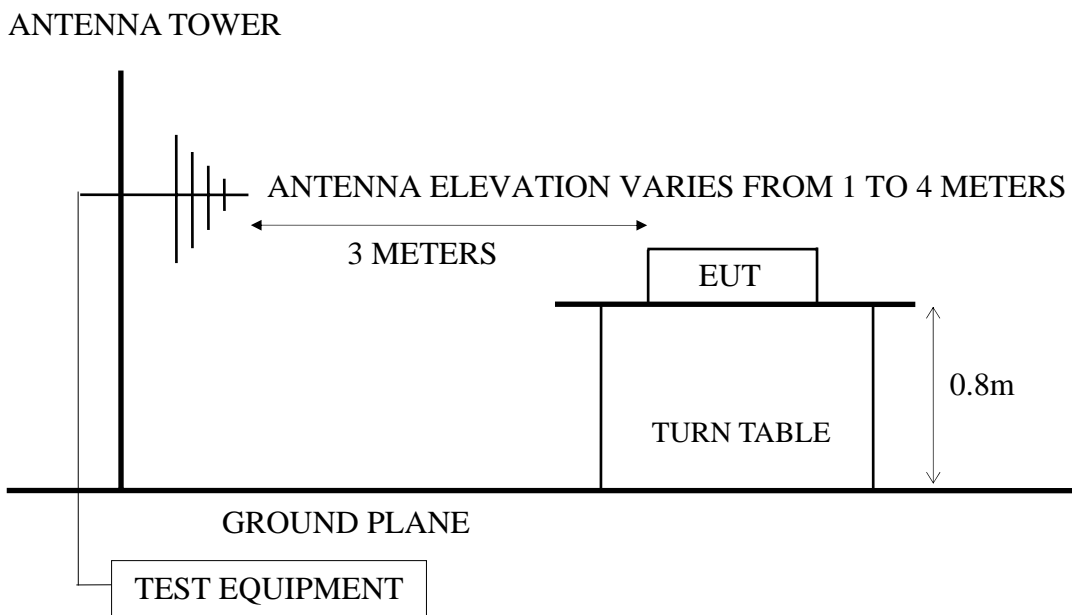

4.3. Radiation Emission Limits (15.231)

4.3.1. Fundamental Frequency Emission Limit (§15.231)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
Fundamental Frequency	3	5583.34	74.93 (Quasi-Peak)
Harmonic	3	558.468	54.93 (Quasi-Peak)

- Remarks :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) Where limit of Fundamental Freq. is calculated by: $41.6667 \times 304 - 7083.3333 = 5583.3435 \mu\text{V/m} = 74.93 \text{dB}\mu\text{V/m}$
 - (5) The limits in this table are based on CFR 47 Part 15.231(b).

4.4. Operating Condition of EUT

- 4.4.1. Set up the **EUT {Ceiling Fan Remote Controller (Transmitter)}** and simulator as shown on 4.2.
- 4.4.2. Turn on the power.
- 4.4.3. The **EUT {Ceiling Fan Remote Controller (Transmitter)}** was operated on maximum transmitting status during all testing.

4.5. Test Procedure


The EUT and was placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna could be moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna is used as a receiving antenna. Both polarizations horizontal and vertical are set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

EUT was tested during radiated measurement and all the test results are listed in section 4.6.

4.6. Fundamental Measurement Results



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

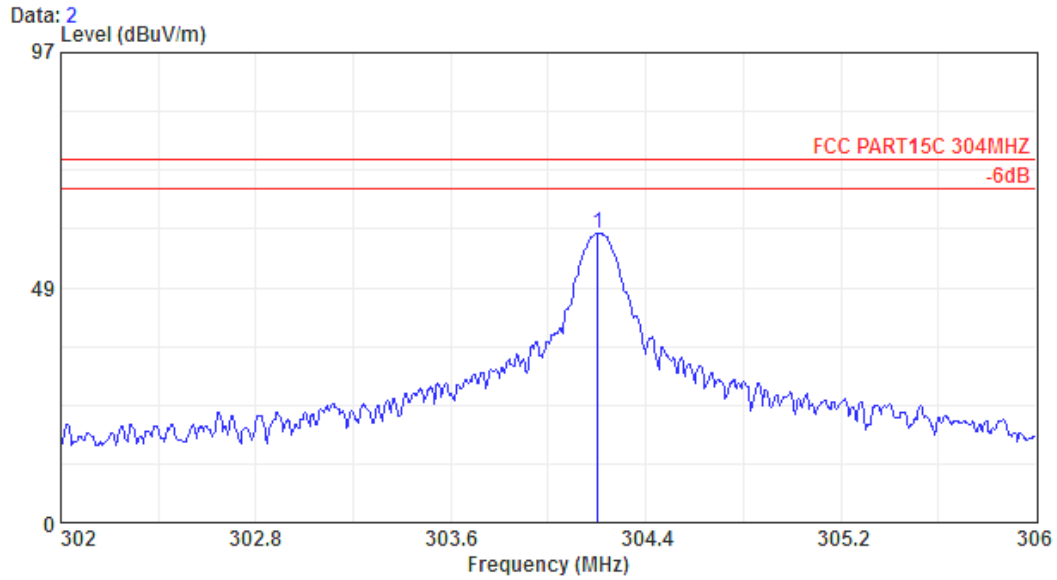

```

Site no.      : A/C Chamber site           Data no.   : 2
Dis. / Ant.  : 3m VBA6106A/UHALP9108A    Ant. pol.  : HORIZONTAL
Limit        : FCC PART15C 304MHZ
Env. / Ins.  : E4446A 23°C/55%           Johnny_Hsueh
EUT          : JY610C
Power Rating : DC9V
Test Mode    : power
    
```

	Ant. Factor	Cable Loss	Emission Reading	Emission Level	Remark
Freq. (MHz)	(dB/m)	(dB)	(dBµV)	(dBµV/m)	
1 304.204	14.87	3.90	40.99	59.77	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Horizontal is the strongest polarization and QP value has complied with limit, So Vertical won't be listed in test report.

Because RBW of spectrum is larger than PRF, thus PDCF is no need for finding true peak level.



AUDIX Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

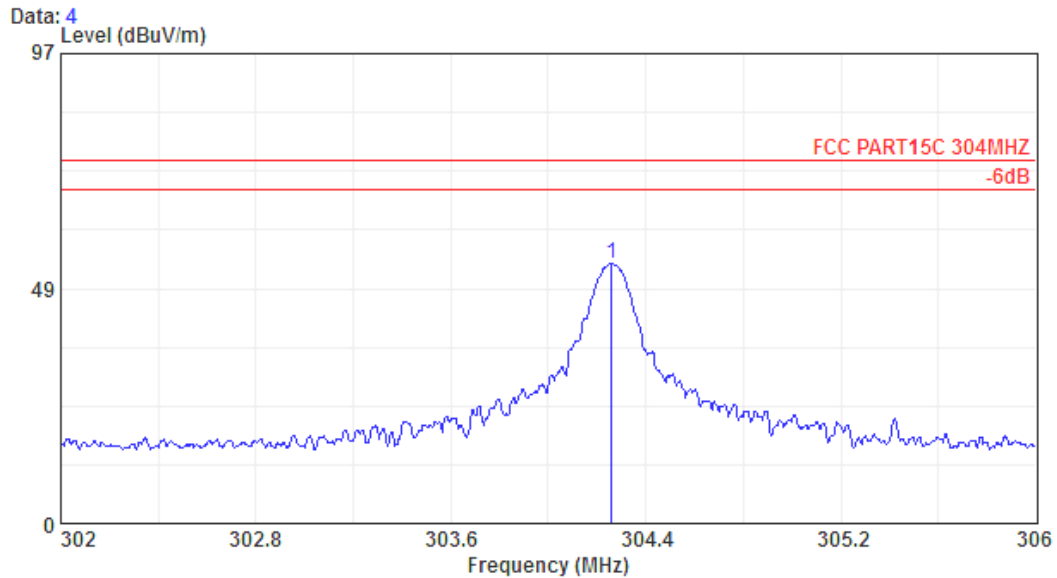

Site no. : A/C Chamber site Data no. : 4
 Dis. / Ant. : 3m VBA6106A/UHALP9108A Ant. pol. : HORIZONTAL
 Limit : FCC PART15C 304MHZ
 Env. / Ins. : E4446A 23°C/55% Johnny_Hsueh
 EUT : JY610C-L
 Power Rating : DC9V
 Test Mode : power

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Remark
-----	1	304.260	14.87	3.90	34.79	53.56 QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Horizontal is the strongest polarization and QP value has complied with limit, So Vertical won't be listed in test report.

Because RBW of spectrum is larger than PRF, thus PDCF is no need for finding true peak level.

5. EMISSION BANDWIDTH MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the Emission Bandwidth Test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

5.2. Block Diagram of Test Setup



5.3. Specification Limits (§15.231-(c))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

5.4. Emission Bandwidth Measurement Results

PASS.

Fundamental Frequency: 304MHz


Test Date: Jul. 30, 2013 Temperature: 24 Humidity: 58%

No.	Test model	Center Frequency	Bandwidth	Tolerance (%)
1.	JY610C	304.000MHz	64.0kHz	0.0210%
2.	JY610C-L	304.000MHz	63.0kHz	0.0207%

The bandwidth of emission was measured at the point 20dB down from the center frequency of modulated carrier.


Graph of Bandwidth Measurement

Model: JY610C

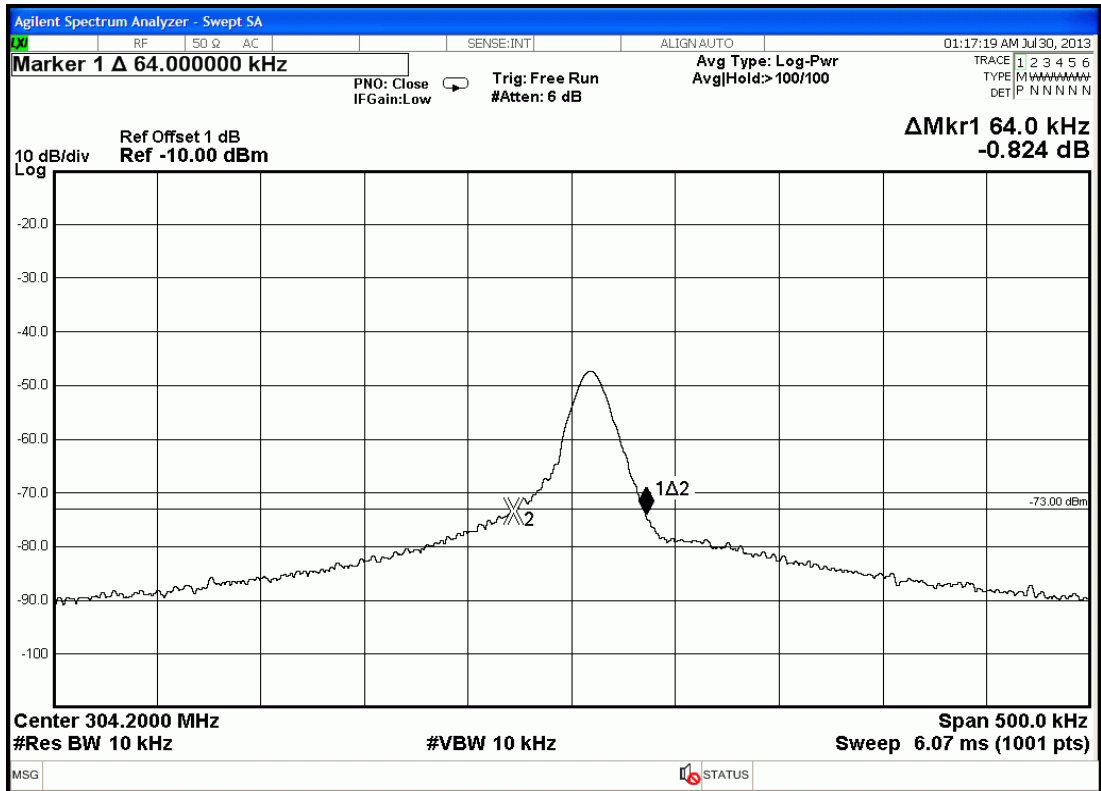

Note: “◇” The line is 20dB from the modulated carrier.

Model: JY610C-L

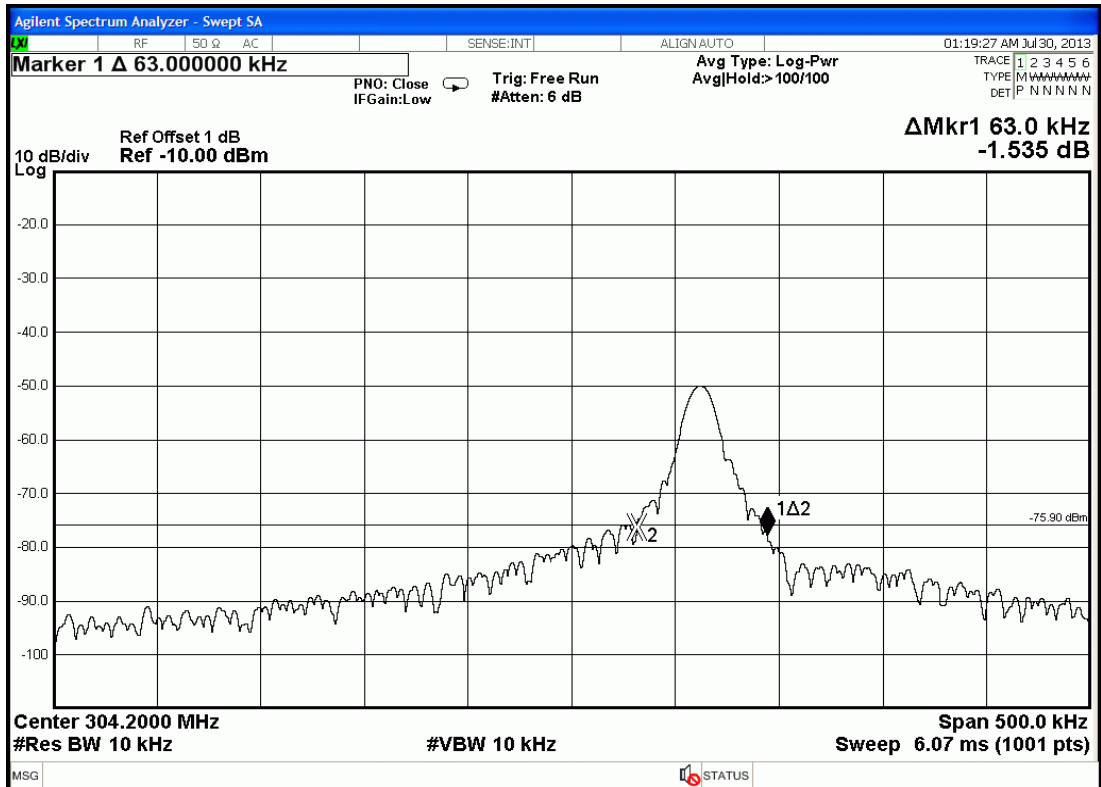

Note: “◇” The line is 20dB from the modulated carrier.


6. PERIODIC OPERATED MEASUREMENT

6.1. Test Equipment

The following test equipment was used during the periodic operated test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	Oct. 17, 12'	Oct. 16, 13'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

6.2. Block Diagram of Test Setup

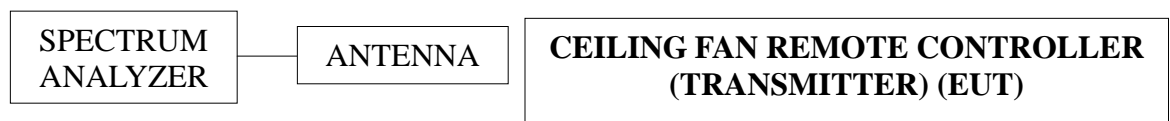

6.3. Specification Limits [§15.231-(a)-(1)]

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released, Compliance with §15.231 (a)- (1).

6.4. Periodic Operated Measurement Results

PASS. Model: JY610C: T = 2.570s. (< 5sec.)

PASS. Model: JY610C-L: T = 2.585s. (< 5sec.)

Fundamental Frequency: 304MHz


Test Date: Jul. 30, 2013 Temperature: 24

Humidity: 58%


The graph of testing is attached in next page.

Graph of Periodic Operated Measurement

Model: JY610C

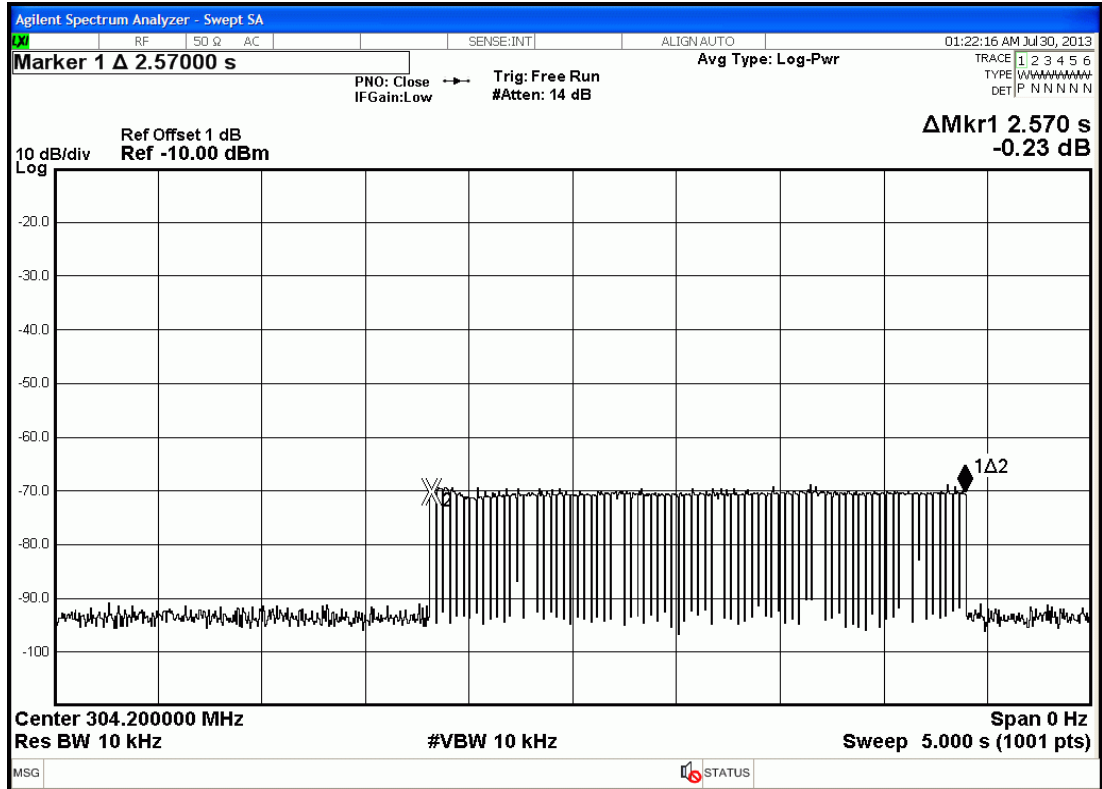

Model: JY610C-L

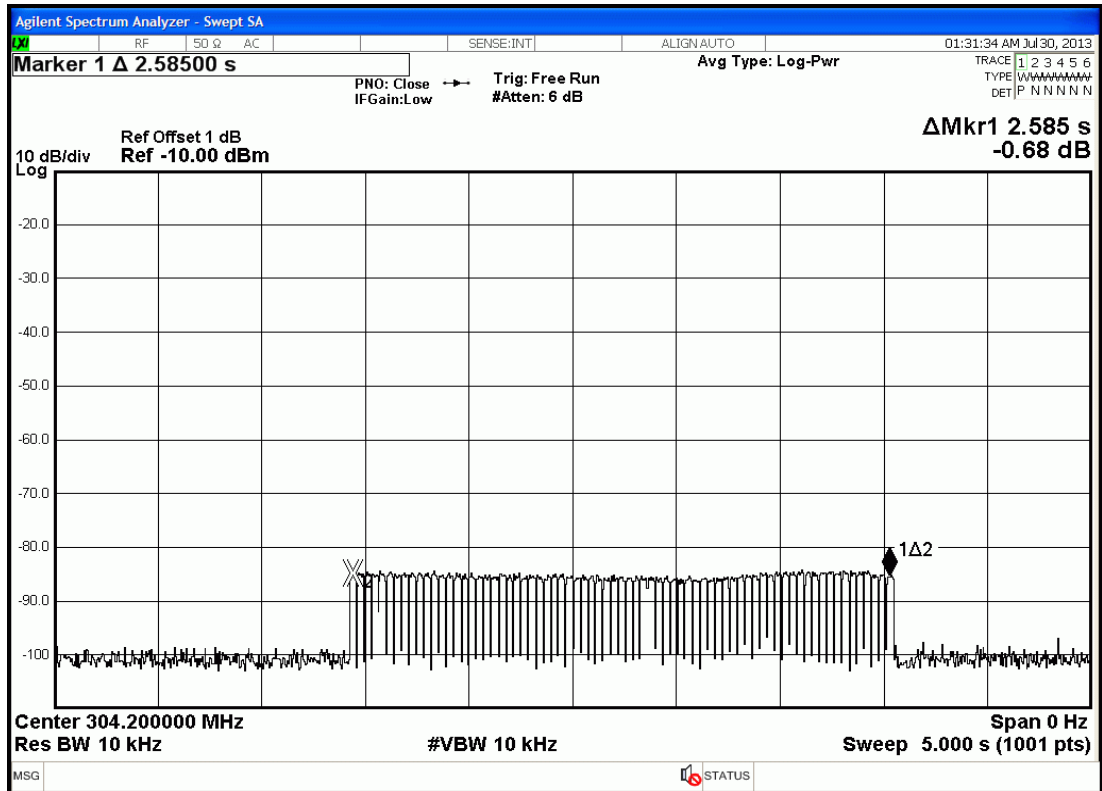

7. DEVIATION TO TEST SPECIFICATIONS

【NONE】

8. PHOTOGRAPHS

8.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz)

EUT on Stand



EUT on Side



EUT on Lying



8.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz)

EUT on Stand



EUT on Side



EUT on Lying



8.3. Photo of Section RF Near Field Measurement

