

## FCC 15.231 Test Report

for

**Chungear Industrial Co., Ltd**

**12 Jingke 8th Rd Nantun District Taichung 40852 Taiwan**

**Product Name : Ceiling Fan Remote Controller  
(Transmitter)**  
**Model Name : TR123B**  
**FCC ID : KUJCE10901**

**Prepared by: : AUDIX Technology Corporation,  
EMC Department**



The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.  
The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

## TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION.....	4
<b>1. REVISION RECORD OF TEST REPORT .....</b>	<b>4</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
<b>3. GENERAL INFORMATION .....</b>	<b>6</b>
3.1. Description of Application .....	6
3.2. Description of EUT .....	6
3.3. Antenna Information .....	7
3.4. EUT Specifications Assessed in Current Report .....	7
3.5. Description of Key Components .....	7
3.6. Test Configuration .....	8
3.7. Tested Supporting System List .....	9
3.8. Setup Configuration .....	9
3.9. Operating Condition of EUT .....	9
3.10. Description of Test Facility .....	10
3.11. Measurement Uncertainty .....	11
<b>4. MEASUREMENT EQUIPMENT LIST .....</b>	<b>12</b>
4.1. Radiated Emission Measurement .....	12
4.2. RF Conducted Measurement .....	12
<b>5. CONDUCTED EMISSION .....</b>	<b>13</b>
<b>6. RADIATED SPURIOUS EMISSION .....</b>	<b>14</b>
6.1. Block Diagram of Test Setup .....	14
6.2. Radiated Emission Limits .....	15
6.3. Test Procedure .....	16
6.4. Measurement Result Explanation .....	17
6.5. Test Results .....	17
<b>7. EMISSION BANDWIDTH MEASUREMENT .....</b>	<b>18</b>
7.1. Block Diagram of Test Setup .....	18
7.2. Specification Limits .....	18
7.3. Test Procedure .....	18
7.4. Test Results .....	18
<b>8. PERIODIC OPERATED MEASUREMENT .....</b>	<b>19</b>
8.1. Block Diagram of Test Setup .....	19
8.2. Specification Limits .....	19
8.3. Test Procedure .....	19
8.4. Test Results .....	19
<b>9. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>20</b>
APPENDIX A TEST DATA AND PLOTS	
APPENDIX B TEST PHOTOGRAPHS	

## TEST REPORT CERTIFICATION

Applicant : Chungear Industrial Co., Ltd  
Manufacturer #1 : Chungear Industrial Co., Ltd  
Manufacturer #2 : Satellite Electronic (Zhongshan) Ltd.  
Manufacturer #3 : Zhongshan Amity Electronic Ltd.  
EUT Description  
(1) Product : Ceiling Fan Remote Controller (Transmitter)  
(2) Model : TR123B  
(3) Power Supply : DC 12V

Applicable Standards:

Title 47CFR FCC Part 15 Subpart C  
ANSI C63.10:2013

**Audix Technology Corp.** tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

**Audix Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.


Date of Report: 2020. 08. 28

Reviewed by:

  
\_\_\_\_\_

(Sabrina Wang/Administrator)

Approved by:

  
\_\_\_\_\_

(Johnny Hsueh/Section Manager)

## 1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2020. 08. 28	Original Report	EM-F200378

## 2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	N/A, Note 2
15.209/15.231(b)	Radiated Spurious Emission and Fundamental Frequency	PASS
15.231(c)	Emission Bandwidth	PASS
15.231(a)(1)	Periodic Operated	PASS
15.203	Antenna Requirement	Compliance
Note: 1. The uncertainties value is not used in determining the result. 2. The EUT only employs battery power for operation, so it is unnecessary to test.		

### 3. GENERAL INFORMATION

#### 3.1. Description of Application

Applicant	Chungear Industrial Co., Ltd 12 Jingke 8th Rd Nantun District Taichung 40852 Taiwan
Manufacture	#1 Chungear Industrial Co., Ltd 12 Jingke 8th Rd Nantun District Taichung 40852 Taiwan #2 Satellite Electronic (Zhongshan) Ltd. 8 CHUANG YE RD.TORCH DEVELOPMENT ZONE..ZHONGSHAN.GUANGDONG.528437 CHINA #3 Zhongshan Amity Electronic Ltd. No. 16 Torch Hi-Tech Industrial Development Zone, Zhong Shan City Guangdong Province China.
Product	Ceiling Fan Remote Controller (Transmitter)
Model	TR123B

#### 3.2. Description of EUT

Test Model	TR123B
Serial Number	N/A
Power Rating	DC 12V
RF Features	ASK
Transmit Type	1T
Sample Status	Production
Date of Receipt	2020. 08. 14
Date of Test	2020. 08. 25
Interface Ports of EUT	N/A
Accessories Supplied	N/A

### 3.3. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	---	---	PCB	---	---

### 3.4. EUT Specifications Assessed in Current Report

Modulation	Fundamental Range (MHz)	Channel Number
ASK	304.17	1

### 3.5. Description of Key Components

None

### 3.6. Test Configuration

#### Duty Cycle

TX <sub>on</sub> (ms)	TX <sub>on+off</sub> (ms)	Duty Cycle Factor (dB)
0.375*6+0.750*19= 16.50	37.95	-7.23
Duty Cycle Factor = 20log (TX <sub>on</sub> /TX <sub>on+off</sub> )		



Note: Normal, Learn Key and were assessed. The worst DCCF for normal were calculated the average emission level.

Item	Test Frequency
Radiated Spurious Emission and Fundamental Frequency	304.17MHz
Emission Bandwidth	304.17MHz
Periodic Operated	304.17MHz

Note 1:  Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:  Lie  Side  Stand



### 3.7. Tested Supporting System List

None

### 3.8. Setup Configuration

#### 3.8.1. EUT Configuration for Radiated Emission



#### 3.8.2. EUT Configuration for RF Conducted Test Items



### 3.9. Operating Condition of EUT

To press the button of EUT is used for enabling EUT RF function under continues transmitting.

### 3.10. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.1 3m Semi Anechoic Chamber (2) Fully Anechoic Chamber

### 3.11.Measurement Uncertainty

Test Items/Facilities		Frequency Range	Uncertainty	
Conduction Test		9kHz-150kHz	±3.7dB	
		150kHz-30MHz	±3.5dB	
Radiation Test	<input checked="" type="checkbox"/>	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.1dB
			200MHz-1000MHz, 3m, Horizontal	±3.9dB
			30MHz-200MHz, 3m, Vertical	±4.2dB
			200MHz-1000MHz, 3m, Vertical	±4.1dB
			1GHz-6GHz, 3m	±4.2dB
			6GHz-18GHz, 3m	±4.6dB
	<input type="checkbox"/>	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±3.9dB
			30MHz-200MHz, 3m, Vertical	±4.4dB
			200MHz-1000MHz, 3m, Vertical	±4.1dB
	<input type="checkbox"/>	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.3dB
			200MHz-1000MHz, 3m, Horizontal	±4.0dB
			30MHz-200MHz, 3m, Vertical	±4.3dB
			200MHz-1000MHz, 3m, Vertical	±4.4dB
			1GHz-6GHz, 3m	±4.5dB
			6GHz-18GHz, 3m	±4.6dB
	<input type="checkbox"/>	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.0dB
			200MHz-1000MHz, 3m, Horizontal	±3.9dB
			30MHz-200MHz, 3m, Vertical	±4.2dB
			200MHz-1000MHz, 3m, Vertical	±4.3dB
			1GHz-6GHz, 3m	±4.3dB
			6GHz-18GHz, 3m	±4.7dB
	<input checked="" type="checkbox"/>	Fully Anechoic Chamber	30MHz~1000MHz	±4.7dB
			1GHz~18GHz	±5.3dB

Remark : Uncertainty =  $ku_c(y)$

Test Item	Uncertainty
Emission Bandwidth (20dB)	± 0.2kHz
99% Occupied Bandwidth	± 0.38%
Periodic Operated	± 0.05s

## 4. MEASUREMENT EQUIPMENT LIST

### 4.1. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2019.09.11	1 Year
2.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2020.01.16	1 Year
3.	Test Receiver	R&S	ESCS30	100338	2020.06.10	1 Year
4.	Amplifier	HP	8447D	2944A06305	2020.01.16	1 Year
5.	Amplifier	HP	8449B	3008A02678	2020.02.27	1 Year
6.	Loop Antenna	R&S	HFH2-Z2	891847/27	2019.12.26	2 Years
7.	Bilog Antenna	TESEQ	CBL6112D	33821	2020.01.17	1 Year
8.	Horn Antenna	EMCO	3117	00135902	2020.03.20	1 Year
9.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2020.04.17	1 Year
10.	Digital Thermo-Hygro Meter	EVERY DAY	E-512	RF-02	2020.04.17	1 Year
11.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.
12.	Test Software	Audix	e3	V6.110601	N.C.R.	N.C.R.

### 4.2. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9020B-544	MY57120357	2020.01.10	1 Year
2.	Wide Band Antenna	Diamond	RH799	N/A	N.C.R.	N.C.R.
3.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2020.04.17	1 Year

## **5. CONDUCTED EMISSION**

【The EUT only employs Batteries power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】


## 6. RADIATED SPURIOUS EMISSION

### 6.1. Block Diagram of Test Setup


#### 6.1.1. Block Diagram of EUT

Indicated as section 3.8


#### 6.1.2. Setup Diagram for 9kHz-30MHz

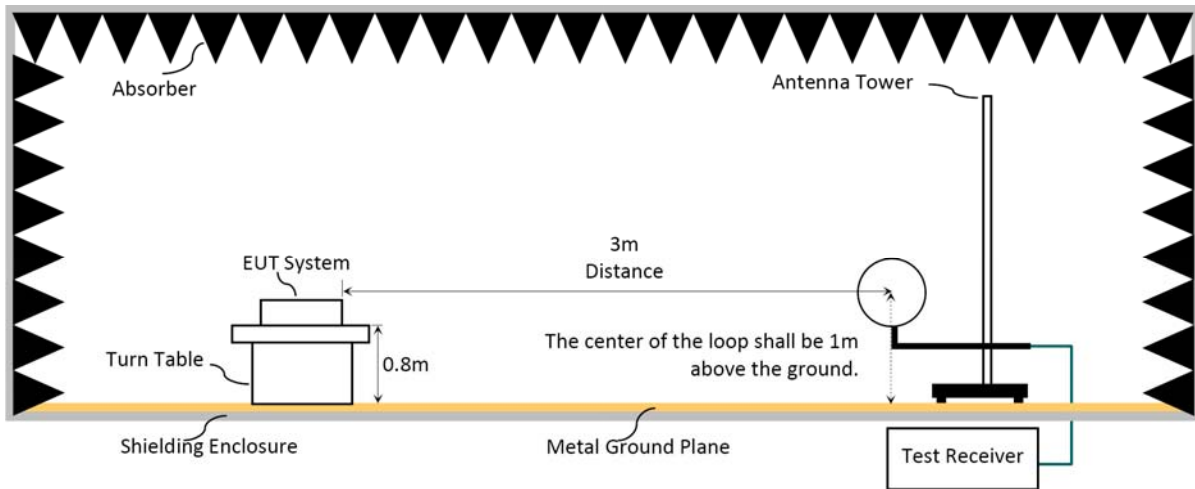

#### 6.1.3. Setup Diagram for 30MHz-1000MHz

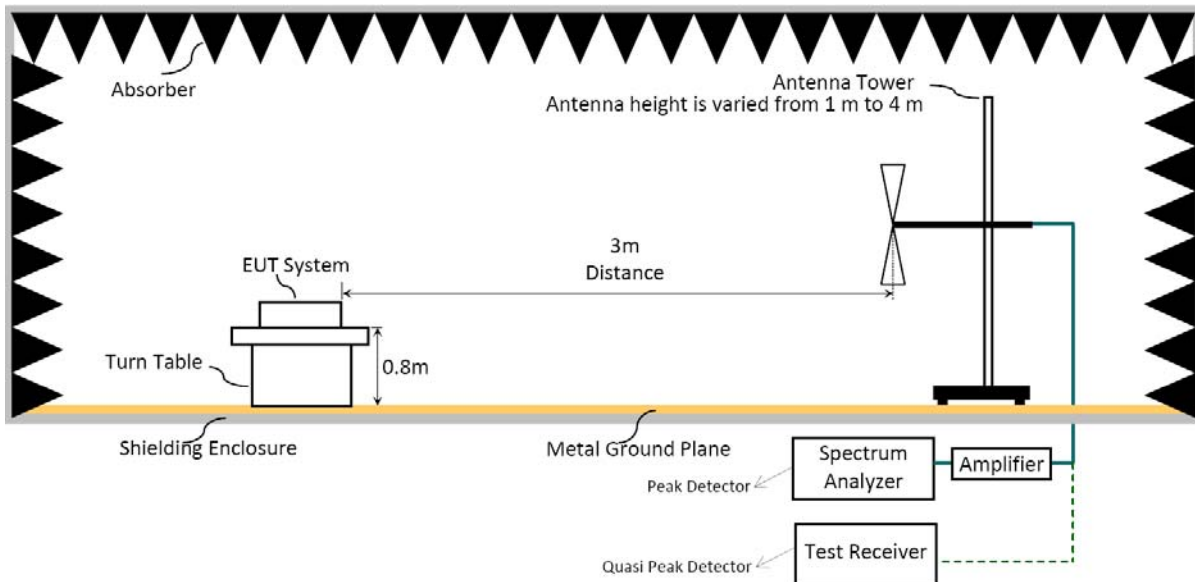

### 6.1.4. Setup Diagram for above 1GHz

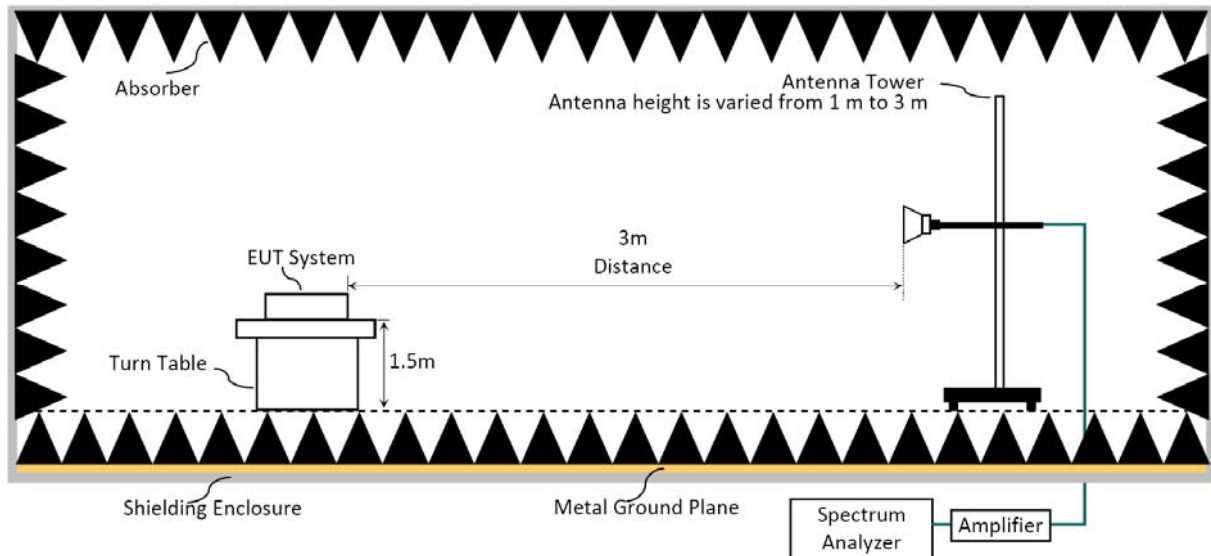

## 6.2. Radiated Emission Limits

### 6.2.1. General Limit

Radiated emissions which fall in restricted bands, as defined in Section 15.205 must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB $\mu$ V/m	$\mu$ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB $\mu$ V/m (Peak) 54.0 dB $\mu$ V/m (Average)	

Remark : (1) dB $\mu$ V/m = 20 log ( $\mu$ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

## 6.2.2. Limite for Fundamental Frequency

In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

<sup>1</sup>: Linear Interpolations

Remark : (1)  $\text{dB}\mu\text{V}/\text{m} = 20 \log (\mu\text{V}/\text{m})$

(2) The tighter limit applies to the edge between two frequency bands.

(3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(4) Where limit of Fundamental Freq. is calculated by:

$$41.6667 \times 304.17 - 7083.3333 = 5590.51839 \mu\text{V}/\text{m} = 74.95 \text{dB}\mu\text{V}/\text{m}$$

(5) The limits in this table are based on CFR 47 Part 15.231(b).

## 6.3. Test Procedure

### Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

(1) RBW = 9kHz with peak and average detector.

(2) Detector: average and peak (9kHz-490kHz)

Q.P. (490kHz-30MHz)

### Frequency Range 30MHz to 10th harmonic:

The EUT setup on the turn table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.



**Frequency below 1 GHz:**

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

**Frequency above 1GHz to 10th harmonic:****Peak Detector:**

- (1) RBW = 1MHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

**Average Detector:****■ Option 1:**

- (1) RBW = 1MHz
- (2) VBW  $\geq 1/T$ .
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

**□ Option 2:**

Average Emission Level = Peak Emission Level + D.C.C.F.

## 6.4. Measurement Result Explanation

■ Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)

■ Average Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)

□ Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) =  $20 \log(TX_{on}/TX_{on+off})$  presented in section 3.6


□ ERP = Peak Emission Level - 95.2dB - 2.14dB

## 6.5. Test Results

Please refer to Appendix A.

## 7. EMISSION BANDWIDTH MEASUREMENT

### 7.1. Block Diagram of Test Setup

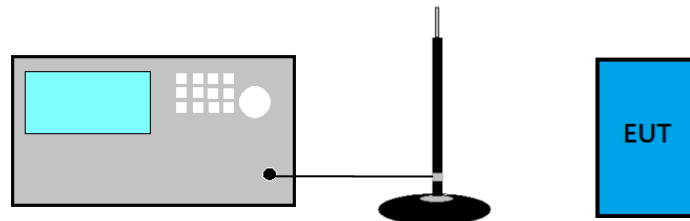

### 7.2. Specification Limits

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

### 7.3. Test Procedure


- (1) Set RBW close to 1-5 % of OBW.
- (2) Set  $VBW \geq RBW$ .
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.

### 7.4. Test Results

Please refer to Appendix A

## 8. PERIODIC OPERATED MEASUREMENT

### 8.1. Block Diagram of Test Setup

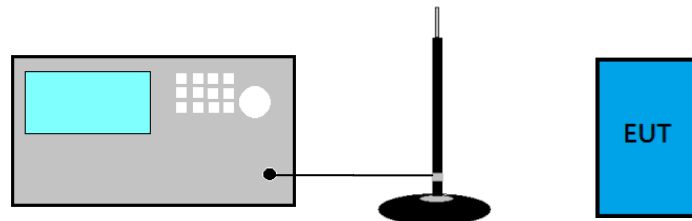

### 8.2. Specification Limits

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released

### 8.3. Test Procedure

- (1) Span = zero
- (2) RBW  $\geq$  100kHz
- (3) VBW  $\geq$  RBW
- (4) Sweep = 5s
- (5) Detector function = peak
- (6) Trace = single sweep

### 8.4. Test Results

Please refer to Appendix A



**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

---

## 9. DEVIATION TO TEST SPECIFICATIONS

**【NONE】**



*Audix Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan*

*Tel: +886 2 26099301  
Fax: +886 2 26099303*

---

# APPDNDIX A

## TEST DATA AND PLOTS

(Model: TR123B)

## TABLE OF CONTENTS

<b>A.1 RADIATED SPURIOUS EMISSION.....</b>	<b>2</b>
A.1.1 Emissions Applied to General Requirement .....	2
A.1.2 Fundamental Frequency .....	6
<b>A.2 EMISSION BANDWIDTH MEASUREMENT.....</b>	<b>7</b>
A.2.1 Emission Bandwidth .....	7
A.2.2 Measurement Plots .....	7
<b>A.3 PERIODIC OPERATED MEASUREMENT .....</b>	<b>8</b>
A.3.1 Periodic Operated.....	8
A.3.2 Measurement Plots .....	8

## A.1 RADIATED SPURIOUS EMISSION

Test Date	2020/08/25	Temp./Hum.	25°C/46%
Test Voltage	DC 12V	Tested By	Martin Chen


### A.1.1 Emissions Applied to General Requirement

#### A.1.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

A.1.1.2 Frequency Below 1 GHz

Test Frequency	TX 304.17MHz	Test Model	TR123B
----------------	--------------	------------	--------

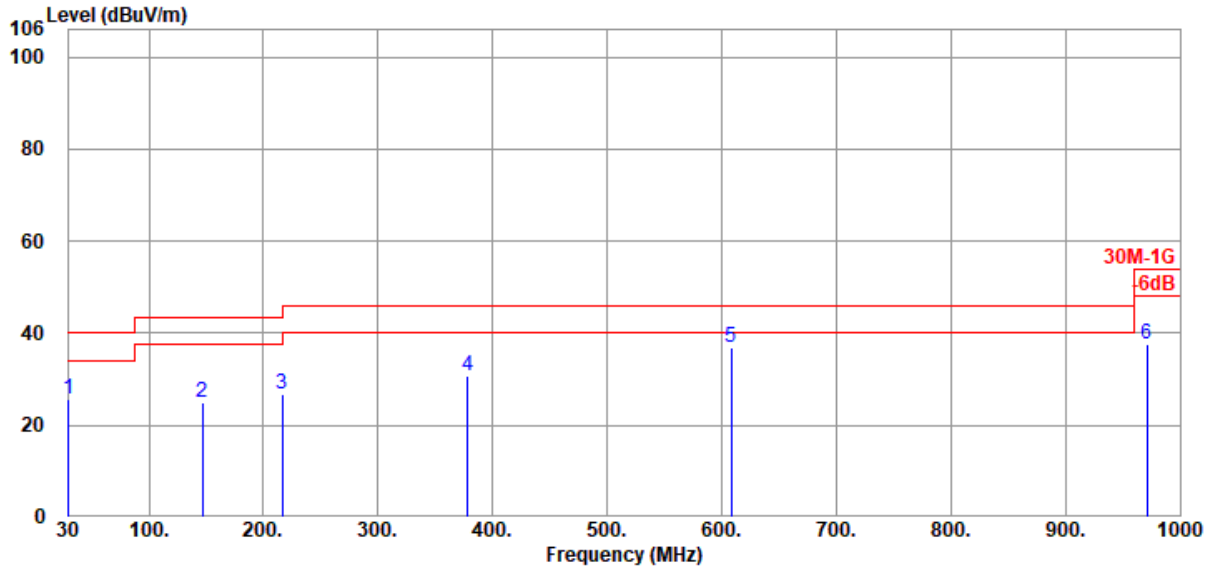


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	24.20	1.20	26.53	26.84	25.71	40.00	14.29	Peak
146.400	17.55	3.02	26.07	30.46	24.96	43.50	18.54	Peak
216.240	16.49	3.70	25.83	32.57	26.93	46.00	19.07	Peak
378.230	21.35	5.71	26.39	30.22	30.89	46.00	15.11	Peak
608.120	24.82	7.08	27.48	32.60	37.02	46.00	8.98	Peak
970.900	27.25	9.03	26.92	28.31	37.67	54.00	16.33	Peak



Test Frequency	TX 304.17MHz	Test Model	TR123B
----------------	--------------	------------	--------

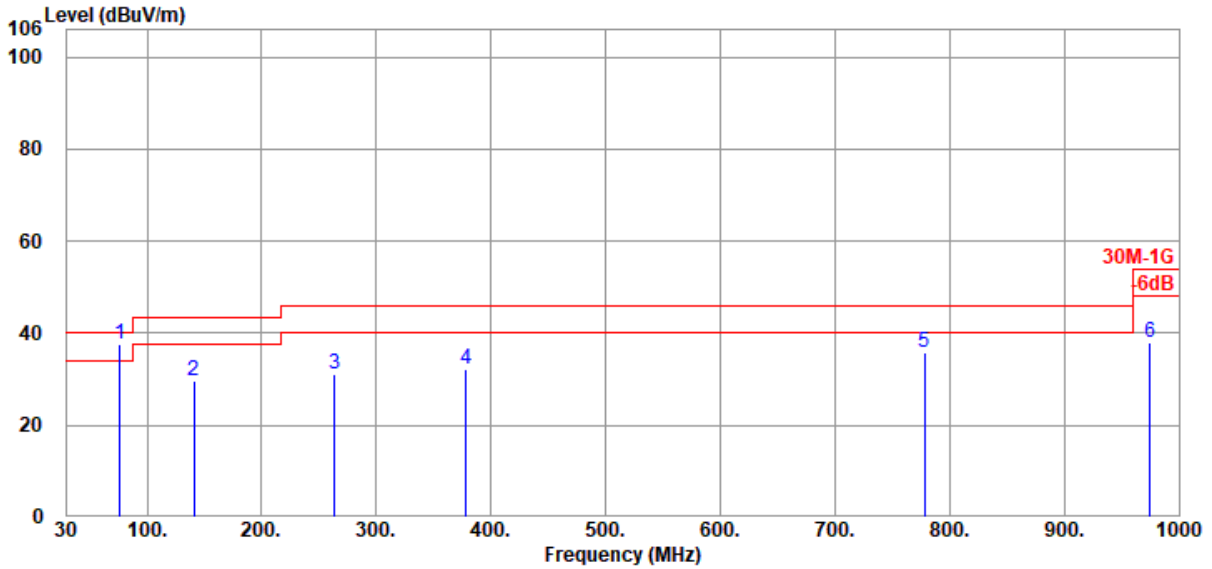

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
76.560	12.92	2.12	26.39	48.82	37.47	40.00	2.53	Peak
140.580	18.04	2.95	26.10	34.93	29.82	43.50	13.68	Peak
263.770	18.86	4.17	25.75	33.99	31.27	46.00	14.73	Peak
378.230	21.35	5.71	26.39	31.42	32.09	46.00	13.91	Peak
777.870	25.86	8.02	27.43	29.40	35.85	46.00	10.15	Peak
974.780	27.26	9.05	26.90	28.76	38.17	54.00	15.83	Peak

A.1.1.3 Frequency Above 1 GHz

Test Frequency	TX 304.17MHz	Test Model	TR123B
----------------	--------------	------------	--------

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1208.000	28.74	6.82	35.06	38.17	38.67	54.00	15.33	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1208.000	28.74	6.82	35.06	36.74	37.24	54.00	16.76	Peak

A.1.2 Fundamental Frequency

Test Frequency	TX 304.17MHz	Test Model	TR123B
----------------	--------------	------------	--------

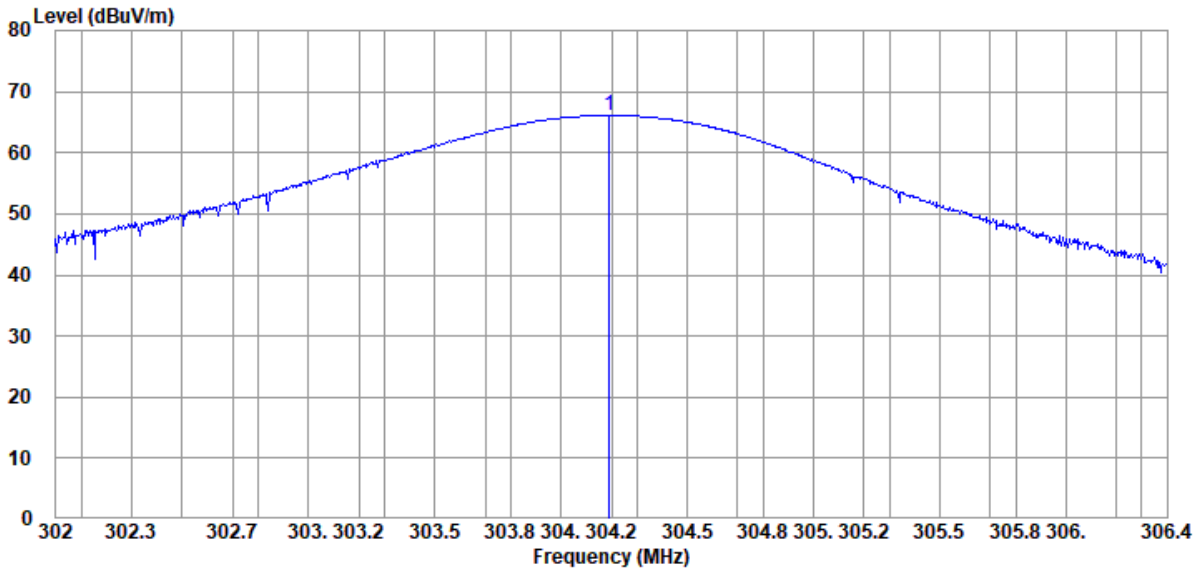

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
304.191	19.40	4.62	25.75	67.86	66.13	94.95	28.82	Peak
Emission Frequency (MHz)	Peak Emission Level (dBμV/m)	DCCF (dB)	Average Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark		
304.191	66.13	-7.23	58.90	74.95	16.05	Average		

Remark: Horizontal is the strongest polarization and peak value has complied with average limit, so vertical won't be listed in test report.


## A.2 EMISSION BANDWIDTH MEASUREMENT

Test Date	2020/08/25	Temp./Hum.	25°C/52%
Test Voltage	DC 12V	Tested By	Martin Chen
Test Frequency	TX 304.17MHz	Test Model	TR123B

### A.2.1 Emission Bandwidth

Center Frequency (MHz)	20dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Tolerance (%)	Tolerance Limit (%)
304.17	0.009611	0.016053	0.003	0.25

### A.2.2 Measurement Plots

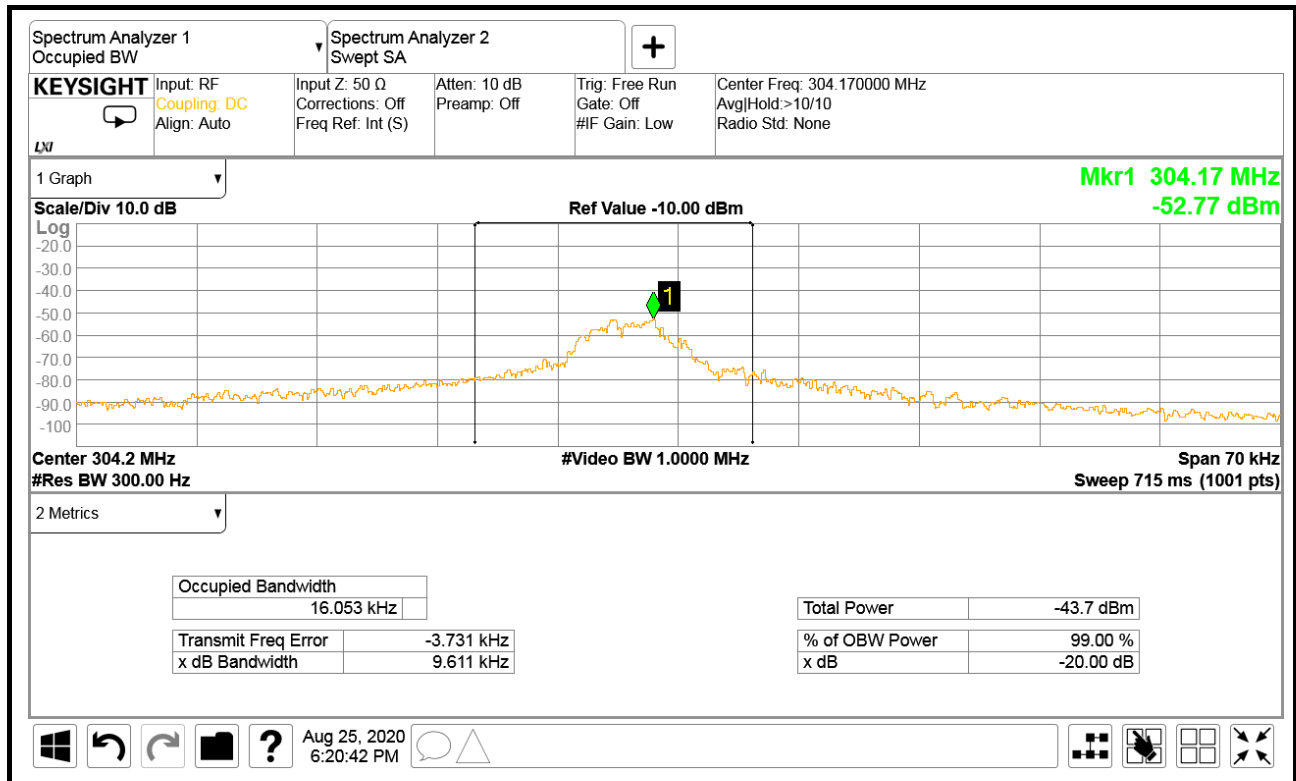

### A.3 PERIODIC OPERATED MEASUREMENT

Test Date	2020/08/25	Temp./Hum.	25°C/52%
Test Voltage	DC 12V	Tested By	Martin Chen
Test Frequency	TX 304.17MHz	Test Model	TR123B

#### A.3.1 Periodic Operated

Center Frequency (MHz)	Time (Sec.)	Limit (Sec.)
304.17	0.300	< 5

#### A.3.2 Measurement Plots

