

TEST REPORT FOR CERTIFICATION
On Behalf of
CHUNGEAR INDUSTRIAL CO., LTD.

Ceiling Fan Remote Controller

Model : CS6A

FCC ID : KUJCE9601

Prepared for : CHUNGEAR INDUSTRIAL CO., LTD.
106 Kanho Rd., Taichung, Taiwan, R.O.C.

Prepared by : Audix Technology Corporation
EMC Department
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County 24443, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax : (02) 2609-9303

File Number : EM960345
Report Number : EM-F960115
Date of Test : Mar. 17, 2007
Date of Report : Mar. 21, 2007

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility.....	5
1.3. Measurement Uncertainty.....	5
2. CONDUCTED EMISSION MEASUREMENT	6
3. RADIATED EMISSION MEASUREMENT	7
3.1. Test Equipment.....	7
3.2. Test Setup.....	7
3.3. Radiation Emission Limits (15.231).....	8
3.4. EUT's Configuration during Compliance Measurement.....	8
3.5. Operating Condition of EUT.....	8
3.6. Test Procedure.....	9
3.7. Radiated Emission Noise Measurement Results.....	10
4. EMISSION BANDWIDTH MEASUREMENT	19
4.1. Test Equipment.....	19
4.2. Block Diagram of Test Setup.....	19
4.3. Specification Limits (§15.231-(c)).....	19
4.4. EUT's Configuration during Compliance Measurement.....	19
4.5. Emission Bandwidth Measurement Results.....	19
5. PERIODIC OPERATED MEASUREMENT	21
5.1. Test Equipment.....	21
5.2. Block Diagram of Test Setup.....	21
5.3. Specification Limits [§15.231-(a)-(1)].....	21
5.4. EUT's Configuration during Compliance Measurement.....	21
5.5. Periodic Operated Measurement Results.....	21
6. DEVIATION TO TEST SPECIFICATIONS	23
7. PHOTOGRAPHS	24
7.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz).....	24
7.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz).....	25
7.3. Photo of Emission Bandwidth Measurement.....	27
7.4. Photo of Periodic Operated Measurement.....	27

TEST REPORT CERTIFICATION

Applicant : CHUNGEAR INDUSTRIAL CO., LTD.
 Manufacturer #1 : CHUNGEAR INDUSTRIAL CO., LTD.
 Manufacturer #2 : SATELLITE ELECTRONIC (ZHONGSHAN) LTD.
 Manufacturer #3 : ZHONGSHAN AMITY ELECTRONIC LTD.
 EUT Description : Ceiling Fan Remote Controller
 FCC ID : KUJCE9601
 (A) MODEL NO. : CS6A
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 9V (Battery)
 (D) TEST VOLTAGE : DC 9V

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2006
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207, §15.209 and §15.231)

The device described above was tested by Audix Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits both radiated and conducted emissions.

The measurement results are contained in this test report and Audix Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology Corporation.

Date of Test : Mar. 17, 2007

Prepared by : Monica Chang Mar. 29, 2007
(Monica Chang/Administrator)

Test Engineer : Alex Deng Mar. 29, 2007
(Alex Deng/Section Manager)

Approved & Authorized Signer : Ben Cheng Mar. 29, 2007
(Ben Cheng/Section Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Ceiling Fan Remote Controller
Model Number	:	CS6A
FCC ID	:	KUJCE9601
Applicant	:	CHUNGEAR INDUSTRIAL CO., LTD. 160 Kanho Rd., Taichung, Taiwan, R.O.C.
Manufacturer #1	:	CHUNGEAR INDUSTRIAL CO., LTD. 160 Kanho Rd., Taichung, Taiwan, R.O.C.
Manufacturer #2	:	SATELLITE ELECTRONIC (ZHONGSHAN) LTD. No. 15, Torch Hi-Tech Industrial Development Zone, Zhongshan City Guangdong Province China.
Manufacturer #3	:	ZHONGSHAN AMITY ELECTRONIC LTD. 2F. No. 16, Torch Hi-Tech Industrial Development Zone, Zhongshan City Guangdong Province China.
Fundamental Frequency	:	299.6MHz
Power Supply	:	DC 9V (Battery)
Date of Receipt of Sample	:	Mar. 06, 2007
Date of Test	:	Mar. 17, 2007

- * Ceiling Fan Remote Controller - Receiver
 (1) Model No.: JY199, FCC by DoC
 (2) Model No.: JY326B, FCC by DoC

Remark:

Antenna requirement: This EUT's transmitter antenna is designed to be soldered on a printed circuit board, comply with §15.203 and inform to user that any change and modify is prohibited.

1.2. Description of Test Facility

Name of Firm : Audix Technology Corporation
EMC Department
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County 24443, Taiwan, R.O.C.

Test Location & Facility (AC) : **Semi-Anechoic Chamber**
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County 24443, Taiwan, R.O.C.
May 16, 2006 Re-File on
Federal Communication Commission
Registration Number: 90993

NVLAP Lab. Code : 200077-0
(NVLAP is a NATA accredited body under Mutual Recognition Agreement)

DAR-Registration No. : DAT-P-145/03-01

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.94dB

Remark : Uncertainty = $ku_c(y)$

2. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission test :

3.1.1. For Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Aug. 23, 06'	Aug. 22, 07'
2.	Test Receiver	R&S	ESCS 30	100265	Sep. 19, 06'	Sep. 18, 07'
3.	Pre-Amplifier	HP	8447D	2944A06305	Mar. 03, 07'	Mar. 02, 08'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Apr. 19, 06'	Apr. 18, 07'
5.	Log Periodic Antenna	Schwarzbeck	UHALP910 8-A	0139	Apr. 19, 06'	Apr. 18, 07'
6.	Coaxial Switch	Anritsu	MP59B	6100226512	Mar. 10, 07'	Mar. 09, 08'

3.1.2. For Frequency Range Above 1GHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Aug. 23, 06'	Aug. 22, 07'
2.	Amplifier	HP	8449B	3008A01284	Jun. 30, 06'	Jun. 29, 07'
3.	Horn Antenna	EMCO	3115	9112-3775	Jun. 01, 06'	May 31, 07'


3.2. Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

CEILING FAN REMOTE CONTROLLER (EUT)

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram

ANTENNA TOWER

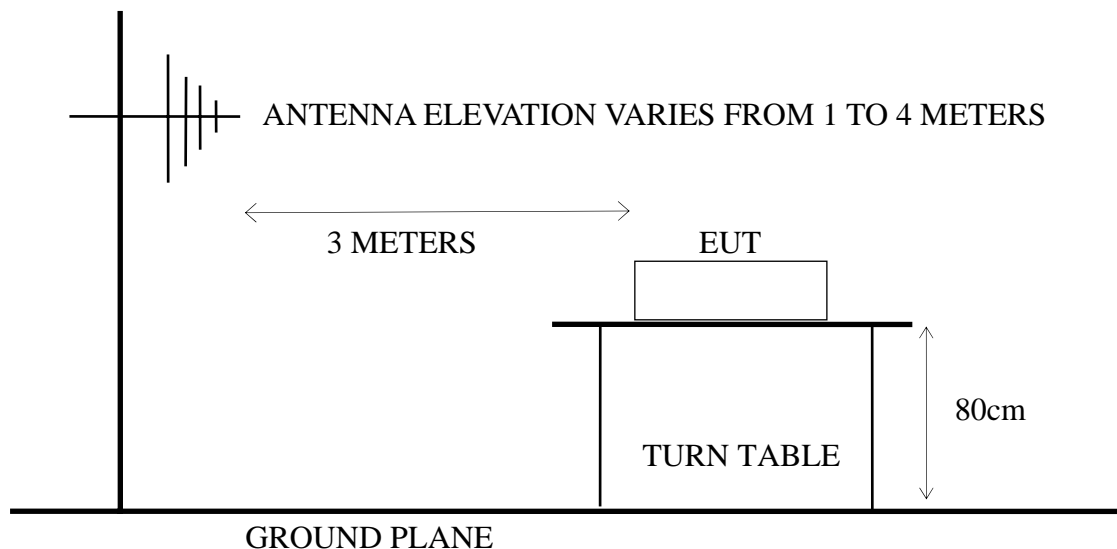

3.3.Radiation Emission Limits (15.231)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
Fundamental Freq.	3	5400.010	74.65 (Quasi-Peak)
Spurious Emission	3	5400.010	54.65 (Quasi-Peak)
Above 1GHz *(6)	3	---	74 (Peak)
Above 1GHz *(6)	3	---	54 (Average)

- Remark :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) Where limit of Fundamental Freq. is calculated by:
 $41.6667 \times 299.6 - 7083.3333 = 5400.010 \mu\text{V/m} = 74.65 \text{dB}\mu\text{V/m}$
 limit of spurious emission is $74.65 \text{dB}\mu\text{V/m} - 20 \text{dB} = 54.65 \text{dB}\mu\text{V/m}$
 - (5) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209(a) and Part 15.231(b).
 - (6) The over 1GHz limit, FCC limit is used based on CFR 47 Part 15.35 (b) and Part 15.205(b) & Part 15.209(b) & Part 15.231(a)-(3).

3.4.EUT's Configuration during Compliance Measurement

The following equipment was installed on radiated measurement to meet the commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

3.4.1. Ceiling Fan Remote Controller (EUT)

Model Number	:	CS6A
Serial Number	:	N/A
FCC ID	:	KUJCE9601
Manufacturer	:	SATELLITE ELECTRONIC (ZHONGSHAN) LTD.
Fundamental Frequency	:	299.6MHz

3.5.Operating Condition of EUT

- 3.5.1. Set up the EUT and simulator as shown on 3.2.
- 3.5.2. Turned on the power of all equipment.
- 3.5.3. The EUT (Ceiling Fan Remote Controller) emitted the fundamental frequency with data code at the stand, side and lying conditions.
- 3.5.4. The EUT was at worked on maximum transmitting status during all testing.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antennas such as calibrated biconical and log- periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of test receiver was set at 120kHz for frequencies below 1GHz and resolution bandwidth of spectrum analyzer was set at 1MHz for frequencies above 1GHz.

The frequency range from 30MHz to 1000MHz was measured with Quasi-Peak detector.

The frequency range from 1GHz to 3.1GHz was pre-scanned with Peak detector.

EUT with three kinds of positions (Lying, Stand, Side) was tested during radiated measurement and all the test results are listed in section 3.7.

Mode	Operation of EUT
Frequency Range: 30-1000MHz	
1.	EUT on Lying, Transmitting Mode
2.	EUT on Side, Transmitting Mode
3.	EUT on Stand, Transmitting Mode
Frequency Range: 1000-2680MHz	
1.	EUT on Lying, Transmitting Mode
2.	EUT on Side, Transmitting Mode
3.	EUT on Stand, Transmitting Mode
Frequency Range: 2680-3100MHz	
1.	EUT on Lying, Transmitting Mode
2.	EUT on Side, Transmitting Mode
3.	EUT on Stand, Transmitting Mode

3.7. Radiated Emission Noise Measurement Results

3.7.1. Frequency Range 30MHz to 1GHz Measurement Results: **PASSED.**

All the emissions not reported below are too low against the FCC part 15 Subpart C limit.

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Lying Fundamental Freq. : 299.6MHz
 Ant. Polarity : Horizontal

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	299.600	14.52	3.90	34.10	52.51	74.65	22.14	
2	599.200	21.31	6.30	19.70	47.31	54.65	7.34	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All readings are Quasi-Peak values.

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Lying Fundamental Freq. : 299.6MHz
 Ant. Polarity : Vertical

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	299.600	14.52	3.90	21.91	40.33	74.65	34.32	
2	599.200	21.31	6.30	10.15	37.76	54.65	16.89	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All readings are Quasi-Peak values.

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Side Fundamental Freq. : 299.6MHz
 Ant. Polarity : Horizontal

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	299.600	14.52	3.90	32.34	50.76	74.65	23.89	
2	599.200	21.31	6.30	20.15	47.76	54.65	6.89	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All readings are Quasi-Peak values.

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Side Fundamental Freq. : 299.6MHz
 Ant. Polarity : Vertical

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	299.600	14.52	3.90	28.70	47.11	74.65	27.54	
2	599.200	21.31	6.30	17.04	44.65	54.65	10.00	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All readings are Quasi-Peak values.

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Stand Fundamental Freq. : 299.6MHz
 Ant. Polarity : Horizontal

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	299.600	14.52	3.90	25.77	44.18	74.65	30.47
2	599.200	21.31	6.30	13.56	41.17	54.65	13.48

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All readings are Quasi-Peak values.

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Stand Fundamental Freq. : 299.6MHz
 Ant. Polarity : Vertical


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBµV)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Remark
1	299.600	14.52	3.90	33.44	51.85	74.65	22.80
2	599.200	21.31	6.30	21.92	49.53	54.65	5.12

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.
 3. All readings are Quasi-Peak values.


3.7.2. Frequency Range 1GHz to 3.1GHz Measurement Results: **PASSED.**

The frequency spectrum from 1GHz to 3.1GHz (up to 10th harmonics) was investigated. All the emissions not reported below are too low against the FCC part 15 Subpart C limit.

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Lying Fundamental Freq. : 299.6MHz

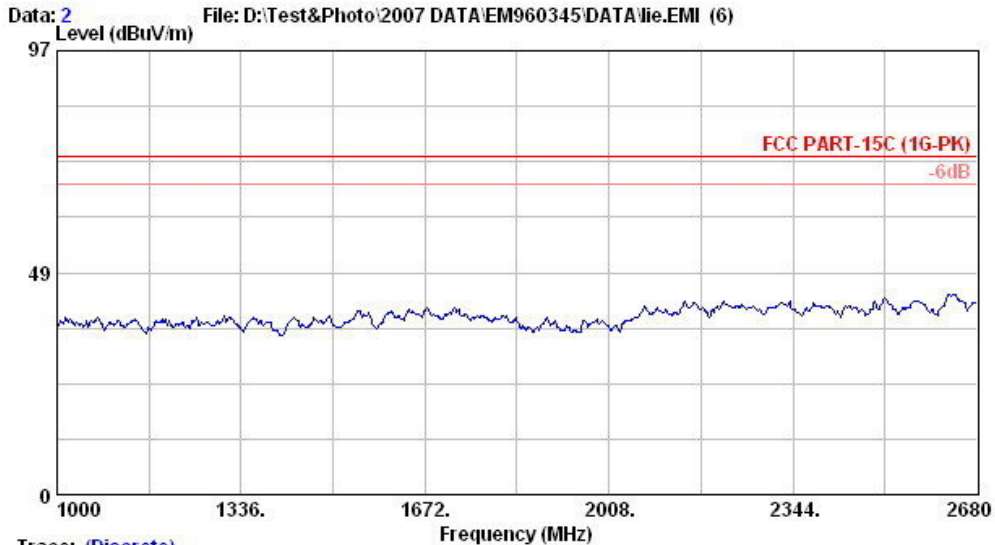


Trace: (Discrete)
 Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 20°C/68% Engineer : Alvin_Yang
 EUT : Ceiling Fan Remote Controller M/N:CS6A
 Power Rating : DC 9V
 Test Mode : Lying

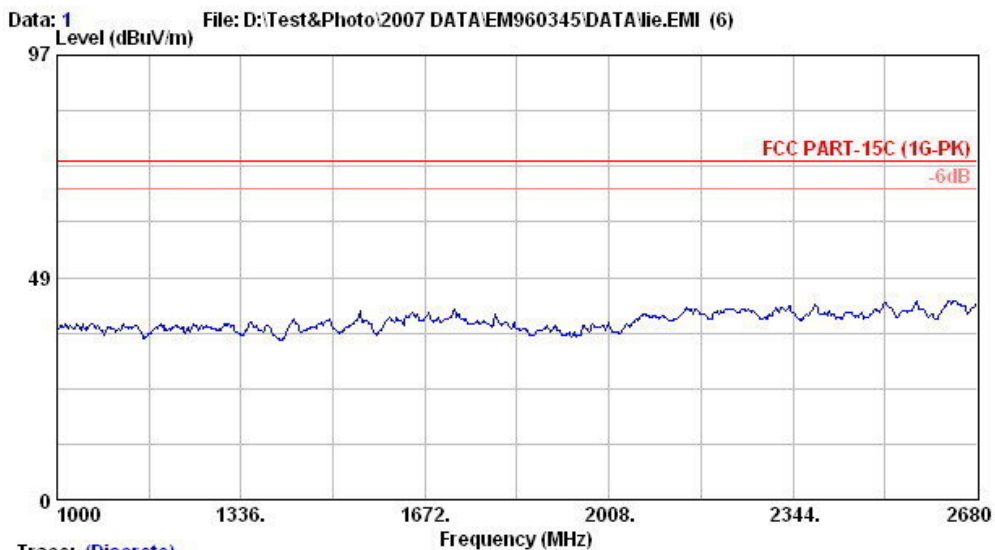


Trace: (Discrete)
 Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 20°C/68% Engineer : Alvin_Yang
 EUT : Ceiling Fan Remote Controller M/N:CS6A
 Power Rating : DC 9V
 Test Mode : Lying

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Lying Fundamental Freq. : 299.6MHz

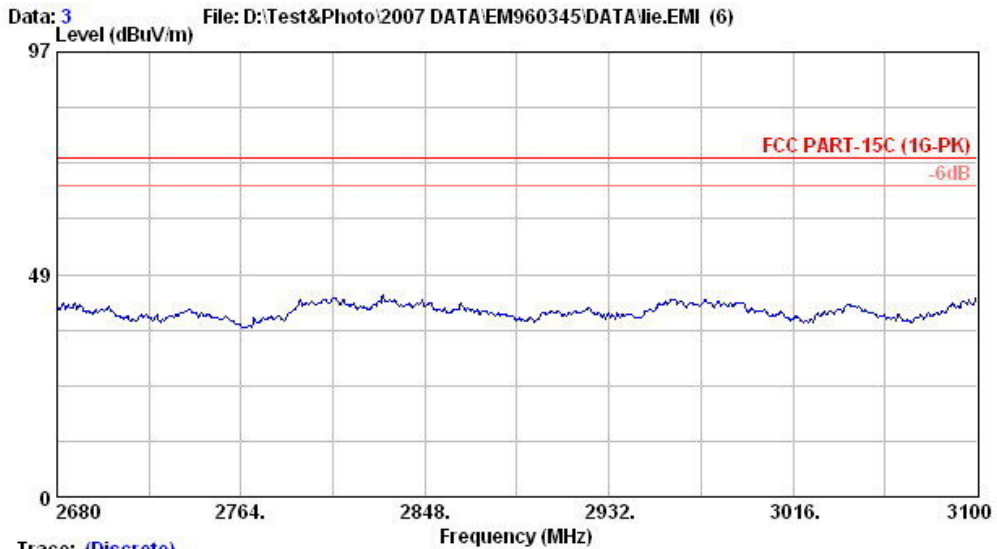

Trace: (Discrete)

Site no.	: A/C Chamber	Data no.	: 3
Dis. / Ant.	: 3m 3115	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8593EM 20*C/68%	Engineer	: Alvin_Yang
EUT	: Ceiling Fan Remote Controller	M/N:	CS6A
Power Rating	: DC 9V		
Test Mode	: Lying		

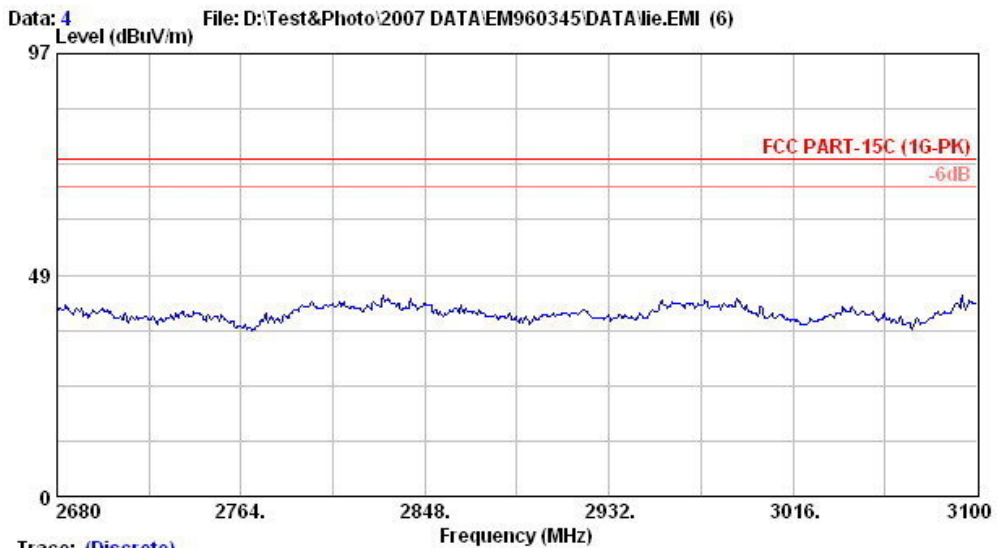


Trace: (Discrete)

Site no.	: A/C Chamber	Data no.	: 4
Dis. / Ant.	: 3m 3115	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8593EM 20*C/68%	Engineer	: Alvin_Yang
EUT	: Ceiling Fan Remote Controller	M/N:	CS6A
Power Rating	: DC 9V		
Test Mode	: Lying		

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Side Fundamental Freq. : 299.6MHz


Data: 3 File: D:\Test&Photo\2007 DATA\EM960345\DATA\side.EMI (6)

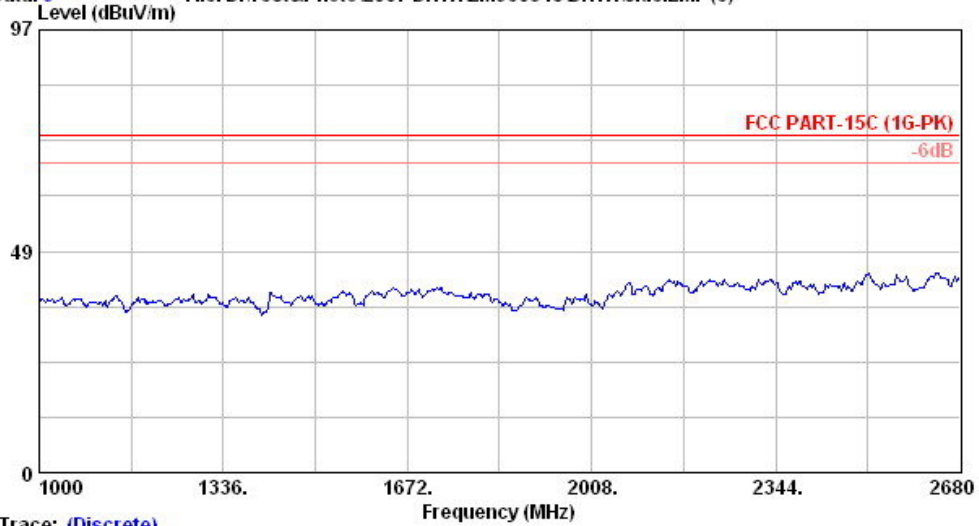

Trace: (Discrete)

Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 20+C/68% Engineer : Alvin_Yang
 EUT : Ceiling Fan Remote Controller M/N:CS6A
 Power Rating : DC 9V
 Test Mode : Side


Data: 4 File: D:\Test&Photo\2007 DATA\EM960345\DATA\side.EMI (6)

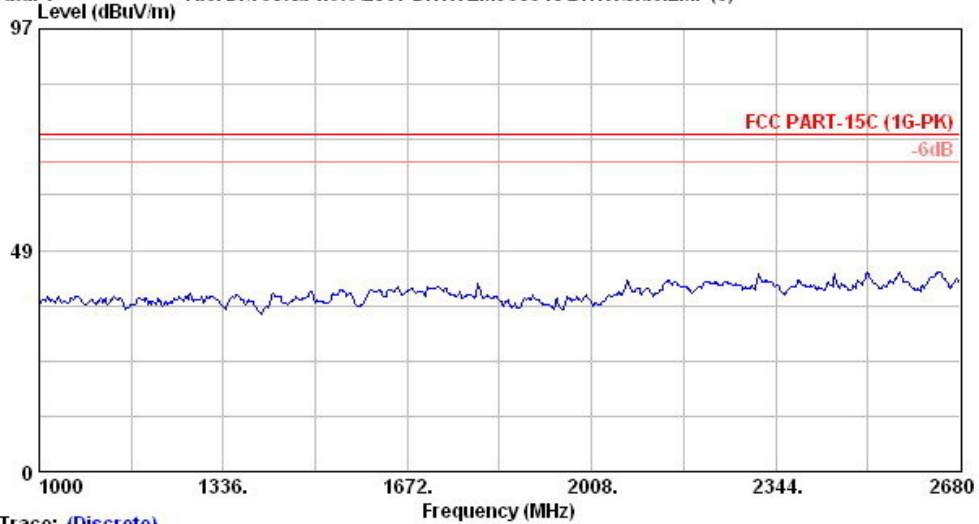


Trace: (Discrete)

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 20+C/68% Engineer : Alvin_Yang
 EUT : Ceiling Fan Remote Controller M/N:CS6A
 Power Rating : DC 9V
 Test Mode : Side

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Side Fundamental Freq. : 299.6MHz

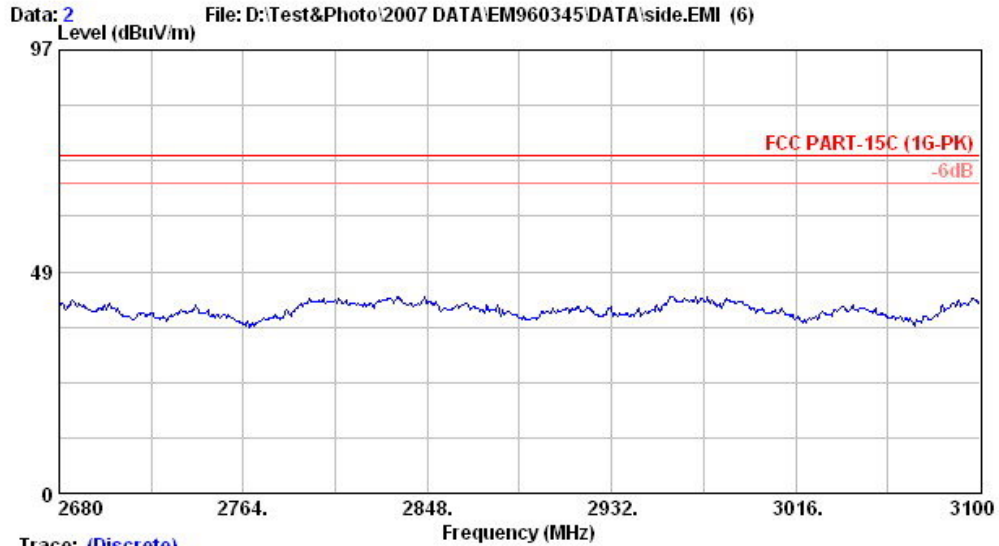


Trace: (Discrete)
 Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 20°C/68% Engineer : Alvin_Yang
 EUT : Ceiling Fan Remote Controller M/N:CS6A
 Power Rating : DC 9V
 Test Mode : Side

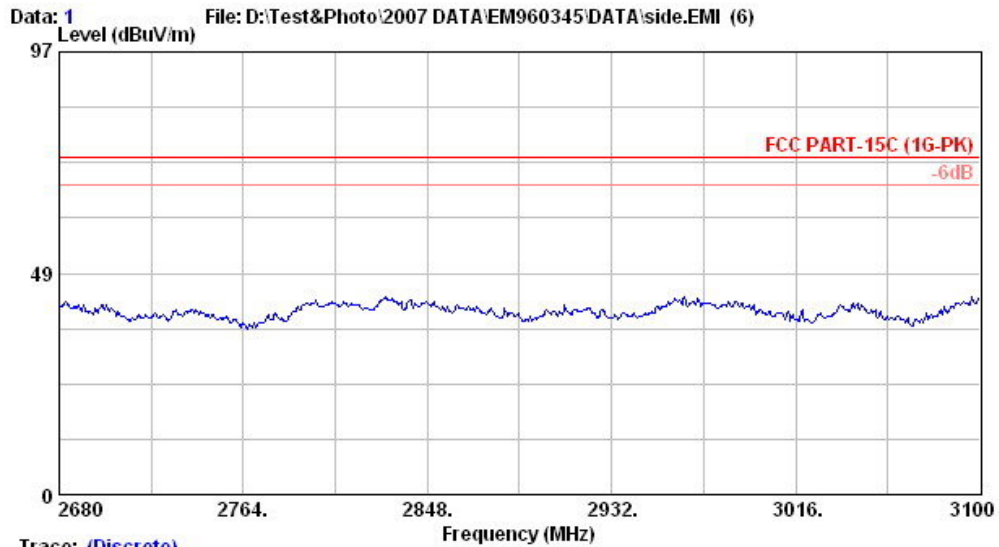


Trace: (Discrete)
 Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 20°C/68% Engineer : Alvin_Yang
 EUT : Ceiling Fan Remote Controller M/N:CS6A
 Power Rating : DC 9V
 Test Mode : Side

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Stand Fundamental Freq. : 299.6MHz

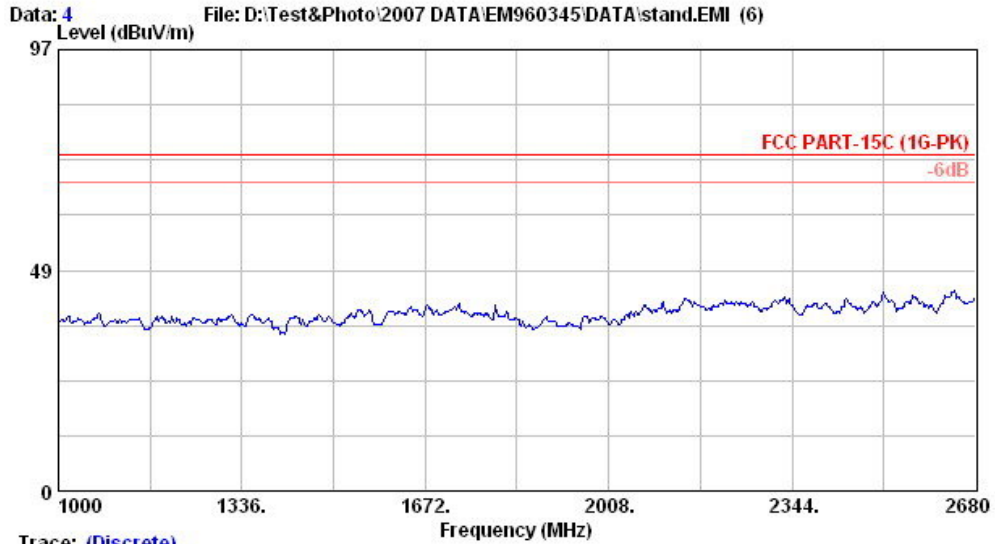


Trace: (Discrete)
 Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 20°C/68% Engineer : Alvin_Yang
 EUT : Ceiling Fan Remote Controller M/N:CS6A
 Power Rating : DC 9V
 Test Mode : Stand

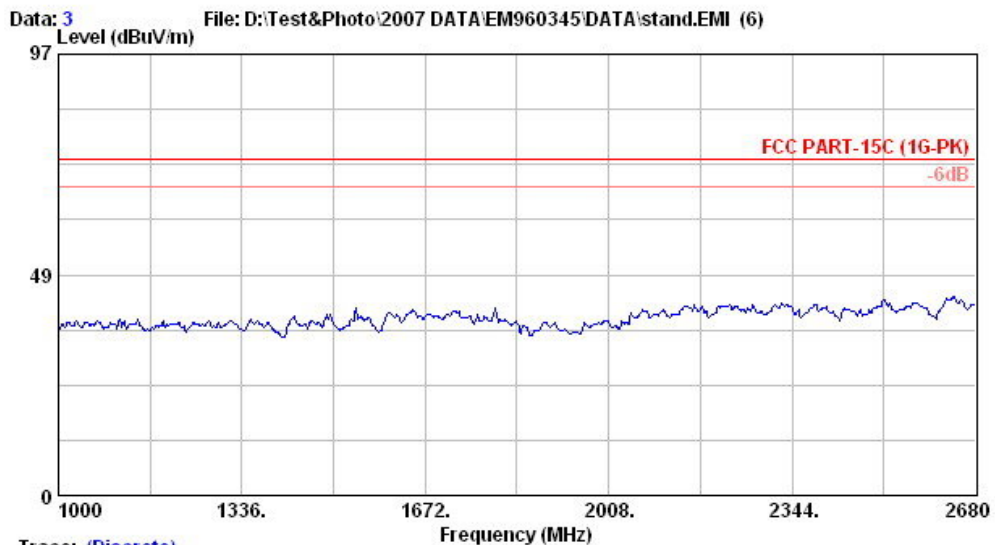


Trace: (Discrete)
 Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 20°C/68% Engineer : Alvin_Yang
 EUT : Ceiling Fan Remote Controller M/N:CS6A
 Power Rating : DC 9V
 Test Mode : Stand

Date of Test : Mar. 17, 2007 Temperature : 20
 EUT : Ceiling Fan Remote Controller Humidity : 68%
 Test Position : EUT on Stand Fundamental Freq. : 299.6MHz

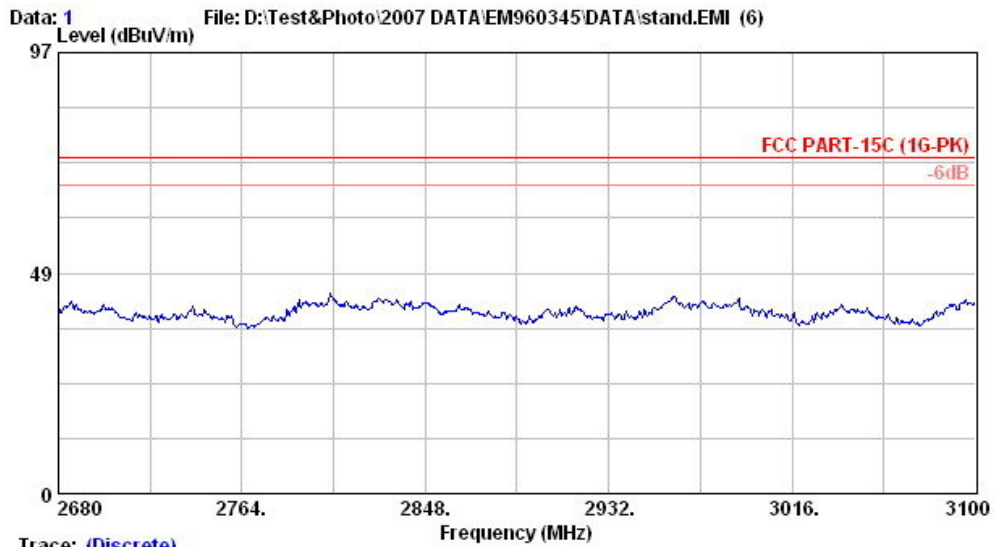

Trace: (Discrete)

Site no.	: A/C Chamber	Data no.	: 1
Dis. / Ant.	: 3m 3115	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8593EM 20*C/68%	Engineer	: Alvin_Yang
EUT	: Ceiling Fan Remote Controller	M/N:	CS6A
Power Rating	: DC 9V		
Test Mode	: Stand		

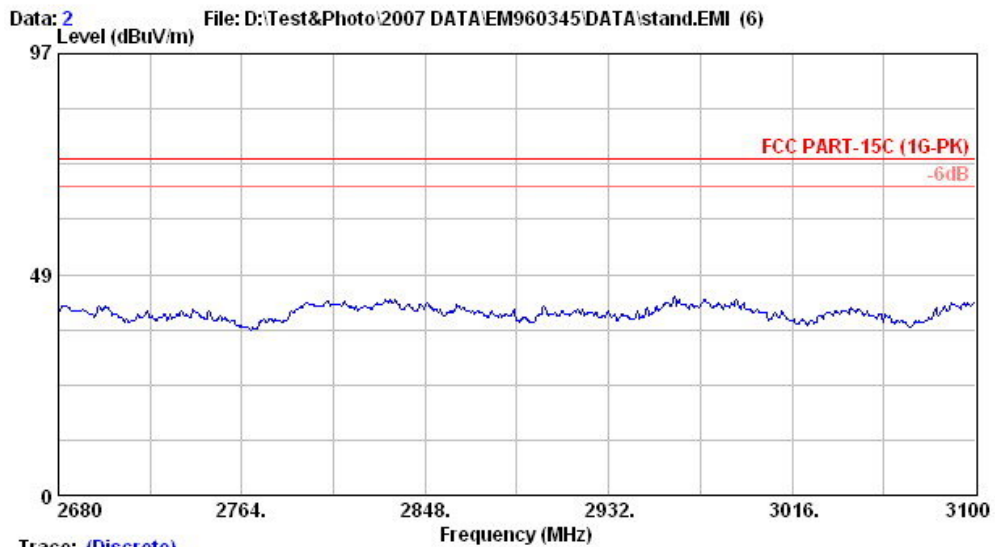

Trace: (Discrete)

Site no.	: A/C Chamber	Data no.	: 2
Dis. / Ant.	: 3m 3115	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8593EM 20*C/68%	Engineer	: Alvin_Yang
EUT	: Ceiling Fan Remote Controller	M/N:	CS6A
Power Rating	: DC 9V		
Test Mode	: Stand		

4. EMISSION BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the Emission Bandwidth Test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 11, 06'	Aug. 10, 07'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

4.2. Block Diagram of Test Setup



4.3. Specification Limits (§15.231-(c))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

4.4. EUT's Configuration during Compliance Measurement

The configuration of EUT was same as section 3.4.

4.5. Emission Bandwidth Measurement Results

PASS. (0.0174% < 0.25%)


Fundamental Frequency: 299.6MHz

Test Date: Mar. 17, 2007 Temperature: 20 Humidity: 68%

No.	Center Frequency	Bandwidth	Tolerance (%)
1.	299.6MHz	52.2kHz	0.0174%

The bandwidth of emission was measured at the point 20dB down from the center frequency of modulated carrier.

Graph of Bandwidth Measurement

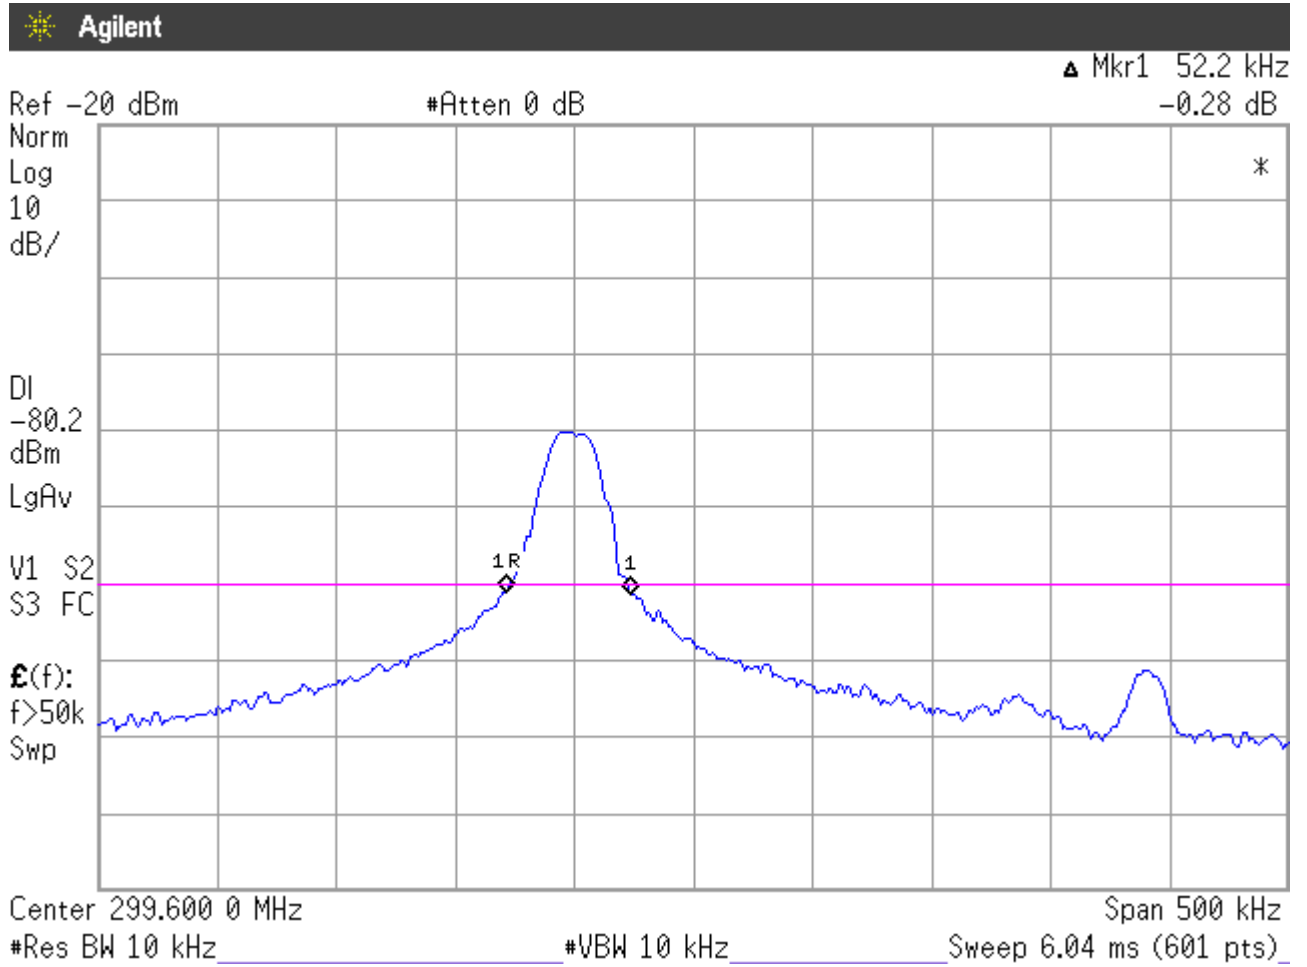

Note: “◇” The line is 20dB from the modulated carrier.


5. PERIODIC OPERATED MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the periodic operated test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 11, 06'	Aug. 10, 07'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

5.2. Block Diagram of Test Setup

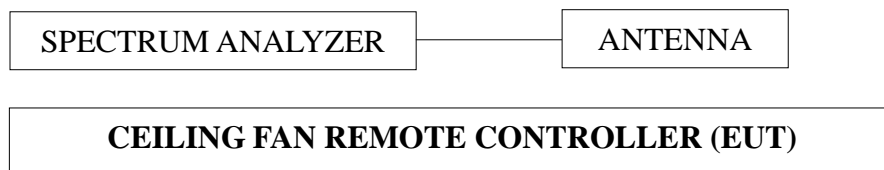

5.3. Specification Limits [§15.231-(a)-(1)]

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released, Compliance with §15.231 (a)- (1).

5.4. EUT's Configuration during Compliance Measurement

The configuration of EUT was same as section 3.4.

5.5. Periodic Operated Measurement Results


PASS. T = 283.3ms. (< 5sec.)

Fundamental Frequency: 299.6MHz

Test Date: Mar. 17, 2007 Temperature: 20 Humidity: 68%

The graph of testing is attached in next page.

Graph of Periodic Operated Measurement

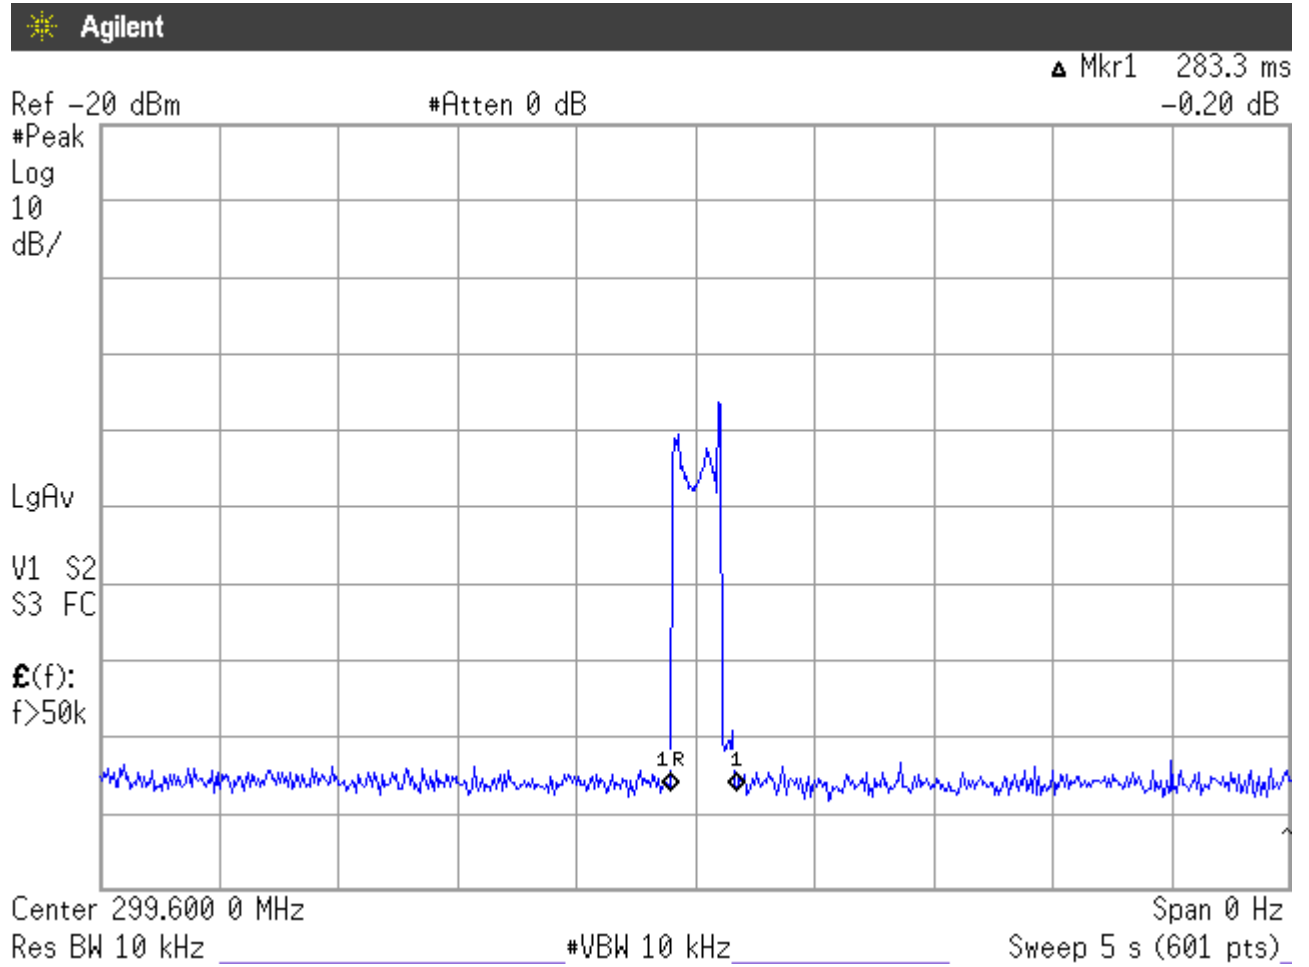

6. DEVIATION TO TEST SPECIFICATIONS

【NONE】