

APPLICATION FOR CERTIFICATION
On Behalf of
CHUNGEAR INDUSTRIAL CO., LTD.
CELLING FAN REMOTE CONTROLLER
Model No. : TR56A
FCC ID : KUJCE9801

Prepared for : CHUNGEAR INDUSTRIAL CO., LTD.
106 KANHO RD, TAICHUNG, TAIWAN

Prepared by : AUDIX Technology Corporation
EMC Department
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : EM980318
Report Number : EM-F980216
Date of Test : Mar. 25 ~ 30, 2009
Date of Report : Apr. 02, 2009

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	5
2. CONDUCTED EMISSION MEASUREMENT	6
3. RADIATED EMISSION MEASUREMENT	7
3.1. Test Equipment	7
3.2. Test Setup	7
3.3. Radiation Emission Limits (§15.209 & 15.231)	8
3.4. Operating Condition of EUT	8
3.5. Test Procedure	9
3.6. Radiated Emission Measurement Results	10
4. EMISSION BANDWIDTH MEASUREMENT	19
4.1. Test Equipment	19
4.2. Block Diagram of Test Setup	19
4.3. Specification Limits (§15.231-(c))	19
4.4. Emission Bandwidth Measurement Results	19
5. PERIODIC OPERATED MEASUREMENT	21
5.1. Test Equipment	21
5.2. Block Diagram of Test Setup	21
5.3. Specification Limits [§15.231-(a)-(1)]	21
5.4. Periodic Operated Measurement Results	21
6. DEVIATION TO TEST SPECIFICATIONS.....	23
7. PHOTOGRAPHS.....	24
7.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz).....	24
7.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz).....	26
7.3. Photo of Emission Bandwidth Measurement	28
7.4. Photo of Periodic Operated Measurement	28

TEST REPORT CERTIFICATION

Applicant : CHUNGEAR INDUSTRIAL CO., LTD.
 Manufacturer #1 : CHUNGEAR INDUSTRIAL CO., LTD.
 Manufacturer #2 : SATELLITE ELECTRONIC (ZHONGSHAN) LTD.
 Manufacturer #3 : ZHONGSHAN AMITY ELECTRONIC LTD.
 EUT Description : CELLING FAN REMOTE CONTROLLER
 FCC ID : KUJCE9801
 (A) Model No. : TR56A
 (B) Serial No. : N/A
 (C) Power Supply : DC 9V (Battery)
 (D) Test Voltage : DC 9V

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, July. 2008
AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207, §15.209 and §15.231)


The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits both radiated and conducted emissions.


The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.


This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Mar. 25 ~ 30, 2009

Date of Report : Apr. 02, 2009

Producer : 
 (Tina Huang/Administrator)

Review : 
 (Henning Chang/Supervisor)

Signatory : 
 (Ben Cheng/Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	CELLING FAN REMOTE CONTROLLER
Model Number	:	TR56A
FCC ID	:	KUJCE9801
Applicant	:	CHUNGEAR INDUSTRIAL CO., LTD. 106 KANHO RD., TAICHUNG, TAIWAN
Manufacturer #1	:	CHUNGEAR INDUSTRIAL CO., LTD. 106 KANHO RD., TAICHUNG, TAIWAN
Manufacturer #2	:	SATELLITE ELECTRONIC (ZHONGSHAN) LTD. NO. 15, TORCH HI-TECH INDUSTRIAL DEVELOPMENT ZONE, ZHONG SHAN CITY GUANGDONG PROVINCE CHINA.
Manufacturer #3	:	ZHONGSHAN AMITY ELECTRONIC LTD. NO. 16, TORCH HI-TECH INDUSTRIAL DEVELOPMENT ZONE, ZHONGS HAN CITY GUANGDONG PROVINCE CHINA.
Fundamental Frequency	:	304MHz
Power Supply	:	DC 9V (Battery)
Date of Receipt of Sample	:	Feb. 16, 2009
Date of Test	:	Mar. 25 ~ 30, 2009

- * CELLING FAN REMOTE CONTROLLER - Receiver
 (1)Model No.: JY199, FCC by DoC
 (2)Model No.: JY326B, FCC by DoC
 (3)Model No.: JY326D, FCC by DoC

Remark:

Antenna requirement: This EUT's transmitter antenna is designed to be soldered on a printed circuit board, comply with §15.203 and inform to user that any change and modify is prohibited.

1.2. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation**
EMC Department
 No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
 Taipei Hsien, Taiwan

Test Location & Facility : **Semi-Anechoic Chamber**
 (C2/AC) No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
 Taipei Hsien, Taiwan.
 May 15, 2006 File on
 Federal Communication Commission
 Registration Number: 90993

NVLAP Lab. Code : 200077-0
 (NVLAP is a NATA accredited body under Mutual Recognition Agreement)

TAF Accreditation No : 1724

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.94dB

Remark : Uncertainty = $ku_c(y)$

2. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission tests :

3.1.1. For Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jul. 03, 08'	Jul. 02, 09'
2.	Test Receiver	R & S	ESCS30	100265	Aug. 28, 08'	Aug. 27, 09'
3.	Pre-Amplifier	HP	8447D	2944A06305	Feb. 04, 09'	Feb. 03, 10'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Apr. 10, 08'	Apr. 09, 09'
5.	Log Periodic Antenna	Schwarzbeck	UHALP9108-A	0810	Apr. 10, 08'	Apr. 09, 09'
6.	Coaxial Switch	Anritsu	MP59B	6100226512	Feb. 20, 09'	Feb. 19, 10'

3.1.2. For Frequency Range Above 1GHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jul. 03, 08'	Jul. 02, 09'
2.	Pre-Amplifier	HP	8449B	3008A01284	Jun. 17, 08'	Jun. 16, 09'
3.	Horn Antenna	EMCO	3115	9112-3775	May 20, 08'	May 19, 09'


3.2. Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

CELLING FAN REMOTE CONTROLLER (EUT)

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram

ANTENNA TOWER

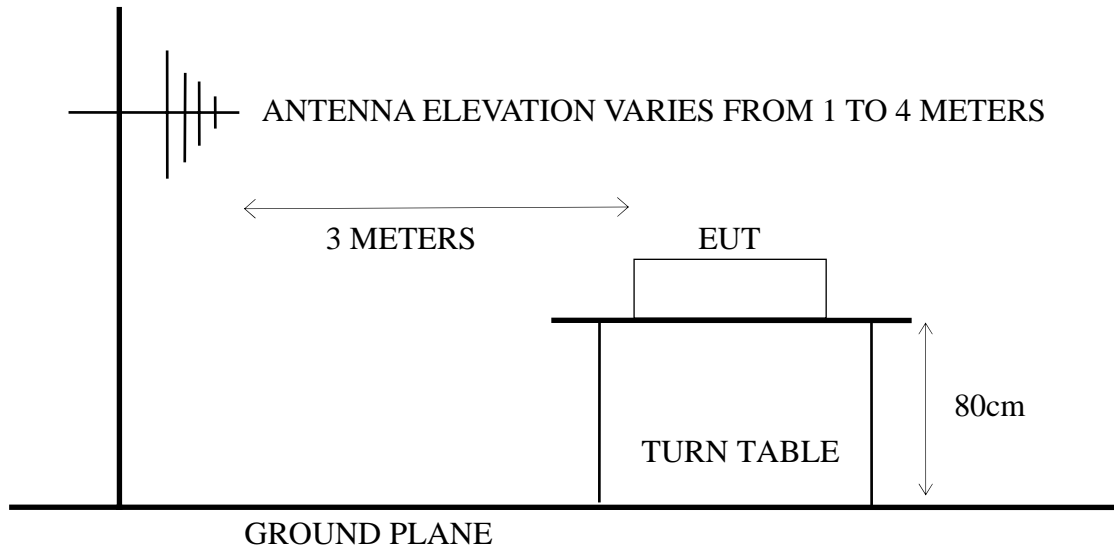

3.3. Radiation Emission Limits (§15.209 & 15.231)

3.3.1. Spurious Emission Limit (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		μV/m	dBμV/m
30 - 88	3	100	40.00
88 - 216	3	150	43.50
216 - 960	3	200	46.00
Above 960	3	500	54.00

- Remarks :
- (1) Emission level (dBμV/m) = 20 log Emission level (μV/m)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3.2. Fundamental Frequency Emission Limit (§15.231)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		μV/m	dBμV/m
Fundamental Frequency	3	5595.010176	74.95 (Quasi-Peak)

- Remarks :
- (1) Emission level (dBμV/m) = 20 log Emission level (μV/m)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) Where limit of Fundamental Freq. is calculated by: $41.6667 \times 304.28 - 7083.3333 = 5595.010176 \mu\text{V/m} = 74.95 \text{dB}\mu\text{V/m}$
 - (5) The limits in this table are based on CFR 47 Part 15.231(b).

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT and simulator as shown on 3.2.
- 3.4.2. To turn on the power of all equipment.
- 3.4.3. The EUT (CELLING FAN REMOTE CONTROLLER) emitted the fundamental frequency with data code at the stand, side and lying conditions.
- 3.4.4. The EUT was at working on maximum transmitting status during all testing.

3.5. Test Procedure

The EUT and was placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log-periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of test receiver was set at 120kHz for frequencies below 1GHz and resolution bandwidth of spectrum analyzer was set at 1MHz for frequencies above 1GHz.

The frequency range from 30MHz to 1000MHz was measured with Quasi-Peak detector.

The frequency range from 1GHz to 4GHz was pre-scanned with Peak detector.

EUT with three kinds of positions (Stand、Side、Lying) was tested during radiated measurement and all the test results are listed in section 3.6.

3.6. Radiated Emission Measurement Results

3.6.1. Frequency Range 30MHz to 1GHz Measurement Results: **PASSED.**

All the emissions not reported below are too low against the FCC part 15 Subpart C limit.

Date of Test :	Mar. 30, 2009	Temperature :	25°C
EUT :	CELLING FAN REMOTE CONTROLLER	Humidity :	50%
Test Position :	EUT on Stand		

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB

Fundamental Freq. (Quasi-Peak Value)						
304.410	14.94	3.90	27.13	45.97	74.95	28.98
Spurious / Harmonic Freq. (Quasi-Peak Value)						
540.220	19.28	7.07	2.88	29.23	46.00	16.77
* 608.900	21.45	6.20	4.47	32.12	46.00	13.88
760.410	23.66	6.75	0.59	31.00	46.00	15.00
913.520	24.82	7.40	1.16	33.38	46.00	12.62
* 973.810	26.64	7.70	-1.07	33.28	54.00	20.72

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB

Fundamental Freq. (Quasi-Peak Value)						
304.410	14.94	3.90	28.82	47.66	74.95	27.29
Spurious / Harmonic Freq. (Quasi-Peak Value)						
508.210	19.14	6.80	3.32	29.26	46.00	16.74
541.190	19.25	7.01	7.57	33.83	46.00	12.17
* 608.900	21.45	6.20	6.51	34.16	46.00	11.84
889.420	25.09	7.30	-0.61	31.78	46.00	14.22
913.520	24.82	7.40	0.00	32.22	46.00	13.78

- Remarks :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~4.0GHz), but the emission levels were too low against the official limit and not report.
 3. "*" The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

Date of Test : Mar. 30, 2009 Temperature : 25°C

EUT : CELLING FAN REMOTE CONTROLLER Humidity : 50%

Test Position : EUT on Side

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB

Fundamental Freq. (Quasi-Peak Value)						
304.410	14.94	3.90	39.52	58.36	74.95	16.59
Spurious / Harmonic Freq. (Quasi-Peak Value)						
486.870	18.67	6.20	2.38	27.25	46.00	18.75
541.190	19.25	7.01	6.46	32.72	46.00	13.28
* 608.900	21.45	6.20	12.91	40.56	46.00	5.44
913.520	24.92	7.40	0.44	32.75	46.00	13.25
* 966.050	26.89	7.70	-1.98	32.61	54.00	21.39

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB

Fundamental Freq. (Quasi-Peak Value)						
304.410	14.94	3.90	27.84	46.68	74.95	28.27
Spurious / Harmonic Freq. (Quasi-Peak Value)						
541.190	19.25	7.01	5.68	31.94	46.00	14.06
* 608.900	21.47	6.20	7.99	35.66	46.00	10.34
649.830	21.50	6.30	0.54	28.34	46.00	17.66
889.420	25.09	7.30	-1.17	31.22	46.00	14.78
913.520	24.82	7.40	-0.49	31.73	46.00	14.27

- Remarks :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~4.0GHz), but the emission levels were too low against the official limit and not report.
 3. "*" The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

Date of Test : Mar. 30, 2009 Temperature : 25°C

EUT : CELLING FAN REMOTE CONTROLLER Humidity : 50%

Test Position : EUT on Lying

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB

Fundamental Freq. (Quasi-Peak Value)						
304.410	14.94	3.90	41.57	60.41	74.95	14.54
Spurious / Harmonic Freq. (Quasi-Peak Value)						
541.190	19.25	7.01	4.82	31.08	46.00	14.92
* 608.900	21.45	6.20	15.68	43.33	46.00	2.67
757.500	23.61	6.73	-1.60	28.74	46.00	17.26
889.420	25.09	7.30	-0.98	31.41	46.00	14.59
913.520	24.96	7.40	0.18	32.54	46.00	13.46

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB

Fundamental Freq. (Quasi-Peak Value)						
304.410	14.94	3.90	35.64	54.48	74.95	20.47
Spurious / Harmonic Freq. (Quasi-Peak Value)						
486.870	18.67	6.20	2.57	27.44	46.00	18.56
541.190	19.25	7.01	5.08	31.34	46.00	14.66
* 608.900	21.42	6.23	9.39	37.04	46.00	8.96
757.500	23.61	6.73	-0.93	29.41	46.00	16.59
913.520	24.82	7.40	-0.26	31.96	46.00	14.04

- Remarks :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~4.0GHz), but the emission levels were too low against the official limit and not report.
 3. "*" The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

3.6.2. Frequency Range 1GHz to 4.0GHz Measurement Results: **PASSED.**

The frequency spectrum from 1GHz to 4.0GHz (up to 10th harmonics) was investigated. All the emissions not reported below are too low against the FCC part 15 Subpart C limit.


Date of Test : Mar. 30, 2009 Temperature : 25°C

EUT : CELLING FAN REMOTE CONTROLLER Humidity : 50%

Test Position : EUT on Stand




AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

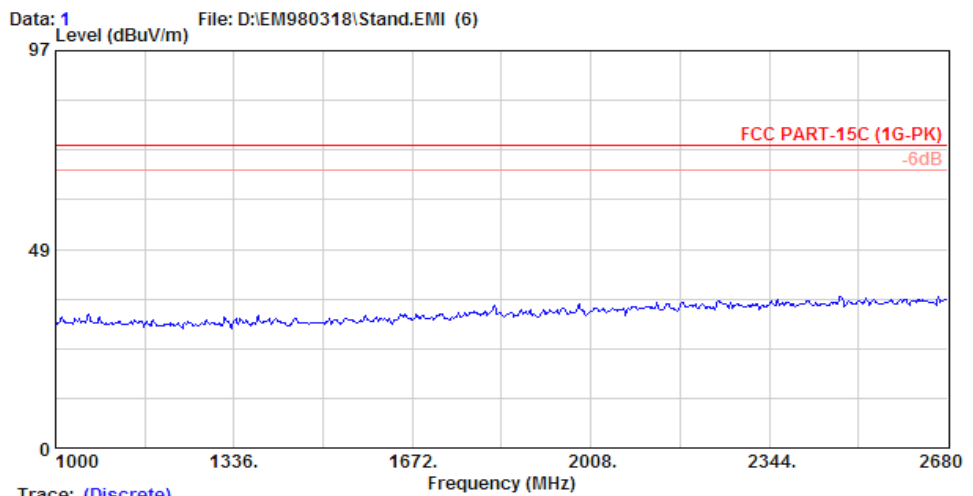

Trace: (Discrete)

Site no.	: A/C Chamber	Data no.	: 1
Dis. / Ant.	: 3m 3115	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8593EM 25°C/50%	Engineer	: Jarwei Wang
EUT	: Ceiling Fan Remote Controller M/N:TR56A		
Power Rating	: DC 9V		
Test Mode	: Stand		

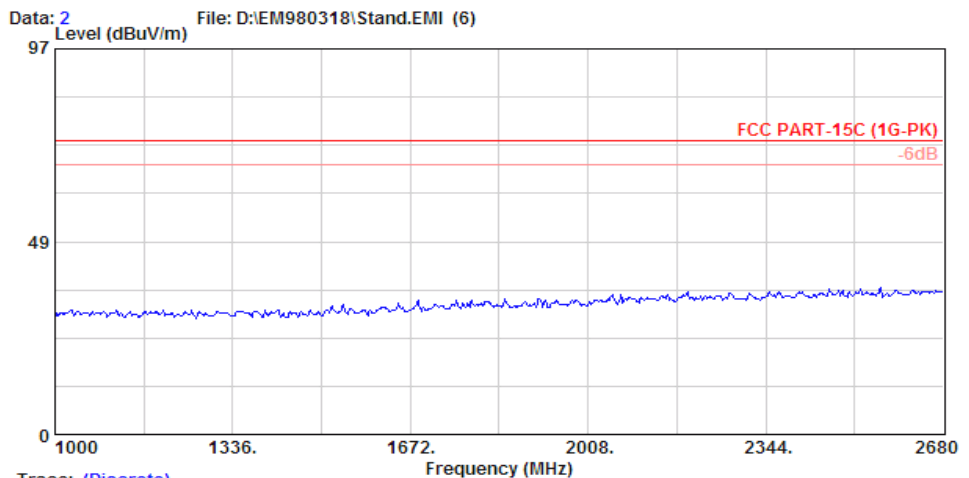


Trace: (Discrete)


Site no.	: A/C Chamber	Data no.	: 2
Dis. / Ant.	: 3m 3115	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8593EM 25°C/50%	Engineer	: Jarwei Wang
EUT	: Ceiling Fan Remote Controller M/N:TR56A		
Power Rating	: DC 9V		
Test Mode	: Stand		



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

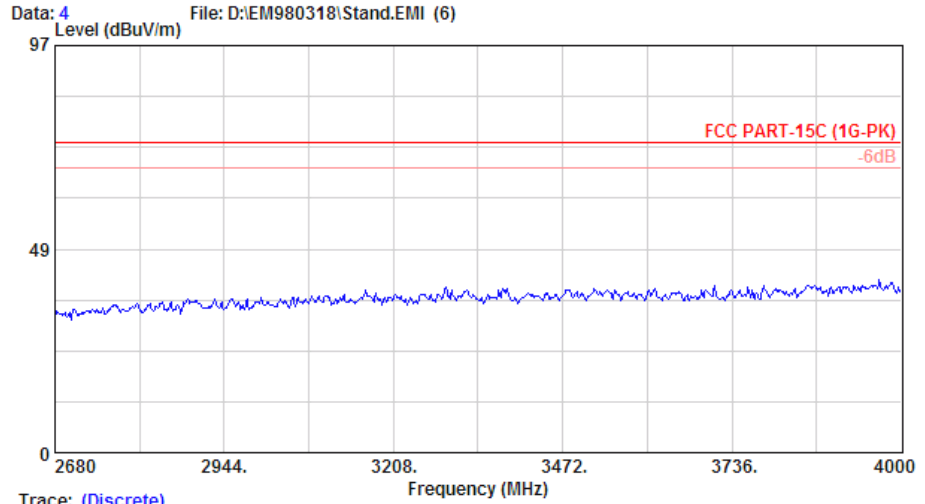

Site no. : A/C Chamber Data no. : 4
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 25°C/50% Engineer : Jarwei Wang
 EUT : Ceiling Fan Remote Controller M/N:TR56A
 Power Rating : DC 9V
 Test Mode : Stand

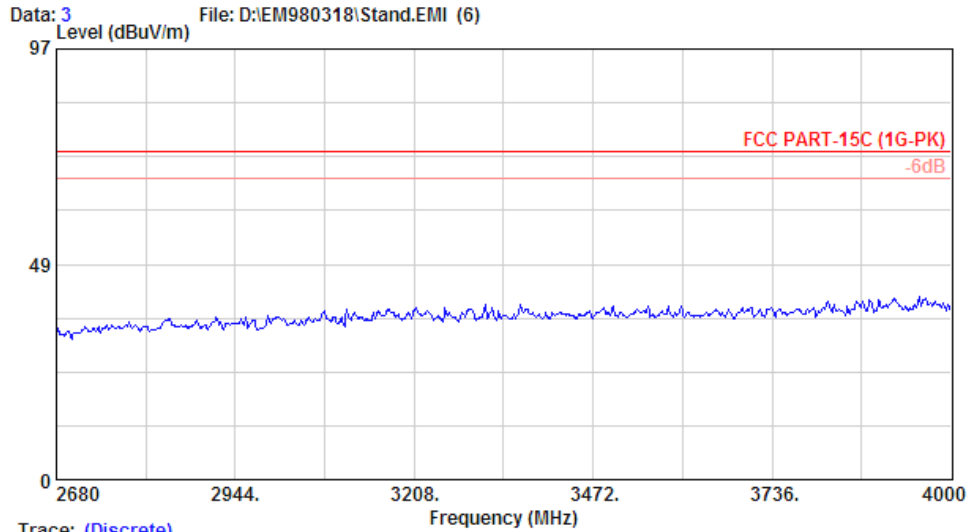


Site no. : A/C Chamber Data no. : 3
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 25°C/50% Engineer : Jarwei Wang
 EUT : Ceiling Fan Remote Controller M/N:TR56A
 Power Rating : DC 9V
 Test Mode : Stand


Date of Test : Mar. 30, 2009 Temperature : 25°C
 EUT : CELLING FAN REMOTE CONTROLLER Humidity : 50%
 Test Position : EUT on Side



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

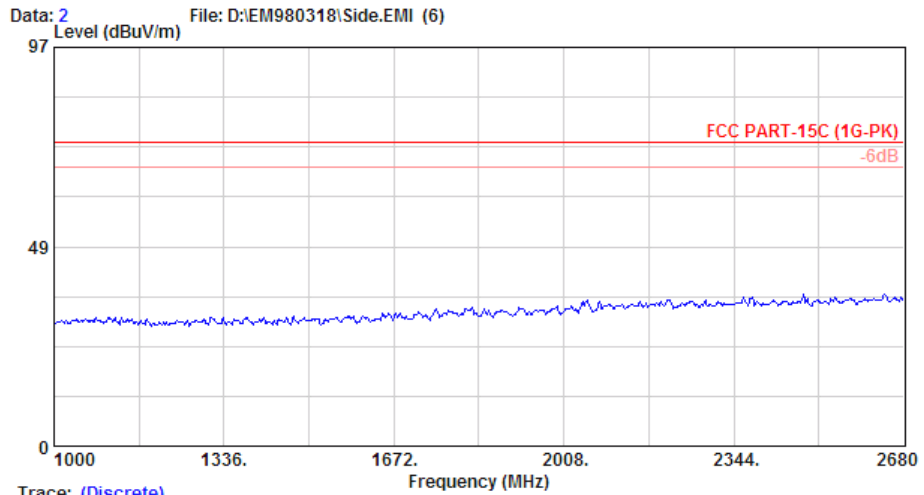


Trace: (Discrete)
 Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 25°C/50% Engineer : Jarwei Wang
 EUT : Ceiling Fan Remote Controller M/N:TR56A
 Power Rating : DC 9V
 Test Mode : Side

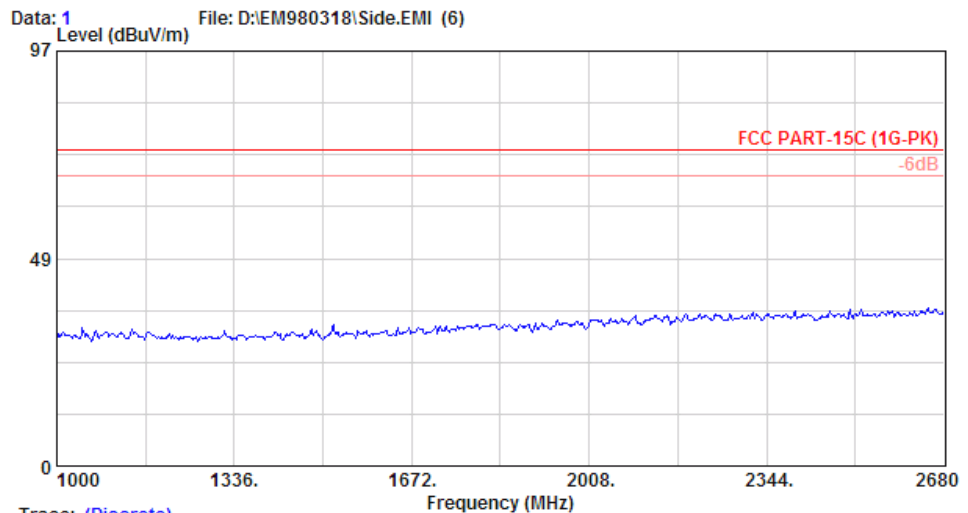

Trace: (Discrete)
 Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 25°C/50% Engineer : Jarwei Wang
 EUT : Ceiling Fan Remote Controller M/N:TR56A
 Power Rating : DC 9V
 Test Mode : Side




AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

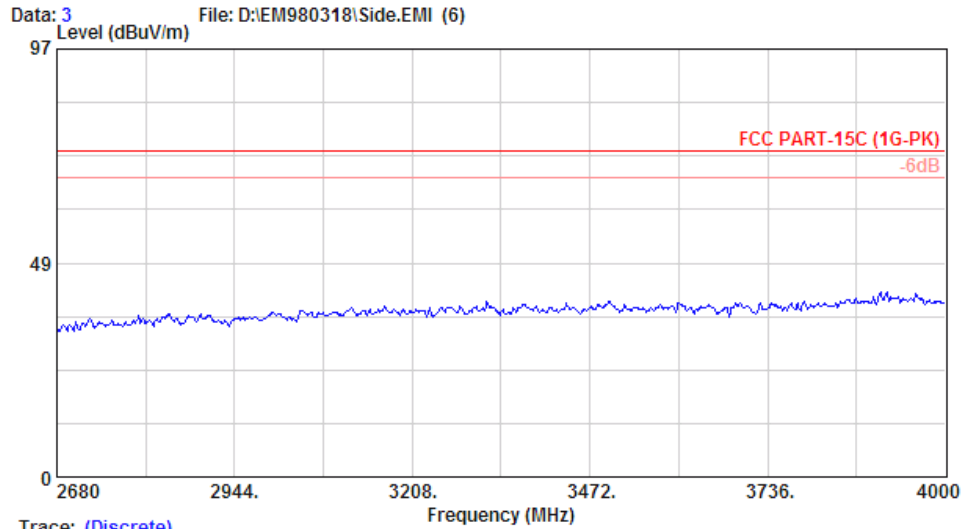

Trace: (Discrete)

Site no.	: A/C Chamber	Data no.	: 3
Dis. / Ant.	: 3m 3115	Ant. pol.	: HORIZONTAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8593EM 25*C/50%	Engineer	: Jarwei Wang
EUT	: Ceiling Fan Remote Controller M/N:TR56A		
Power Rating	: DC 9V		
Test Mode	: Side		

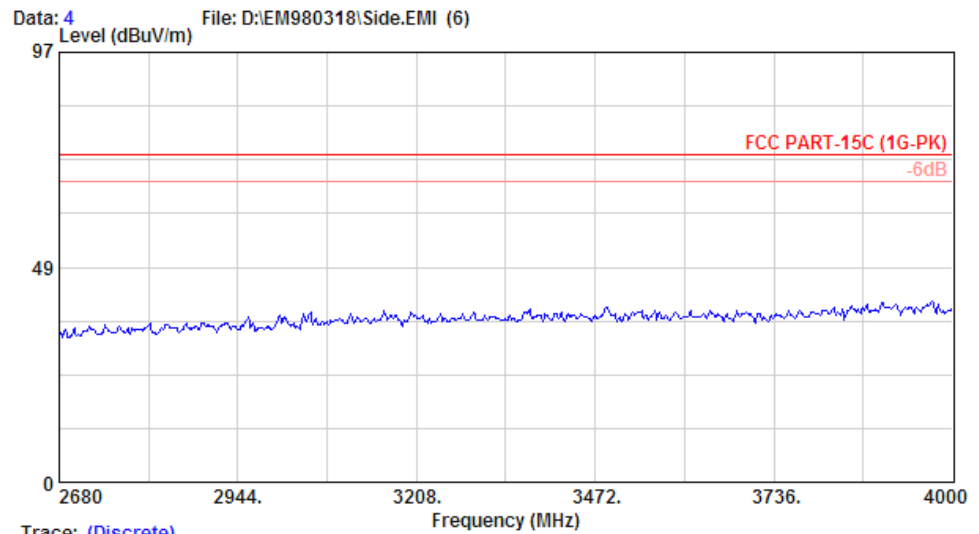

Trace: (Discrete)

Site no.	: A/C Chamber	Data no.	: 4
Dis. / Ant.	: 3m 3115	Ant. pol.	: VERTICAL
Limit	: FCC PART-15C (1G-PK)		
Env. / Ins.	: 8593EM 25*C/50%	Engineer	: Jarwei Wang
EUT	: Ceiling Fan Remote Controller M/N:TR56A		
Power Rating	: DC 9V		
Test Mode	: Side		


Date of Test : Mar. 30, 2009 Temperature : 25°C

EUT : CELLING FAN REMOTE CONTROLLER Humidity : 50%


Test Position : EUT on Lying



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

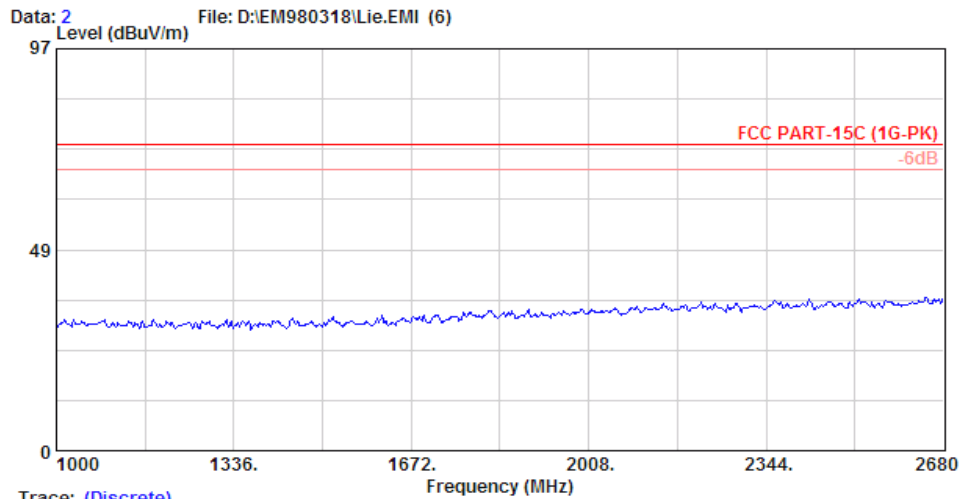


Site no. : A/C Chamber Data no. : 2
 Dis. / Ant. : 3m 3115 Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 25°C/50% Engineer : Jarwei Wang
 EUT : Ceiling Fan Remote Controller M/N:TR56A
 Power Rating : DC 9V
 Test Mode : Lie

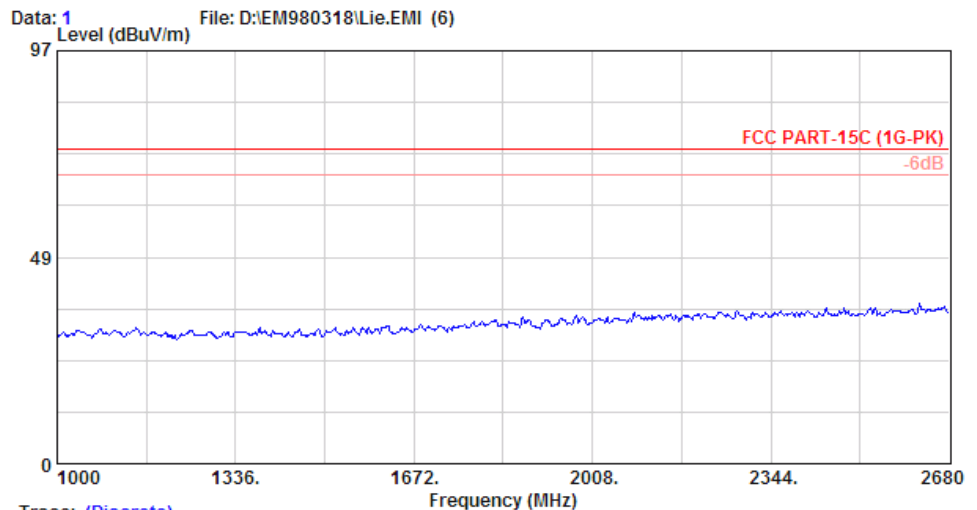

Site no. : A/C Chamber Data no. : 1
 Dis. / Ant. : 3m 3115 Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 25°C/50% Engineer : Jarwei Wang
 EUT : Ceiling Fan Remote Controller M/N:TR56A
 Power Rating : DC 9V
 Test Mode : Lie




AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

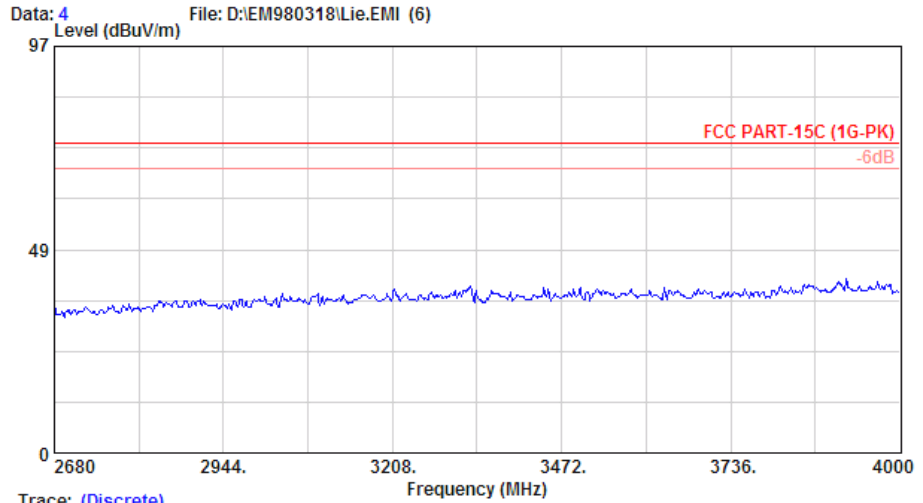

Trace: (Discrete)

Site no. : A/C Chamber	Data no. : 4
Dis. / Ant. : 3m 3115	Ant. pol. : HORIZONTAL
Limit : FCC PART-15C (1G-PK)	
Env. / Ins. : 8593EM 25°C/50%	Engineer : Jarwei Wang
EUT : Ceiling Fan Remote Controller M/N:TR56A	
Power Rating : DC 9V	
Test Mode : Lie	

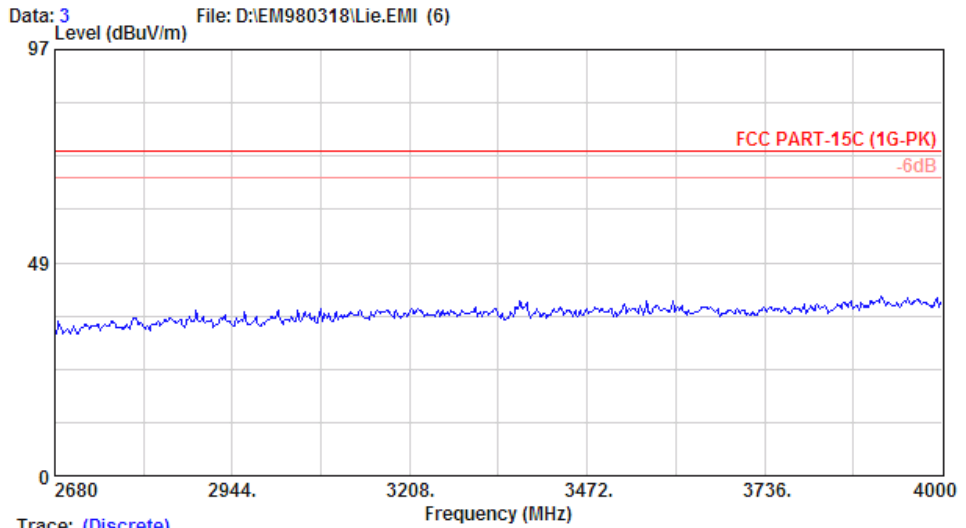

Trace: (Discrete)

Site no. : A/C Chamber	Data no. : 3
Dis. / Ant. : 3m 3115	Ant. pol. : VERTICAL
Limit : FCC PART-15C (1G-PK)	
Env. / Ins. : 8593EM 25°C/50%	Engineer : Jarwei Wang
EUT : Ceiling Fan Remote Controller M/N:TR56A	
Power Rating : DC 9V	
Test Mode : Lie	

4. EMISSION BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the Emission Bandwidth Test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 08'	Aug. 06, 09'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

4.2. Block Diagram of Test Setup



4.3. Specification Limits (§15.231-(c))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

4.4. Emission Bandwidth Measurement Results

PASS.


Fundamental Frequency: 304MHz

Test Date: Mar. 25, 2009 Temperature: 24°C Humidity: 69%

No.	Center Frequency	Bandwidth	Tolerance (%)
1.	304.2831MHz	41.1kHz	0.0135%

The bandwidth of emission was measured at the point 20dB down from the center frequency of modulated carrier.

Graph of Bandwidth Measurement

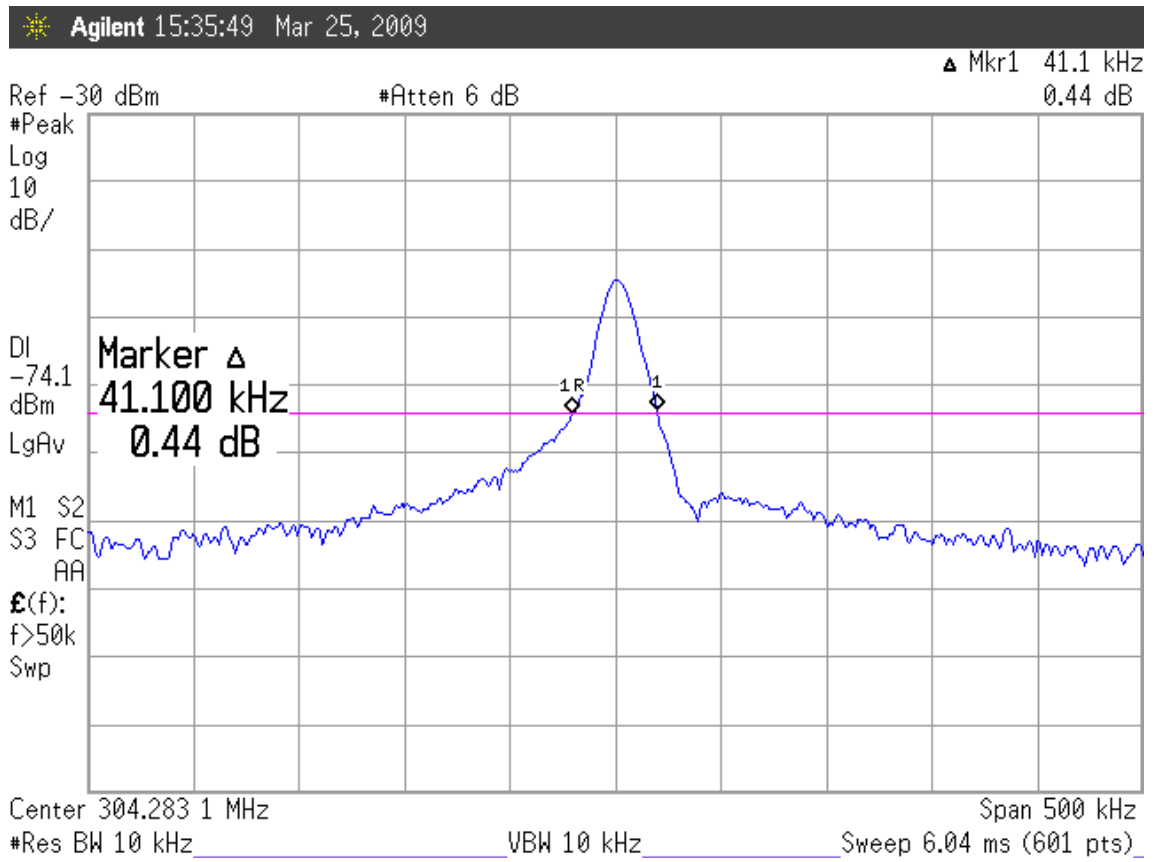

Note: “◇” The line is 20dB from the modulated carrier.

5. PERIODIC OPERATED MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the periodic operated test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Aug. 07, 08'	Aug. 06, 09'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

5.2. Block Diagram of Test Setup



5.3. Specification Limits [§15.231-(a)-(1)]

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released, Compliance with §15.231 (a)- (1).


5.4. Periodic Operated Measurement Results

PASS. T = 683.3ms. (< 5sec.)

Test Date: Mar. 25, 2009 Temperature: 24°C Humidity: 69%

The graph of testing is attached in next page.

Graph of Periodic Operated Measurement

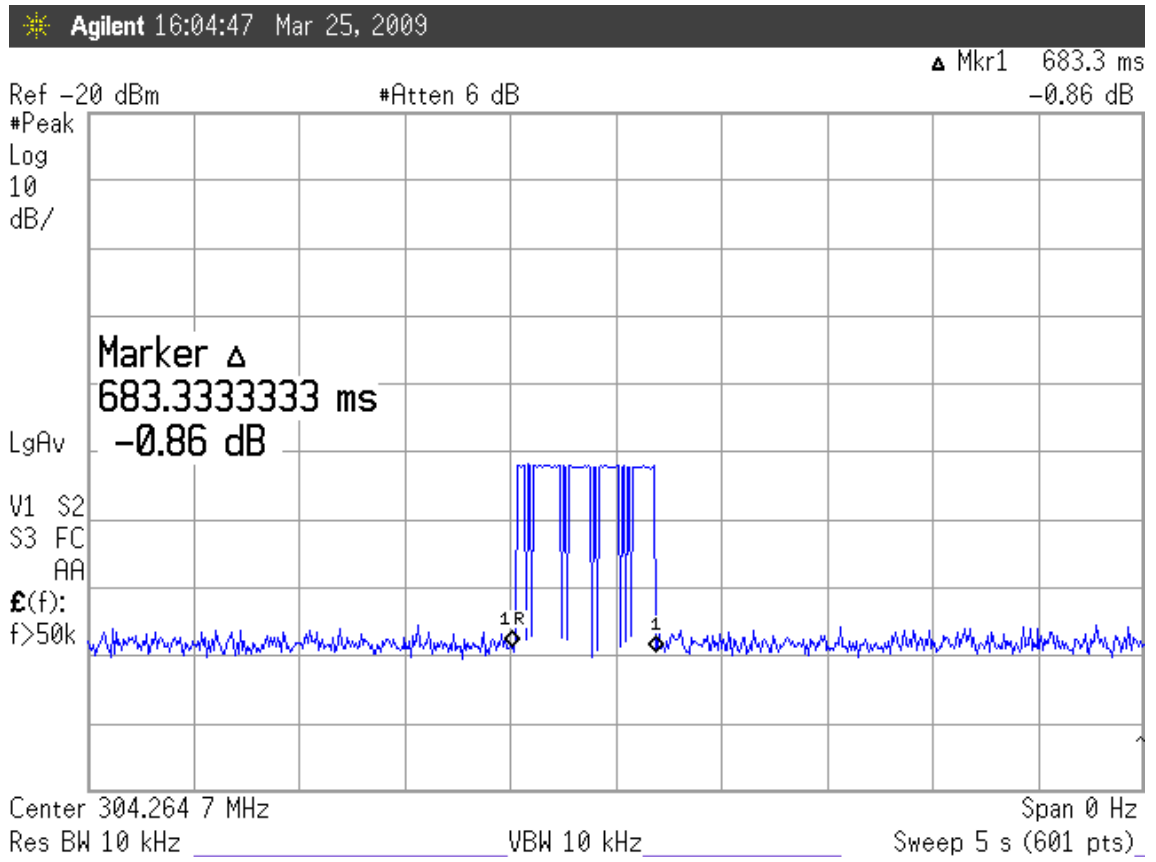

6. DEVIATION TO TEST SPECIFICATIONS

【NONE】