

TEST REPORT FOR CERTIFICATION
On Behalf of
CHUNGEAR INDUSTRIAL CO., LTD.

Ceiling Fan Remote Controller (Transmitter)

Model: TR53C

FCC ID: KUJCE9805

Prepared for : CHUNGEAR INDUSTRIAL CO., LTD.
106 KANHO RD., TAICHUNG, TAIWAN.

Prepared By : AUDIX Technology Corporation
EMC Department
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax : (02) 2609-9303

File Number : EM982160
Report Number : EM-F980799
Date of Test : Oct. 27, 2009
Date of Report : Nov. 04, 2009

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	5
2. CONDUCTED EMISSION MEASUREMENT	6
3. RADIATED EMISSION MEASUREMENT	7
3.1. Test Equipment	7
3.2. Test Setup	7
3.3. Radiation Emission Limits (§15.209 & 15.231)	8
3.4. Operating Condition of EUT	9
3.5. Test Procedure	9
3.6. Radiated Emission Noise Measurement Results	11
4. EMISSION BANDWIDTH MEASUREMENT	25
4.1. Test Equipment	25
4.2. Block Diagram of Test Setup	25
4.3. Specification Limits (§15.231-(c))	25
4.4. EUT's Configuration during Compliance Measurement	25
4.5. Emission Bandwidth Measurement Results	25
5. PERIODIC OPERATED MEASUREMENT	27
5.1. Test Equipment	27
5.2. Block Diagram of Test Setup	27
5.3. Specification Limits [§15.231-(a)-(1)]	27
5.4. EUT's Configuration during Compliance Measurement	27
5.5. Periodic Operated Measurement Results	27
6. DEVIATION TO TEST SPECIFICATIONS	29
7. PHOTOGRAPHS	30
7.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz)	30
7.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz)	31
7.3. Photo of Emission Bandwidth Measurement	33
7.4. Photo of Periodic Operated Measurement	33

TEST REPORT CERTIFICATION

Applicant : CHUNGEAR INDUSTRIAL CO., LTD.
 Manufacturer #1 : CHUNGEAR INDUSTRIAL CO., LTD.
 Manufacturer #2 : SATELLITE ELECTRONIC (ZHONGSHAN) LTD.
 Manufacturer #3 : ZHONGSHAN AMITY ELECTRONIC LTD.
 EUT Description : Ceiling Fan Remote Controller (Transmitter)
 FCC ID : KUJCE9805
 (A) MODEL NO. : TR53C
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 12V (Battery)
 (D) TEST VOLTAGE : DC 12V

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, July 2008
 AND ANSI C63.4/2003

(FCC CFR 47 Part 15C, §15.207, §15.209 and §15.231)

The device described above was tested by AUDIX Technology Corporation to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits both radiated and conducted emissions.


The measurement results are contained in this test report and AUDIX Technology Corporation is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX Technology Corporation.

Date of Test : Oct. 27, 2009 Date of Report : Nov. 04, 2009

Producer : 
 (Nita Lee/Administrator)

Review : 
 (Henning Chang/Supervisor)

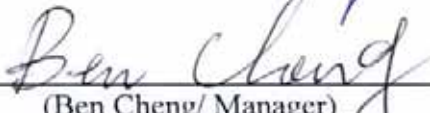Signatory: 
 (Ben Cheng/Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Ceiling Fan Remote Controller (Transmitter)
Model Number	:	TR53C
FCC ID	:	KUJCE9805
Applicant	:	CHUNGEAR INDUSTRIAL CO., LTD. 106 KANHO RD., TAICHUNG, TAIWAN.
Manufacturer #1	:	CHUNGEAR INDUSTRIAL CO., LTD. 106 KANHO RD., TAICHUNG, TAIWAN.
Manufacturer #2	:	SATELLITE ELECTRONIC (ZHONGSHAN) LTD. NO. 15, TORCH HI-TECH INDUSTRIAL DEVELOPMENT ZONE, ZHONG SHAN CITY GUANGDONG PROVINCE CHINA.
Manufacturer #3	:	ZHONGSHAN AMITY ELECTRONIC LTD. NO. 16, TORCH HI-TECH INDUSTRIAL DEVELOPMENT ZONE, ZHONG SHAN CITY GUANGDONG PROVINCE CHINA.
Fundamental Frequency	:	304MHz
Power Supply	:	DC 12V (Battery)
Date of Receipt of Sample	:	Oct. 16, 2009
Date of Test	:	Oct. 27, 2009

- * Ceiling Fan Remote Controller (Transmitter) - Receiver
 (1) Model No.: JY199, FCC by DoC
 (2) Model No.: JY326B, FCC by DoC
 (3) Model No.: JY326D, FCC by DoC
 (4) Model No.: MR36T, FCC by DoC
 (5) Model No.: MR36R, FCC by DoC

Remark:

Antenna requirement: This EUT's transmitter antenna is designed to be soldered on a printed circuit board, comply with §15.203 and inform to user that any change and modify is prohibited.

1.2. Description of Test Facility

Name of Firm : **AUDIX Technology Corporation
EMC Department**
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan.

Test Facility & Location : **Semi-Anechoic Chamber**
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei Hsien, Taiwan.
May 16, 2006 Renewal on
Federal Communication Commission
Registration Number: 90993

NVLAP Lab. Code : 200077-0

TAF Accreditation No : 1724

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Radiation Test (Distance: 3m)	30MHz~300MHz	± 2.91dB
	300MHz~1000MHz	± 2.94dB

Remark : Uncertainty = $ku_c(y)$

2. CONDUCTED EMISSION MEASUREMENT

【The EUT only employs battery power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipment was used during the radiated emission test:

3.1.1. For Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jun. 26, 09'	Jun. 25, 10'
2.	Test Receiver	R & S	ESCS30	100265	Aug. 28, 09'	Aug. 27, 10'
3.	Pre-Amplifier	HP	8447D	2944A06305	Feb. 04, 09'	Feb. 03, 10'
4.	Biconical Antenna	CHASE	VBA6106A	1264	Mar. 20, 09'	Mar. 19, 10'
5.	Log Periodic Antenna	Schwarzbeck	UHALP91 08-A	0810	Mar. 20, 09'	Mar. 19, 10'
6.	Coaxial Switch	Anritsu	MP59B	6100226512	Feb. 20, 09'	Feb. 19, 10'

3.1.2. For Frequency Range Above 1GHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	HP	8593EM	3826A00272	Jun. 26, 09'	Jun. 25, 10'
2.	Amplifier	HP	8449B	3008A00529	Dec. 31, 08'	Dec. 30, 09'
3.	Horn Antenna	EMCO	3115	9112-3775	May 15, 09'	May 14, 10'


3.2. Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

CEILING FAN REMOTE CONTROLLER (TRANSMITTER) (EUT)
--

3.2.2. Semi-Anechoic Chamber (3m) Setup Diagram

ANTENNA TOWER

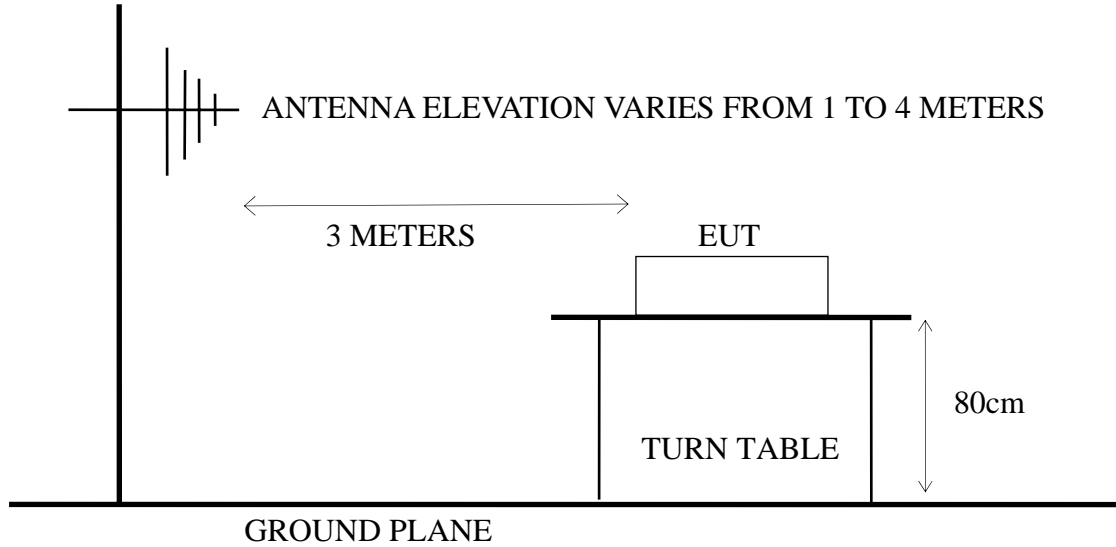

3.3. Radiation Emission Limits (§15.209 & 15.231)

3.3.1. Spurious Emission Limit (§15.209)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	3	100	40.00
88 - 216	3	150	43.50
216 - 960	3	200	46.00
Above 960	3	500	54.00
1000-5500	3	500	54.00 (Average)
1000-5500	3	500	74.00(Peak)

- Remarks :
- (1) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3.2. Fundamental & Harmonic Frequency Emission Limit (§15.231(b))

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS
		dBµV/m
Fundamental Frequency	3	74.96 (Average)
		94.96 (Peak)
Harmonic	3	54.96 (Average)
		74.96 (Peak)

- Remarks :
- (1) Emission level (dBµV/m) = 20 log Emission level (µV/m)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (4) Where limit of Fundamental Freq. is calculated by:
 $41.6667 \times 304.293 - 7083.3333 = 5595.55 \mu\text{V/m} = 74.957 \text{dB}\mu\text{V/m}$
 - (5) The relaxation limits in this table are based on CFR 47 Part 15.231(b)-(2).
 Relaxation limits is calculated by:
 The average value of fundamental frequency is: Average=Peak value+PDCF
 PDCF (Pulse desensitization correction factor) = $20 \log(\text{Duty cycle}) - 14.056$
 Duty cycle= Ton time/100ms= $(5 \times 0.5 \text{ms} + 6 \times 0.75 \text{ms} + 14 \times 0.916 \text{ms}) / 100 \text{ms} = 19.824 / 100 = 0.19824$ (Reference FCC public notice DA 00-705)

3.4. Operating Condition of EUT

- 3.4.1. Set up the EUT and simulator as shown on 3.2.
- 3.4.2. To turn on the power of all equipment.
- 3.4.3. The EUT [Ceiling Fan Remote Controller (Transmitter)] emitted the fundamental frequency with data code at the stand, side and lying conditions. (worst mode is lying condition)
- 3.4.4. The EUT was operated on maximum transmitting status during all testing (lying condition).

3.5. Test Procedure

The EUT and was placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set to 3 meters away from the receiving antenna which was mounted on an antenna tower. The antenna moved up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna was used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-2003 regulation.

The bandwidth of test receiver was set at 120kHz for frequencies below 1GHz and resolution bandwidth of spectrum analyzer was set at 1MHz for frequencies above 1GHz.

The frequency range from 30MHz to 1000MHz was measured with Quasi-Peak detector.

The frequency range from 1GHz to 5.5GHz was pre-scanned with Peak detector.

EUT with worst positions (Lying) was tested during radiated measurement and all the test results are listed in section 3.6.

3.6. Radiated Emission Noise Measurement Results

3.6.1. Frequency Range 30MHz to 1GHz Measurement Results: **PASSED.**

All the emissions not reported below are too low against the FCC part 15 Subpart C limit.

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Position : Operating (Lying)

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Limits dB μ V/m	Margin dB
Fundamental Frequency (Peak Value)						
304.900	14.87	3.90	26.82	45.59	94.96	49.37
Harmonic Freq. (Peak Value)						
608.400	21.45	6.20	11.71	39.36	74.96	35.60
Spurious Freq. (Quasi-Peak Value)						
91.290	15.90	2.00	4.41	22.31	43.50	21.19
97.230	16.75	2.05	5.33	24.13	43.50	19.37
102.090	17.29	2.10	3.88	23.27	43.50	20.23
201.180	22.08	3.00	2.46	27.54	43.50	15.96
* 275.430	25.25	3.70	0.62	29.57	46.00	16.43

Fundamental Freq. (Average Value)


Freq (MHz)	Peak value (dB μ v/m)	PDCF	Average value (dB μ v/m)	Average Limit (dB μ v/m)	Margin (dBm)
304.900	45.59	-14.056	31.554	74.96	43.406

Harmonic Freq. (Average Value)


Freq (MHz)	Peak value (dB μ v/m)	PDCF	Average value (dB μ v/m)	Average Limit (dB μ v/m)	Margin (dBm)
608.400	39.36	-14.056	25.664	54.96	49.296

- Remarks :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~4.0GHz), but the emission levels were too low against the official limit and not report.
 3. "*" The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

Duration time:

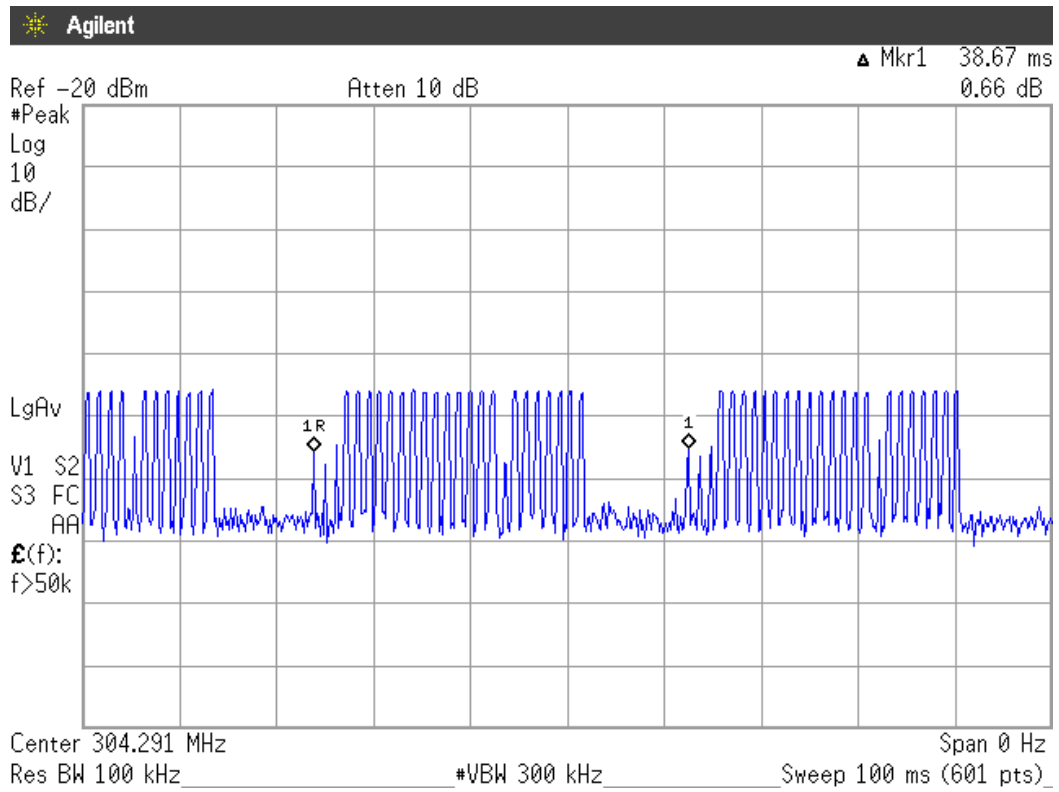

Ton time:

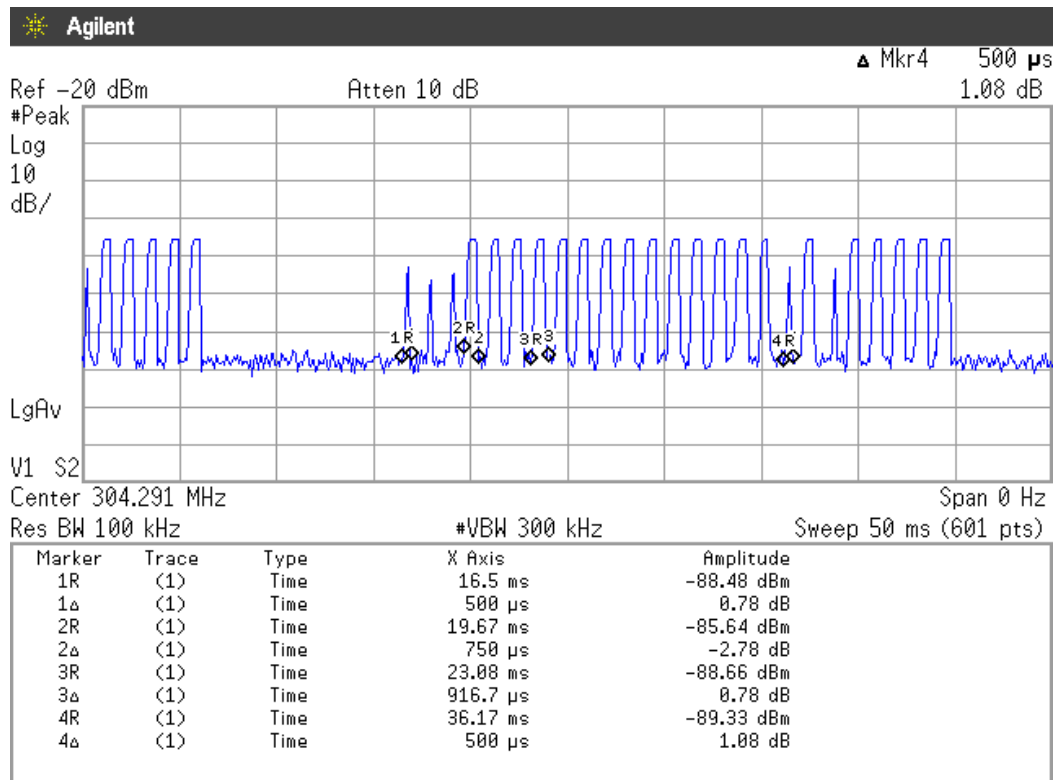

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Position : Operating (Lying)

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB


Fundamental Frequency (Peak Value)						
304.900	14.87	3.90	14.23	33.00	94.96	61.96
Spurious Freq. (Quasi-Peak Value)						
102.090	17.29	2.10	1.59	20.98	43.50	22.52
* 108.840	18.02	2.20	1.53	21.75	43.50	21.75
153.390	20.69	2.60	0.96	24.25	43.50	19.25
174.180	21.13	2.80	1.31	25.24	43.50	18.26
201.180	22.08	3.00	2.88	27.96	43.50	15.54
293.790	26.33	3.96	0.77	31.06	46.00	14.94
295.140	26.43	3.99	0.91	31.33	46.00	14.67

Fundamental Freq. (Average Value)


Freq (MHz)	Peak value (dBuv/m)	PDCF	Average value (dBuv/m)	Average Limit (dBuv/m)	Margin (dBm)
304.900	33.00	-14.056	19.954	74.96	55.006

- Remarks :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~4.0GHz), but the emission levels were too low against the official limit and not report.
 3. "*" The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

Duration time:

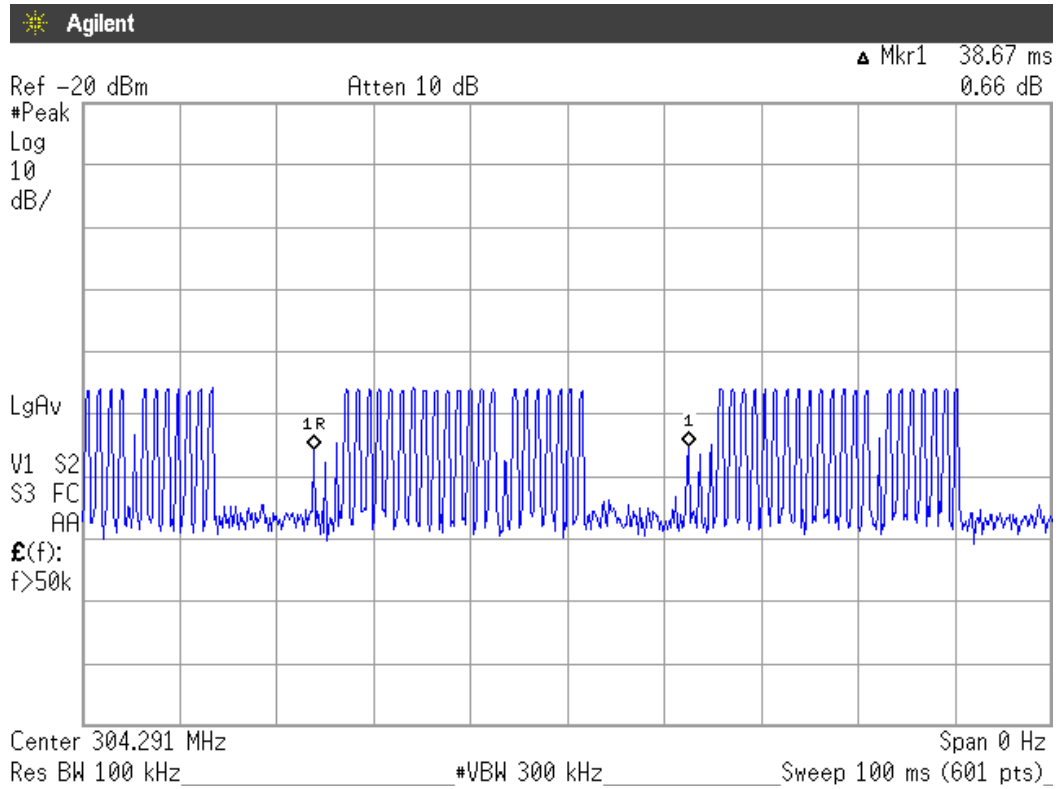

Ton time:

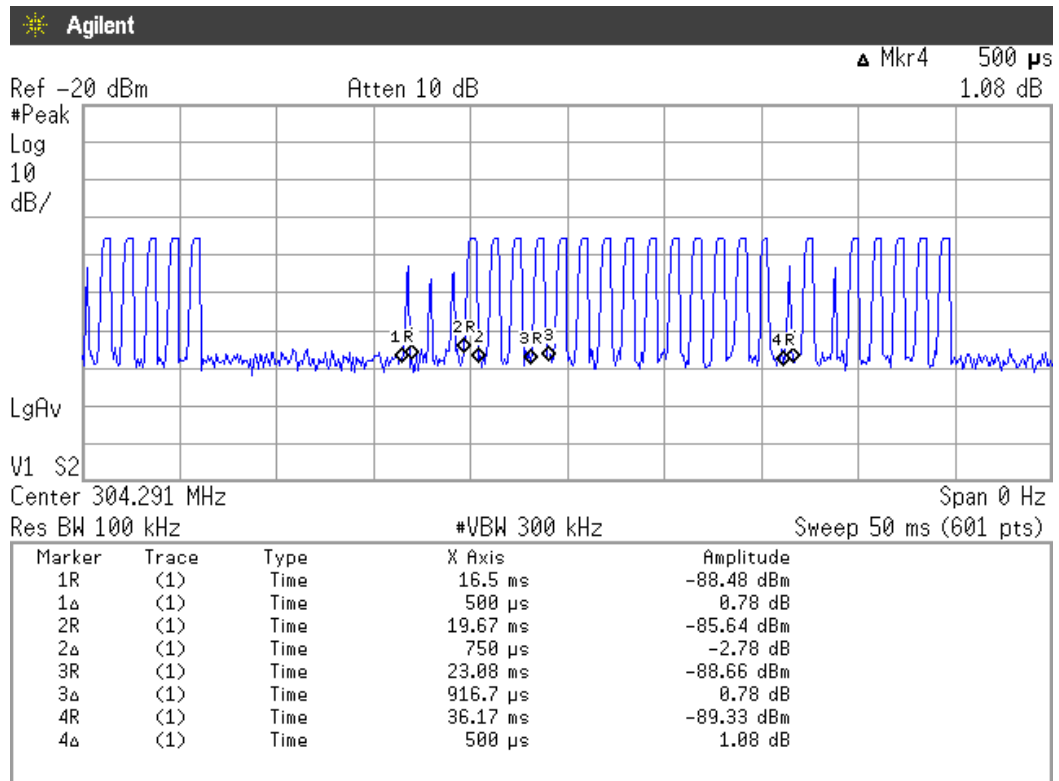

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Position : Operating (Stand)

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level		Margin dB
			Horizontal dB μ V	Horizontal dB μ V/m	Limits dB μ V/m		

Fundamental Freq. (Peak Value)							
304.900	14.94	3.90	26.43	45.27	94.96	49.69	
Harmonic Freq. (Peak Value)							
608.400	21.45	6.20	10.06	37.71	74.96	37.25	
Spurious Freq. (Quasi-Peak Value)							
92.080	16.08	2.00	4.87	22.95	43.50	20.55	
102.750	17.40	2.10	3.68	23.18	43.50	20.32	
201.690	22.07	3.03	0.83	25.93	43.50	17.57	
294.810	26.43	3.99	0.65	31.07	46.00	14.93	

- Remarks :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~5.5GHz), but the emission levels were too low against the official limit and not report.

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Position : Operating (Stand)

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB

Fundamental Freq. (Peak Value)						
304.900	14.94	3.90	22.03	40.87	94.96	54.09
Harmonic Freq. (Peak Value)						
608.400	21.45	6.20	4.15	31.80	74.96	43.16
Spurious Freq. (Quasi-Peak Value)						
166.770	20.96	2.70	1.38	25.04	43.50	18.46
201.690	22.07	3.03	1.32	26.42	43.50	17.08
224.970	21.95	3.30	0.60	25.85	46.00	20.15
572.230	21.12	6.50	0.65	28.27	46.00	17.73
868.080	25.89	7.20	0.74	33.83	46.00	12.17

Remarks : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~5.5GHz), but the emission levels were too low against the official limit and not report.

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Position : Operating (Side)

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Limits dB μ V/m	Margin dB
Fundamental Freq. (Peak Value)						
304.900	14.94	3.90	22.44	41.28	94.96	53.68
Harmonic Freq. (Peak Value)						
608.400	21.45	6.20	6.19	33.84	74.96	41.12
Spurious Freq. (Quasi-Peak Value)						
91.290	15.90	2.00	3.48	21.38	43.50	22.12
97.230	16.75	2.05	4.91	23.71	43.50	19.79
99.390	17.08	2.10	5.92	25.10	43.50	18.40
102.090	17.29	2.10	4.65	24.04	43.50	19.46
201.180	22.08	3.00	1.85	26.93	43.50	16.57

Remarks : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~5.5GHz), but the emission levels were too low against the official limit and not report.

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Position : Operating (Side)


Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Fundamental Freq. (Peak Value)						
304.900	14.94	3.90	16.78	35.62	94.96	59.34
Harmonic Freq. (Peak Value)						
608.400	21.45	6.20	5.56	33.21	74.96	41.75
Spurious Freq. (Quasi-Peak Value)						
156.090	20.70	2.70	0.11	23.51	43.50	19.99
201.180	22.08	3.00	3.52	28.60	43.50	14.90
214.140	21.78	3.11	1.61	26.50	43.50	17.00
293.790	26.33	3.96	0.68	30.97	46.00	15.03
298.380	26.72	3.98	0.04	30.74	46.00	15.26

Remarks : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
 2. Measurement was up to 10th harmonics (~5.5GHz), but the emission levels were too low against the official limit and not report.


3.6.2. Frequency Range 1GHz to 5.5GHz Measurement Results: **PASSED.**

The frequency spectrum from 1GHz to 5GHz (up to 10th harmonics) was investigated. All the emissions not reported below are too low against the FCC part 15 Subpart C limit.

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Mode : Operating (Lying)

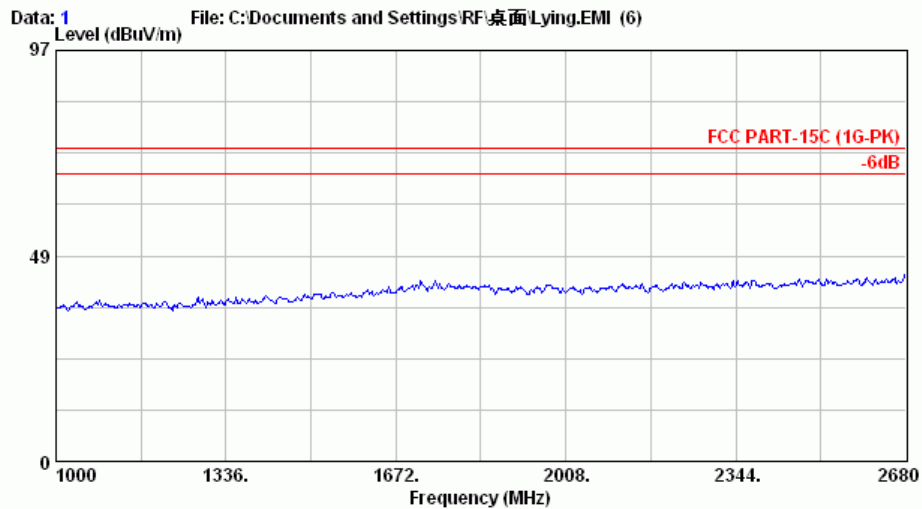

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27*C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Lying---(TX)

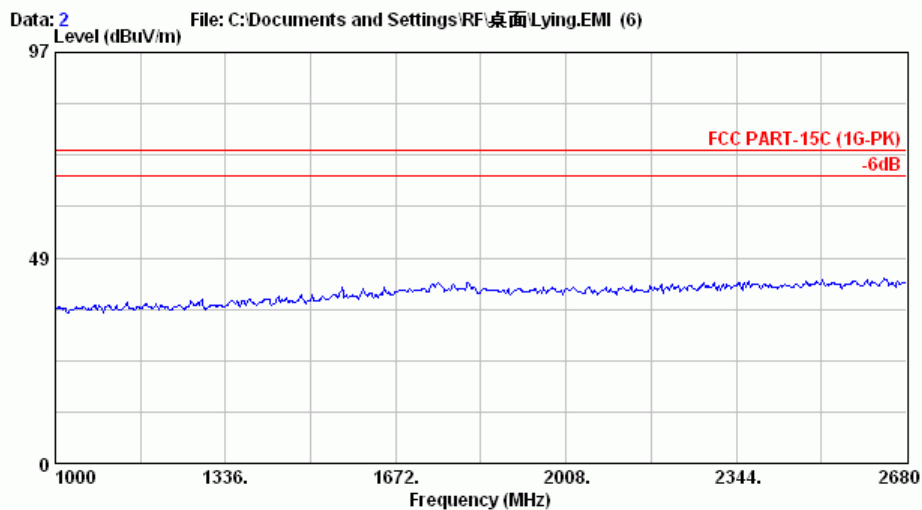


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27*C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Lying---(TX)



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

Data: 4 File: C:\Documents and Settings\RF桌面\Lying.EMI (6)

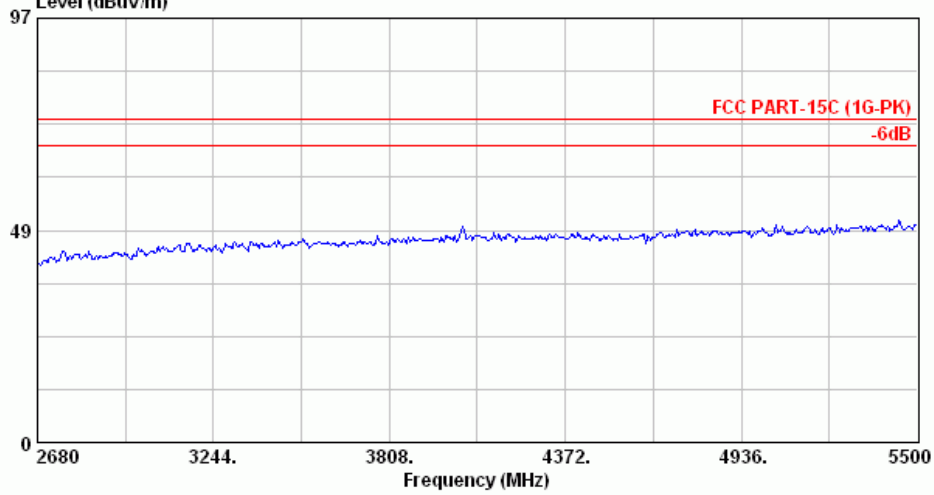


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27°C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Lying--- (TX)




AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttmc@ttmc.com.tw

Data: 3 File: C:\Documents and Settings\RF桌面\Lying.EMI (6)

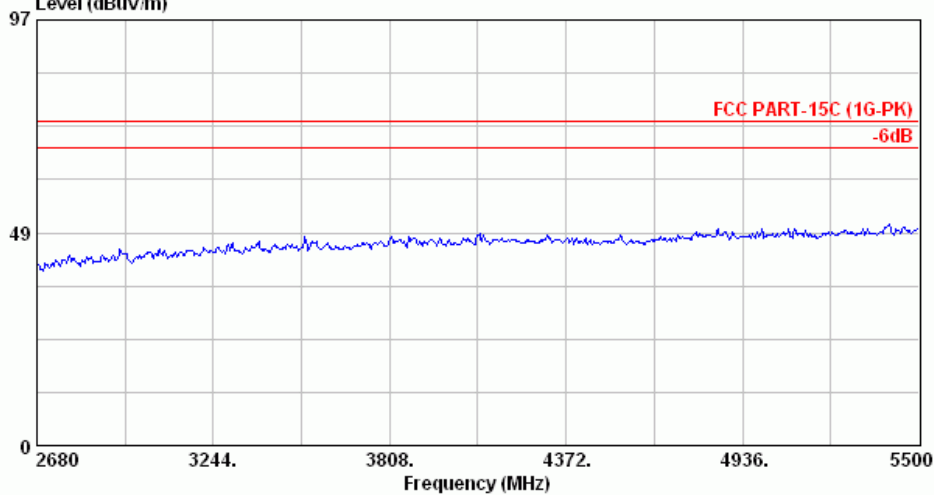


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27°C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Lying--- (TX)

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Mode : Operating (Stand)

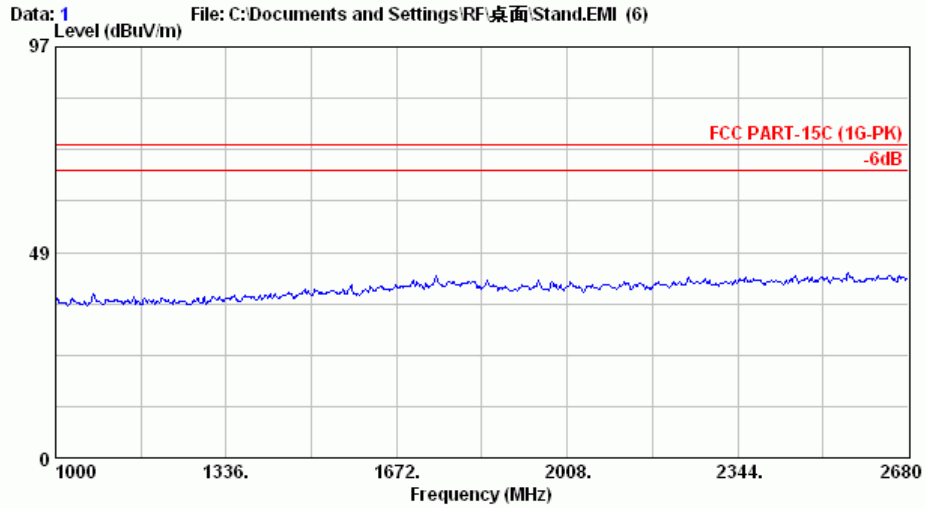

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27*C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Stand---(TX)

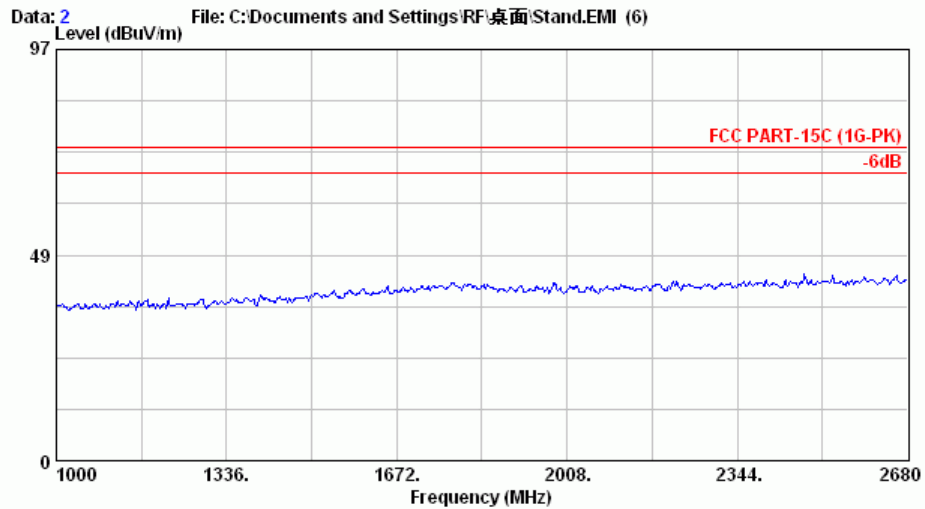


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27*C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Stand---(TX)



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 3 File: C:\Documents and Settings\RF\桌面\Stand.EMI (6)

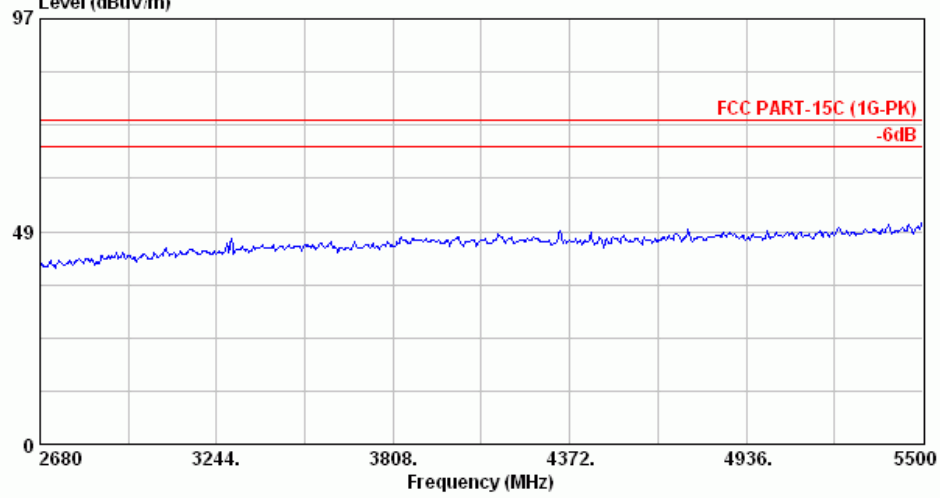


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27+C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Stand---(TX)




AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.53-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 4 File: C:\Documents and Settings\RF\桌面\Stand.EMI (6)

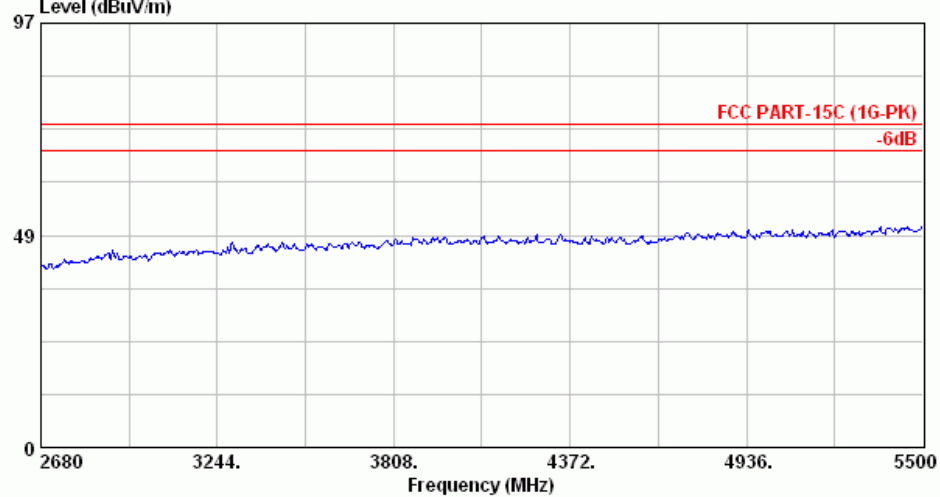


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27+C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Stand---(TX)

Date of Test : Oct. 27, 2009 Temperature : 26
 EUT : Ceiling Fan Remote Controller (Transmitter) Humidity : 66%
 Test Mode : Operating (Side)

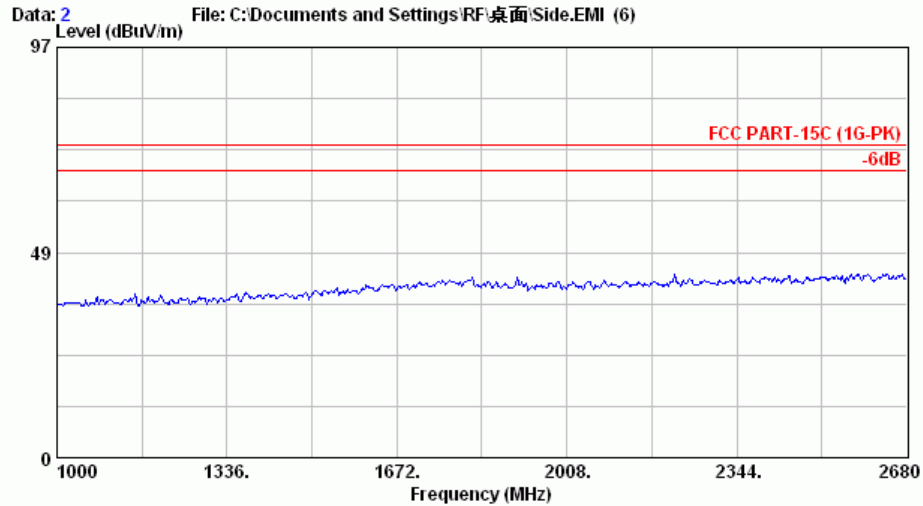

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27*C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Side---(TX)

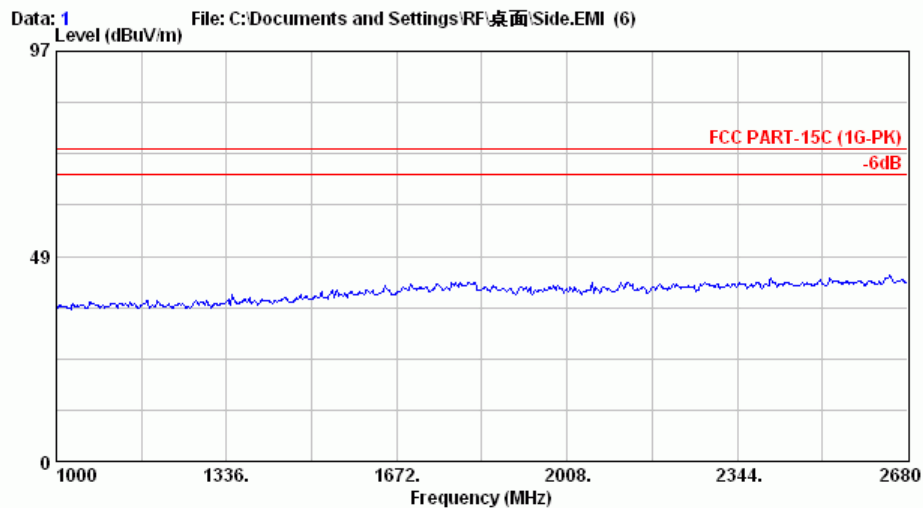


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 3115(4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27*C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Side---(TX)



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 3 File: C:\Documents and Settings\RF\桌面\Side.EMI (6)

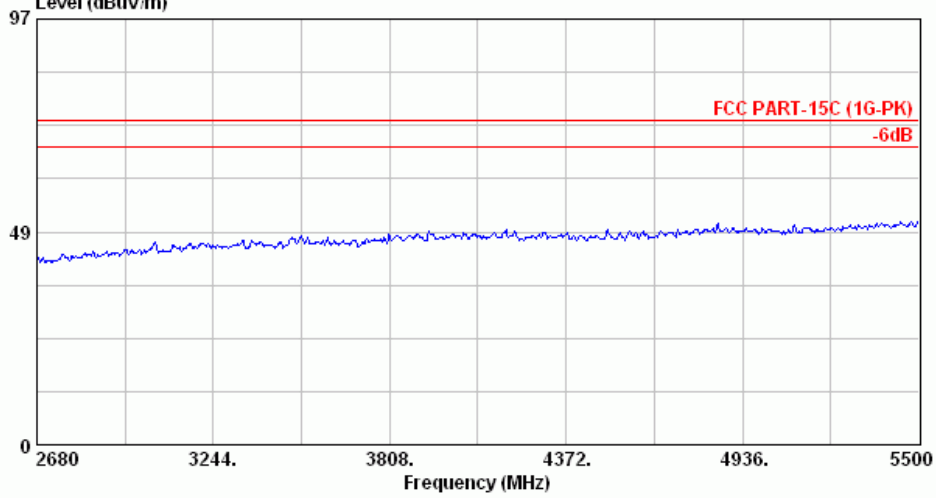


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 3115 (4927) Ant. pol. : HORIZONTAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27°C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Side---(TX)



AUDIX TECHNOLOGY Corp. EMC Laboratory
 No.33-11, Tin-fu Tsun, Lin-kou Hsiang, Taipei
 County, Taiwan R.O.C. Post Code:24443
 Tel:+886-2-26092133 Fax:+886-2-26099303
 Email:ttemc@ttemc.com.tw

Data: 4 File: C:\Documents and Settings\RF\桌面\Side.EMI (6)

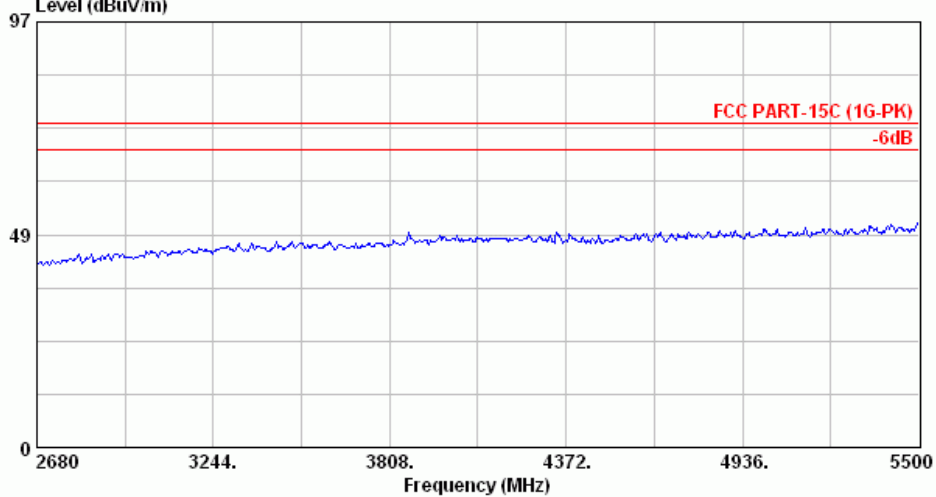

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 3115 (4927) Ant. pol. : VERTICAL
 Limit : FCC PART-15C (1G-PK)
 Env. / Ins. : 8593EM 27°C/63% Engineer : Henning Chang
 EUT : Ceiling Fan Remote Controller M/N:TR53C
 Power Rating : DC 12V
 Test Mode : Side---(TX)

4. EMISSION BANDWIDTH MEASUREMENT

4.1. Test Equipment

The following test equipment was used during the Emission Bandwidth Test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Jul. 23, 09'	Jul. 22, 10'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

4.2. Block Diagram of Test Setup



4.3. Specification Limits (§15.231-(c))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

4.4. EUT's Configuration during Compliance Measurement

The configuration of EUT was same as section 3.4.

4.5. Emission Bandwidth Measurement Results

PASS. (0.0146% < 0.25%)


Fundamental Frequency: 304.293MHz

Test Date: Oct. 27, 2009 Temperature: 26 Humidity: 66%

No.	Center Frequency	Bandwidth	Tolerance (%)
1.	304.293MHz	44.4kHz	0.0146%

The bandwidth of emission was measured at the point 20dB down from the center frequency of modulated carrier.

Graph of Bandwidth Measurement

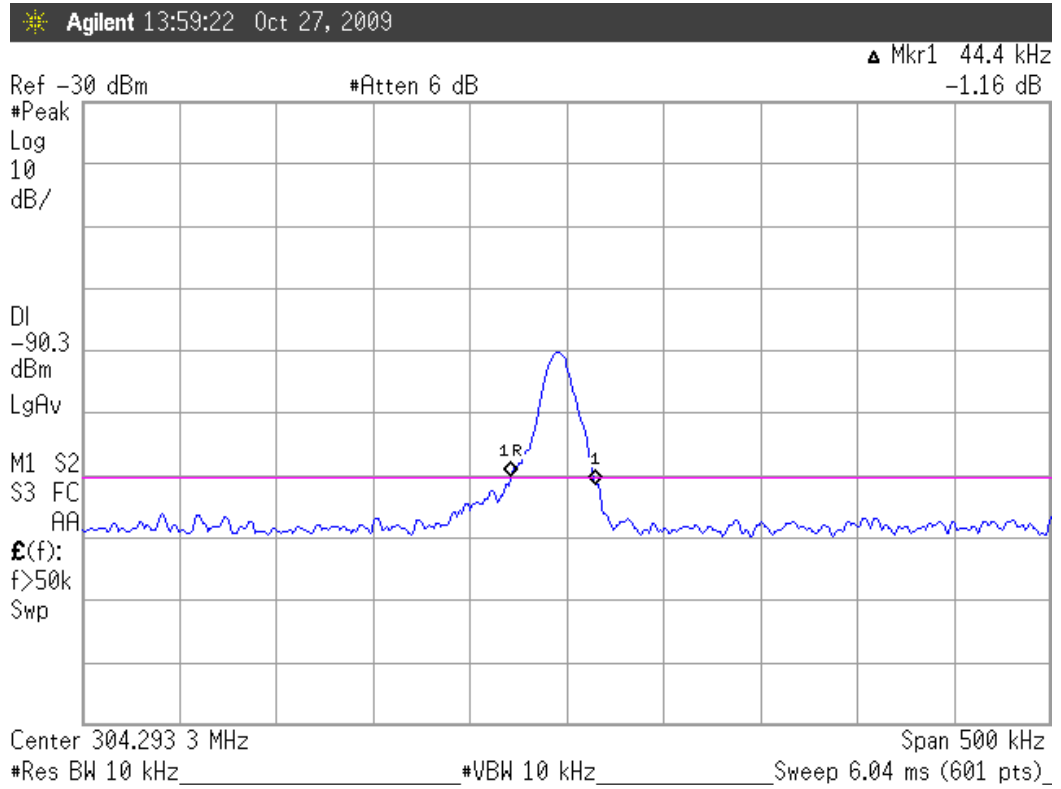

Note: “◇” The line is 20dB from the modulated carrier.


5. PERIODIC OPERATED MEASUREMENT

5.1. Test Equipment

The following test equipment was used during the periodic operated test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	Jul. 23, 09'	Jul. 22, 10'
2.	Wide Band Antenna	Diamond	RH799	2944A06305	N/A	N/A

5.2. Block Diagram of Test Setup

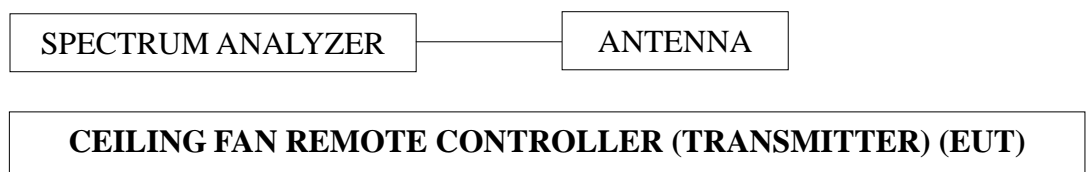

5.3. Specification Limits [§15.231-(a)-(1)]

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released, Compliance with §15.231 (a)- (1).

5.4. EUT's Configuration during Compliance Measurement

The configuration of EUT was same as section 3.4.

5.5. Periodic Operated Measurement Results


PASS. T = 0.825s. (< 5sec.)

Fundamental Frequency: 304.293MHz

Test Date: Oct. 27, 2009 Temperature: 26 Humidity: 66%

The graph of testing is attached in next page.

Graph of Periodic Operated Measurement

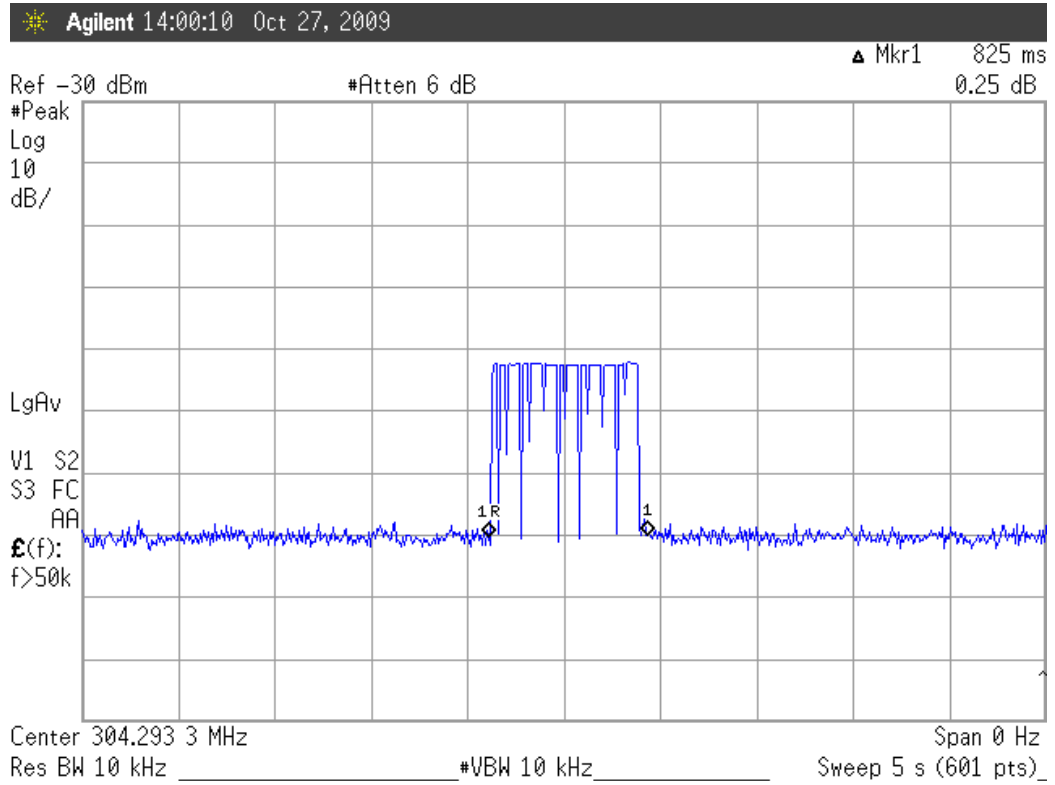

6. DEVIATION TO TEST SPECIFICATIONS

【NONE】

7. PHOTOGRAPHS

7.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz)

Stand Position



Side Position



Lying Position



7.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (Above 1GHz)
Stand Position



Side Position



Lying Position



7.3.Photo of Emission Bandwidth Measurement



7.4.Photo of Periodic Operated Measurement

