

Test laboratory accredited according to ISO 17025 by the Swiss Accreditation Service SAS
 Laboratoire d'essai accrédité selon ISO 17025 par le Service d'accréditation suisse SAS
 Prüflabor akkreditiert nach ISO 17025 durch die Schweizerische Akkreditierungsstelle SAS

Registration number
 Numéro d'accréditation
 Akkreditierungsnummer

STS 024

Schweizerischer Prüfstellendienst
 Service suisse d'essai
 Swiss testing service



Report:	Electromagnetic compatibility and Radio spectrum Matters		Report no:	13-MO-0167.12A *
Product name:	Roger Pen (DM part)		Mandate no:	13-MO-0167
Serial no:	---	Model number:	---	
Customer:	Phonak Communications AG Länggasse 17 3280 Murten Switzerland		Date of test:	June 7 - 26, 2013 July 23 - 26, 2013

* Replaces report no 13-MO-0167.12

Standards		Result
47 CFR, Part 1	(Subpart C, Intentional radiators: §§ 207/209/247)	Pass
	(Subpart B, Intentional radiators: § 15.109)	Pass
Industry Canada	(RSS-210, Licence-exempt Radio Apparatus: Category I Equipment)	Pass

These tests have been performed without modifications.


Test performed by

Mr B. Itzcovich
 EMC Test Engineer



Report prepared by

Mr B. Itzcovich
 EMC Test Engineer



Report controlled and approved by

Mr J. Ding
 EMC Test Engineer



Rossens, October 18, 2013

(Issue Date)

REV20130422

Main language : English

The present document results from tests on one specimen and does not prejudice to the conformity of all the manufactured products.

t:\auftragsablage pq\auftragsablage ih-mo\2013\100-199\13-mo-0167_phonak_easy_mercury\4 prüfberichte\13-mo-0167.12a_phonak_easymercury_dm_fcc.doc

Electrosuisse, SEV Association for Electrical Engineering, Power and Information Technologies

Montena EMC
 route de Montena 75
 1728 Rossens
 Switzerland
 phone +41 26 411 93 33
 fax +41 26 411 93 30
 www.montenaemc.ch
 office@montenaemc.ch

Montena EMC
 Technopark Blumenegg
 Blumeneggstrasse 50
 9403 Goldach
 Switzerland
 phone +41 71 278 41 92
 fax +41 71 278 41 93

Montena EMC
 Ringstrasse 10
 5432 Neuenhof
 Switzerland
 phone +41 56 290 30 35
 fax +41 56 290 38 33

Montena EMC
 Postfach 1315
 3072 Ostermundigen
 Switzerland
 phone +41 79 256 21 55

Contents

	<i>Page</i>
1. SUMMARY OF TEST RESULTS	3
2. APPLIED STANDARDS	4
3. CLIENT	4
4. EQUIPMENT UNDER TEST	4
4.1 Identification	4
4.2 Pictures of the EUT	5
4.3 Classification	6
4.4 Transmitter characteristics (according to Phonak Communications AG)	7
4.5 Receiver characteristics (according to Phonak Communications AG)	7
4.6 Ports	7
4.7 Modifications	7
5. TEST CONDITIONS	8
5.1 Climatic conditions, location and date	8
5.2 Test facility and methodology	8
5.3 Attendant persons	8
5.4 Test configuration	8
5.5 Operating conditions	9
5.6 Auxiliary equipment	9
6. TEST RESULTS	10
6.1 Channel 20dB-bandwidth	11
6.2 Carrier frequency separation	13
6.3 Number of hopping channels	15
6.4 Time of occupancy (dwell time)	17
6.5 Antenna gain & effective isotropic radiated power	19
6.6 Maximum output power (conducted)	21
6.7 Band-edge emission (conducted)	23
6.8 Spurious emission (conducted – 15 MHz to 26.5 GHz)	25
6.9 Spurious emission transmit mode - radiated	28
6.9.1 30 MHz to 1 GHz	28
6.9.2 1 GHz to 18 GHz	31
6.9.3 18 GHz to 26.5 GHz	36
6.10 Spurious emission receive & standby mode - radiated	39
6.10.1 30 MHz to 1 GHz	39
6.10.2 1 GHz to 18 GHz	44
6.11 Conducted emission - Interference voltage	49
6.12 Designation of emission	54

1. Summary of test results

- ✓ Pass
- ✗ Fail
- Ø Not applicable to this product
- Not tested
- # No requirements

§	Test Type	Result
6	Emission	CFR 47 Part 15 Industry Canada
6.1	Channel 20dB-bandwidth CFR 47 § 15.247 (a)(1) RSS-210 § A8.1 (b)	1.94 MHz
6.2	Carrier frequency separation CFR 47 § 15.247 (a)(1) RSS-210 § A8.1 (b)	✓
6.3	Number of hopping channels CFR 47 § 15.247 (a)(1)(iii) RSS-210 § A8.1 (d)	✓
6.4	Time of occupancy (dwell time) CFR 47 § 15.247 (a)(1)(iii) RSS-210 § A8.1 (d)	✓
6.5	Antenna gain & effective radiated power CFR 47 § 15.247 (b)(4) RSS-210 § A8.4 (1)	< -6.05 dBi
6.6	Maximum output power (conducted) CFR 47 § 15.247 (b)(1) RSS-210 § A8.4 (1)	✓
6.7	Band-edge emission (conducted) CFR 47 § 15.247 (d) RSS-210 § A8.5	✓
-	Band-edge emission (radiated) CFR 47 § 15.247 (d) CFR 47 § 15.205 RSS-210 § A8.5	#¹
6.8	Spurious emissions – conducted (transmitter) CFR 47 § 15.247 (d) RSS-210 § A8.5	✓
6.9	Spurious emissions – radiated (transmitter) CFR 47 § 15.247 (d) CFR 47 § 15.209 (a) CFR 47 § 15.205 RSS-210 § A8.5	✓
6.10	Radiated emission – receiver CFR 47 § 15.109 RSS-Gen	✓
6.11	Conducted emission CFR 47 § 15.207	✓
6	Emission	CFR 47 Part 2
6.12	Designation of emission FCC 47 §2.201 FCC 47 §2.202	1M85FXD

1. Conducted tests could be successfully performed on the EUT

2. Applied standards

47 CFR Part 15 Subpart C	Code of Federal Regulations - Title 47 - Telecommunication, Part 15, Subpart C: "Intentional Radiators"
47 CFR Part 15 Subpart B	Code of Federal Regulations - Title 47 - Telecommunication, Part 15, Subpart B: "Unintentional Radiators"
RSS-Gen issue 3, December 2010	Spectrum Management and Telecommunications - Radio Standards Specification General Requirements and Information for the Certification of Radio Apparatus
RSS-210 issue 8, December 2010	Spectrum Management and Telecommunications - Radio Standards Specification Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

3. Client

Client name and address	Phonak Communications AG Länggasse 17 3280 Murten Switzerland
Contact Person	Mr Josuah Wicht
Telephone	+41 26 672 92 78
Fax	+41 26 672 93 80
E-mail	Josuah.Wicht@phonak.com
Mandate no	13-MO-0167




4. Equipment under test

4.1 Identification

Manufacturer name and address	Phonak Communications AG Länggasse 17 3280 Murten Switzerland
Production country	Vietnam
Brand name	Phonak
Product name	Roger Pen (DM part)
Product description	Wireless microphone 2.4 GHz
Model number	- - -
Serial no	- - -
FCC ID IC ID	FCC: KWCTX17 IC: 2262A-TX17
Software version	SVN 2414
Highest frequency	38.4 MHz (DSP) / 2.48 GHz (Transmitter)
Supply	$U = 3.7 V_{DC} / P_{max} = 0.25 W$ (Lithium Polymer Battery) or $U = 5 V_{DC} / P_{max} = 2 W$ (DC In USB) *
Dimension / Weight	~145 mm x Ø ~15 mm (l x d) / ~ 28 g
Technical	None. The equipment is completely identified by the above-mentioned information. Phonak Communications AG assures the traceability of the documentation and is responsible for the product identification.

* When the external 5 V_{DC} supply is connected to the EUT, the battery is disconnected from the RF module.

4.2 Pictures of the EUT

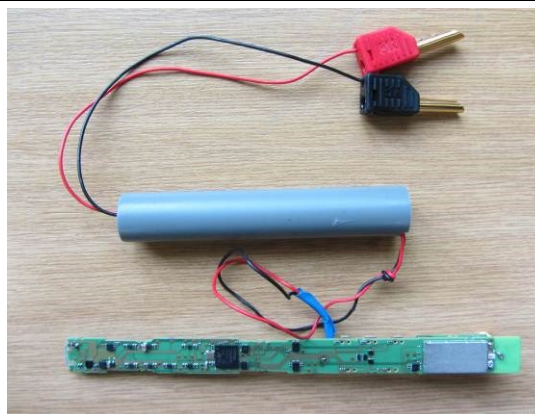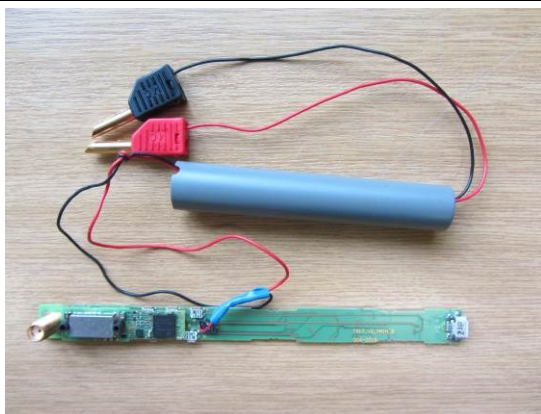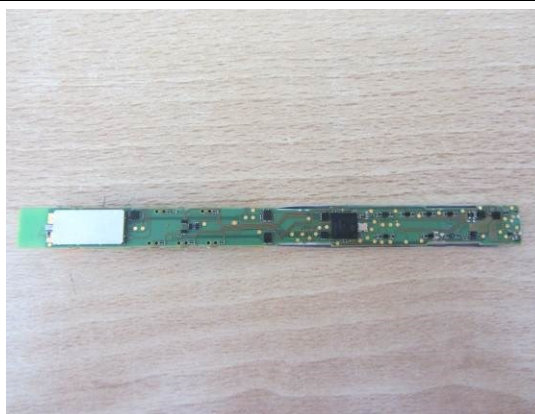*Electronic board with temporary antenna & supply connectors**Front**Rear**Electronic board (with battery) : front**Electronic board : rear**EUT identification (on bottom of Cradle)**Connectors (USB + audio)*

4.3 Classification

CFR 47 Part 15	☒ Unintentional radiator (Subpart B), Receive mode ☐ Class A digital device ☒ Class B digital device ☐ The highest frequency of the internal sources of the EUT is less than 108 MHz (measurement shall be made up to 1 GHz). ☐ The highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz (measurement shall be made up to 2 GHz). ☐ The highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz (measurement shall be made up to 5 GHz). ☒ The highest frequency of the internal sources of the EUT is above 1 GHz (measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is lower). ☒ Intentional radiator (Subpart C), Transmit mode ☒ The highest fundamental frequency of the EUT is less than 10 GHz (measurement shall be made up to the tenth harmonic or 40 GHz, whichever is lower). ☐ The highest fundamental frequency of the EUT is between 10 GHz and 30 GHz (measurement shall be made up to the fifth harmonic or 100 GHz, whichever is lower). ☐ The highest fundamental frequency of the EUT is above 30 GHz (measurement shall be made up to the fifth harmonic or 200 GHz, whichever is lower).
----------------	--

4.4 Transmitter characteristics (according to Phonak Communications AG)

Method of frequency generation	☒ Crystal ☐ Synthesizer ☐
Transmitter operating frequency range (OFR) The OFR is the total range of frequencies covered by one type, or by a family of equipment. It is noted that a family of equipment may be capable of covering a wider frequency range than the alignment frequency range of one type of equipment.	2.402 GHz to 2.480 GHz.
Channel separation (if applicable)	2 MHz
Number of channels	40
Maximum rated output power	11.0 dBm (at transmitter RF output connector)
Variable carrier output	☐ Transmitter carrier output is not variable. RF output: $P_{OUT} = \dots mW$ ☒ Transmitter carrier output is variable. Max. RF output: $P_{OUT MAX} = 12.6 mW$ Min. RF output: $P_{OUT MIN} = 0.04 mW$ ☒ RF output continuously variable ☐ RF output stepped: dB per step
Modulation	☐ Amplitude ☐ Frequency: Deviation kHz ☐ Phase ☐ Pulse Pulse repetition frequency Duty cycle ☒ Other FHSS, GFSK ☐ Transmitter can be operated without modulation ☒ Transmitter can only be operated with modulation

4.5 Receiver characteristics (according to Phonak Communications AG)

Receiver operating frequency range	2.402 GHz to 2.480 GHz
Channel separation (if applicable)	2 MHz
Number of channels	40

4.6 Ports

Port	Cable			Remark
	Max. length	Type	Screen	
DC 5V in (USB charger)	1.5 m (≤ 3 m)	Micro USB	Yes	Connected to Power supply
Audio in	≤ 3 m	Jack 3.5 mm stereo	Yes	External audio input port

4.7 Modifications

None

5. Test conditions

5.1 Climatic conditions, location and date

Location	Date	Temp.	Pressure	Rel. humidity
Electrosuisse Montena EMC 1728 Rossens Switzerland	June 7 - 26, 2013 July 23 - 26, 2013	20 - 26 °C	1000 - 1040 hPa	35 - 60 %

5.2 Test facility and methodology

The alternate test site (ferrite chamber) is accepted by FCC (Reg. No. 90808) and by Industry Canada (Site number 3625A-2).
Conducted and radiated measurements are performed according to the ANSI C63.4 (2003) procedure.

5.3 Attendant persons


Test Engineer(s):

Mr B. Itzcovich
EMC Test Engineer

Other(s):

Name	Company
Mr Josuah Wicht (partially)	Phonak Communications AG
Mr Stéphane Rochat (partially)	Phonak Communications AG

5.4 Test configuration

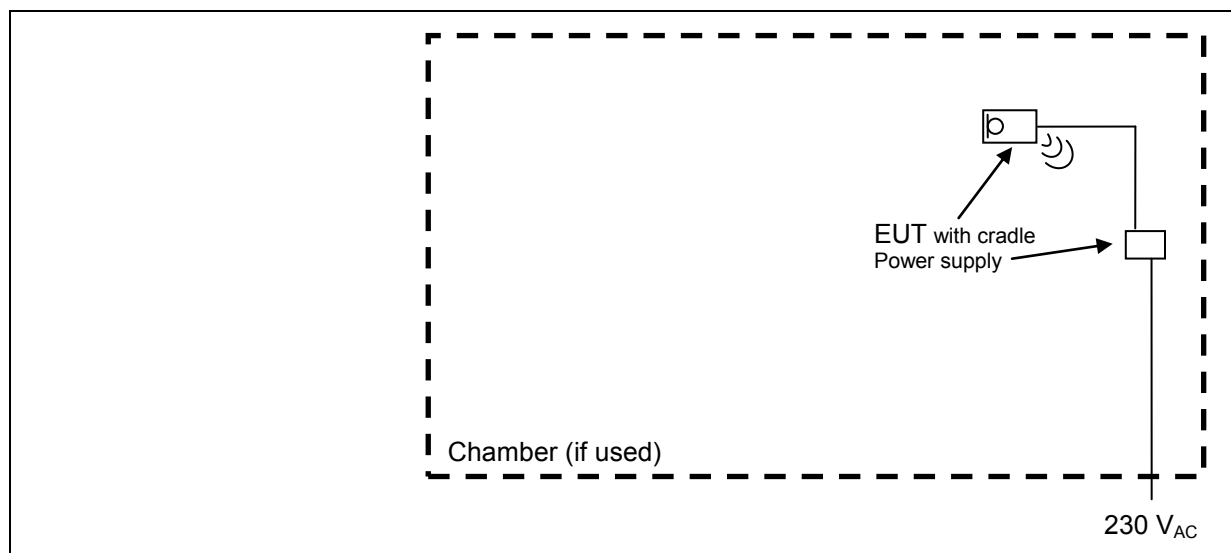

5.5 Operating conditions


Power supply during tests if not stated otherwise in § 6 : 5 V_{DC} (USB)

- Continuous transmission of random data with single frequencies (2.402, 2.440 and GHz and 2.480 GHz)
- Normal operation: transmission of random data with hopping sequence
- Standby: DSP & controller running, RF module disabled
- Coexistence mode: DM and Bluetooth active and continuously transmitting

5.6 Auxiliary equipment

The following pieces of equipment are used for the monitoring of the EUT or are necessary for the EUT but they are not part of the EUT

Product	Brand	Model No.	ID	Remark
Cradle	Phonak	Roger Pen	- - -	Portable device holder
Power supply	Phonak	GPE0538-050100-Z	- - -	AC adapter (5 V _{DC} output)

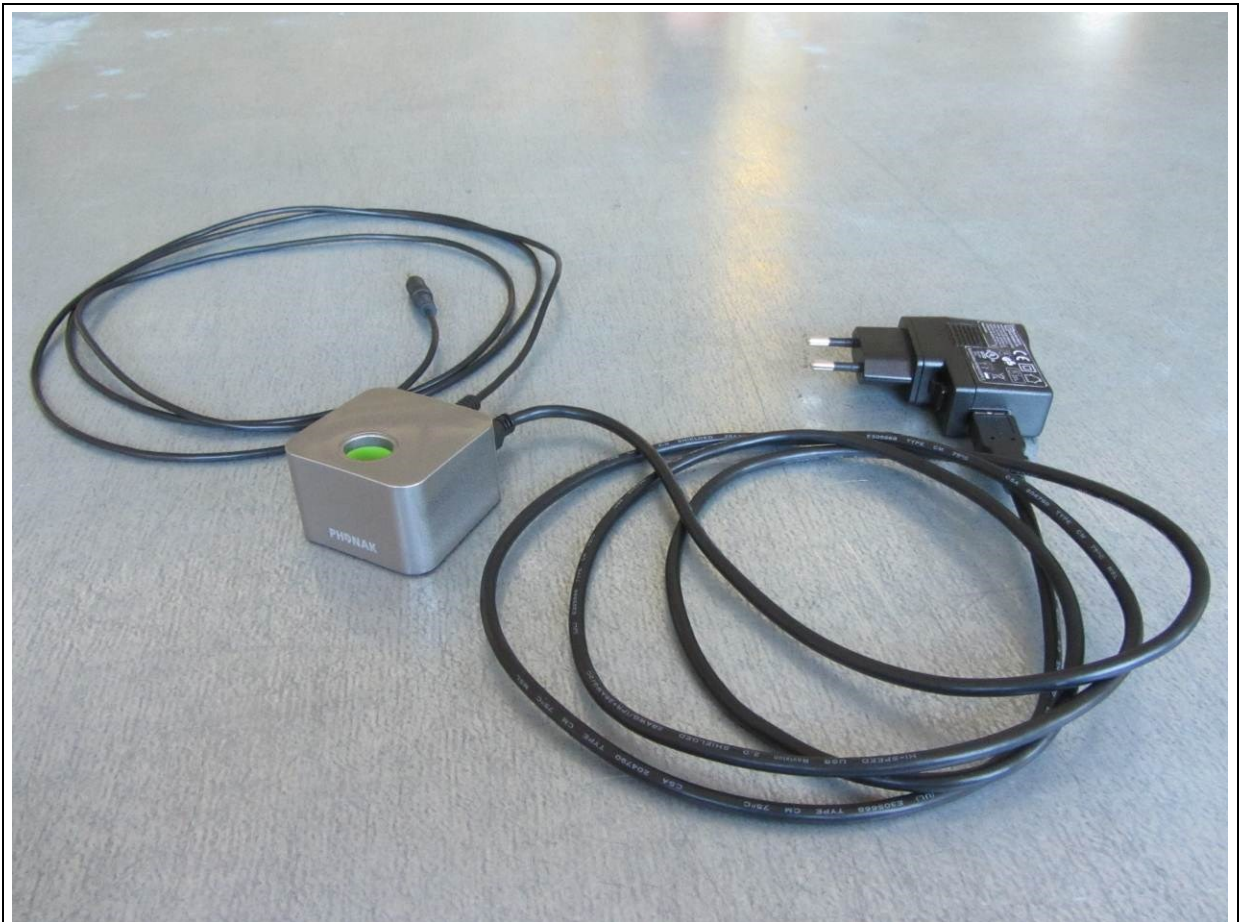

Cradle with power supply & audio cable

6. Test results

6.1 Channel 20dB-bandwidth

Introduction: Channel-bandwidth measured at -20 dBc.


Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☐ semi-anechoic chamber (ferrites) ☒ laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB
 3GHz – 6.7GHz: ± 2.1 dB
 6.7GHz – 13.2GHz: ± 2.6 dB
 13.2GHz – 19GHz: ± 2.8 dB
 19GHz – 26.5GHz: ± 3 dB

Method: Measurement of the conducted power on the antenna connector or a test fixture.

Limit: - - -

Test set-up:

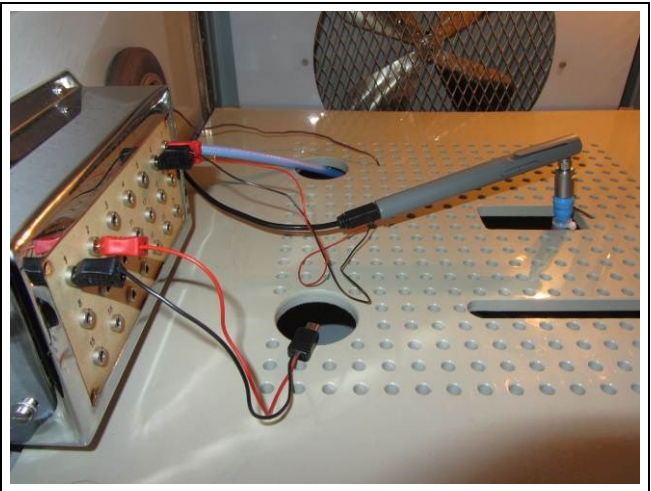

Remarks: - - -

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 07-53
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Results of the test

Client: *Phonak Communications AG*



Apparatus: *Roger Pen (DM part)*

Operating mode: *Single frequencies (2.402, 2.440 and 2.480 GHz), modulated, Pmax*

Cables connected to the EUT: *Temporary supply & antenna cables*

Remarks: *Measured on temporary antenna connector*

frequency [GHz]	20 dB bandwidth [MHz]	Remarks
2.402	1.935	---
2.440	1.940	---
2.480	1.938	---

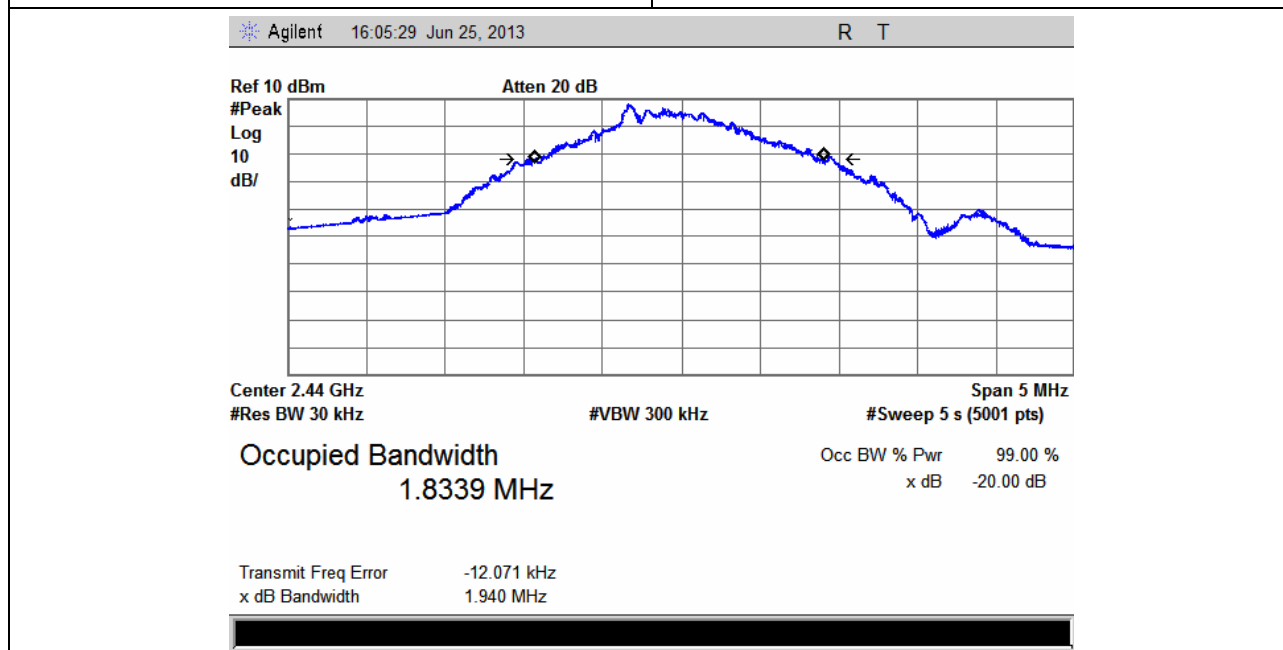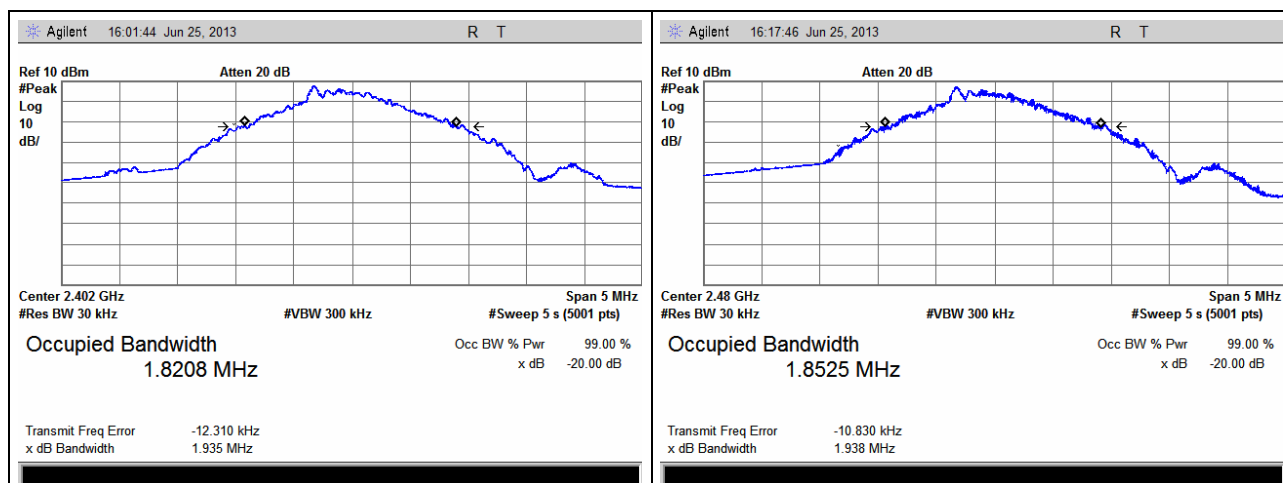

Place and date of test: *Rossens, June 25, 2013*
 Operator: *B. Itzcovich*

6.2 Carrier frequency separation

Introduction: Determination of the frequency separation of two adjacent channels.


Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☐ semi-anechoic chamber (ferrites) ☒ laboratory

Meas. uncertainty: $\pm 2.6 \mu\text{Hz/Hz}$

Method: Measurement of the frequency separation on the antenna connector or a test fixture.

Limit: Minimum 25 kHz or 20 dB bandwidth of the hopping channel

Test set-up:

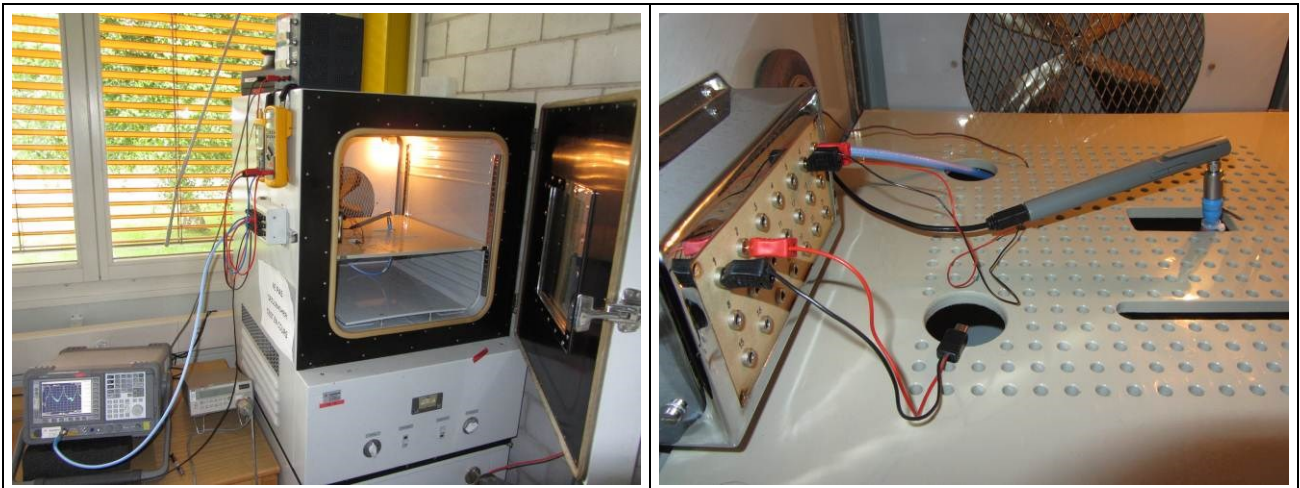

Remarks: ---

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 07-53
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result:	☒ pass	☐ fail	☐ not applicable	☐ not tested
----------------	--	-------------------------------	---	-------------------------------------

Results of the test


Client: *Phonak Communications AG*

Apparatus: *Roger Pen (DM part)*

Operating mode: *Continuously hopping*

Cables connected to the EUT: *Temporary supply & antenna cables*

Remarks: *Measured on temporary antenna connector*

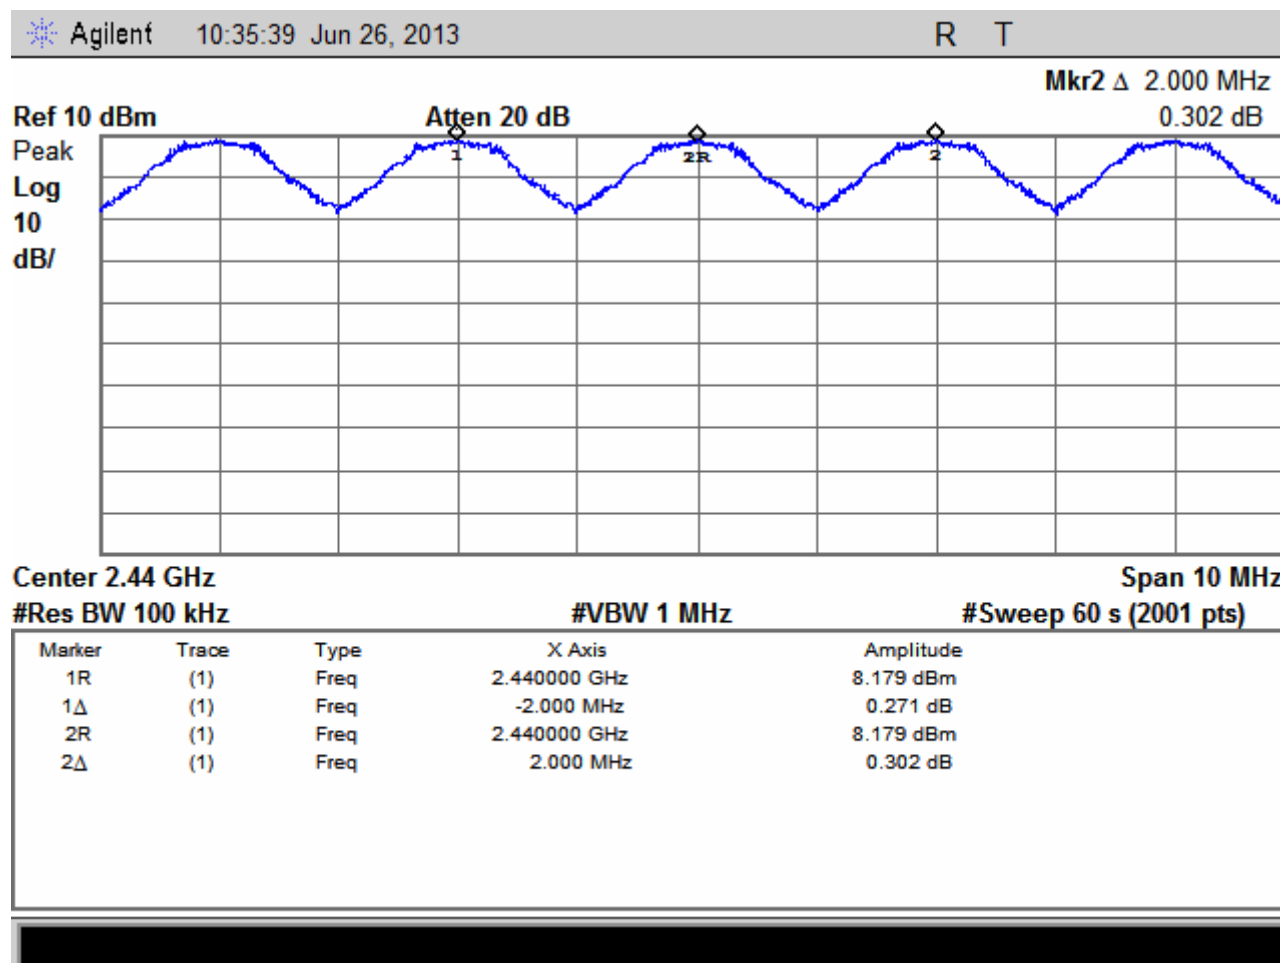

Carrier frequency separation = 2.0 MHz

Place and date of test: *Rossens, June 26, 2013*
Operator: *B. Itzcovich*

6.3 Number of hopping channels

Introduction: Number of hopping channels used in the frequency hopping system.


Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☐ semi-anechoic chamber (ferrites) ☒ laboratory

Meas. uncertainty: $\pm 2.6 \mu\text{Hz/Hz}$

Method: Measurement of the frequency separation on the antenna connector or a test fixture.

Limit: At least 15 channels

Test set-up:

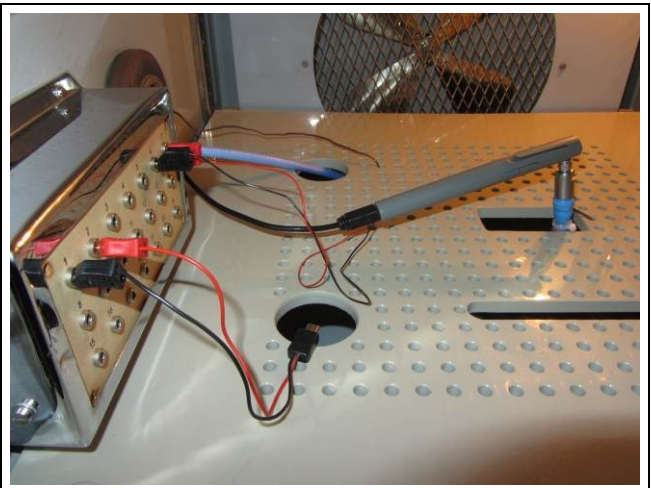

Remarks: ---

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 07-53
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test


Client: *Phonak Communications AG*

Apparatus: *Roger Pen (DM part)*

Operating mode: *Continuously hopping*

Cables connected to the EUT: *Temporary supply & antenna cables*

Remarks: *Measured on temporary antenna connector*

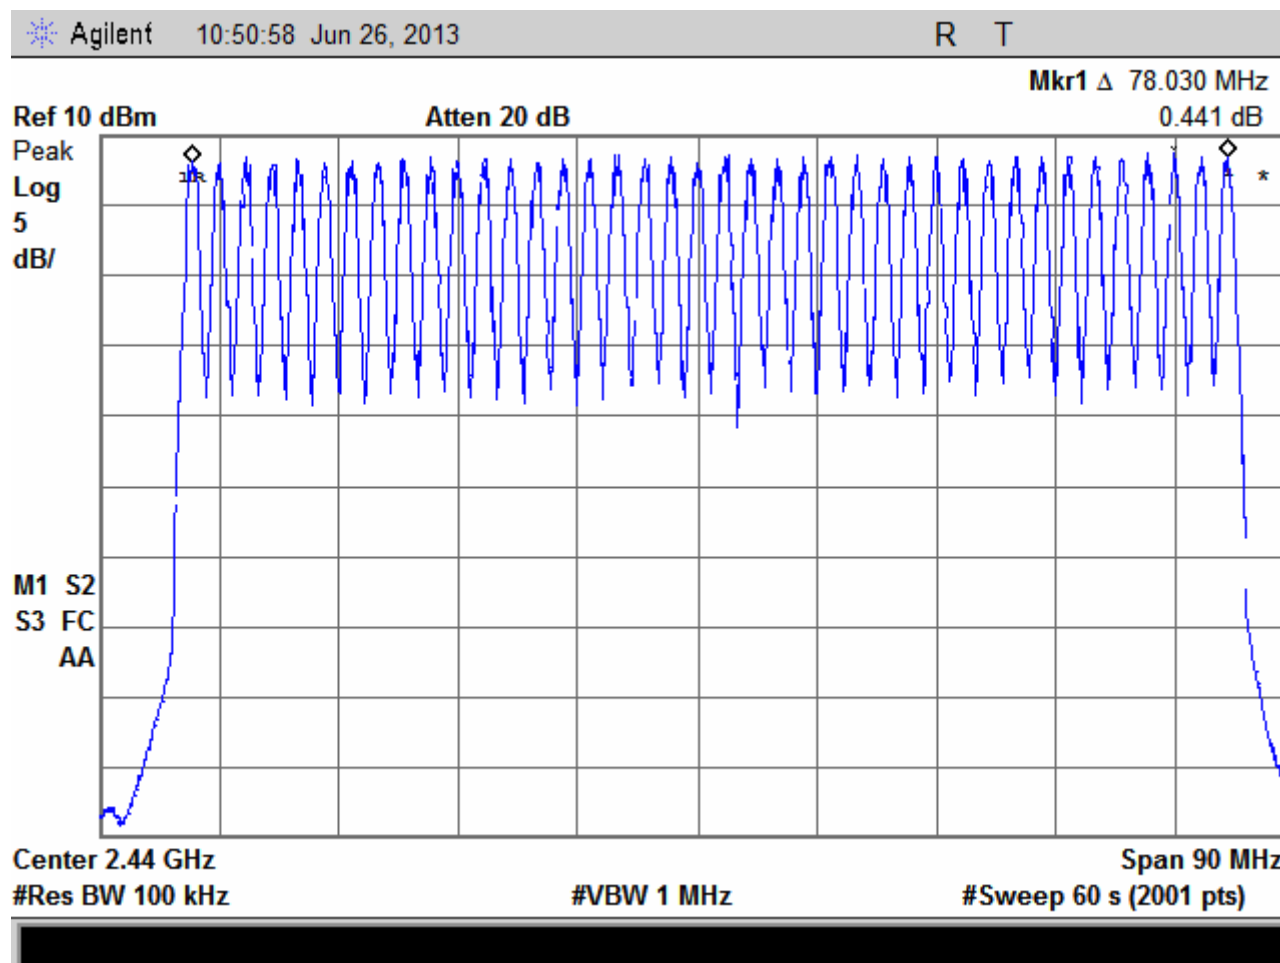

Number of hopping channels = 40

Place and date of test: *Rossens, June 26, 2013*

Operator: *B. Itzcovich*

6.4 Time of occupancy (dwell time)

Introduction: Average duration during which the system stays on one channel.


Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☐ semi-anechoic chamber (ferrites) ☒ laboratory

Meas. uncertainty: $\pm 2.6 \mu\text{s/s}$

Method: Measurement on the antenna connector or a test fixture.

Limit: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test set-up:

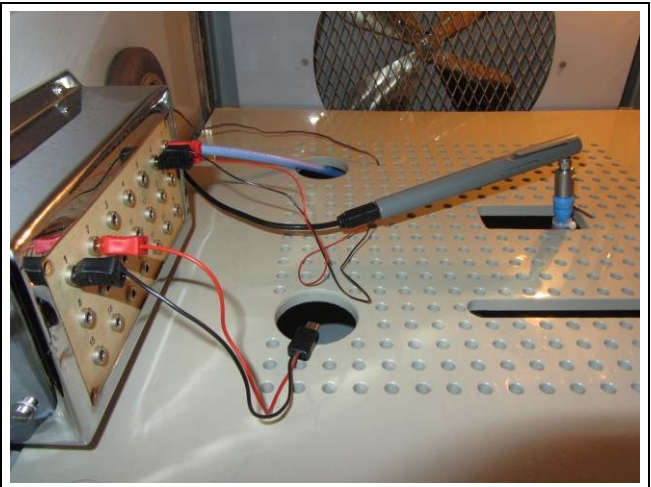

Remarks: ---

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 07-53
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result:	☒ pass	☐ fail	☐ not applicable	☐ not tested
---------	--	-------------------------------	---	-------------------------------------

Results of the test

Client: *Phonak Communications AG*

Apparatus: *Roger Pen (DM part)*

Operating mode: *Continuously hopping*

Cables connected to the EUT: *Temporary supply & antenna cables*

Remarks: *Measured on temporary antenna connector*

Calculation based on information from Phonak Communications AG and measurement of the pulse duration

Number of channels: 40

Period of observation: $\text{Number of channels} \times 0.4 \text{ s} = 40 \times 0.4 \text{ s} = 16 \text{ s}$

Single occupancy time during one hop (measured): 149 μs


Pulses in 2.9h: $2^{16} \times 40 \times 10 = 26214400$

Pulses in 16 s: $(\text{Pulses in 2.9h} / 2.9) / 3600 \times 16 \text{ s} = 40175.3$

Pulse in 16 s of one channel: $\text{Pulses in 16 s} / \text{Number of channels} = 1004.4$

Time of occupancy: $\text{Pulse in 16 s of one channel} \times \text{occupancy time} = 1004.4 \times 148 \mu\text{s} = 0.149 \text{ s}$

RESULT $0.149 < 0.4 \text{ s} \Rightarrow \text{Pass}$

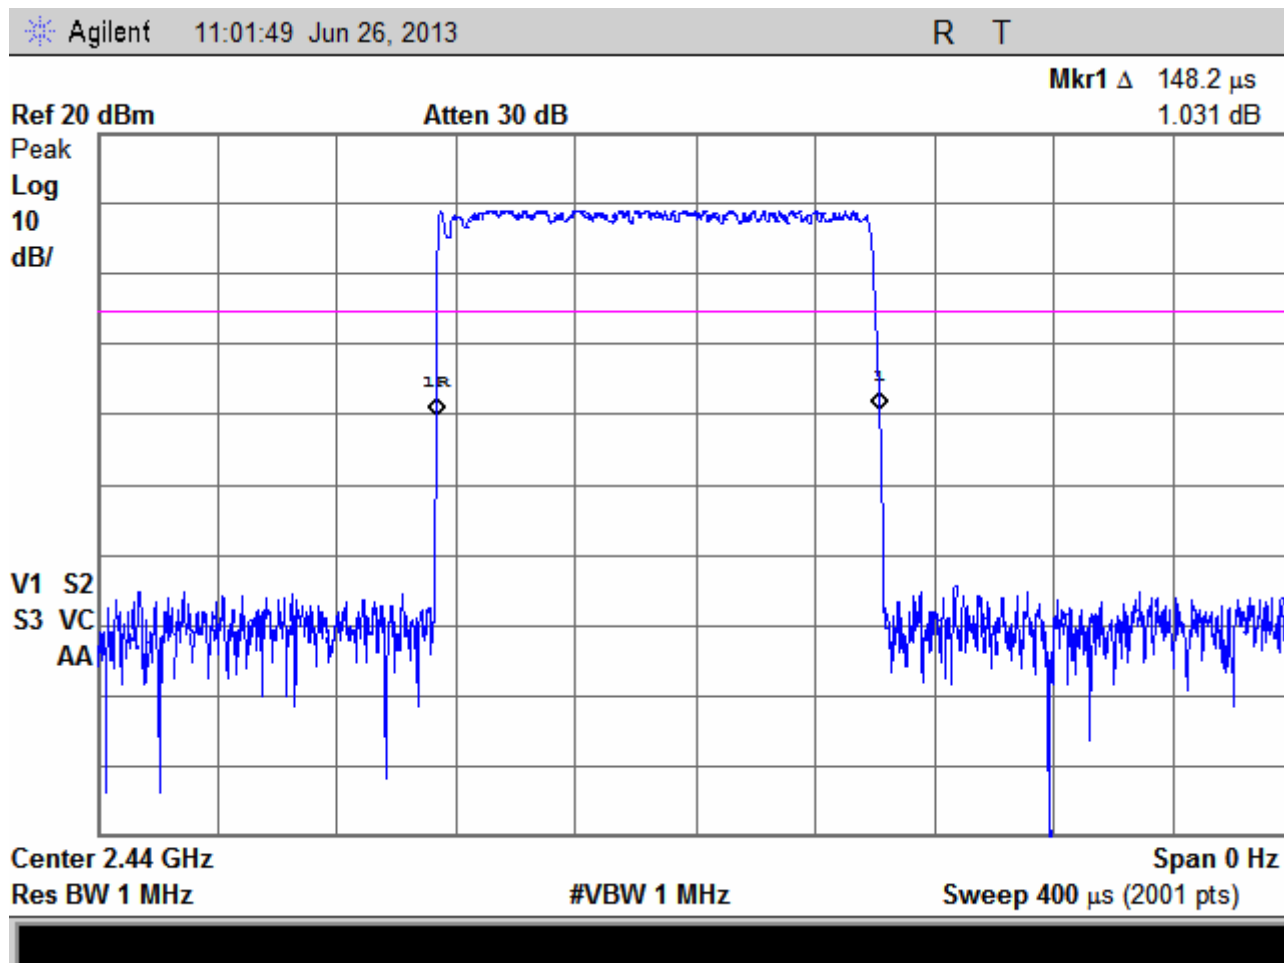Example of pulse duration at frequency 2.44 GHz

Place and date of test: *Rossens, June 26, 2013*
Operator: *B. Itzcovich*

6.5 Antenna gain & effective isotropic radiated power

Introduction: The effective radiated power is the power radiated by the antenna of an interrogator in its direction of maximum gain under specified conditions of measurement.

Test site: ☐ semi-anechoic chamber (ferrites) ☒ semi-anechoic chamber (foam)

Distance: ☐ 1 m ☒ 3 m ☐ 10 m ☐ 30 m


Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. uncertainty: ± 1.34 dB ($f < 300$ MHz) / ± 1.61 dB ($f > 300$ MHz)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and a wide band antenna. The ERP / EIRP values are determined replacing the EUT by a substitution antenna (dipole or other). The limits on the plots represent the equivalent field levels for the required power limits.

Limit: Antenna gain 6 dBi (for a maximum conducted power of 125 mW = 21 dBm). If antennas with directional gains exceeding 6 dBi are used, the maximum peak output power shall be reduced as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test set-up:

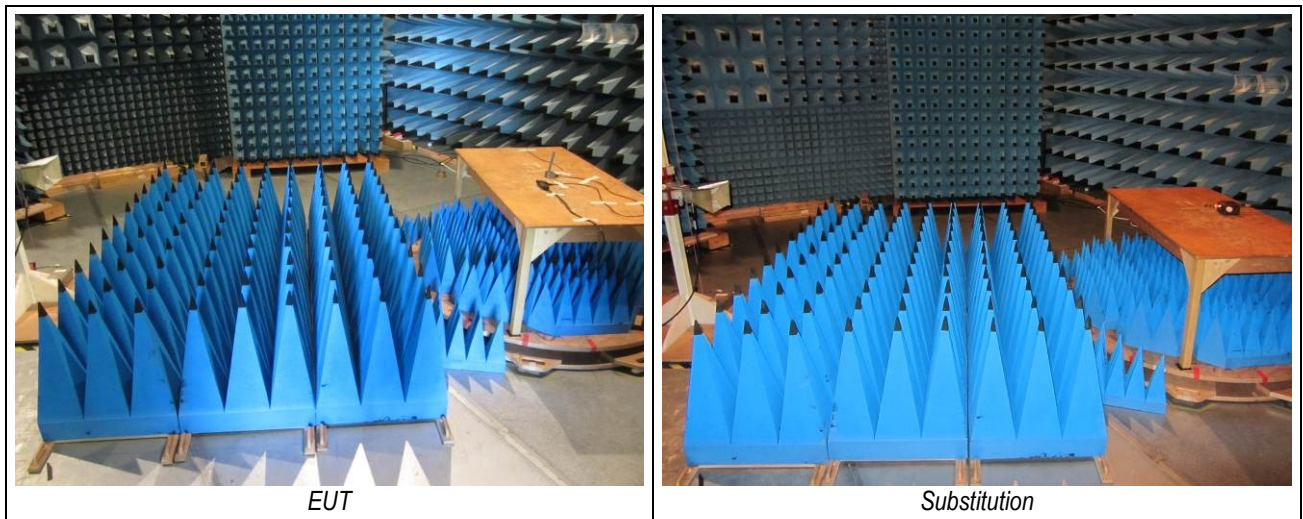

Remarks: ---

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☒ 02-06	☐ 03-45	☐ 05-39	☐ 07-53
Receiver	☐ 85-04	☐ 90-43	☐ 94-35	☐ 04-29		
Preamplifier	☒ 11-29	☐ 95-86	☐ 05-56	☐ 05-59	☐ 05-62	☐ 05-87
Antenna (horn)	☒ 90-24	☐ 98-12	☐ 98-13	☐ 07-31		
HF-wattmeter	☐ 95-97	☐ 01-15	☐ 01-17	☒ 03-07	☐ 04-96	☐ 05-20
Thermocouple detector	☐ 92-03	☐ 05-74	☐ 05-88	☐ 07-03	☐ 10-27	☒ 09-03
Substitution antenna	☐ 89-01	☒ 00-52				
Oscilloscope	☐ 90-14	☐ 93-85	☐ 93-86	☐ 01-20	☐ 04-06	☐ 04-50
Multimeter	☐ 89-07	☐ 90-38	☐ 92-25	☐ 94-51	☐ 95-93	☐ 02-03
	☐ 03-22	☐ 04-47	☐ 04-104	☐ 04-105	☐ 06-51	☐ 06-52
Frequency generator	☐ 88-23	☐ 00-42	☐ 03-39	☒ 07-04	☐ 04-89	☐ 05-78
Cables	☒ 06-00	☐ 06-01	☒ 11-61	☒ SMK		
Attenuator 10dB	☒ 11-36					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test

Client: *Phonak Communications AG*

Apparatus: *Roger Pen (DM part)*

Operating mode: *Hopping f = 2.402/2.440/2.480 GHz, modulated, Pmax*

Cables connected to the EUT: *All (see § 4.6 and § 5.4)*

Remarks: *RBW = VBW = 1MHz; Peak detector*

f [GHz]	Measurement with EUT		Power at substitution ant.		Meas. with subst. ant.	Parameters of substitution ant.		Result			Remarks
	E [dBuV/m]	preamp [dB]	P [dBm]	factor [dB]	E [dBuV/m]	gain [dB]	att. Cable [dB]	corr. [dB]	P EIRP [dBm]	P EIRP [W]	
2.402	102.0	0.0	0	0	100.2	2.15	0	-98.06	3.91	2.46 mW	Vertical
2.402	100.4	0.0	0	0	99.1	2.15	0	-96.97	3.44	2.21 mW	Horizontal
2.440	100.8	0.0	0	0	99.1	2.15	0	-96.92	3.85	2.43 mW	Vertical
2.440	99.3	0.0	0	0	99.3	2.15	0	-97.16	2.15	1.64 mW	Horizontal
2.480	98.8	0.0	0	0	97.5	2.15	0	-95.34	3.41	2.19 mW	Vertical
2.480	97.4	0.0	0	0	99.8	2.15	0	-97.64	-0.19	957.45 uW	Horizontal

The antenna gain is the difference (in dB) of the radiated EIRP power and the conducted power of § 6.6 :

frequency [GHz]	Conducted power [dBm]	Radiated power EIRP [dBm]	Antenna gain [dBi]	Remarks
2.402	9.96	3.91	-6.05	---
2.440	10.33	3.85	-6.48	---
2.480	10.42	3.41	-7.01	---

Place and date of test: *Rossens, July 23, 2013*
 Operator: *B. Itzcovich*

6.6 Maximum output power (conducted)


Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☐ semi-anechoic chamber (ferrites) ☒ laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB
 3GHz – 6.7GHz: ± 2.1 dB
 6.7GHz – 13.2GHz: ± 2.6 dB
 13.2GHz – 19GHz: ± 2.8 dB
 19GHz – 26.5GHz: ± 3 dB

Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Limit: Maximum 0.125 Watt (= 21 dBm) for systems using antennas with directional gains that do not exceed 6 dBi. If antennas with directional gains exceeding 6 dBi are used, the maximum peak output power shall be reduced as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test set-up:

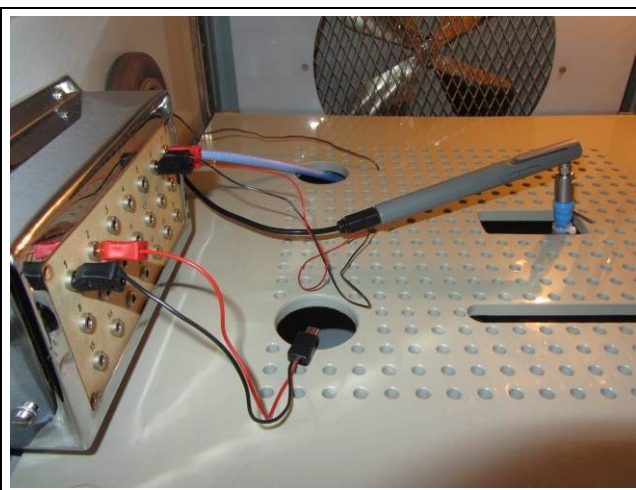

Remarks: - - -

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 07-53
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test

Client: *Phonak Communications AG*

Apparatus: *Roger Pen (DM part)*

Operating mode: *Hopping f = 2.402/2.440/2.480 GHz, modulated, Pmax*

Cables connected to the EUT: *Temporary supply & antenna cables*

Remarks: *Measured on temporary antenna connector*

f normal [GHz]	Temp [°C]	U [V]	P [dBm]	Limit [dBm]	Remarks	Pass	
						Yes	No
2.402	23.9	3.8	9.96	21	---	☒	☐
2.440	23.9	3.8	10.33	21	---	☒	☐
2.480	23.9	3.8	10.42	21	---	☒	☐


Equipment Under Test : TX17 Roger Pen

Set-Up : EUT with temporary supply & antenna connectors, see photos

Operating Conditions : DM hopping emission (f = 2.402 / 2.440 / 2.480 GHz), modulated, Pmax

Remarks : Peak detector sweep, ST = 30 s (Ton = 184 us, T = 400 us)

Supply = 3.70 VDC, Temp = 23.7 °C

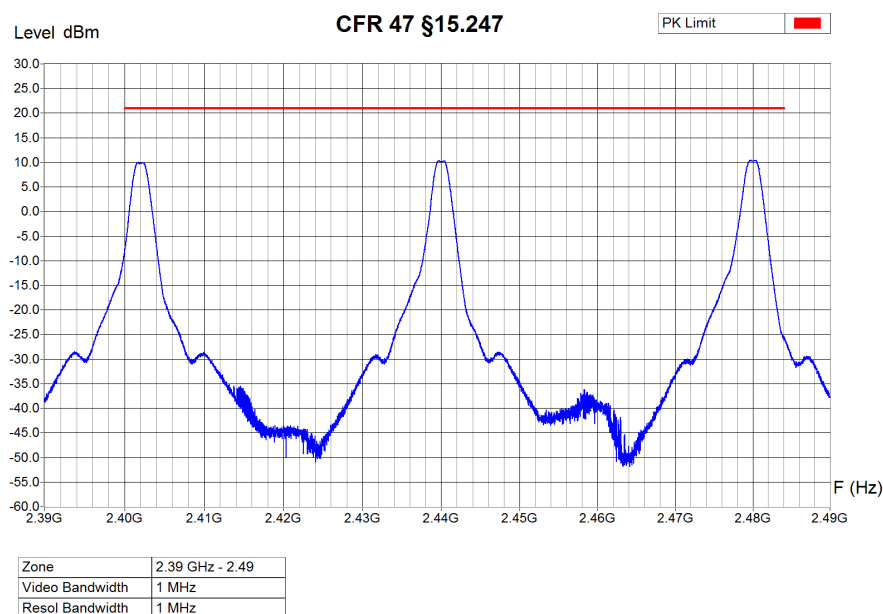

Operator: B. Itzcovich
Date/Time: 25.06.2013 11:39
Filename:
85_EIRP_Cond_DM_3V7_FCC.pn
g/.txt

Place and date of test: *Rossens, June 25, 2013*
Operator: *B. Itzcovich*

6.7 Band-edge emission (conducted)


Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☐ semi-anechoic chamber (ferrites) ☒ laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB
 3GHz – 6.7GHz: ± 2.1 dB
 6.7GHz – 13.2GHz: ± 2.6 dB
 13.2GHz – 19GHz: ± 2.8 dB
 19GHz – 26.5GHz: ± 3 dB

Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Limit: In any 100 kHz bandwidth outside the frequency band, the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. This requirement applies to hopping mode on and off.

Test set-up:

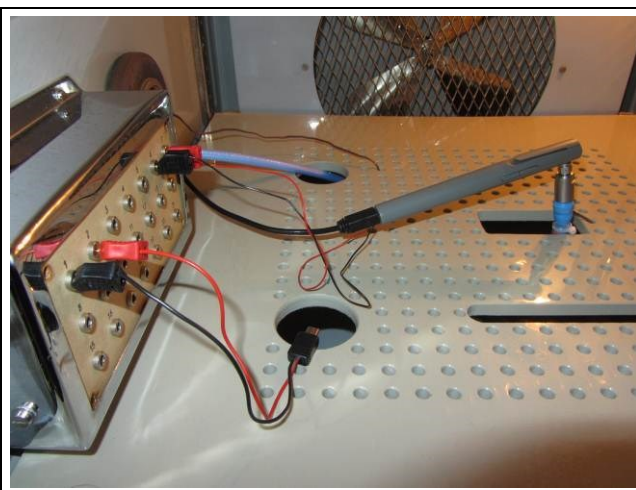

Remarks: - - -

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 07-53
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test


Client: *Phonak Communications AG*

Apparatus: *Roger Pen (DM part)*

Operating mode: *Hopping f = 2.402/2.440/2.480 GHz, modulated, Pmax*

Cables connected to the EUT: *Temporary supply & antenna cables*

Remarks: *Measured on temporary antenna connector*

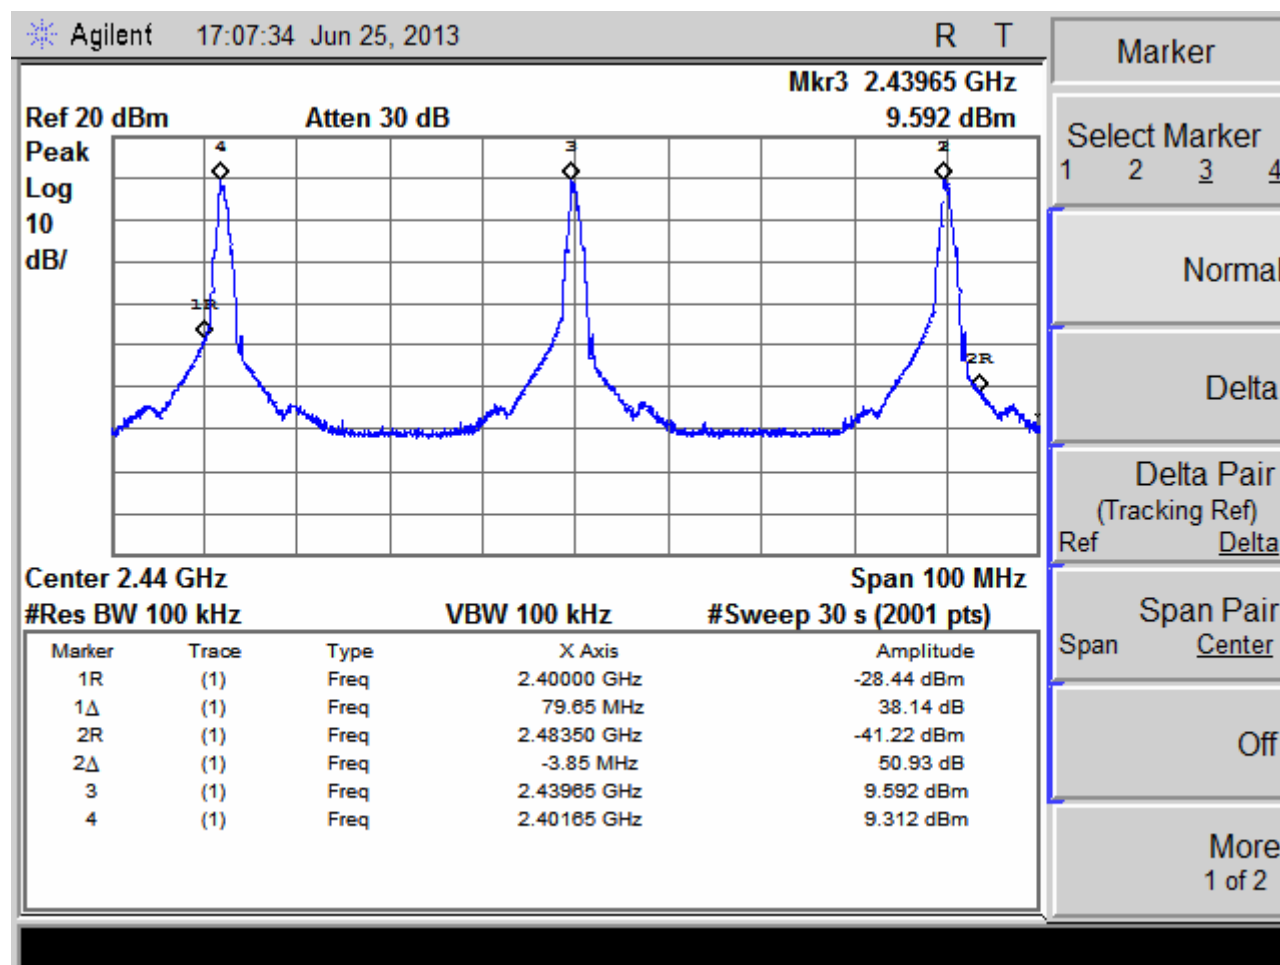

Place and date of test: *Rossens, June 25, 2013*

Operator: *B. Itzcovich*

6.8 Spurious emission (conducted – 15 MHz to 26.5 GHz)



Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☐ semi-anechoic chamber (ferrites) ☒ laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB
 3GHz – 6.7GHz: ± 2.1 dB
 6.7GHz – 13.2GHz: ± 2.6 dB
 13.2GHz – 19GHz: ± 2.8 dB
 19GHz – 26.5GHz: ± 3 dB

Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Limit: In any 100 kHz bandwidth outside the frequency band, the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Test set-up:

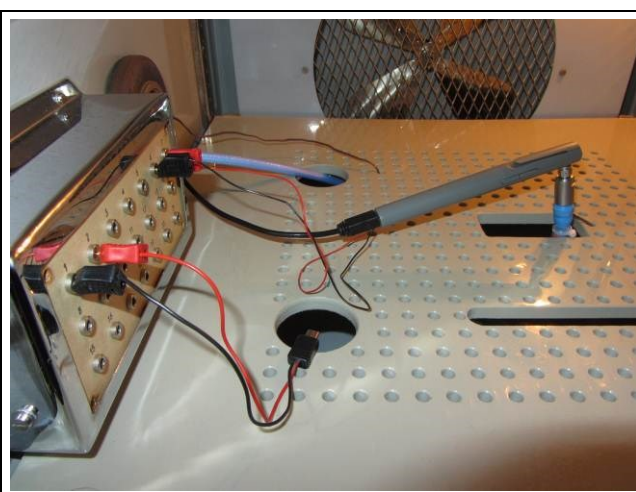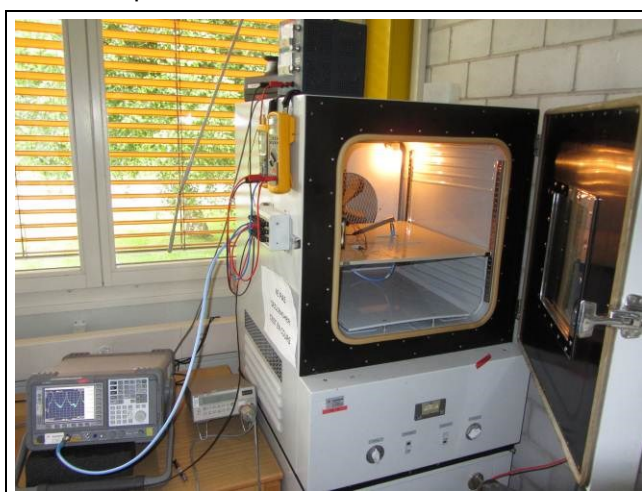


Remarks: ---

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 07-53
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result:	☒ pass	☐ fail	☐ not applicable	☐ not tested
---------	--	-------------------------------	---	-------------------------------------


Equipment Under Test : TX17 Roger Pen
 Set-Up : EUT with temporary supply & antenna connectors, see photos
 Operating Conditions : DM hopping emission (f = 2.402 / 2.440 / 2.480 GHz), modulated, Pmax
 Remarks : Supply = 3.70 VDC, Temp = 24.5 °C
 Peak detector sweep, ST = 60 s
 Ton = 184 us, T = 400 us

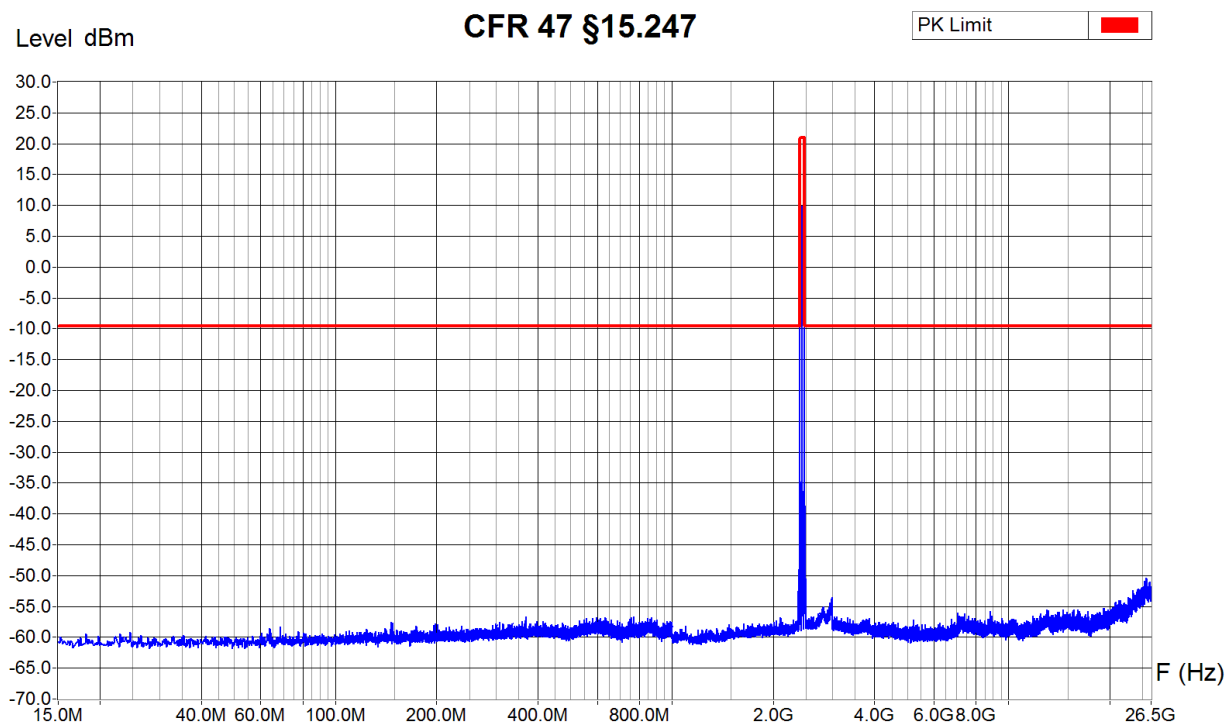

Zone	15 MHz - 1 GHz	1 GHz - 9 GHz	9 GHz - 18 GHz	18 GHz - 26.50 GHz
Video Bandwidth	100 KHz	100 KHz	100 KHz	100 KHz
Resol Bandwidth	100 KHz	100 KHz	100 KHz	100 KHz

Operator: B. Itzcovich
 Date/Time: 25.06.2013 17:47
 Filename:
 91_CE_15M-26G5_DM_TX3f.png/
 .txt

Equipment Under Test : TX17 Roger Pen
Set-Up : EUT with temporary supply & antenna connectors, see photos
Operating Conditions : DM continuously hopping, modulated, Pmax
Remarks : Supply = 3.70 VDC, Temp = 21.7 °C
 Peak detector sweep, ST = 60 s
 Ton = 184 us, T = 400 us

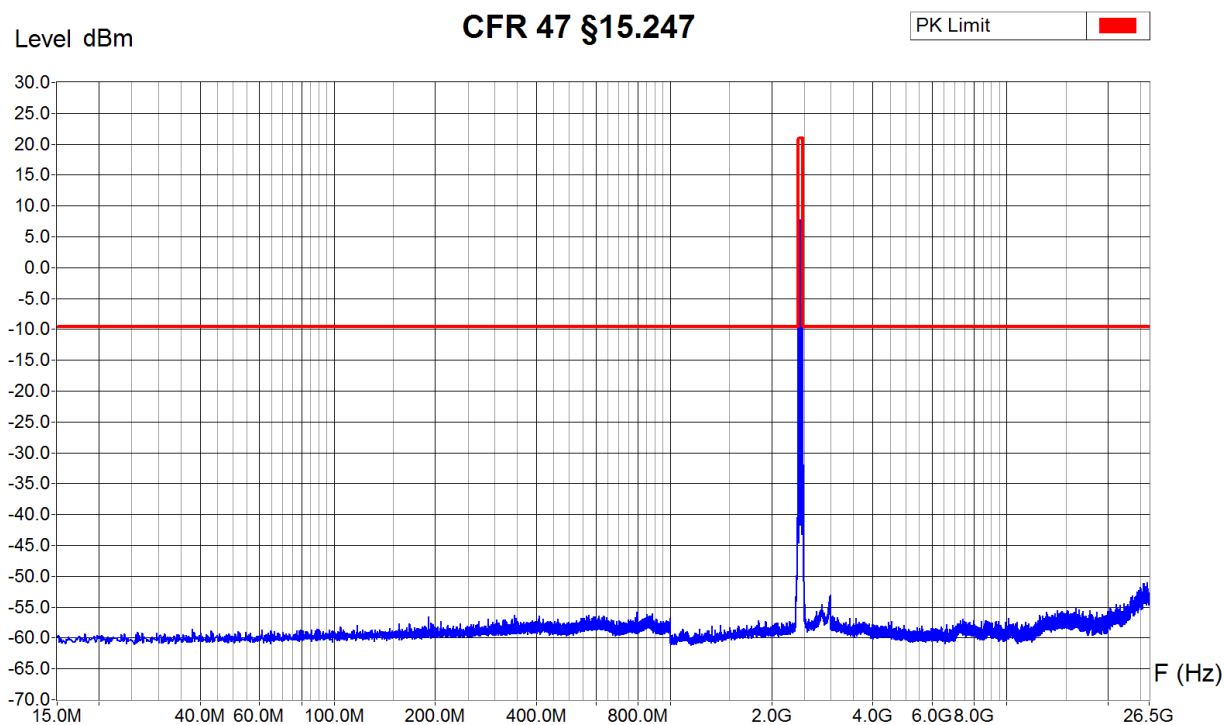

Zone	15 MHz - 1 GHz	1 GHz - 9 GHz	9 GHz - 18 GHz	18 GHz - 26.50 GHz
Video Bandwidth	100 KHz	100 KHz	100 KHz	100 KHz
Resol Bandwidth	100 KHz	100 KHz	100 KHz	100 KHz

Operator: B. Itzcovich
 Date/Time: 26.06.2013 09:13
 Filename:
 94_CE_15M-
 26G5_DM_hopping.png/.txt

6.9 Spurious emission transmit mode - radiated

6.9.1 30 MHz to 1 GHz

Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☒ semi-anechoic chamber (ferrites) ☐


Distance: ☒ 3 m ☐ 10 m ☐ 30 m

Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. uncertainty: ± 4.6 dB (30 - 300 MHz) / ± 3.7 dB (300 - 1000 MHz)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbances appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding a limit are remeasured manually using a receiver.

Test set-up:

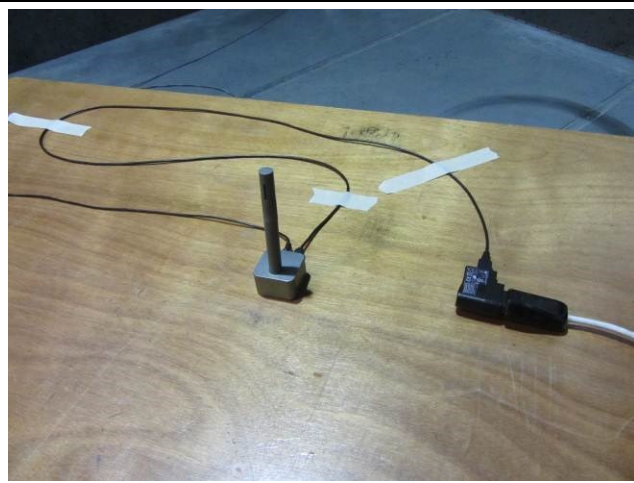

Remarks: Limit values expressed in dB μ V/m and transformed to a measuring distance of 3 m
(factor used = 20 dB/decade) if necessary
e.g.: for $f = 40$ MHz the limit is 100 μ V/m at 3 m;

$$20 \log \left(\frac{100 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) = 40 \frac{dB \mu V}{m} \text{ at } 3m$$

Test equipment:


Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 10-70
Receiver	☐ 85-04	☐ 90-43	☐ 94-35	☒ 10-70		
Preamplifier	☐ 90-01	☐ 95-86	☐ 05-56	☒ 05-59	☐ 05-62	
Antenna (bilog)	☒ 94-03	☐ 05-38				
Cables	☒ 06-01					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0 - 360°
Antenna Height : 1 - 4 m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected
Operating Conditions : DM Hopping emission (f = 2.402, 2.440 and 2.480 GHz), modulated, Pmax
Remarks :
Cage 06-01

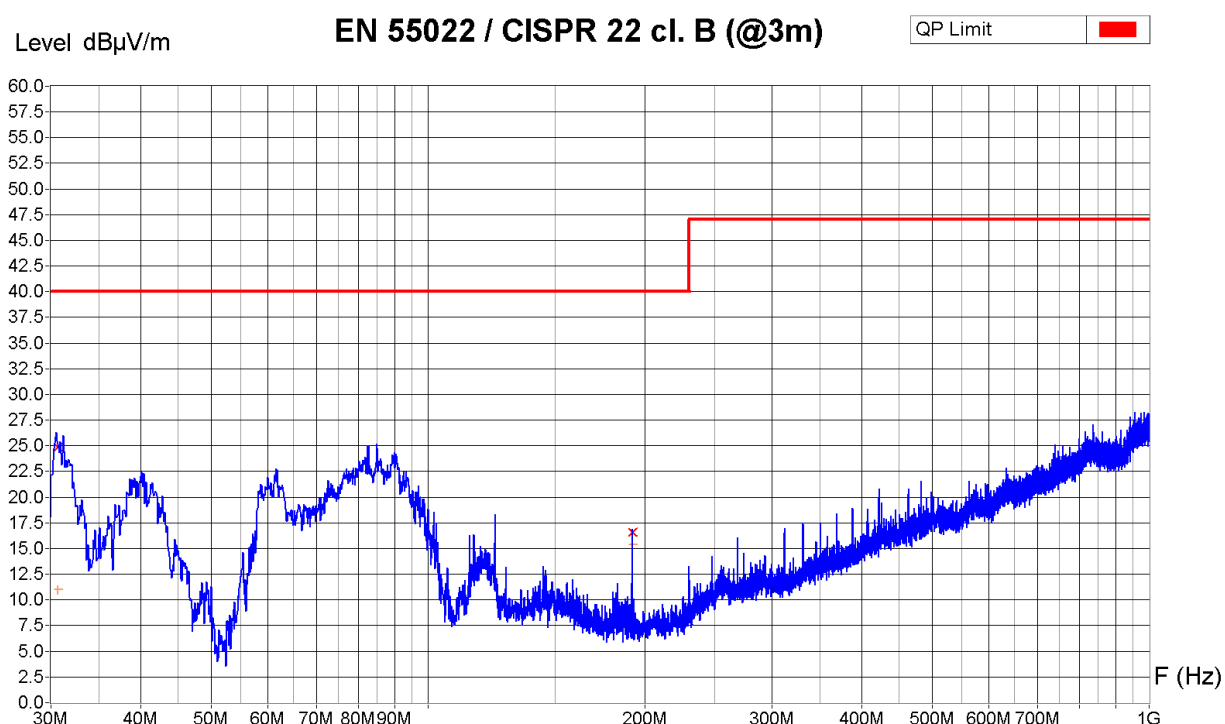

Zone	25 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	100 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
30.65 MHz	28.8 dBμV/m	24.8 dBμV/m	11.0 dBμV/m	15.2 dB
192 MHz	18.9 dBμV/m	16.6 dBμV/m	15.4 dBμV/m	23.4 dB


Operator: B. Itzcovich
Date/Time: 07.06.2013 09:40
Filename:
01_RE_25M-
1G_DMTX3f_V_C22.png/.txt

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0 - 360°
Antenna Height : 1 - 4 m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected
Operating Conditions : DM Hopping emission (f = 2.402, 2.440 and 2.480 GHz), modulated, Pmax
Remarks :

Cage 06-01

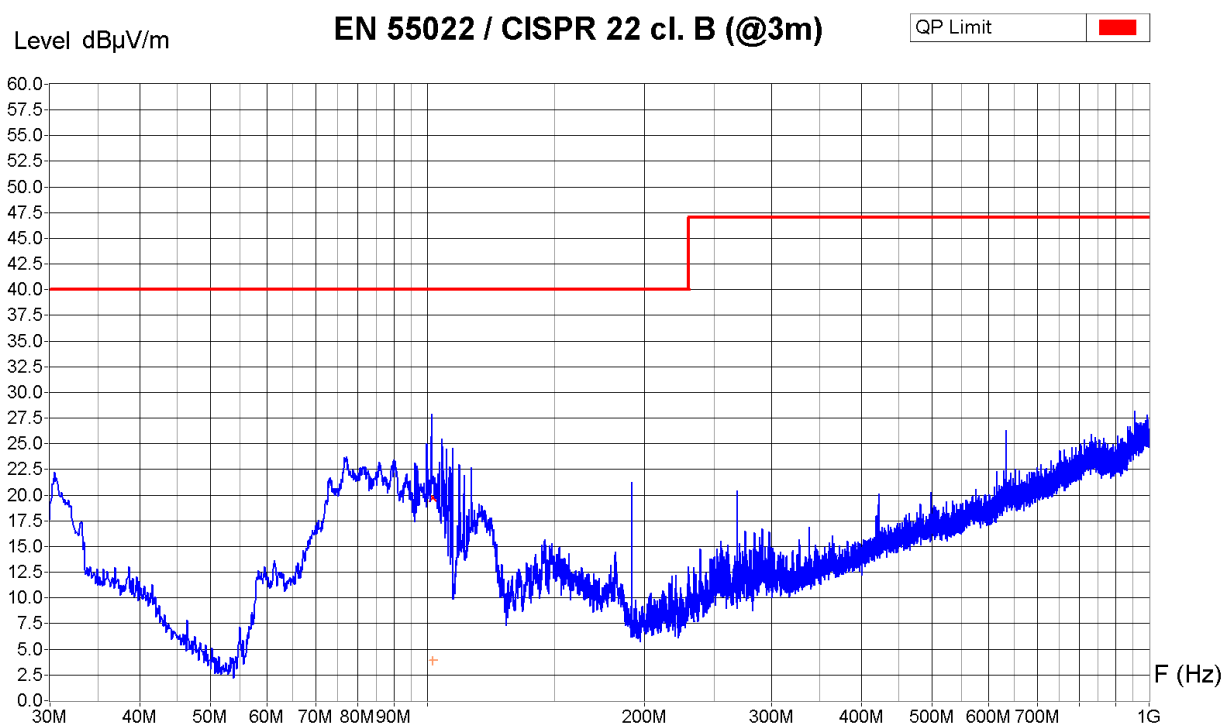

Zone	25 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	100 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
101.83 MHz	30.9 dB μ V/m	19.8 dB μ V/m	3.9 dB μ V/m	20.2 dB

Operator: B. Itzcovich
Date/Time: 07.06.2013 09:50
Filename:
02_RE_25M-
1G_DMTX3f_H_C22.png/.txt


6.9.2 1 GHz to 18 GHzTest site: ☐ semi-anechoic chamber (ferrites) ☒ semi-anechoic chamber (foam)Distance: ☒ 1 m ☐ 3 m ☐ 10 m ☐ 30 m

Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and a wide band antenna. The antenna is placed at the same height as the EUT successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value (peak) of all the disturbances appearing while the apparatus is under test.

Test set-up:

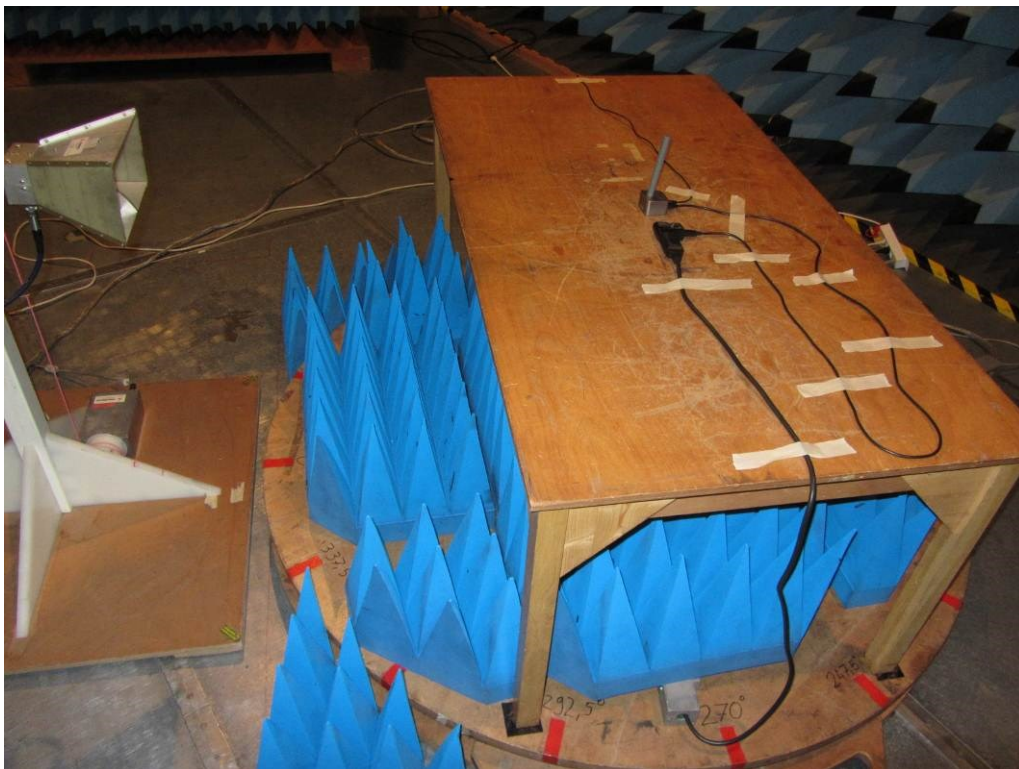

Remarks: Limit values expressed in dB μ V/m and transformed to a measuring distance of 1 m (factor used = 20 dB/decade) if necessary
e.g.: for $f = 1$ GHz the limit is 500 μ V/m at 3 m;

$$20 \log \left(\frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left(\frac{3 m}{1 m} \right) = 63.5 \frac{dB\mu V}{m} \text{ at } 1 m$$

Test equipment:


Spectrum analyser	☐ 88-14	☐ 94-24	☒ 02-06	☐ 03-45	☐ 05-39	☐ 07-53
Preamplifier	☐ 05-56	☐ 05-87	☒ 11-29			
Antenna (horn)	☒ 90-24	☐ 07-31				
Cables	☒ 10-75	☒ 11-61				
Filters	☐ 10-65	☐ 10-66	☐ 11-08	☒ 12-06		

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0° - 360°
Antenna Height : 1m - 2m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected
Operating Conditions : DM Hopping emission (f = 2.402, 2.440 and 2.480 GHz), modulated, Pmax
Remarks : Without filter, without preamp
Cage 06-00

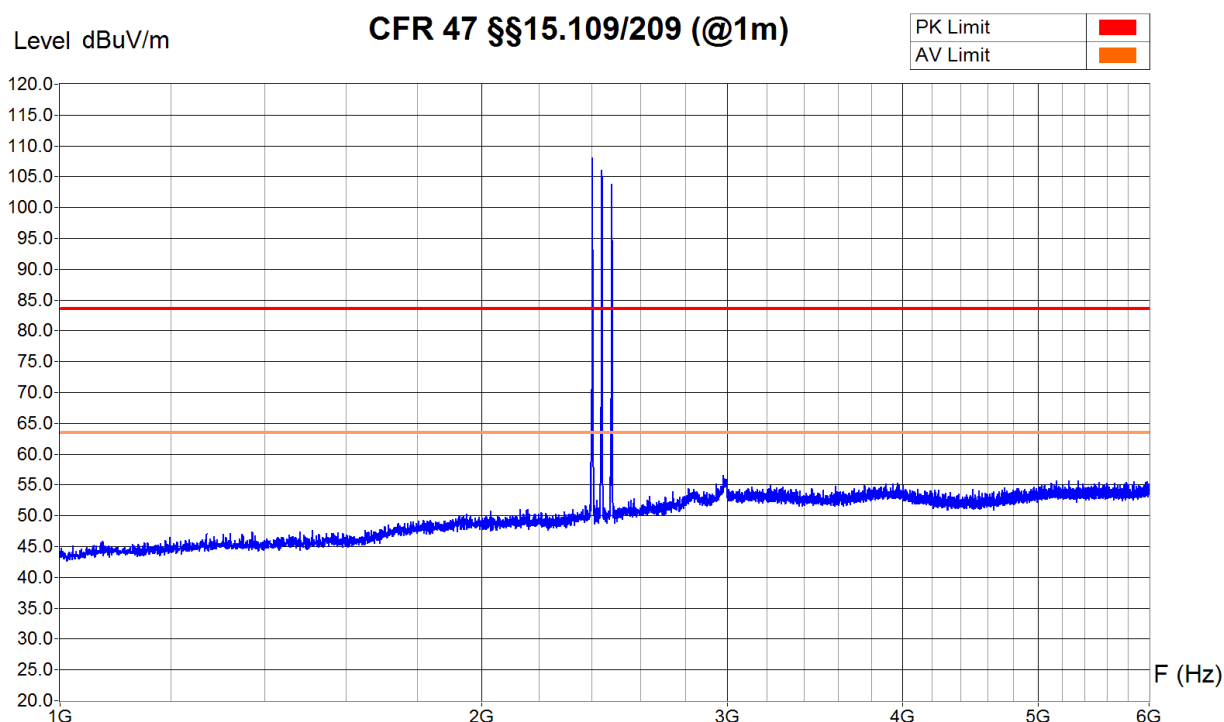


Zone	1 GHz - 6 GHz
Video Bandwidth	100 KHz
Resol Bandwidth	100 KHz

Operator: B. Itzcovich
Date/Time: 25.07.2013 12:18
Filename:
121_RE_1G-6G_DMTX3f_V.png/
.txt

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0° - 360°
Antenna Height : 1m - 2m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : DM Hopping emission (f = 2.402, 2.440 and 2.480 GHz), modulated, Pmax
Remarks : Without filter, without preamp
Cage 06-00

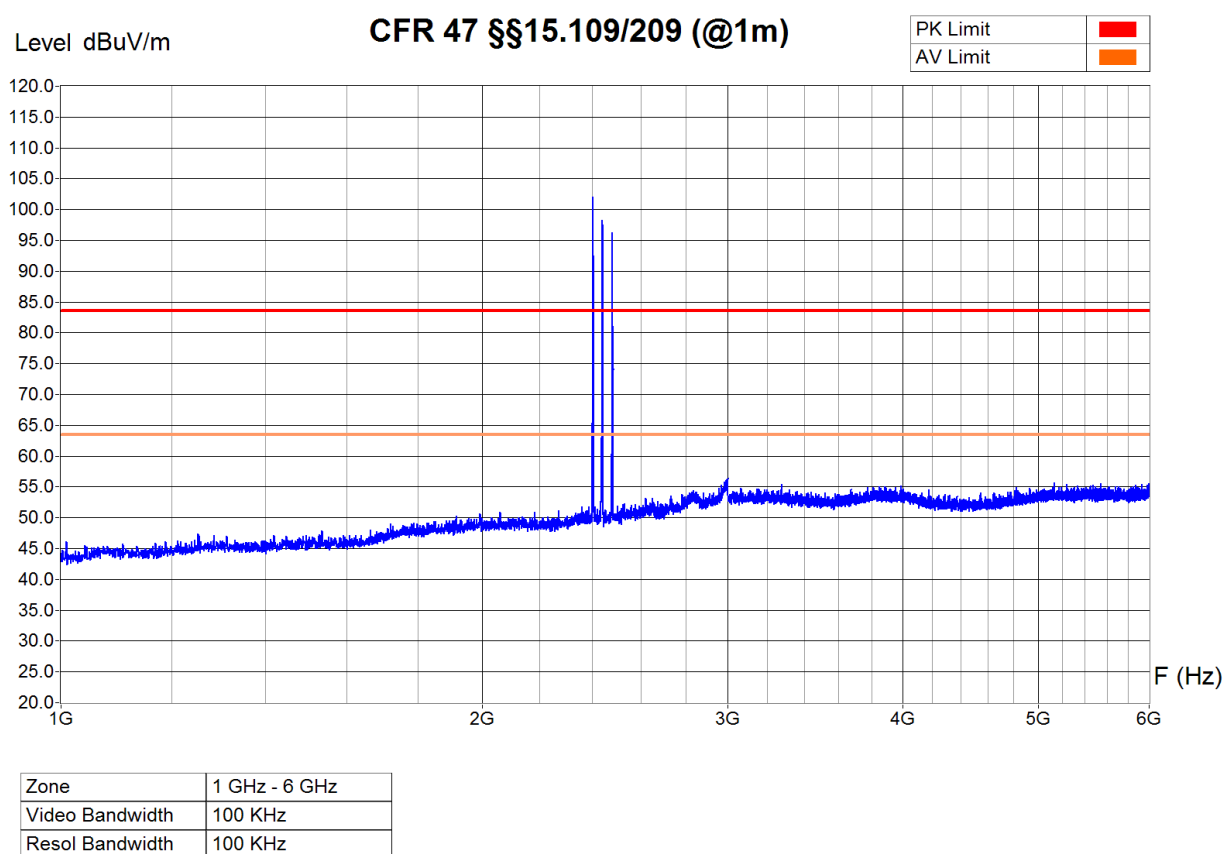


Operator: B. Itzcovich
Date/Time: 25.07.2013 12:13
Filename:
122_RE_1G-6G_DMTX3f_H.png/
.txt

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0° - 360°
Antenna Height : 1m - 2m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : DM Hopping emission (f = 2.402, 2.440 and 2.480 GHz), modulated, Pmax
Remarks : With filter, with preamp
Cage 06-00

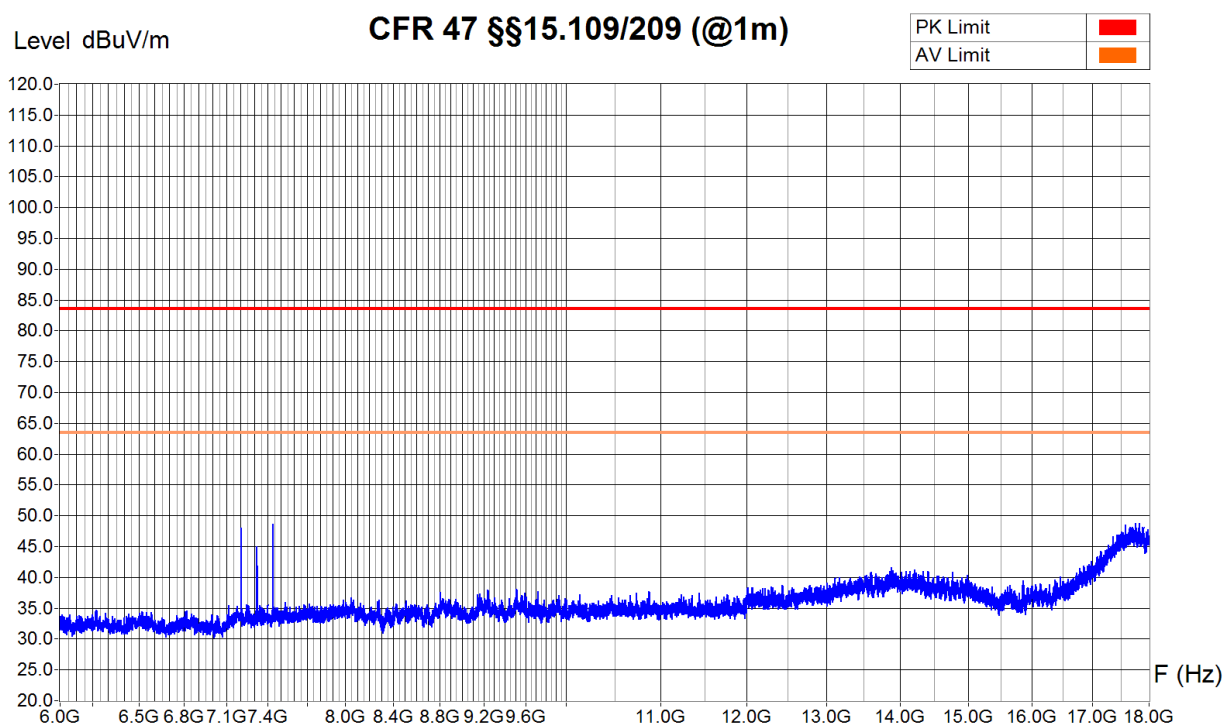


Zone	6 GHz - 12 GHz	12 GHz - 18 GHz
Video Bandwidth	100 KHz	100 KHz
Resol Bandwidth	100 KHz	100 KHz

Operator: B. Itzcovich
Date/Time: 25.07.2013 14:17
Filename:
125_RE_6G-18G_DMTX3f_V.png/
.txt

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0° - 360°
Antenna Height : 1m - 2m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : DM Hopping emission (f = 2.402, 2.440 and 2.480 GHz), modulated, Pmax
Remarks : With filter, with preamp
Cage 06-00

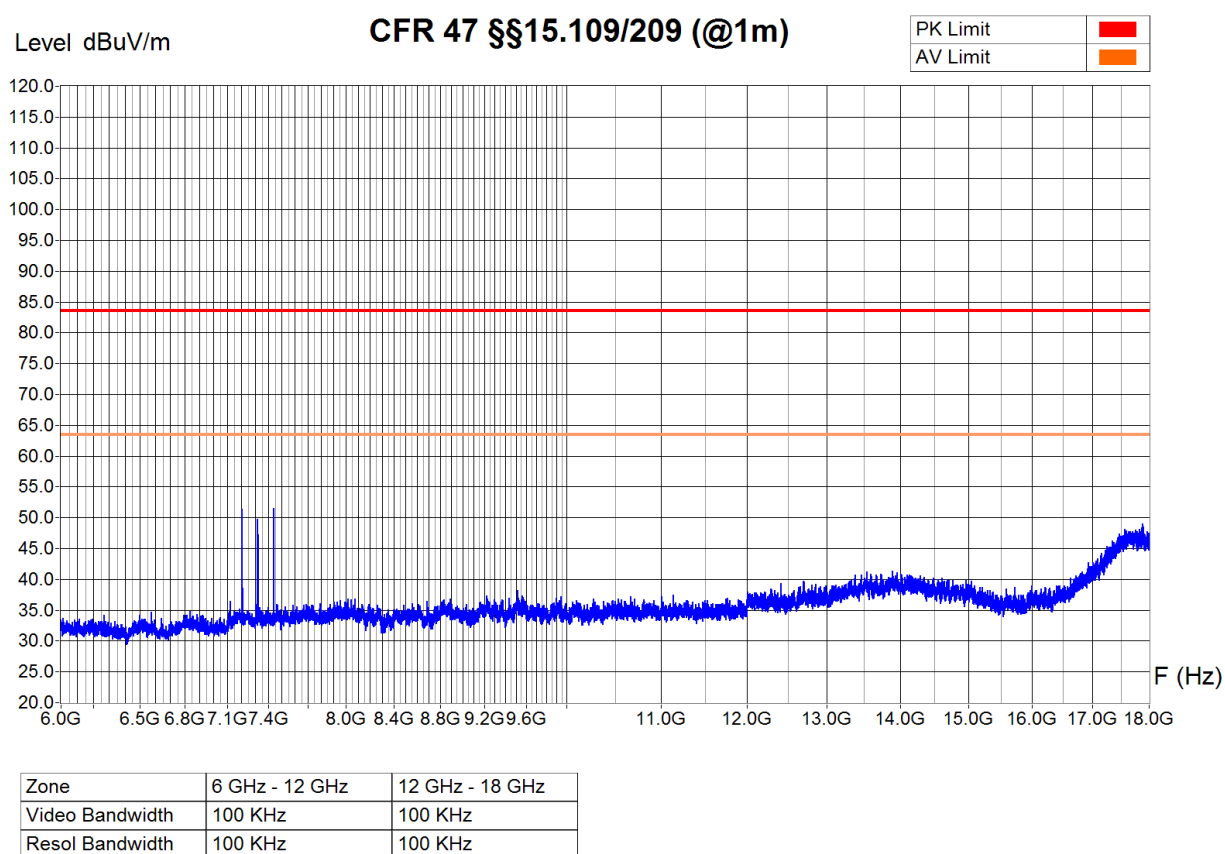

Operator: B. Itzcovich
Date/Time: 25.07.2013 14:07
Filename:
126_RE_6G-18G_DMTX3f_H.png/
.txt

6.9.3 18 GHz to 26.5 GHz

Test site: ☒ semi-anechoic chamber (foam) ☐ semi-anechoic chamber (ferrites)


Distance: ☒ 1 m ☐ 3 m ☐ 10 m ☐ 30 m

Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and a wide band antenna. The antenna is placed at the same height as the EUT successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value (peak) of all the disturbances appearing while the apparatus is under test.

Test set-up:

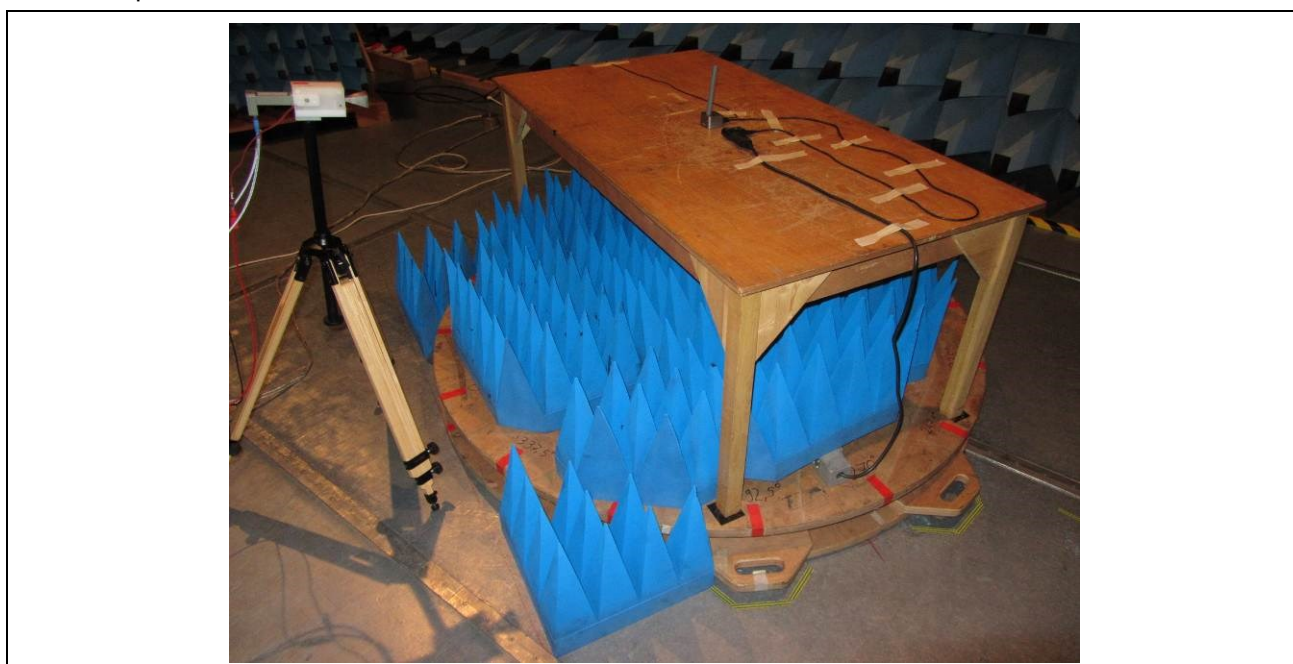

Remarks:

Limit values expressed in dB μ V/m and transformed to a measuring distance of 1 m (factor used = 20 dB/decade) if necessary

e.g.: for $f = 18$ GHz the limit is 500 μ V/m at 3 m;

$$20 \log \left(\frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left(\frac{3 m}{1 m} \right) = 63.5 \frac{dB \mu V}{m} \text{ at } 1 m$$

Test equipment:


Spectrum analyser	☐ 88-14	☐ 94-24	☒ 02-06	☐ 03-45	☐ 05-39	☐ 07-53
Antenna with mixer & preamp.	☒ 98-12					
Cables	☒ 11-62	☒ 10-81				
Power supply	☒ 06-62					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0° - 360°
Antenna Height : 1 m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : DM Hopping emission (f = 2.402, 2.440 and 2.480 GHz), modulated, Pmax
Remarks :
Cage 06-00

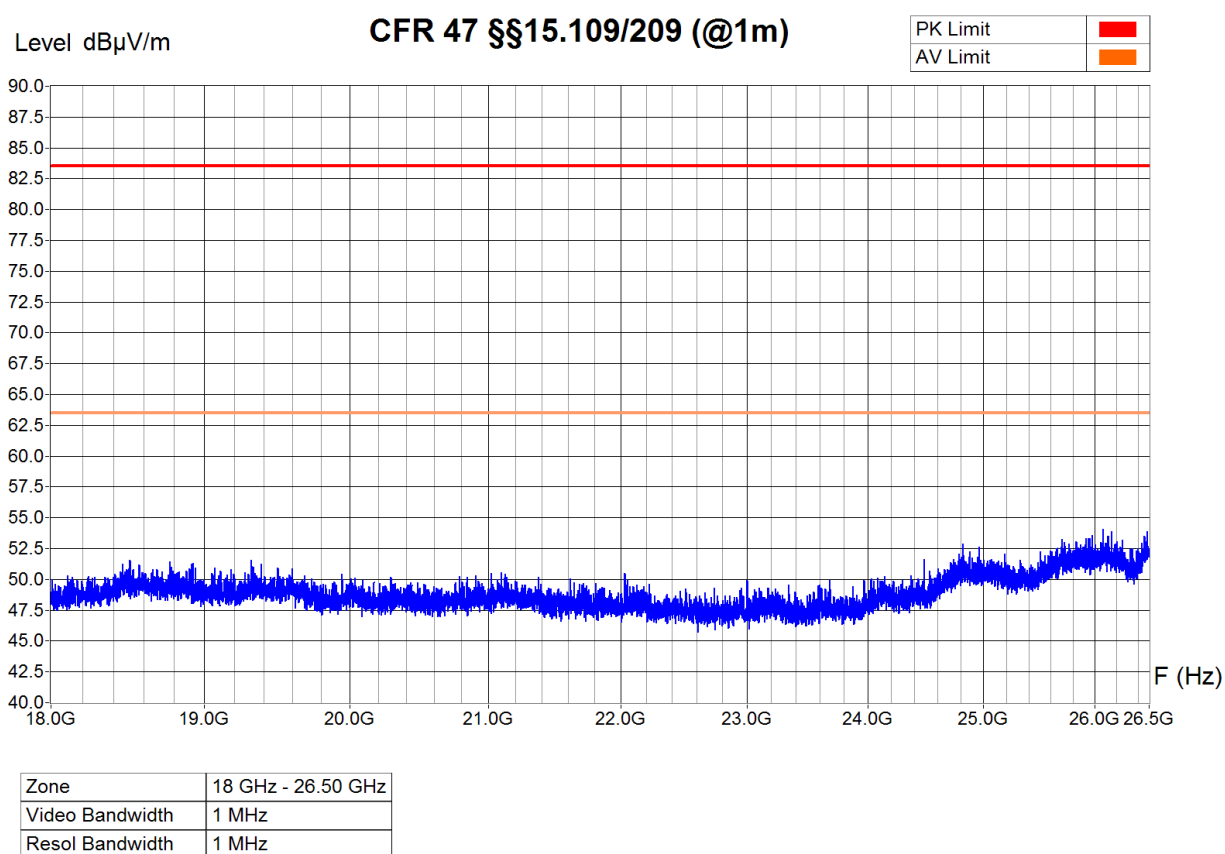


Operator: B. Itzcovich
Date/Time: 26.07.2013 11:09
Filename:
135_RE_18G-
26G5_DMTX3f_V.png/.txt

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0° - 360°
Antenna Height : 1 m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : DM Hopping emission (f = 2.402, 2.440 and 2.480 GHz), modulated, Pmax
Remarks :

Cage 06-00

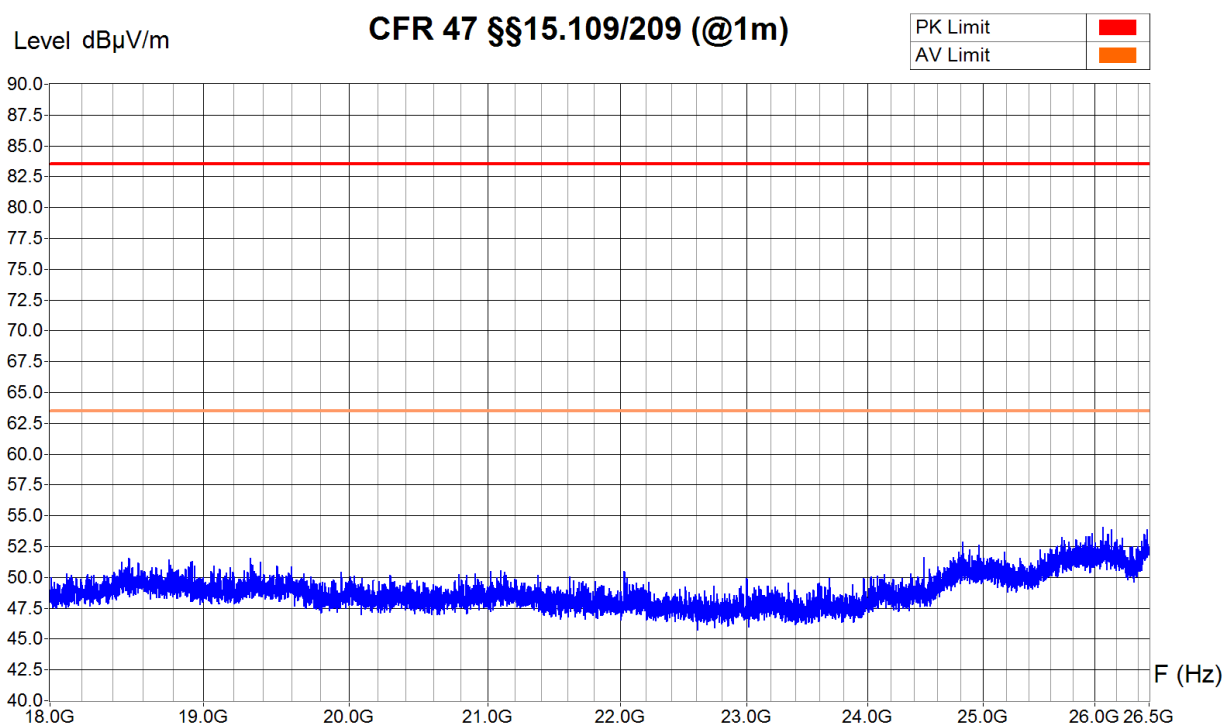

Zone	18 GHz - 26.50 GHz
Video Bandwidth	1 MHz
Resol Bandwidth	1 MHz

Operator: B. Itzcovich
Date/Time: 26.07.2013 11:12
Filename:
136_RE_18G-
26G5_DMTX3f_H.png/.txt

6.10 Spurious emission receive & standby mode - radiated**6.10.1 30 MHz to 1 GHz**

Test site: ☐ semi-anechoic chamber (foam) ☐ open test site
☒ semi-anechoic chamber (ferrites) ☐


Distance: ☒ 3 m ☐ 10 m ☐ 30 m

Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. uncertainty: ± 4.6 dB (30 - 300 MHz) / ± 3.7 dB (300 - 1000 MHz)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbances appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding a limit are remeasured manually using a receiver.

Test set-up:

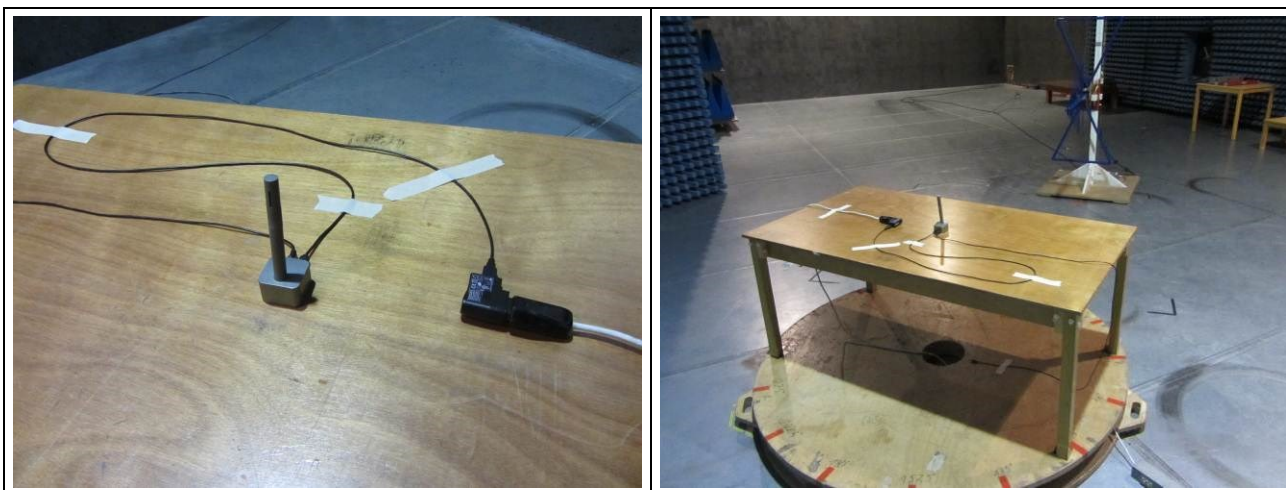

Remarks: Limit values expressed in dB μ V/m and transformed to a measuring distance of 3 m
 (factor used = 20 dB/decade) if necessary
 e.g.: for $f = 40$ MHz the limit is 100 μ V/m at 3 m;

$$20 \log \left(\frac{100 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) = 40 \frac{dB \mu V}{m} \text{ at } 3m$$

Test equipment:

Spectrum analyser	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 10-70
Receiver	☐ 85-04	☐ 90-43	☐ 94-35	☒ 10-70		
Preamplifier	☐ 90-01	☐ 95-86	☐ 05-56	☒ 05-59	☐ 05-62	
Antenna (bilog)	☒ 94-03	☐ 05-38				
Cables	☒ 06-01					


Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0 - 360°
Antenna Height : 1 - 4 m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected
Operating Conditions : DM RX (f = 2.440 GHz)
Remarks :

Cage 06-01

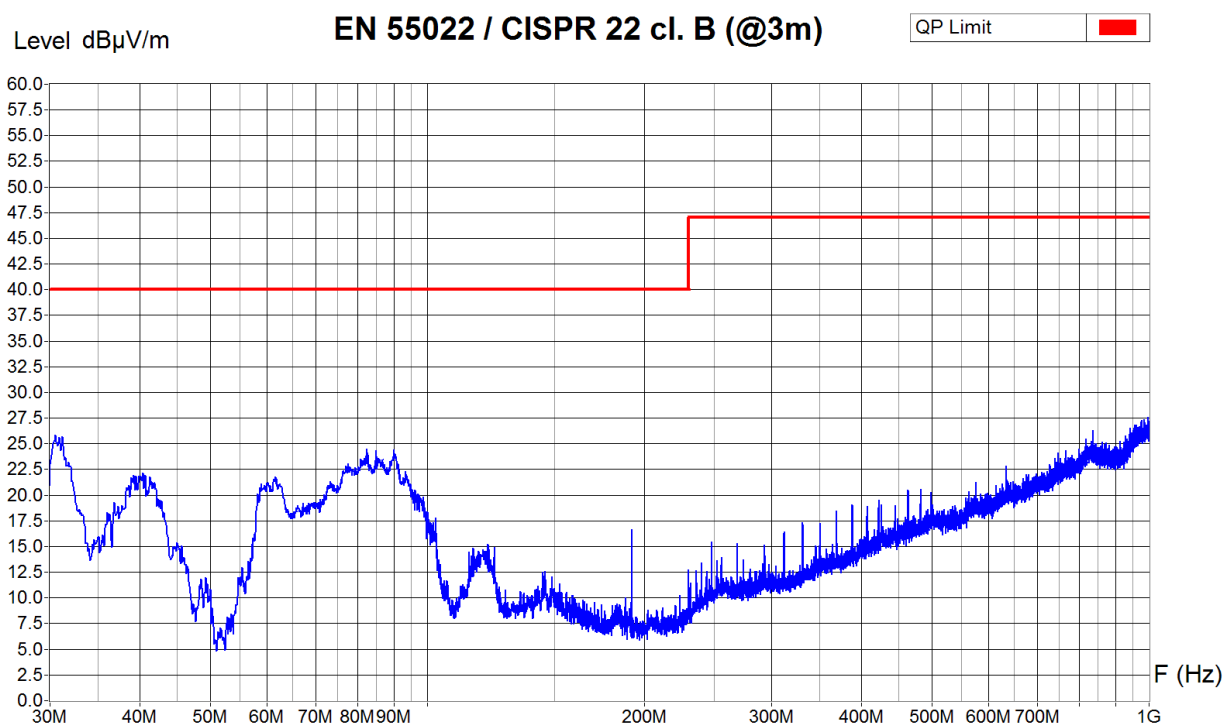

Zone	25 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	100 KHz


Operator: B. Itzcovich
Date/Time: 07.06.2013 08:50
Filename:
001_RE_25M-
1G_DMRX2440_V_C22.png/.txt

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0 - 360°
Antenna Height : 1 - 4 m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected
Operating Conditions : DM RX (f = 2.440 GHz)
Remarks :

Cage 06-01

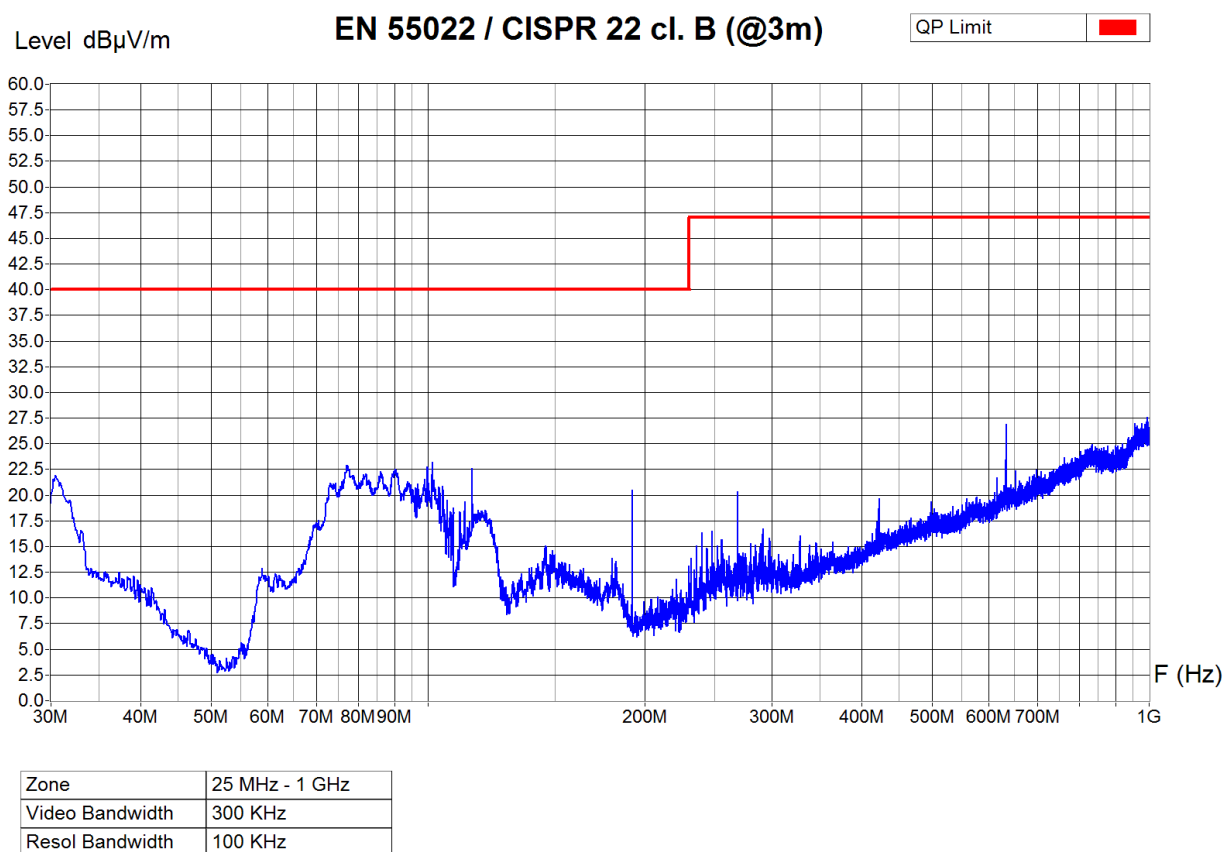

Operator: B. Itzcovich
Date/Time: 07.06.2013 08:59
Filename:
002_RE_25M-
1G_DMRX2440_H_C22.png/.txt


Measurement Type : Radiated Field
 Polarisation : Vertical
 Table Angle : 0 - 360°
 Antenna Height : 1 - 4 m



Equipment Under Test : TX17 Roger Pen
 Set-Up : With cradle, charger and audio cable connected
 Operating Conditions : Standby mode, charging

Remarks :

Cage 06-01

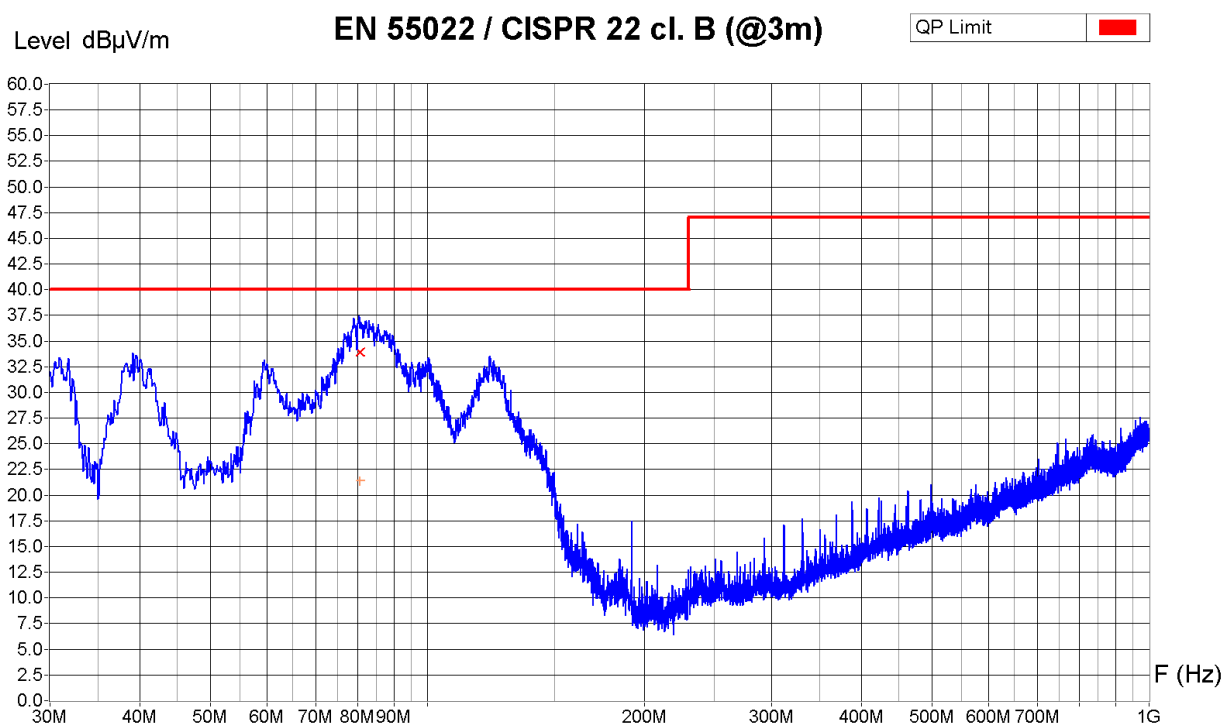

Zone	25 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	100 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
80.70 MHz	37.0 dB μ V/m	33.9 dB μ V/m	21.4 dB μ V/m	6.1 dB

Operator: B. Itzcovich
 Date/Time: 07.06.2013 10:44
 Filename:
 05_RE_25M-
 1G_Stby_V_C22.png/.txt


Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0 - 360°
Antenna Height : 1 - 4 m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected
Operating Conditions : Standby mode, charging

Remarks :

Cage 06-01

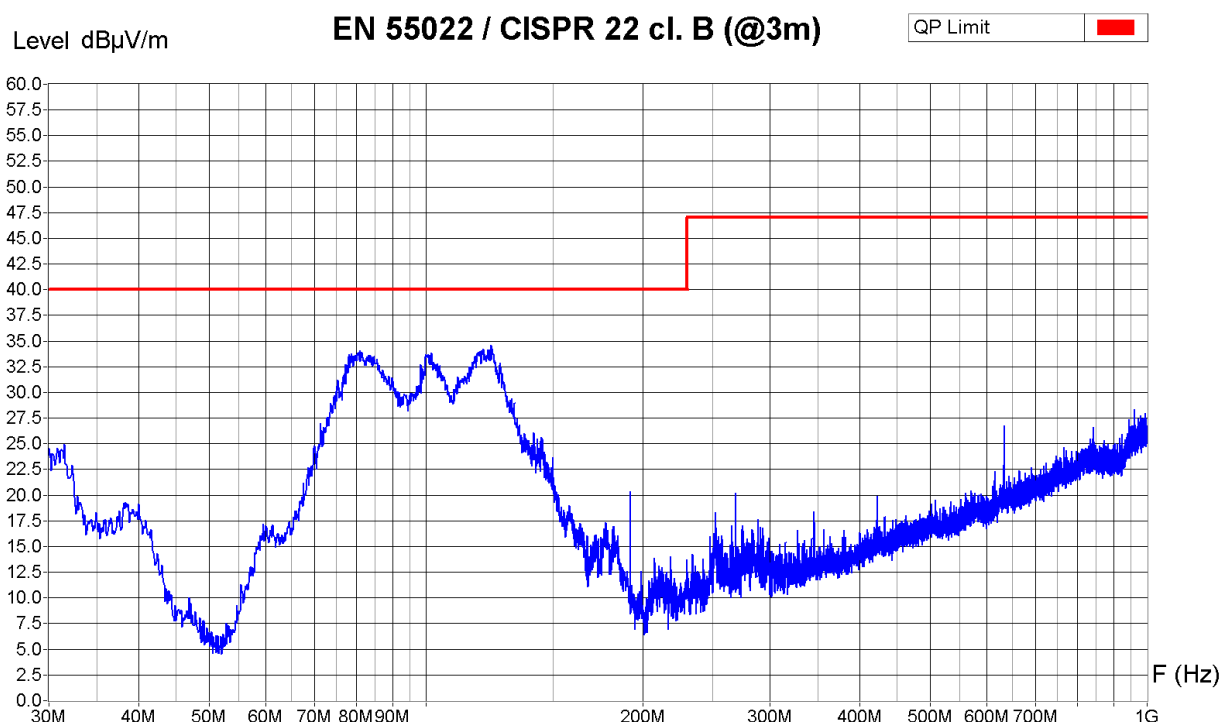

Zone	25 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	100 KHz

Operator: B. Itzcovich
Date/Time: 07.06.2013 10:58
Filename:
06_RE_25M-
1G_Stby_H_C22.png/.txt

6.10.2 1 GHz to 18 GHz

Test site: ☐ semi-anechoic chamber (ferrites) ☒ semi-anechoic chamber (foam)


Distance: ☒ 1 m ☐ 3 m ☐ 10 m ☐ 30 m

Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and a wide band antenna. The antenna is placed at the same height as the EUT successively with horizontal and vertical polarisations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value (peak) of all the disturbances appearing while the apparatus is under test.

Test set-up:

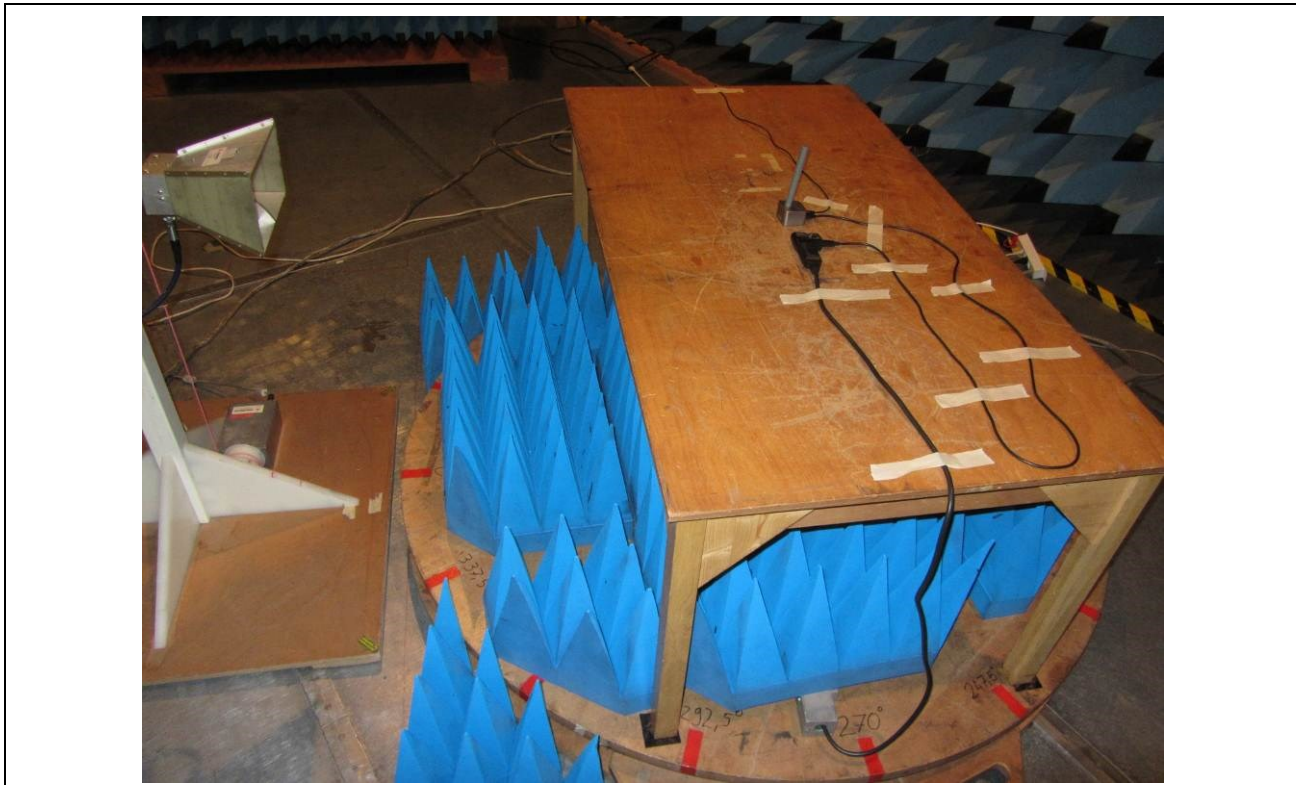

Remarks: Limit values expressed in dB μ V/m and transformed to a measuring distance of 1 m (factor used = 20 dB/decade) if necessary
e.g.: for $f = 1$ GHz the limit is 500 μ V/m at 3 m;

$$20 \log \left(\frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left(\frac{3m}{1m} \right) = 63.5 \frac{dB\mu V}{m} \text{ at } 1m$$

Test equipment:


Spectrum analyser	☐ 88-14	☐ 94-24	☒ 02-06	☐ 03-45	☐ 05-39	☐ 07-53
Preamplifier	☐ 05-56	☐ 05-87	☒ 11-29			
Antenna (horn)	☒ 90-24	☐ 07-31				
Cables	☒ 10-75	☒ 11-61				

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0° - 360°
Antenna Height : 1m - 2m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : DM RX (f = 2.440 GHz)
Remarks : Without filter, with preamp
Cage 06-00

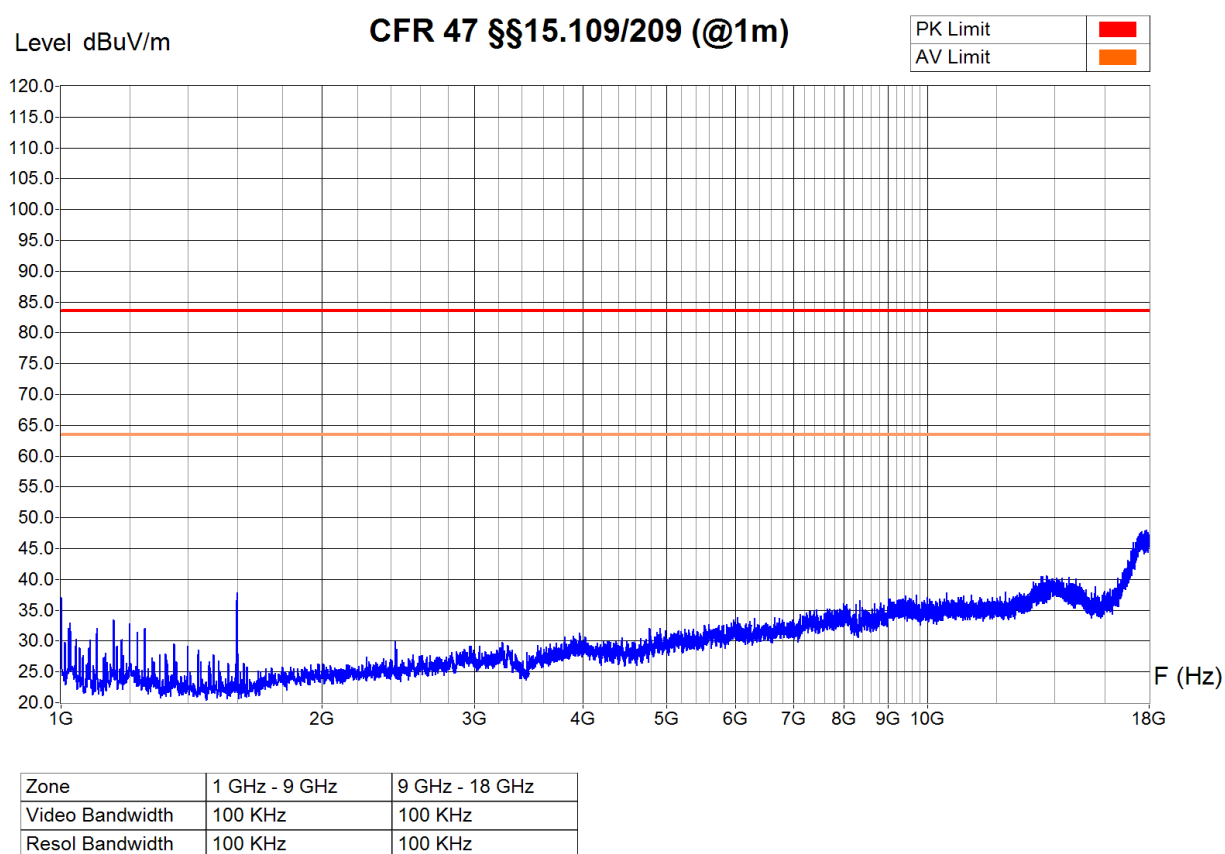


Operator: B. Itzcovich
Date/Time: 25.07.2013 15:45
Filename:
129_RE_1G-18G_DMRX_V.png/
.txt

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0° - 360°
Antenna Height : 1m - 2m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : DM RX (f = 2.440 GHz)
Remarks : Without filter, with preamp
Cage 06-00

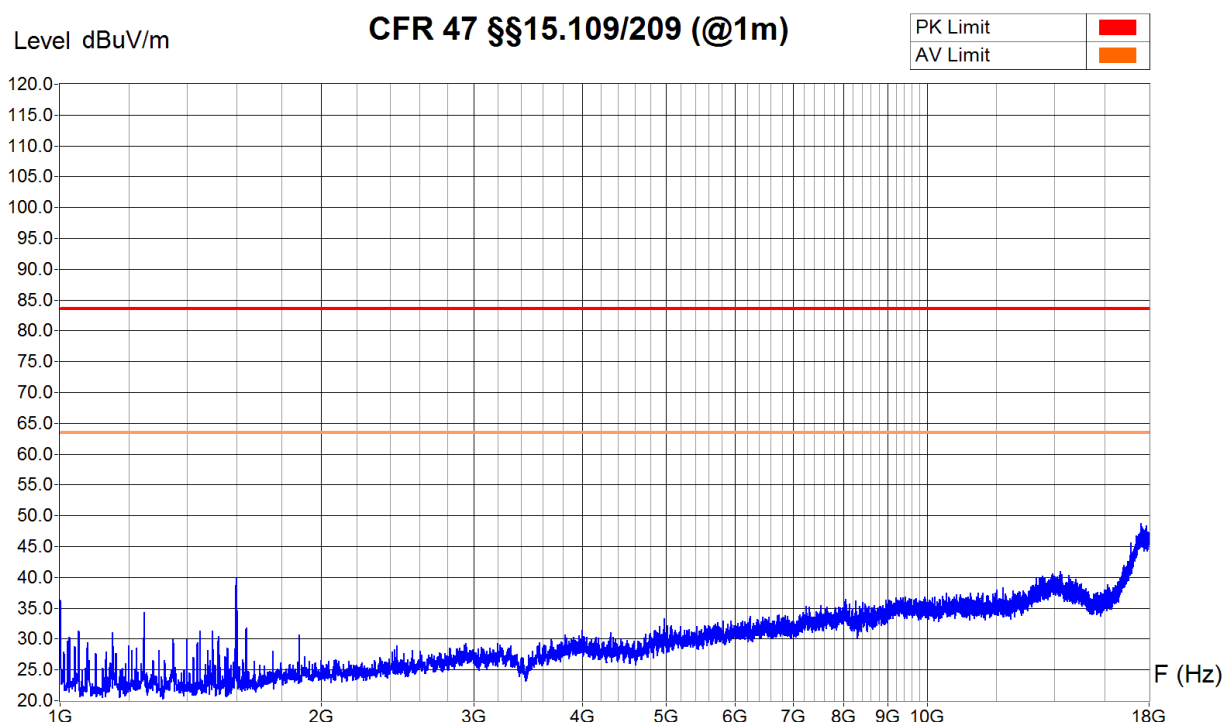


Zone	1 GHz - 9 GHz	9 GHz - 18 GHz
Video Bandwidth	100 KHz	100 KHz
Resol Bandwidth	100 KHz	100 KHz

Operator: B. Itzcovich
Date/Time: 25.07.2013 15:36
Filename:
130_RE_1G-18G_DMRX_H.png/
.txt

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0° - 360°
Antenna Height : 1m - 2m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : Standby (DM and BT)
Remarks : Without filter, with preamp
Cage 06-00

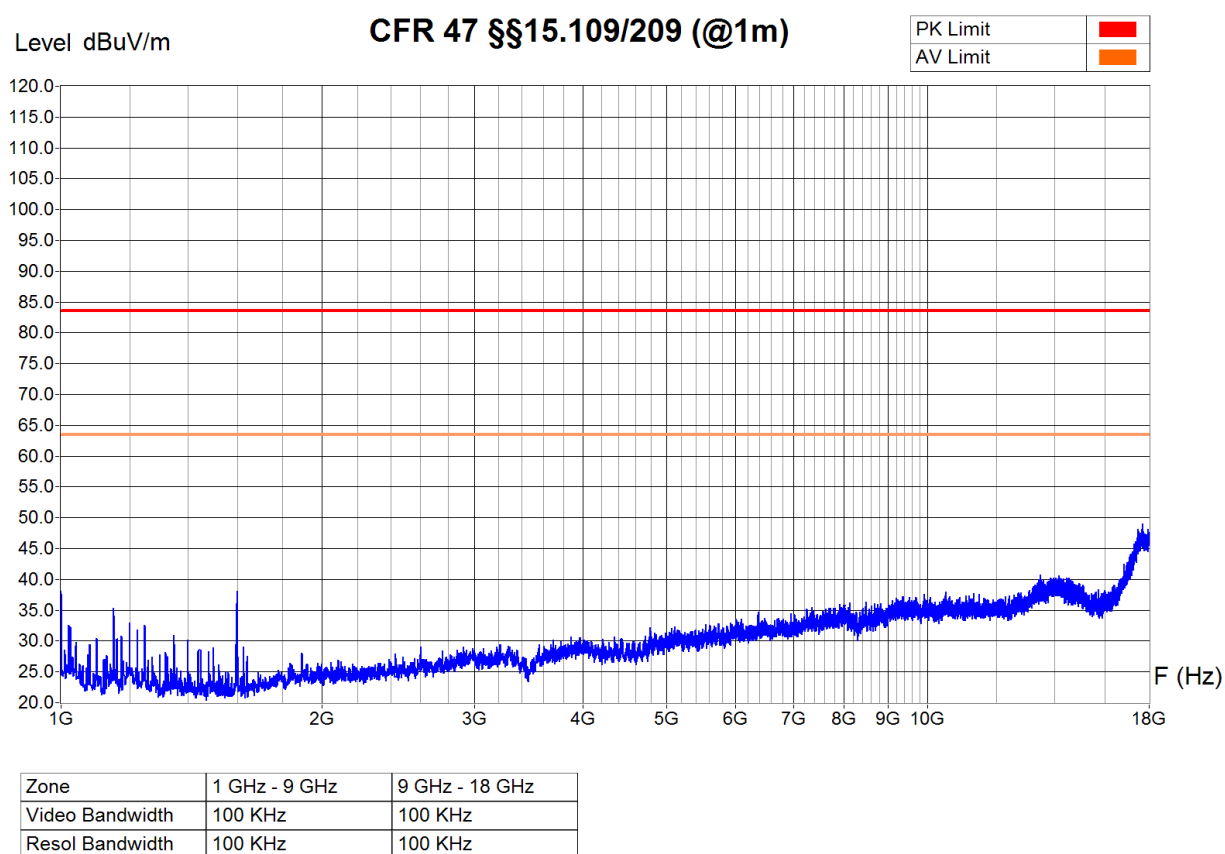


Operator: B. Itzcovich
Date/Time: 25.07.2013 16:35
Filename:
133_RE_1G-18G_Stby_V.png/.txt

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0° - 360°
Antenna Height : 1m - 2m



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : Standby (DM and BT)
Remarks : Without filter, with preamp
Cage 06-00

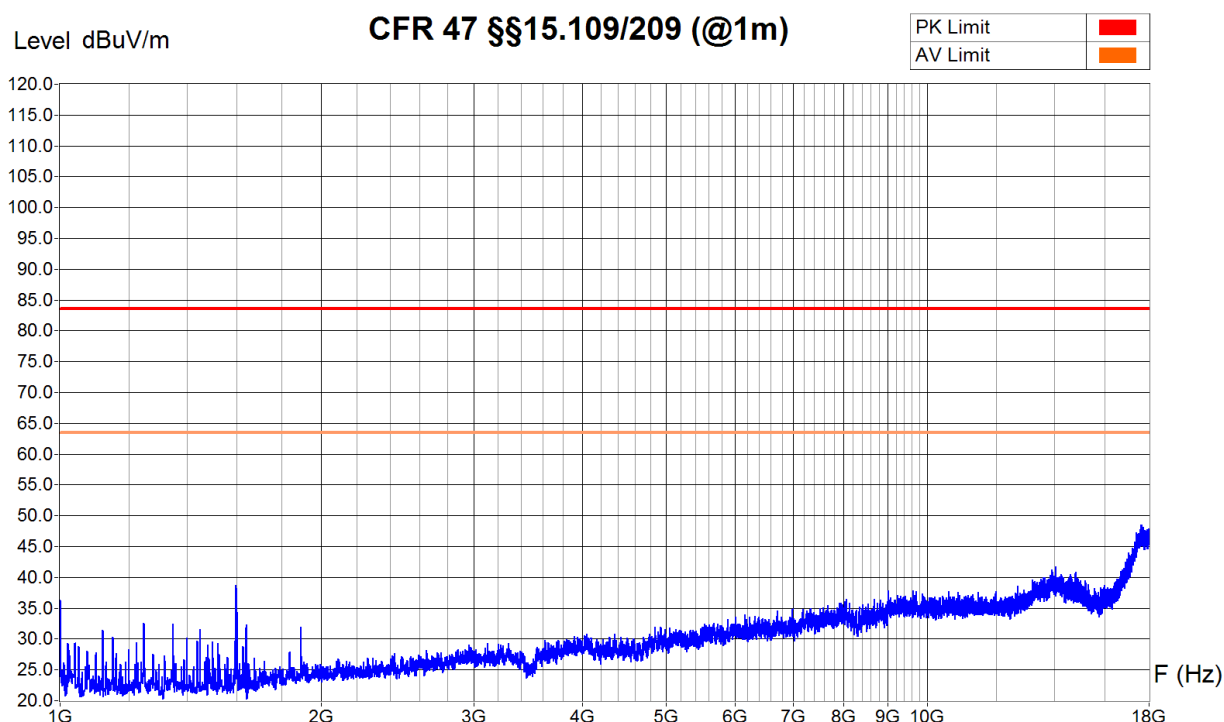

Zone	1 GHz - 9 GHz	9 GHz - 18 GHz
Video Bandwidth	100 KHz	100 KHz
Resol Bandwidth	100 KHz	100 KHz

Operator: B. Itzcovich
Date/Time: 25.07.2013 16:26
Filename:
134_RE_1G-18G_Stby_H.png/.txt


6.11 Conducted emission - Interference voltage

Test site: ☐ semi-anechoic chamber (foam) ☐ shielded room
☒ semi-anechoic chamber (ferrites) ☐ laboratory
☐ open test site

Meas. uncertainty: ± 3.6 dB

Measuring method: The conducted disturbance is measured using a spectrum analyser and a line impedance substitution network (LISN). The measurement of the voltage against the earth is carried out successively. The peak values are recorded continuously on the graph. The values that exceed the limit are remeasured with a measuring receiver.

Test set-up:

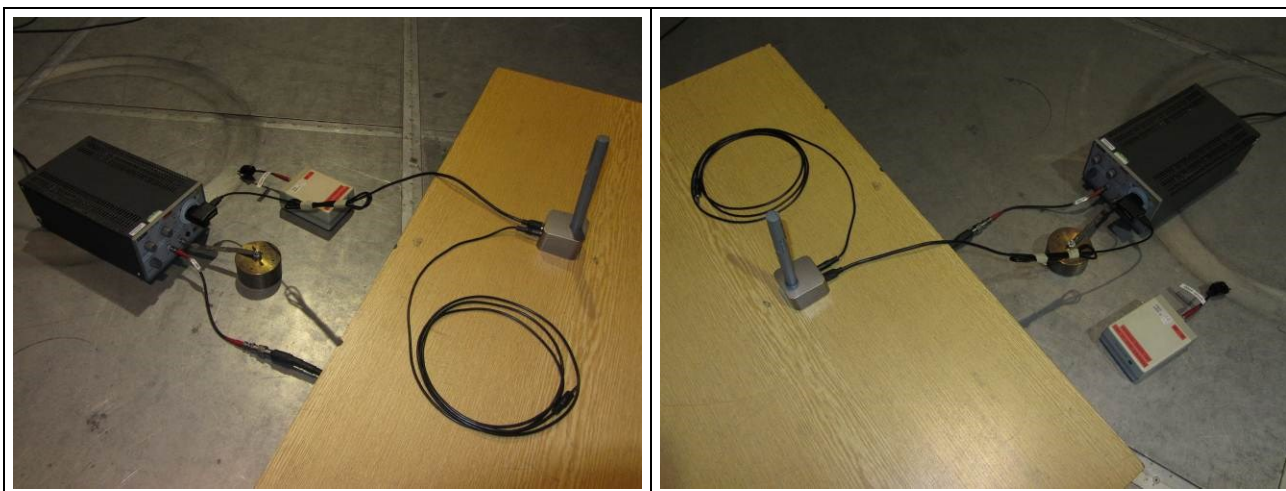

Remarks: ---

Test equipment:


Spectrum analyser	☒ 10-70	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☐ 07-53
Receiver	☒ 10-70	☐ 90-11	☐ 94-34	☐ 04-28	☐ 06-29	
LISN	☐ 85-13	☐ 90-08	☐ 94-36	☒ 94-40	☐ 95-12	☐ 00-43
Protection 10 dB	☐ 91-44 ☐ 96-38	☐ 91-45 ☒ included in LISN	☐ 95-30	☐ 95-33	☐ 95-35	☐ 95-36
Protection 20 dB	☐ 91-46	☐ 95-33	☐ 95-38	☐ included in LISN		
Cables	☒ 06-01	☒ 06-206				

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Voltage Interference
 Supply : Line 1
 Other : Powered with 230V / 50 Hz



Equipment Under Test : TX17 Roger Pen
 Set-Up : With cradle, charger and audio cable connected. See photos
 Operating Conditions : Coexistence mode, charging
 Remarks :
 cage 06-01

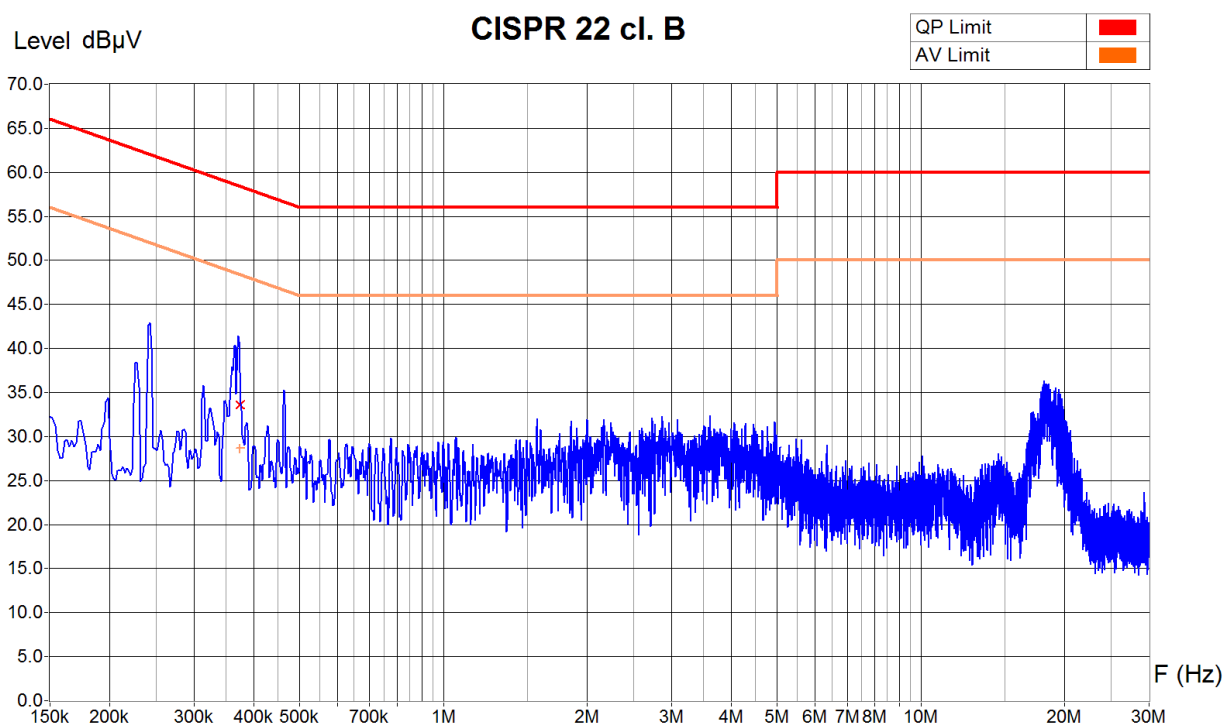

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
375 KHz	47.0 dB μ V	33.6 dB μ V	28.7 dB μ V	24.8 dB

Operator: B. Itzcovich
 Date/Time: 10.06.2013 11:45
 Filename:
 07_CV_150k-30M_L1_FCC.png/
 .txt

Measurement Type : Voltage Interference
 Supply : Neutral
 Other : Powered with 230 V / 50 Hz



Equipment Under Test : TX17 Roger Pen
 Set-Up : With cradle, charger and audio cable connected. See photos
 Operating Conditions : Coexistence mode, charging
 Remarks :
 cage 06-01

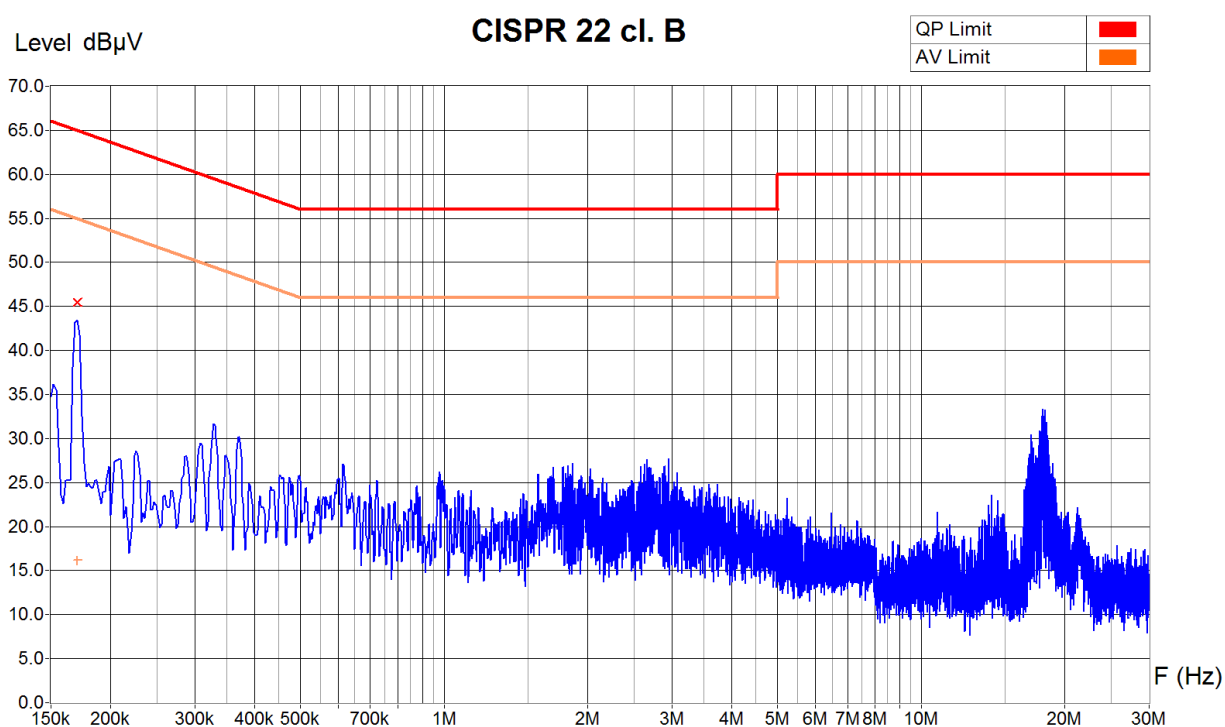

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
170.20 KHz	47.6 dBμV	45.4 dBμV	16.2 dBμV	19.5 dB

Operator: B. Itzcovich
 Date/Time: 10.06.2013 11:55
 Filename:
 08_CV_150k-30M_N_FCC.png/
 .txt

Measurement Type : Voltage Interference
 Supply : Line 1
 Other : Powered with 100 V / 50 Hz



Equipment Under Test : TX17 Roger Pen
 Set-Up : With cradle, charger and audio cable connected. See photos
 Operating Conditions : Coexistence mode, charging
 Remarks : cage 06-01

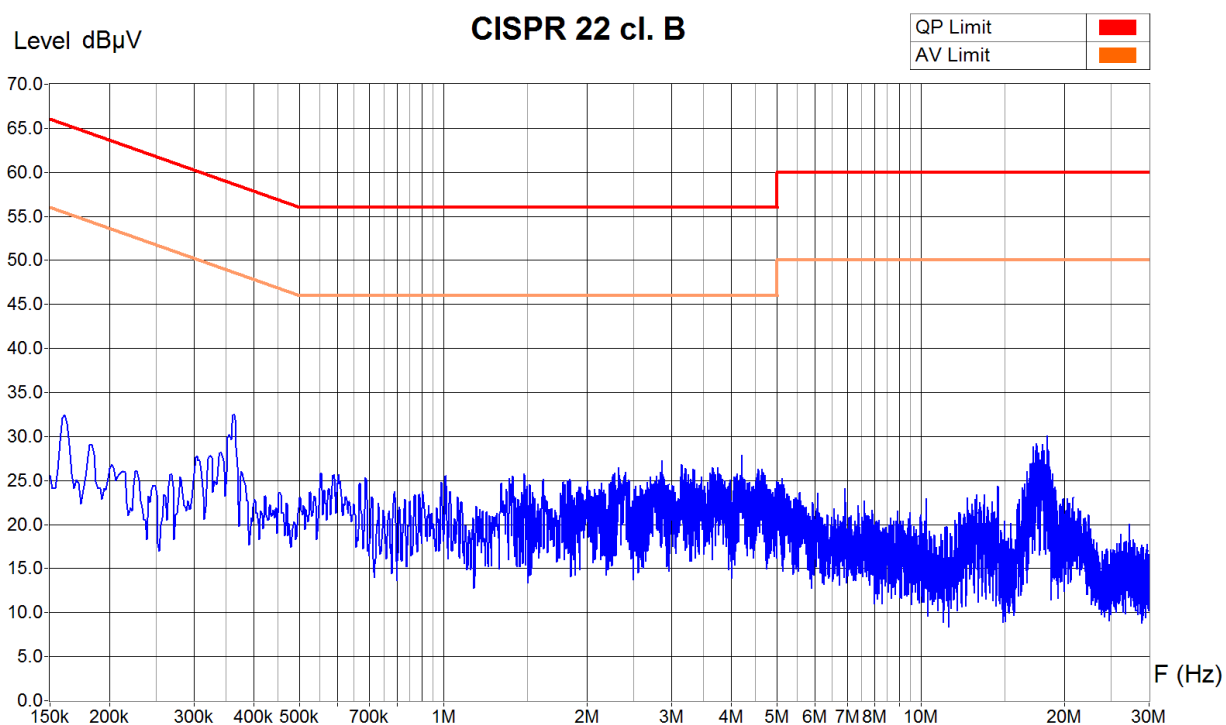


Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Operator: B. Itzcovich
 Date/Time: 10.06.2013 12:13
 Filename:
 09_CV_150k-
 30M_100V_L1_FCC.png/.txt

Measurement Type : Voltage Interference
Supply : Neutral
Other : Powered with 100 V / 50 Hz



Equipment Under Test : TX17 Roger Pen
Set-Up : With cradle, charger and audio cable connected. See photos
Operating Conditions : Coexistence mode, charging
Remarks :
cage 06-01

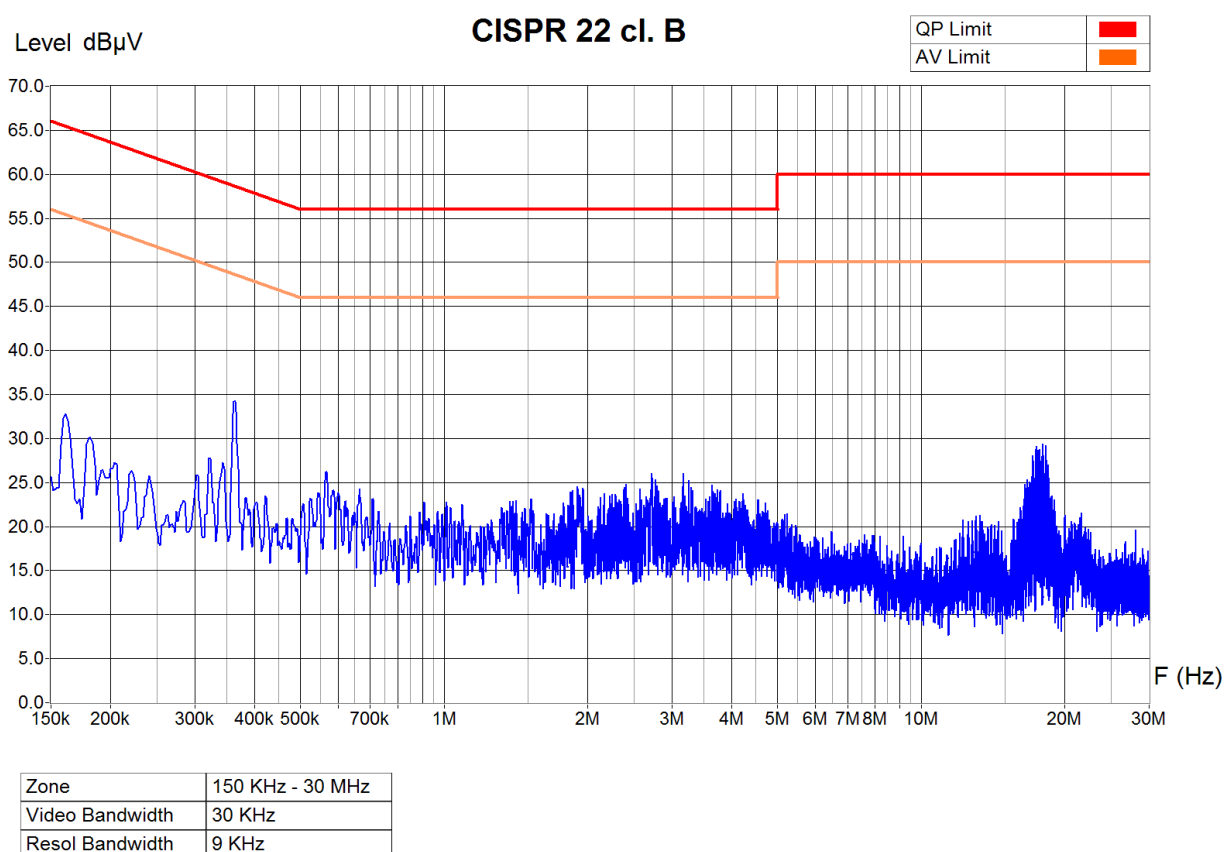

Operator: B. Itzcovich
Date/Time: 10.06.2013 12:11
Filename:
10_CV_150k-
30M_100V_N_FCC.png/.txt

