

Test laboratory accredited according to ISO 17025 by the Swiss Accreditation Service SAS

Registration number

**STS 0001**

Swiss testing service



Report:	<b>Electromagnetic compatibility and Radio spectrum Matters</b>		Report no:	<b>18-MO-0155.R03</b>
Product name:	<b>Roger Select iN</b>		Mandate no:	<b>18-MO-0155</b>
Serial no:	<b>Proto 01 and 02</b>	Model number:	<b>TX32</b>	
Customer:	<b>Phonak Communications AG Länggasse 17 3280 Murten SWITZERLAND</b>	Date of test:	<b>August 28 – September 3, 2018</b>	

Standards		Result
<b>47 CFR, Part 15</b>	(Subpart C, Intentional radiators: §§ 15.207/209/247)	<b>Pass</b>
	(Subpart B, Class B digital devices: § 15.109)	<b>Pass</b>
<b>Industry Canada</b>	RSS-247, Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	<b>Pass</b>
	RSS-Gen, General Requirements and Information for the Certification of Radio Apparatus	

These results were achieved without modification of EUT

Test performed by

Mr B. Itzcovich  
EMC Test Engineer



Report prepared by

Mr B. Itzcovich  
EMC Test Engineer



Report controlled and approved by

Mr J. Ding  
EMC Test Engineer



Rossens, October 9, 2018

(Issue Date)

Main language : English

The present document results from tests on one specimen and does not prejudice to the conformity of all the manufactured products.

t:\dossiers\m\2018\01xx\18-mo-0155\_phonak\_roger\_select\_in4\_prüfberichte\18-mo-0155.r03\_phonak\_tx32\_fcc.doc

## Contents

	<i>Page</i>
1. SUMMARY OF TEST RESULTS.....	3
2. APPLIED STANDARDS .....	3
3. CLIENT.....	4
4. EQUIPMENT UNDER TEST .....	4
4.1 Identification.....	4
4.2 Pictures of the EUT.....	5
4.3 Classification.....	6
4.4 Transmitter characteristics (according to Phonak Communications AG) .....	7
4.5 Receiver characteristics (according to Phonak Communications AG) .....	7
4.6 Ports.....	7
5. TEST CONDITIONS.....	8
5.1 Climatic conditions, location and date .....	8
5.2 Test facility and methodology .....	8
5.3 Attendant persons.....	8
5.4 Test configuration .....	8
5.5 Operating conditions.....	9
5.6 Auxiliary equipment.....	9
6. TEST RESULTS .....	10
6.1 Channel 20dB-bandwidth .....	11
6.2 Carrier frequency separation .....	13
6.3 Number of hopping channels.....	15
6.4 Time of occupancy (dwell time) .....	17
6.5 Antenna gain & effective isotropic radiated power .....	19
6.6 Maximum output power (conducted) .....	21
6.7 Band-edge emission (conducted).....	23
6.8 Band-edge emission (radiated).....	25
6.9 Spurious emissions – conducted (transmitter – 9 kHz to 26 GHz).....	27
6.10 Spurious emissions, transmit mode – radiated.....	29
6.10.1 9 kHz to 30 MHz.....	29
6.10.2 30 MHz to 1 GHz.....	33
6.10.3 1 GHz to 18 GHz.....	36
6.10.4 18 GHz to 26 GHz (FCC / industry Canada).....	39
6.11 Spurious emissions, receive mode – radiated.....	44
6.11.1 30 MHz to 1 GHz.....	44
6.11.2 1 GHz to 13 GHz.....	47
6.12 Conducted emission – Interference voltage .....	50
6.13 Designation of emission.....	55
7. APPENDIX .....	56
7.1 Test equipment .....	57

## 1. Summary of test results

- ✓ Pass
- ✗ Fail
- ∅ Not applicable to this product
- Not tested
- # No requirements / not required

§	Test Type	Result
<b>6</b>	<b>Emission</b>	<b>CFR 47 Part 15 Industry Canada</b>
6.1	Channel 20dB-bandwidth	CFR 47 § 15.247 (a)(1) RSS-247 § 5.1 a) ✓
6.2	Carrier frequency separation	CFR 47 § 15.247 (a)(1) RSS-247 § 5.1 b) ✓
6.3	Number of hopping channels	CFR 47 § 15.247 (a)(1)(iii) RSS-247 § 5.1 c) ✓
6.4	Time of occupancy (dwell time)	CFR 47 § 15.247 (a)(1)(iii) RSS-247 § 5.1 d) ✓
6.5	Antenna gain & effective radiated power	CFR 47 § 15.247 (b)(4) RSS-247 § 5.4 (2) and (6) ✓
6.6	Maximum output power (conducted)	CFR 47 § 15.247 (b)(1) RSS-247 § 5.4 b) ✓
6.7	Band-edge emission (conducted)	CFR 47 § 15.247 (d) RSS-247 § 5.5 ✓
6.8	Band-edge emission (radiated)	CFR 47 § 15.247 (d) CFR 47 § 15.205 RSS-Gen Table 7 ✓
6.9	Spurious emissions – conducted (transmitter)	CFR 47 § 15.247 (d) RSS-247 § 5.5 ✓
6.10	Spurious emissions – radiated (transmitter)	CFR 47 § 15.247 (d) CFR 47 § 15.209 (a) CFR 47 § 15.205 RSS-247 § 5.5 RSS-Gen Tables 5 and 6 ✓
6.11	Radiated emission – receiver	CFR 47 § 15.109 RSS-Gen Table 3 ✓
6.12	Conducted emission	CFR 47 § 15.207 RSS-Gen Table 4 ✓
<b>6</b>	<b>Emission</b>	<b>CFR 47 Part 2</b>
6.13	Designation of emission	FCC 47 §2.201 FCC 47 §2.202 <b>1M73FXD</b>

## 2. Applied standards

47 CFR Part 15 Subpart C	Code of Federal Regulations - Title 47 - Telecommunication, Part 15, Subpart C: "Intentional Radiators"
47 CFR Part 15 Subpart B	Code of Federal Regulations - Title 47 - Telecommunication, Part 15, Subpart B: "Unintentional Radiators"
RSS-Gen issue 5, April 2018	Spectrum Management and Telecommunications - Radio Standards Specification General Requirements and Information for the Certification of Radio Apparatus
RSS-247 issue 2, February 2017	Digital Transmission Systems (DTs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

### 3. Client


Client name and address	<i>Phonak Communications AG Länggasse 17 3280 Murten SWITZERLAND</i>
Contact Person	<i>Mr Immanuel Steib</i>
Telephone	<i>+41 26 672 35 19</i>
Fax	<i>+41 26 672 93 80</i>
E-mail	<a href="mailto:immanuel.steib@phonak.com"><i>immanuel.steib@phonak.com</i></a>
Mandate no	<i>18-MO-0155</i>

### 4. Equipment under test

#### 4.1 Identification

Manufacturer name and address	<i>Phonak Communications AG Länggasse 17 3280 Murten SWITZERLAND</i>
Production country	<i>Vietnam</i>
Brand name	<i>Phonak</i>
Product name	<i>Roger Select iN</i>
Product description	<i>Wireless microphone 2.4 GHz</i>
Model number	<i>TX32</i>
Serial no	<i>Proto 01 and 02</i>
Software version	<i>chiangmai_wim_v.1.0.37986</i>
FCC ID IC ID	<i>FCC: KWCTX32 IC: 2262A-TX32</i>
Lowest Frequency	<i>20 kHz (charge pump for LED driver)</i>
Highest frequency	<i>16 MHz (uC Xtal) / 26 MHz (RF chip) / 2.48 GHz (RF Transmitter carrier)</i>
Supply	<i>U = 3.8 V<sub>DC</sub> / P<sub>max</sub> = 0.25 W (Lithium Polymer Battery) or U = 5 V<sub>DC</sub> / P<sub>max</sub> = 2.5 W (USB)</i>
Dimension	<i>~55 mm x ~13 mm (Ø x h)</i>
Technical	<i>None. The equipment is completely identified by the above-mentioned information. Phonak Communications AG assures the traceability of the documentation and is responsible for the product identification.</i>

#### 4.2 Pictures of the EUT

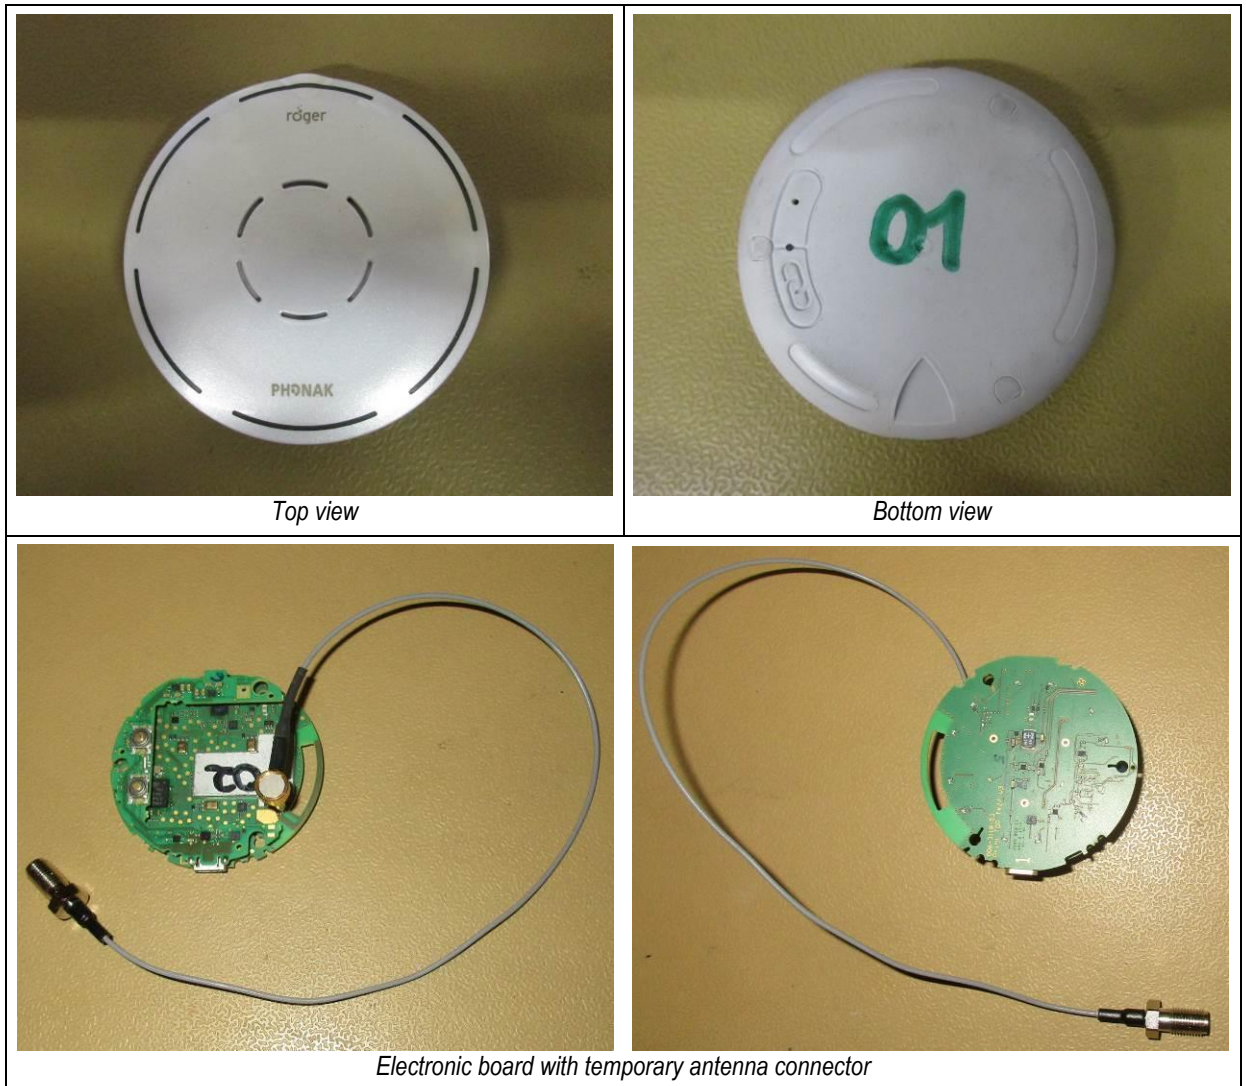

### 4.3 Classification

CFR 47 Part 15	<ul style="list-style-type: none"><li><input checked="" type="checkbox"/> Unintentional radiator (Subpart B), Receive mode<ul style="list-style-type: none"><li><input type="checkbox"/> Class A digital device</li><li><input checked="" type="checkbox"/> Class B digital device</li><li><input checked="" type="checkbox"/> The highest frequency of the internal sources of the EUT is less than 108 MHz (measurement shall be made up to 1 GHz).</li><li><input type="checkbox"/> The highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz (measurement shall be made up to 2 GHz).</li><li><input type="checkbox"/> The highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz (measurement shall be made up to 5 GHz).</li><li><input type="checkbox"/> The highest frequency of the internal sources of the EUT is above 1 GHz (measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is lower).</li></ul></li><li><input checked="" type="checkbox"/> Intentional radiator (Subpart C), Transmit mode<ul style="list-style-type: none"><li><input checked="" type="checkbox"/> The highest fundamental frequency of the EUT is less than 10 GHz (measurement shall be made up to the tenth harmonic or 40 GHz, whichever is lower).</li><li><input type="checkbox"/> The highest fundamental frequency of the EUT is between 10 GHz and 30 GHz (measurement shall be made up to the fifth harmonic or 100 GHz, whichever is lower).</li><li><input type="checkbox"/> The highest fundamental frequency of the EUT is above 30 GHz (measurement shall be made up to the fifth harmonic or 200 GHz, whichever is lower).</li></ul></li></ul>
----------------	--



## 5. Test conditions

### 5.1 Climatic conditions, location and date

Location	Date	Temp.	Pressure	Rel. humidity
<i>Eurofins Electrosuisse Product Testing AG 1728 Rossens SWITZERLAND</i>	<i>August 28 – September 4, 2018</i>			<i>See § 6</i>

### 5.2 Test facility and methodology

*The test site is accepted by FCC:*  
 - Test Firm Registration Number: 683197  
 - Designation Number: CH5001

*The test site is accepted by Industry Canada:*  
 - ISED Assigned Code: 3625A  
 - Ferrite chamber (06-01): 3625A-2  
 - Foam chamber (06-00): 3625A-3

*Conducted and radiated measurements are performed according to the ANSI C63.4-2014 and C63.10-2013 procedures.*

### 5.3 Attendant persons


#### Test Engineer(s):

*Mr B. Itzcovich  
EMC Test Engineer*

#### Other(s):

Name	Company
<i>Mr Immanuel Steib (partially)</i>	<i>Phonak Communications AG</i>

### 5.4 Test configuration

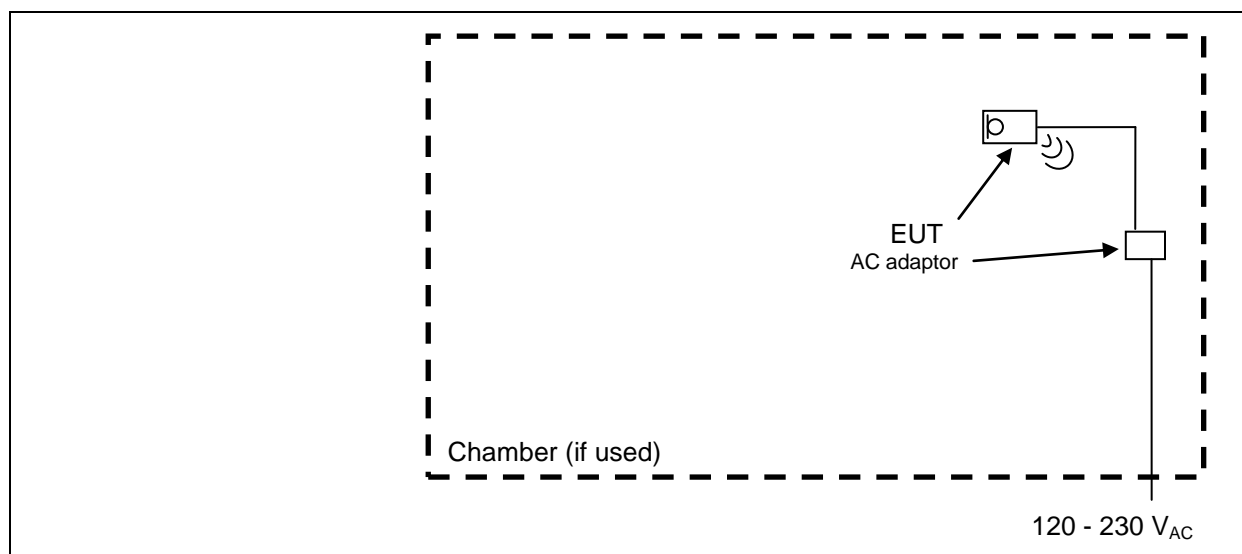



## 5.5 Operating conditions

Power supply during tests if not stated otherwise in § 6 : 5 V<sub>DC</sub> (USB)

- Continuous hopping transmission of random data on three frequencies
- Normal operation: transmission of random data with hopping sequence
- Continuous reception on single frequency
- Continuous transmission of random data on one frequency, Duty 100%

## 5.6 Auxiliary equipment

The following pieces of equipment are used for the monitoring of the EUT or are necessary for the EUT but they are not part of the EUT

Product	Brand	Model No.	ID	Remark
AC adaptor	FLYPOWER	PS06H050K 1000EU	- - -	5 V <sub>DC</sub> output (USB)
Cradle	Phonak	Roger Select	- - -	To provide connectivity with cables



Cradle + AC Adaptor + cables



Marking on AC adaptor

## 6. Test results

**6.1 Channel 20dB-bandwidth**

Introduction: Channel-bandwidth measured at -20 dBc.


Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB  
 3GHz – 6.7GHz: ± 2.1 dB  
 6.7GHz – 13.2GHz: ± 2.6 dB  
 13.2GHz – 19GHz: ± 2.8 dB  
 19GHz – 26.5GHz: ± 3 dB

Method: Measurement of the conducted power on the antenna connector or a test fixture.

Limit: - - -

Test set-up:

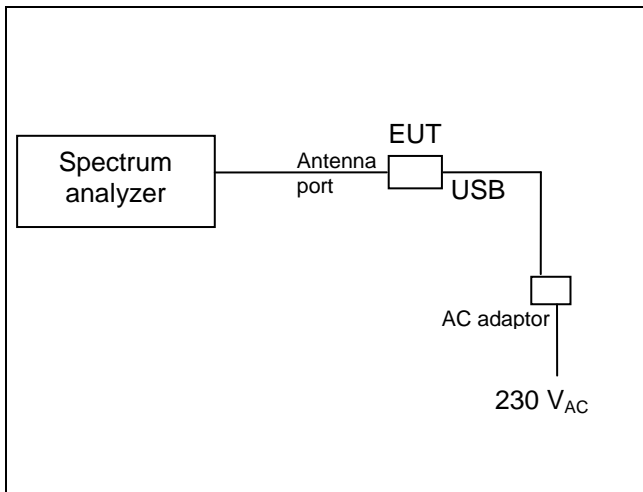

Remarks: - - -




Test equipment:

Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Power supply	<input type="checkbox"/> 99-07	<input type="checkbox"/> 04-31				
Cables	<input checked="" type="checkbox"/> 11-13					

**Results of the test**

Client: *Phonak Communications AG*  
 Apparatus: *Roger Select iN, proto 02*  
 Operating mode: *Single frequencies (2.402, 2.440 and 2.480 GHz), modulated, Pmax (05)*  
 Cables connected to the EUT: *USB and temporary antenna cables*  
 Remarks: *Measured on temporary antenna connector*  
 Modifications:  None     1     2     3     4     5  
 Climatic conditions:      Temperature: 23 °C      Humidity: 49 %      Pressure QFE: 937 hPa

frequency [GHz]	20 dB bandwidth [MHz]	Remarks
2.402	1.604	---
2.440	1.554	---
2.480	1.607	---

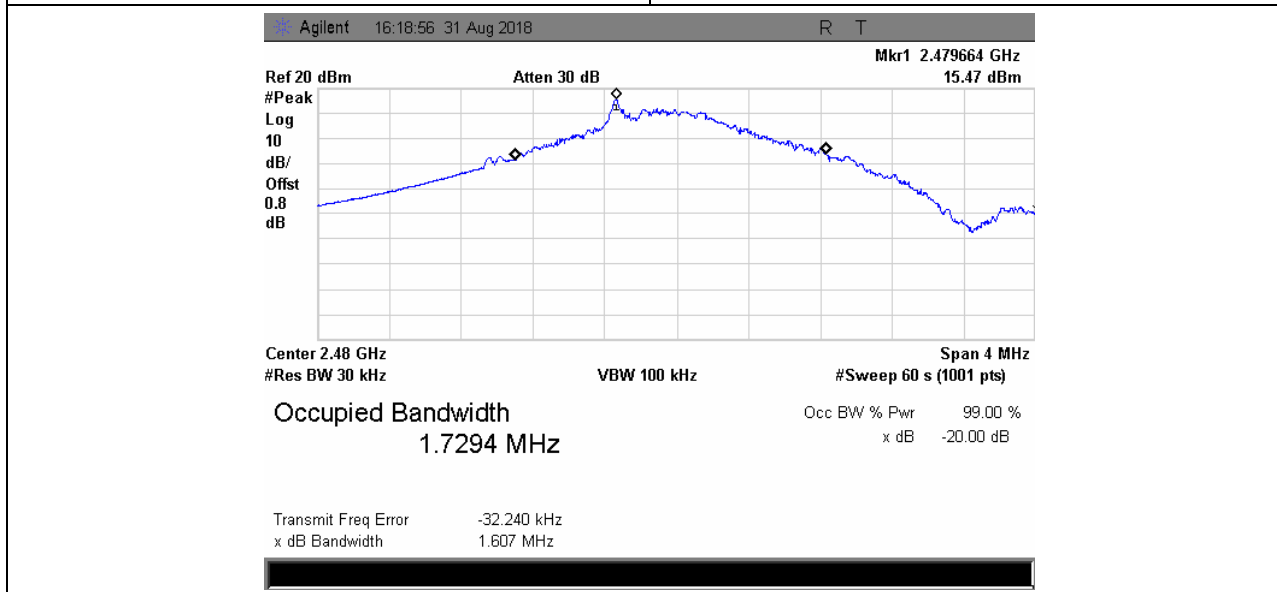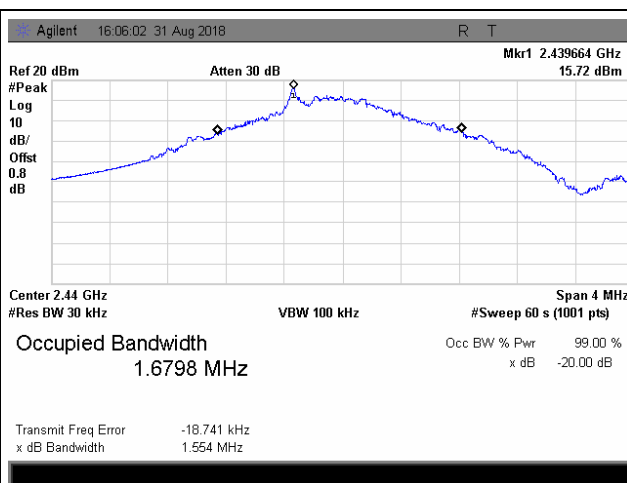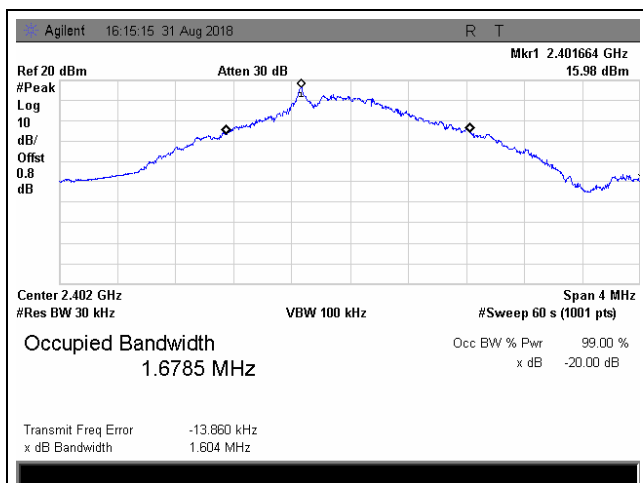


Place and date of test: *Rossens, August 31, 2018*  
 Operator: *B. Itzcovich*

**6.2 Carrier frequency separation**

Introduction: Determination of the frequency separation of two adjacent channels.  
 Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  laboratory  
 Meas. uncertainty: ± 2.6 µHz/Hz  
 Method: Measurement of the frequency separation on the antenna connector or a test fixture.  
 Limit: Minimum 25 kHz two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test set-up:

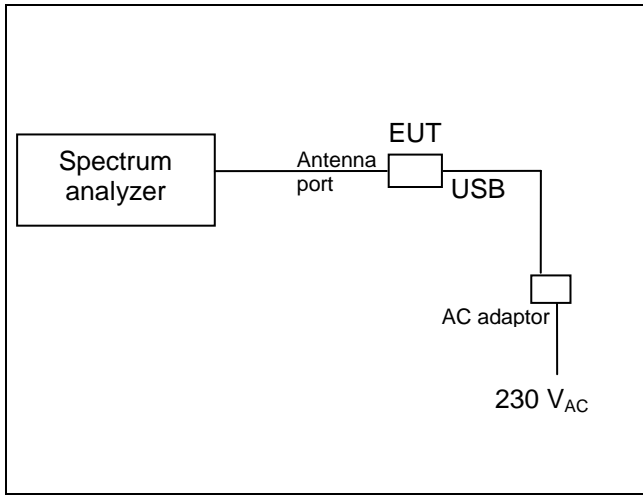

Remarks: ---


Test equipment:

Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Power supply	<input type="checkbox"/> 99-07	<input type="checkbox"/> 04-31				
Cables	<input checked="" type="checkbox"/> 11-13					

**Result:**  pass  fail  not applicable  not tested

**Results of the test**

Client: *Phonak Communications AG*  
 Apparatus: *Roger Select iN, proto 02*  
 Operating mode: *Continuously hopping on all channels*  
 Cables connected to the EUT: *USB and temporary antenna cables*  
 Remarks: *Measured on temporary antenna connector*  
 Modifications:  None     1     2     3     4     5  
 Climatic conditions:    Temperature: 23 °C    Humidity: 45 %    Pressure QFE: 933 hPa

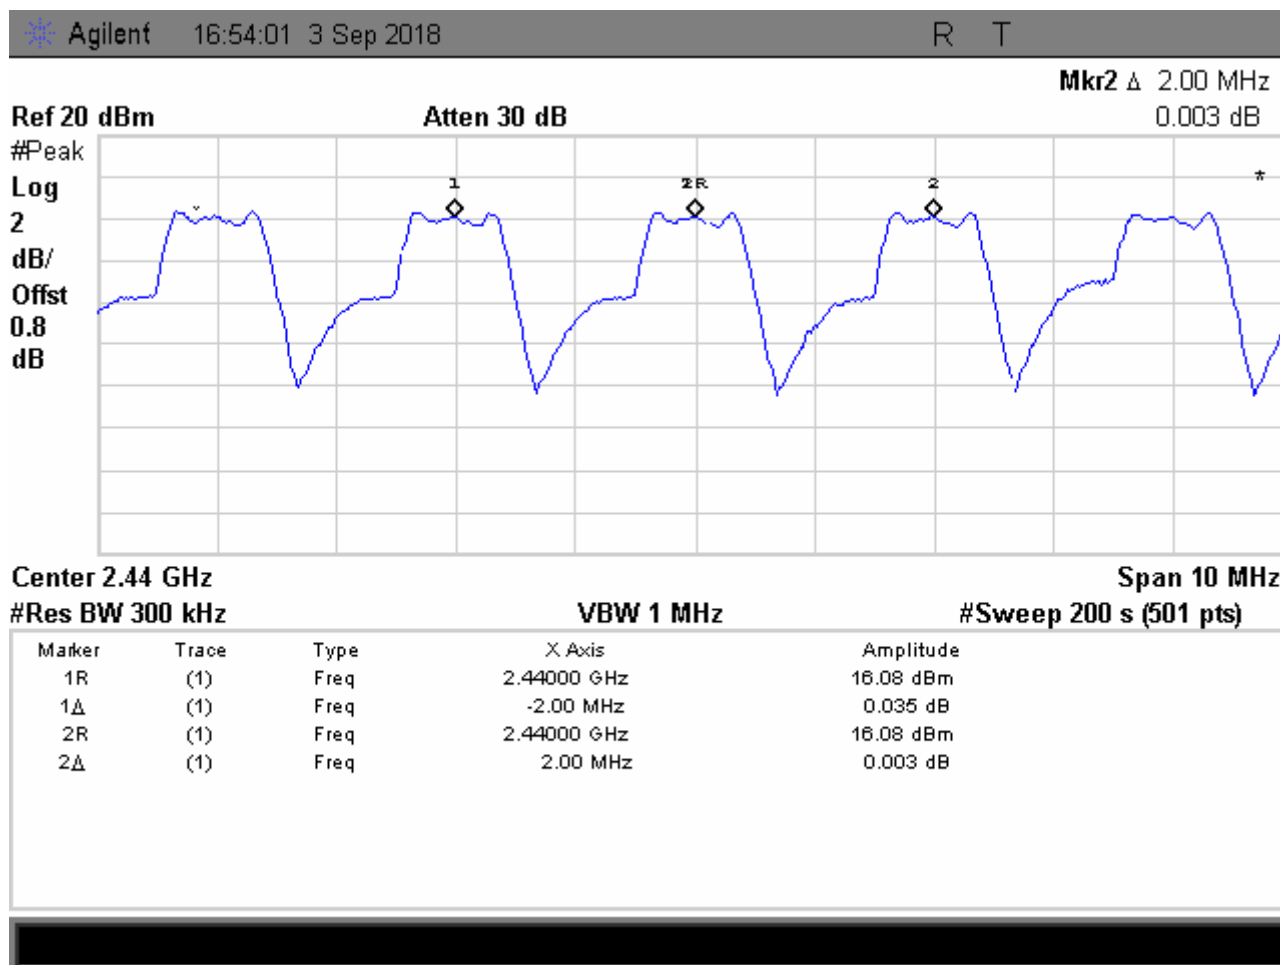

**Carrier frequency separation = 2.00 MHz > (2/3) x 1.60 MHz (see § 6.1)**

Place and date of test: *Rossens, September 3, 2018*  
 Operator: *B. Itzcovich*

**6.3 Number of hopping channels**

Introduction: Number of hopping channels used in the frequency hopping system.  
 Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  laboratory  
 Meas. uncertainty: ± 2.6 µHz/Hz  
 Method: Measurement of the frequency separation on the antenna connector or a test fixture.  
 Limit: Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test set-up:

--	--

Remarks: - - -

Test equipment:

Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Power supply	<input type="checkbox"/> 99-07	<input type="checkbox"/> 04-31				
Cables	<input checked="" type="checkbox"/> 11-13					

**Result:**  pass  fail  not applicable  not tested


**Results of the test**

Client: *Phonak Communications AG*  
 Apparatus: *Roger Select iN, proto 02*  
 Operating mode: *Continuously hopping on all channels*  
 Cables connected to the EUT: *Temporary supply & antenna cables*

Remarks: *Measured on temporary antenna connector*

Modifications:  None     1     2     3     4     5

Climatic conditions:            Temperature: 23 °C            Humidity: 45 %            Pressure QFE: 933 hPa

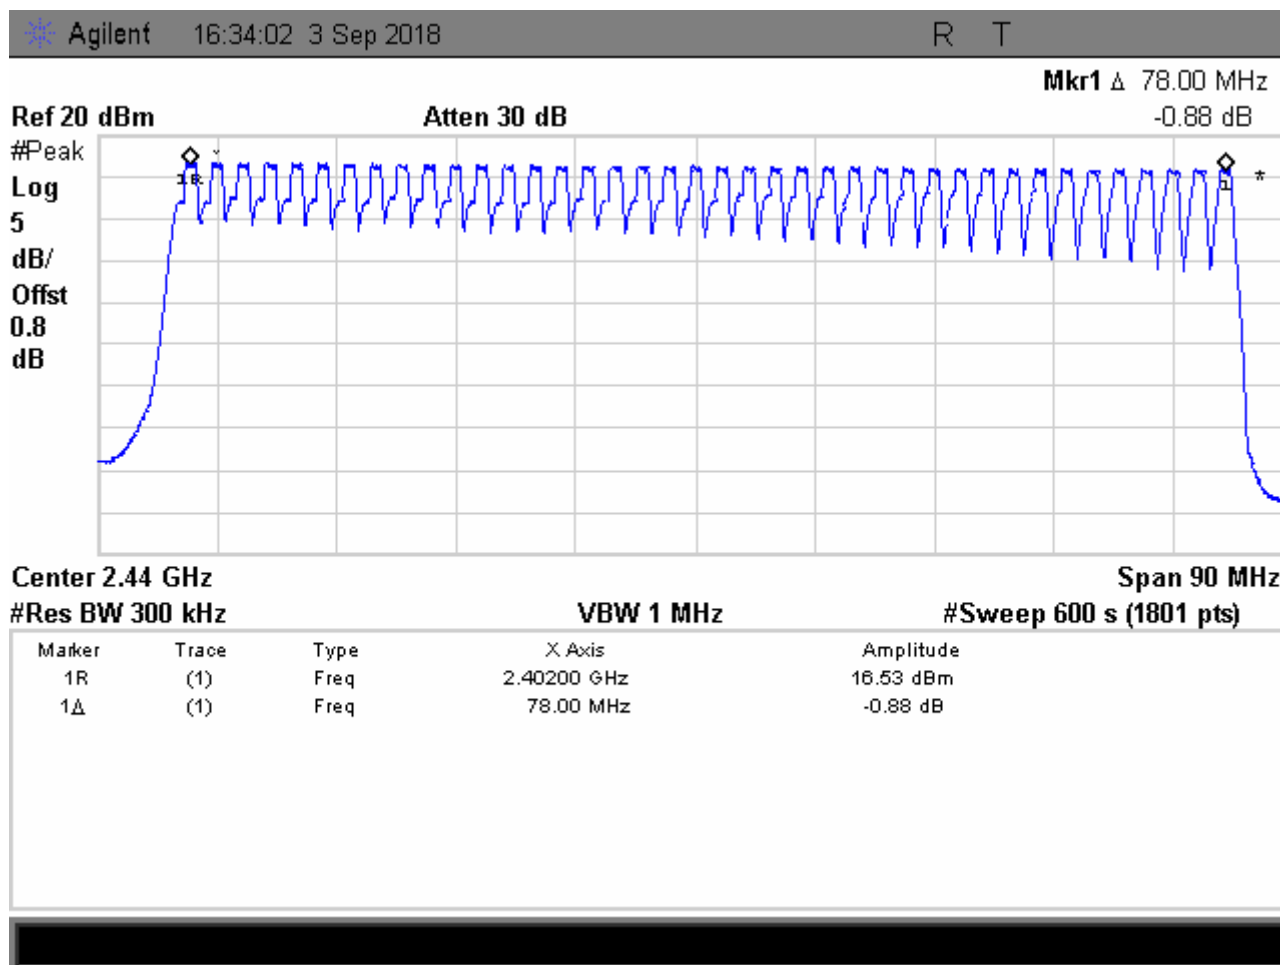

**Number of hopping channels = 40 (≥15)**

Place and date of test: *Rossens, September 3, 2018*  
 Operator: *B. Itzcovich*



**6.4 Time of occupancy (dwell time)**

Introduction: Average duration during which the system stays on one channel.

Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  laboratory

Meas. uncertainty:  $\pm 2.6 \mu\text{s/s}$

Method: Measurement on the antenna connector or a test fixture.

Limit: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test set-up:

Remarks: ---

Test equipment:

Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Power supply	<input type="checkbox"/> 99-07	<input type="checkbox"/> 04-31				
Cables	<input checked="" type="checkbox"/> 11-13					

**Result:**  pass  fail  not applicable  not tested

**Results of the test**

Client: *Phonak Communications AG*

Apparatus: *Roger Select iN, proto 02*

Operating mode: *Continuously hopping on all channels*

Cables connected to the EUT: *USB and temporary antenna cables*

Remarks: *Measured on temporary antenna connector*

Modifications:  None     1     2     3     4     5

Climatic conditions:      Temperature: 23 °C      Humidity: 45 %      Pressure QFE: 933 hPa

**Calculation based on information from Phonak Communications AG and measurement of the pulse duration**

Number of channels                    40

Period of observation:                 $Number\ of\ channels * 0.4\ s = 40 * 0.4s = 16\ s$

Single occupancy time during  
one hop (measured):                165  $\mu$ s

Pulses in 2.9h:                         $2^{16} * 40 * 10 = 26'214'400$


Pulses in 16 s:                          $(Pulses\ in\ 2.9h / 2.9) / 3'600 * 16s = 40'175.3$

Pulses in 16 s of one channel:     $Pulses\ in\ 16\ s / Number\ of\ channels = 1004.4$

Time of occupancy:                     $Pulse\ in\ 16\ s\ of\ one\ channel * occupancy\ time = 1004.4 * 156\ \mu s = 0.157\ s$

**RESULT**                                     $0.157\ s < 0.4\ s \Rightarrow$  **Pass**

**Example of pulse duration at frequency 2.44 GHz**

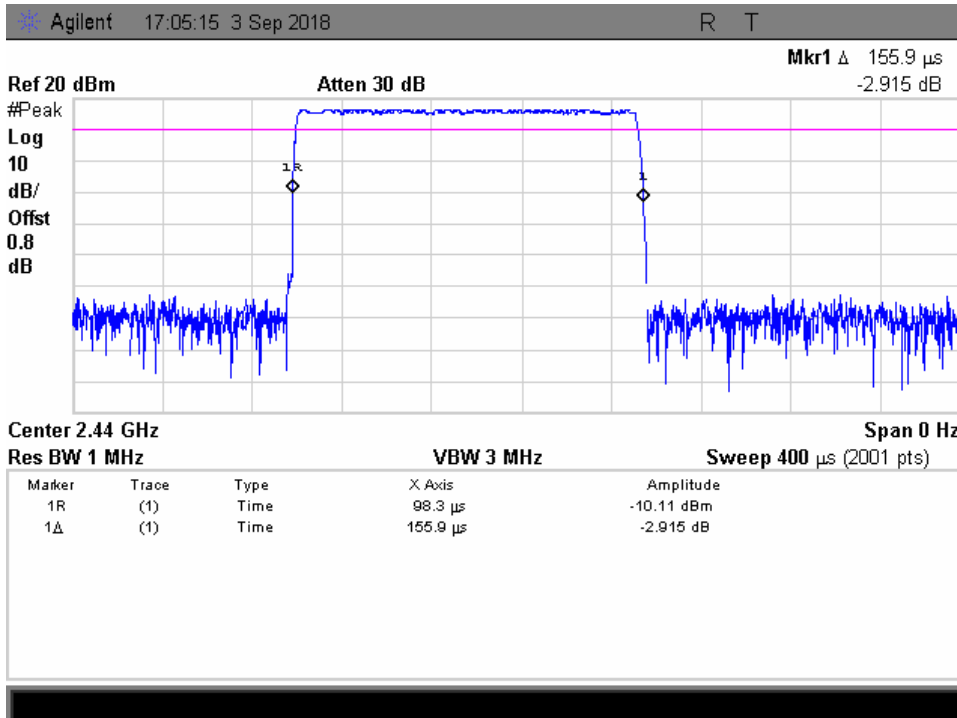

Place and date of test: *Rossens, December 15, 2017*

Operator: *B. Itzcovich*

### 6.5 Antenna gain & effective isotropic radiated power

**Introduction:** The effective radiated power is the power radiated by the antenna of an interrogator in its direction of maximum gain under specified conditions of measurement.

**Test site:**  semi-anechoic chamber (ferrites)  semi-anechoic chamber (foam)

**Distance:**  1 m  3 m  10 m  30 m


**Position of EUT:** 1.5 m (height of the equipment under test above floor)

**Meas. uncertainty:** ± 1.3 dB (f < 300 MHz) / ± 1.6 dB (f > 300 MHz)

**Test method:** The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The ERP / EIRP values are determined replacing the EUT by a substitution antenna (dipole or other). The limits on the plots represent the equivalent field levels for the required power limits.

**Limit:** Antenna gain 6dBi (for a maximum conducted power of 125 mW = 21 dBm). If antennas with directional gains exceeding 6 dBi are used, the maximum peak output power shall be reduced as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Test set-up:**

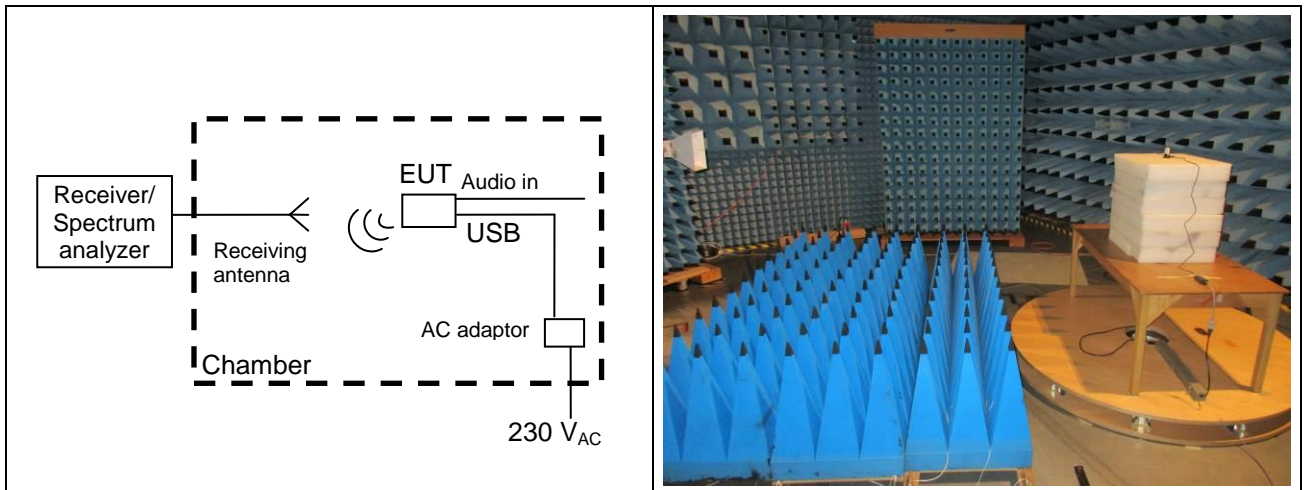

Remarks: ---

**Test equipment:**

Spectrum analyser	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 18-01	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 16-03
Receiver	<input type="checkbox"/> 85-04	<input type="checkbox"/> 90-43	<input type="checkbox"/> 94-35	<input type="checkbox"/> 04-29		
Preamplifier	<input type="checkbox"/> 11-29	<input type="checkbox"/> 95-86	<input type="checkbox"/> 05-56	<input type="checkbox"/> 05-59	<input type="checkbox"/> 05-62	<input type="checkbox"/> 05-87
Antenna (horn)	<input type="checkbox"/> 90-24	<input type="checkbox"/> 98-12	<input type="checkbox"/> 98-13	<input checked="" type="checkbox"/> 07-31		
HF-wattmeter	<input type="checkbox"/> 95-97	<input type="checkbox"/> 01-15	<input type="checkbox"/> 01-17	<input type="checkbox"/> 03-07	<input checked="" type="checkbox"/> 03-12	<input type="checkbox"/> 05-20
Thermocouple detector	<input checked="" type="checkbox"/> 09-04	<input type="checkbox"/> 05-74	<input type="checkbox"/> 05-88	<input type="checkbox"/> 07-03	<input type="checkbox"/> 10-27	<input type="checkbox"/> 03-14
Substitution antenna	<input type="checkbox"/> 89-01	<input checked="" type="checkbox"/> 00-52				
Oscilloscope	<input type="checkbox"/> 90-14	<input type="checkbox"/> 93-85	<input type="checkbox"/> 93-86	<input type="checkbox"/> 01-20	<input type="checkbox"/> 04-06	<input type="checkbox"/> 04-50
Multimeter	<input type="checkbox"/> 03-22	<input type="checkbox"/> 04-47	<input type="checkbox"/> 04-104	<input type="checkbox"/> 04-105	<input type="checkbox"/> 06-51	<input type="checkbox"/> 06-52
Signal generator	<input checked="" type="checkbox"/> 13-16	<input type="checkbox"/> 00-42	<input type="checkbox"/> 03-39	<input type="checkbox"/> 07-02	<input type="checkbox"/> 04-89	<input type="checkbox"/> 05-78
Cables	<input checked="" type="checkbox"/> 06-00	<input type="checkbox"/> 06-01	<input checked="" type="checkbox"/> 10-51	<input type="checkbox"/> SMK		
Attenuator 10dB	<input type="checkbox"/> 11-36					

**Result:**  pass  fail  not applicable  not tested

**Results of the test**

Client: *Phonak Communications AG*

Apparatus: *Roger Select iN, proto 01*

Operating mode: *Hopping f = 2.402/2.440/2.480 GHz, modulated, max. power*

Cables connected to the EUT: *All (see § 4.6 and § 5.4)*

Remarks: *RBW = 5 MHz, VBW = 20 MHz; Peak detector*

Modifications:  None     1     2     3     4     5

Climatic conditions:      Temperature: 25 °C      Humidity: 49 %      Pressure QFE: 934 hPa

f [GHz]	Measurement with EUT		Power at substitution ant.		Meas. with subst. ant.	Parameters of substitution ant.		Result			Polarisation
	U [dBuV]	preamp [dB]	P [dBm]	factor [dB]	U [dBuV]	gain [dB]	att. Cable [dB]	corr. [dB]	P EIRP [dBm]	P EIRP [W]	
2.402	72.2	0.0	10.0	0	73.3	2.15	0	-61.10	11.14	13.00 mW	Vertical
2.402	74.0	0.0	10.0	0	73.5	2.15	0	-61.32	12.72	18.71 mW	Horizontal
2.440	71.7	0.0	10.0	0	73.4	2.15	0	-61.24	10.42	11.02 mW	Vertical
2.440	73.4	0.0	10.0	0	73.6	2.15	0	-61.47	11.88	15.42 mW	Horizontal
2.480	69.5	0.0	10.0	0	73.2	2.15	0	-61.01	8.50	7.08 mW	Vertical
2.480	70.9	0.0	10.0	0	73.1	2.15	0	-60.93	9.96	9.91 mW	Horizontal

The antenna gain is the difference (in dB) of the radiated EIRP power and the conducted power of § 6.6 :

frequency [GHz]	Conducted power [dBm]	Radiated power EIRP [dBm]	Antenna gain [dBi]	Remarks
2.402	15.95	12.72	-3.23	---
2.440	15.69	11.88	-3.81	---
2.480	15.41	9.96	-5.45	---

Place and date of test: *Rossens, August 29 and 31, 2018*  
 Operator: *B. Itzcovich*

**6.6 Maximum output power (conducted)**

Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB  
 3GHz – 6.7GHz: ± 2.1 dB  
 6.7GHz – 13.2GHz: ± 2.6 dB  
 13.2GHz – 19GHz: ± 2.8 dB  
 19GHz – 26.5GHz: ± 3 dB

Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Limit: Maximum 0.125 Watt (= 21 dBm) for systems using antennas with directional gains that do not exceed 6 dBi. If antennas with directional gains exceeding 6 dBi are used, the maximum peak output power shall be reduced as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test set-up:

Remarks: ---

Test equipment:

Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Power supply	<input type="checkbox"/> 99-07	<input type="checkbox"/> 04-31				
Cables	<input checked="" type="checkbox"/> 11-13					

**Result:**  pass  fail  not applicable  not tested

**Results of the test**

Client: *Phonak Communications AG*

Apparatus: *Roger Select iN, proto 02*

Operating mode: *Hopping f = 2.402/2.440/2.480 GHz, modulated, Pmax (05)*

Cables connected to the EUT: *USB and temporary antenna cables*

Remarks: *Measured on temporary antenna connector*

Modifications:  None     1     2     3     4     5

Climatic conditions:      Temperature: 23 °C      Humidity: 49 %      Pressure QFE: 937 hPa

f normal [GHz]	Temp [°C]	U [V]	P [dBm]	Limit [dBm]	Remarks	Pass	
						Yes	No
2.402	21	5.0	15.95	21	Maximum conducted emission	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2.440	21	5.0	15.69	21	---	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2.480	21	5.0	15.41	21	---	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Place and date of test: *Rossens, August 31, 2018*  
 Operator: *B. Itzcovich*

**6.7 Band-edge emission (conducted)**

Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB  
 3GHz – 6.7GHz: ± 2.1 dB  
 6.7GHz – 13.2GHz: ± 2.6 dB  
 13.2GHz – 19GHz: ± 2.8 dB  
 19GHz – 26.5GHz: ± 3 dB

Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Limit: In any 100 kHz bandwidth outside the frequency band, the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Test set-up:

--	--

Remarks: ---


Test equipment:

Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Power supply	<input type="checkbox"/> 99-07	<input type="checkbox"/> 04-31				
Cables	<input checked="" type="checkbox"/> 11-13					

**Result:**  pass  fail  not applicable  not tested

**Results of the test**

Client: *Phonak Communications AG*  
 Apparatus: *Roger Select iN, proto 02*  
 Operating mode: *Hopping f = 2.402/2.440/2.480 GHz, modulated, Pmax (05)*  
 Cables connected to the EUT: *USB and temporary antenna cables*  
 Remarks: *Measured on temporary antenna connector*  
 Modifications:  None     1     2     3     4     5  
 Climatic conditions:    Temperature: 22 °C    Humidity: 45 %    Pressure QFE: 934 hPa

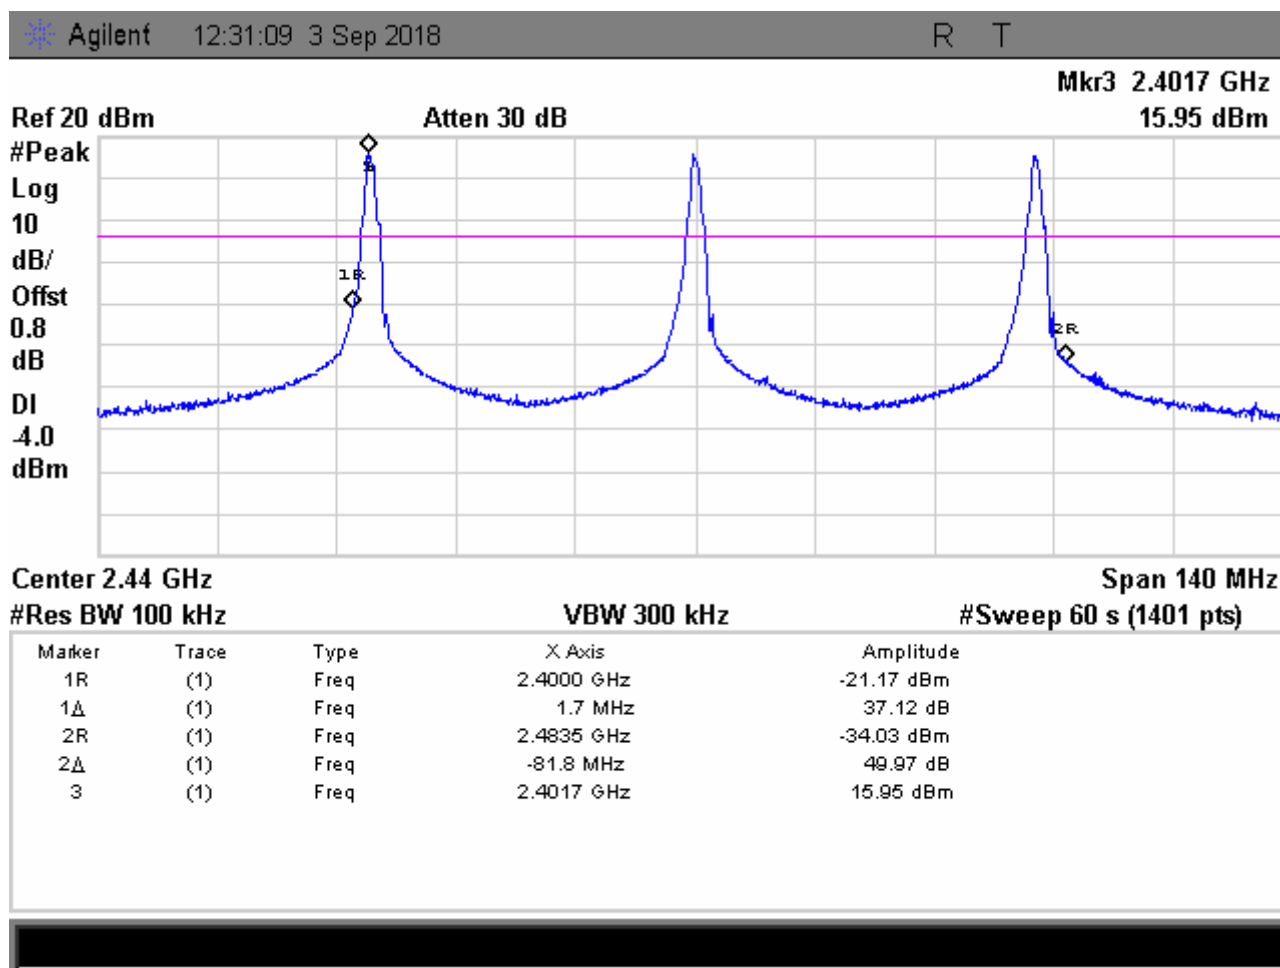

Place and date of test: *Rossens, September 3, 2018*  
 Operator: *B. Itzcovich*



**6.8 Band-edge emission (radiated)**

Test site:  semi-anechoic chamber (ferrites)  semi-anechoic chamber (foam)

Distance:  1 m  3 m  10 m  30 m


Position of EUT: 1.5 m (height of the equipment under test above floor)

Meas. uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyser and a wide band antenna. The antenna is placed at the same height as the EUT successively with horizontal and vertical polarisations, and aimed at the source by tilting. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbances appearing while the EUT is under test.

Limit: Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

Test set-up:

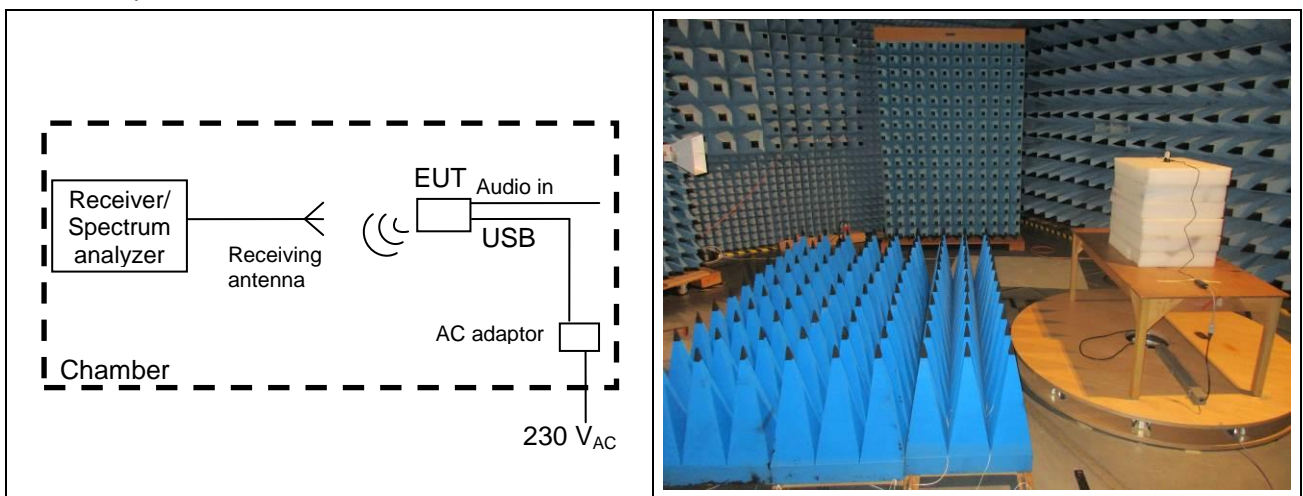

Remarks: *Limit values expressed in dBµV/m and transformed to a measuring distance of 3 m (factor used = 20 dB/decade) if necessary*  
 e.g.: for f = 40 MHz the limit is 500 µV/m at 3 m;

$$20 \log \left( \frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) = 54 \frac{dB\mu V}{m} \text{ at } 3m$$

Test equipment:



Spectrum analyser	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 18-01	<input type="checkbox"/> 03-45	<input checked="" type="checkbox"/> 16-03	<input type="checkbox"/> 07-53
Preamplifier	<input type="checkbox"/> 05-56	<input type="checkbox"/> 05-87	<input type="checkbox"/> 14-27			
Antenna (horn)	<input type="checkbox"/> 90-24	<input checked="" type="checkbox"/> 07-31				
Cables	<input type="checkbox"/> 06-00	<input checked="" type="checkbox"/> 11-30	<input checked="" type="checkbox"/> 10-75			

**Result:**  pass  fail  not applicable  not tested

**Results of the test**

Client: *Phonak Communications AG*  
 EUT: *Roger Select iN*  
 Operating mode: *TX (f = 2.402/2.480 GHz), modulated, Pmax (05)*  
 Cables connected to the EUT: *All (see § 4.6 and § 5.4)*  
 Remarks: *1001 Sweep Points*  
 Modifications:  None  1  2  3  4  5  
 Climatic conditions: Temperature: 24 °C Humidity: 48 % Pressure QFE: 938 hPa

	Measured field strength [dBµV/m]		Limit [dBµV/m]	Margin [dB]		Pass	
	≤2390.0 MHz	≥2483.5 MHz		≤2390.0 MHz	≥2483.5 MHz	Yes	No
Peak detector	65.78	71.79	74	8.22	2.21	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Average RMS detector	42.50	47.77	54	11.50	6.23	<input checked="" type="checkbox"/>	<input type="checkbox"/>

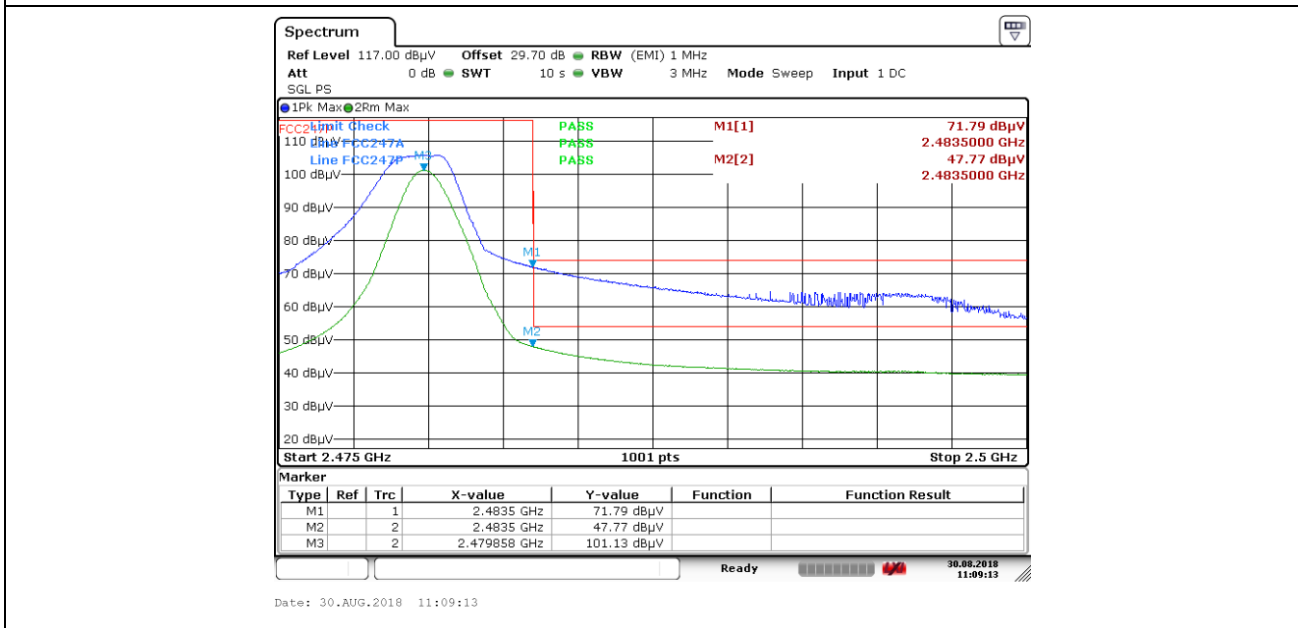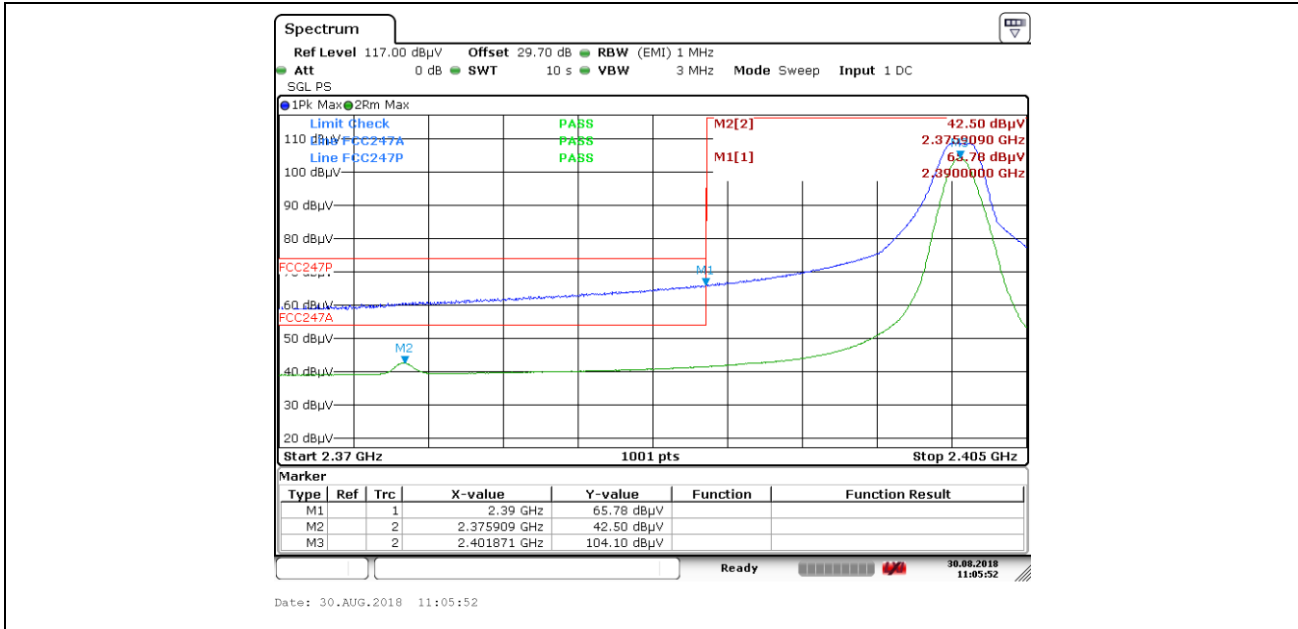

Place and date of test: *Rossens, August 30, 2018*  
 Operator: *B. Itzcovich*

**6.9 Spurious emissions – conducted (transmitter – 9 kHz to 26 GHz)**

Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  laboratory

Meas. Uncertainty: 9kHz – 3GHz: ± 1 dB  
 3GHz – 6.7GHz: ± 2.1 dB  
 6.7GHz – 13.2GHz: ± 2.6 dB  
 13.2GHz – 19GHz: ± 2.8 dB  
 19GHz – 26.5GHz: ± 3 dB



Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Limit: In any 100 kHz bandwidth outside the frequency band, the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Modifications:  None  1  2  3  4  5

Climatic conditions: Temperature: 24 °C Humidity: 48 % Pressure QFE: 938 hPa

Test set-up:

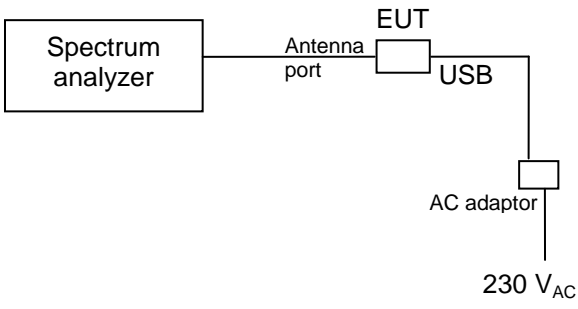	
--	---

Remarks: *Emissions near band-edges are checked under § 6.7*

Test equipment:


Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Power supply	<input type="checkbox"/> 99-07	<input type="checkbox"/> 04-31				
Cables	<input type="checkbox"/> 11-13					

<b>Result:</b> <input checked="" type="checkbox"/> pass	<input type="checkbox"/> fail	<input type="checkbox"/> not applicable	<input type="checkbox"/> not tested
---	-------------------------------	---	-------------------------------------

Measurement Type : Power Interference  
Port : Temporary antenna connector  
Clamp position : -



Equipment Under Test : Roger Select iN (TX32), Proto 02  
Set-Up : See photos  
Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05)  
Remarks : Peak detector sweep, 8001 Pts/zone

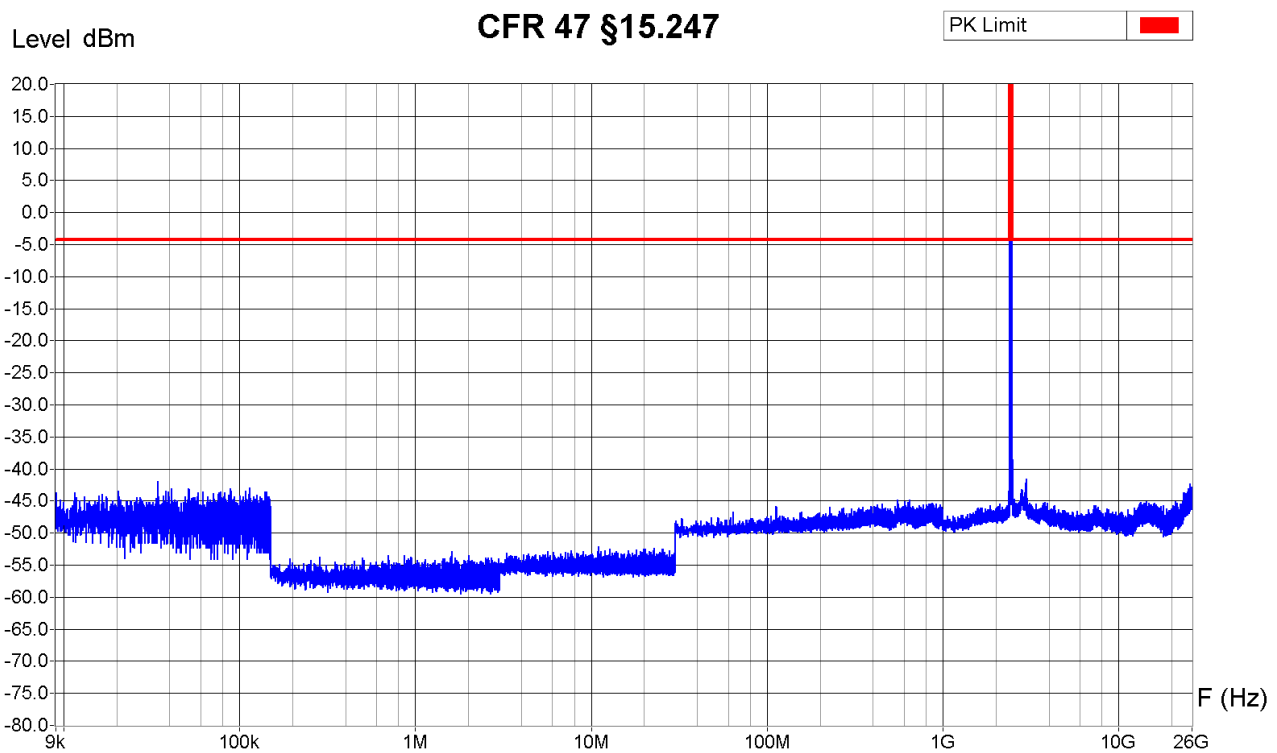

Operator: B. Itzcovich  
Date/Time: 03.09.2018 13:19  
Filename:  
Pcond\_9k-26G\_TX3f.png/.txt

**6.10 Spurious emissions, transmit mode – radiated**

**6.10.1 9 kHz to 30 MHz**

Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  .....

Distance:  3 m  10 m  30 m

Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. Uncertainty: ± 2.8 dB

Test method: The magnetic disturbance radiated by the equipment under test is measured using a spectrum analyzer and a wide band magnetic antenna. The antenna is placed at 1 m height, first in the direction of the apparatus under test, then at 90° to the apparatus and if required also horizontally. If possible the turning table is operated through 360° during the measurement. The recording is carried out taking into account the maximum value of the disturbance appearing during the functioning of the apparatus under test. The peak values are recorded continuously on a graph. The values exceeding the limits are remeasured using a measuring receiver.

Modifications:  None  1  2  3  4  5

Climatic conditions: Temperature: 24 °C Humidity: 43 % Pressure QFE: 935 hPa

Test set-up:

Remarks: *Limit values expressed in dBµV/m and transformed to a measuring distance of 10 m (factor used = 40 dB/decade) if necessary*  
 e.g.: for f = 10 MHz the limit is 30 µV/m at 30 m;  

$$20 \log \left( \frac{30 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 40 \log \left( \frac{30 m}{10 m} \right) = 48.6 \frac{dB\mu V}{m} \text{ at } 10 m$$

Test equipment:


Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 10-70
Receiver	<input type="checkbox"/> 85-04	<input type="checkbox"/> 90-43	<input type="checkbox"/> 94-35	<input checked="" type="checkbox"/> 10-70		
Preamplifier	<input type="checkbox"/> 90-01	<input type="checkbox"/> 95-86	<input type="checkbox"/> 05-56	<input type="checkbox"/> 05-59	<input type="checkbox"/> 05-62	
Antenna (type: magnetic)	<input type="checkbox"/> 90-25	<input type="checkbox"/> 90-28	<input type="checkbox"/> 99-32	<input checked="" type="checkbox"/> 04-79		
Cables	<input checked="" type="checkbox"/> 06-01	<input type="checkbox"/> 06-236				

**Result:**  pass  fail  not applicable  not tested

Measurement Type : Radiated Field  
 Polarisation : Parallel  
 Table Angle : 0 - 360°  
 Antenna Height : 1 m



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 3001 Pts/zone  
 "Parallel" means "loop antenna axis towards EUT"

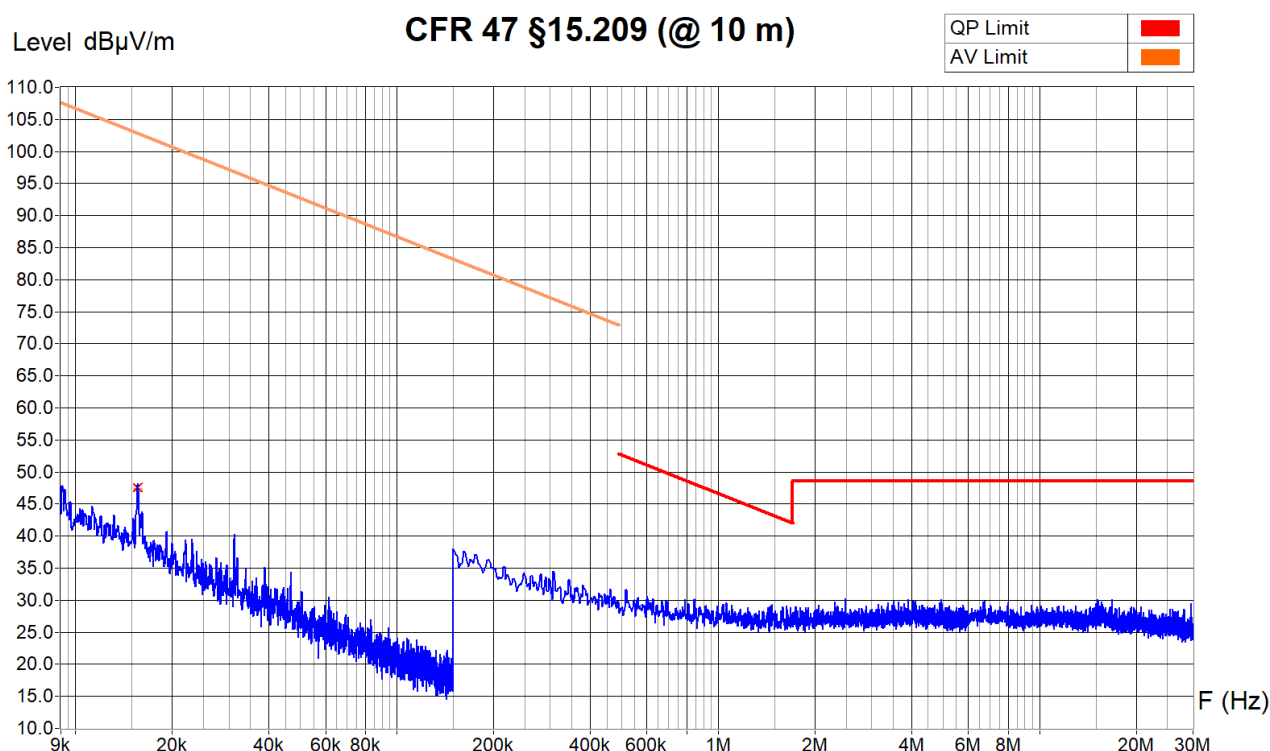

Zone	9 KHz - 150 KHz	150 KHz - 6 MHz	6 MHz - 30 MHz
Video Bandwidth	500 Hz	30 KHz	30 KHz
Resol Bandwidth	200 Hz	9 KHz	9 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)
15.62 KHz	51.2 dBµV/m	47.6 dBµV/m	47.3 dBµV/m


Sample calculation with all conversion and correction factors used				
Frequency [kHz]	Receiver AV value [dBµV]	Cable att. corr. [dB]	Antenna factor corr. [dB]	AV field [dBµV/m]
15.62	26.5	+0.0	+20.8	= 47.3

Operator: B. Itzcovich  
 Date/Time: 28.08.2018 13:11  
 Filename:  
 09\_RE\_9k-30M\_TX3f\_Par.png/txt

Measurement Type : Radiated Field  
 Polarisation : Perpendicular  
 Table Angle : 0 - 360°  
 Antenna Height : 1 m



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 3001 Pts/zone  
 "Parallel" means "loop antenna axis towards EUT"

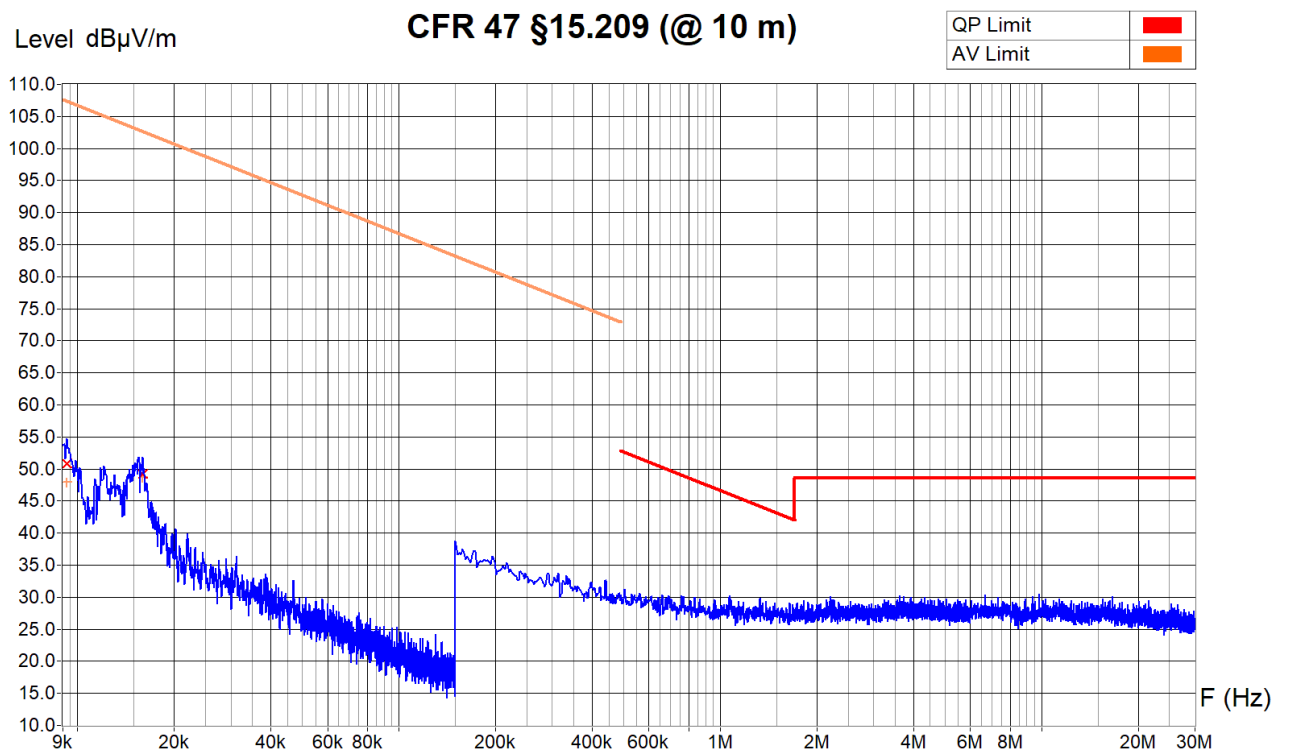

Zone	9 KHz - 150 KHz	150 KHz - 6 MHz	6 MHz - 30 MHz
Video Bandwidth	500 Hz	30 KHz	30 KHz
Resol Bandwidth	200 Hz	9 KHz	9 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)
9.27 KHz	56.7 dBµV/m	50.9 dBµV/m	47.9 dBµV/m
15.96 KHz	53.6 dBµV/m	49.1 dBµV/m	48.7 dBµV/m


Frequency	Average RMS detector meas. @ 10m	Average RMS detector meas. corrected for 3m
15.96 kHz	48.7 dBµV/m	69.6 dBµV/m

Operator: B. Itzcovich  
 Date/Time: 28.08.2018 13:33  
 Filename: 10\_RE\_9k-30M\_TX3f\_Per.png/.txt

Measurement Type : Radiated Field  
 Polarisation : Horizontal  
 Table Angle : 0 - 360°  
 Antenna Height : 1 m



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 3001 Pts/zone  
 "Parallel" means "loop antenna axis towards EUT"

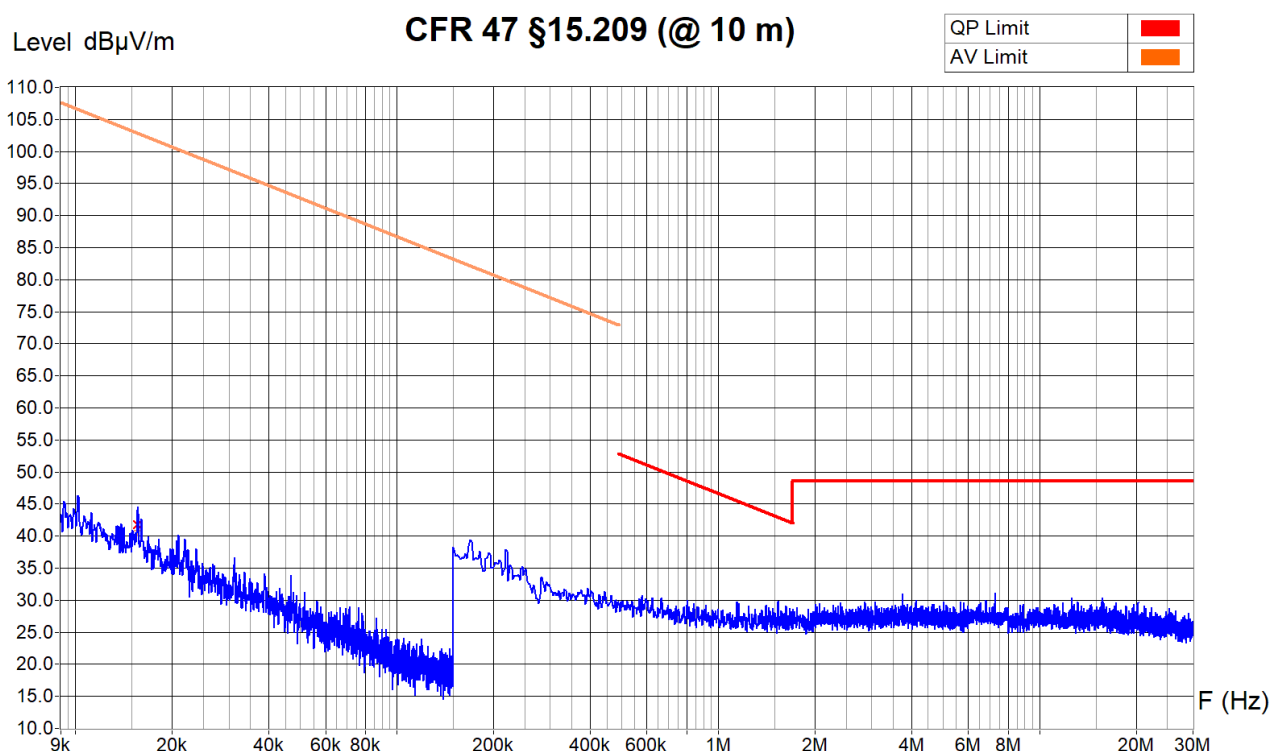

Zone	9 KHz - 150 KHz	150 KHz - 6 MHz	6 MHz - 30 MHz
Video Bandwidth	500 Hz	30 KHz	30 KHz
Resol Bandwidth	200 Hz	9 KHz	9 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)
15.62 KHz	47.3 dBµV/m	41.7 dBµV/m	40.8 dBµV/m

Operator: B. Itzcovich  
 Date/Time: 28.08.2018 13:55  
 Filename:  
 11\_RE\_9k-30M\_TX3f\_Hor.png/.txt



**6.10.2 30 MHz to 1 GHz**

Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  .....

Distance:  3 m  10 m  30 m

Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. Uncertainty: ± 4.6 dB (30 – 300 MHz) / ± 3.7 dB (300 – 1000 MHz)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarizations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbances appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding a limit are re-measured manually using a receiver.

Modifications:  None  1  2  3  4  5

Climatic conditions: Temperature: 23 °C Humidity: 44 % Pressure QFE: 935 hPa

Test set-up:

Remarks: - Limit values expressed in dBµV/m and transformed to a measuring distance of 10 m (factor used = 20 dB/decade) if necessary  
 e.g.: for f = 40 MHz the limit is 100 µV/m at 3 m;  

$$20 \log \left( \frac{100 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left( \frac{3 m}{10 m} \right) = 29.54 \frac{dB\mu V}{m} \text{ at } 10 m$$

Test equipment:


Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 10-70
Receiver	<input type="checkbox"/> 85-04	<input type="checkbox"/> 90-43	<input type="checkbox"/> 94-35	<input type="checkbox"/> 04-29	<input checked="" type="checkbox"/> 10-70	
Preamplifier	<input type="checkbox"/> 90-01	<input type="checkbox"/> 95-86	<input type="checkbox"/> 05-56	<input checked="" type="checkbox"/> 05-59	<input type="checkbox"/> 05-62	<input type="checkbox"/> 05-87
Antenna (bilog)	<input type="checkbox"/> 94-03	<input checked="" type="checkbox"/> 05-38				
Cables	<input checked="" type="checkbox"/> 06-01					

**Result:**  pass  fail  not applicable  not tested

Measurement Type : Radiated Field  
 Polarisation : Vertical  
 Table Angle : 0 - 360°  
 Antenna Height : 1 - 4m



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 9701 Pts/zone

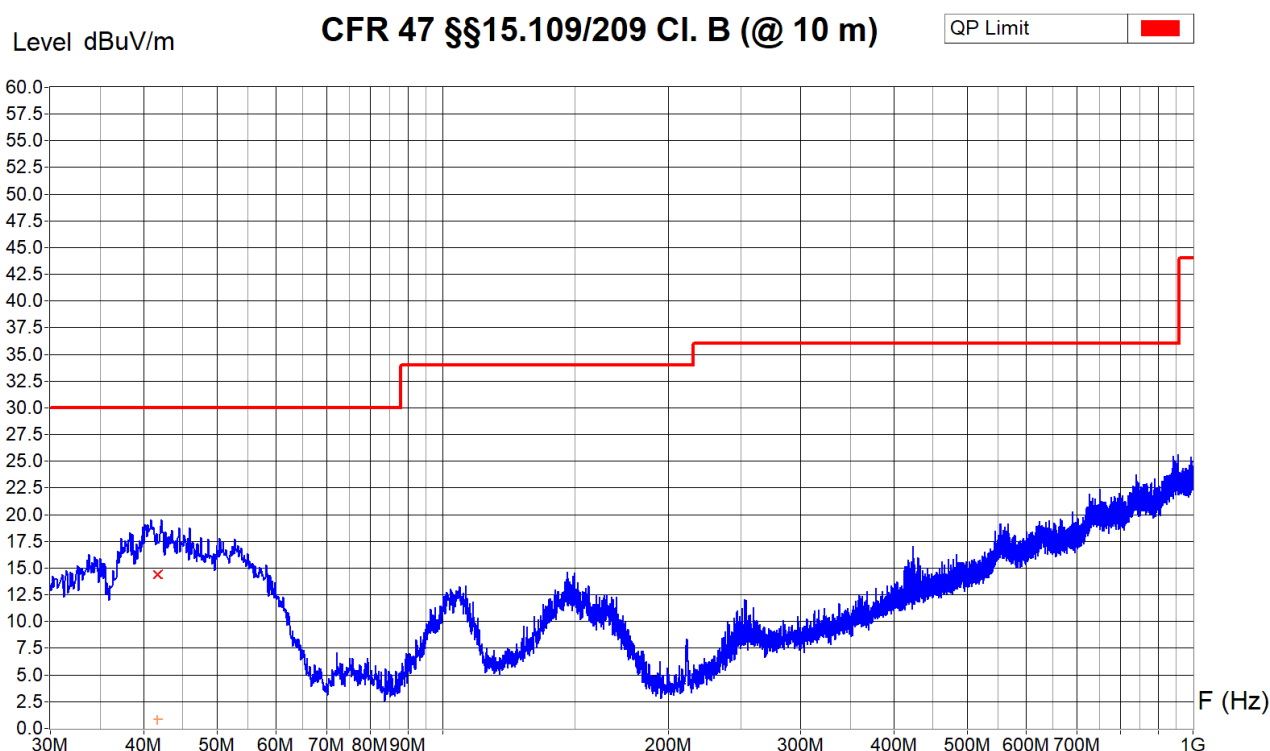

Zone	30 MHz - 1 GHz
Video Bandwidth	500 KHz
Resol Bandwidth	120 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
41.65 MHz	21.2 dBuV/m	14.4 dBuV/m	0.9 dBuV/m	15.6 dB


Sample calculation with all conversion and correction factors used					
Frequency [MHz]	Receiver QP value [dBuV]	Cable att. corr. [dB]	Preamp. gain corr. [dB]	Antenna factor corr. [dB]	QP field [dBuV/m]
41.65	30.8	+0.8	-29.1	+11.9	= 14.4

Operator: B. Itzcovich  
 Date/Time: 28.08.2018 09:01  
 Filename:  
 01\_RE\_30M-  
 1G\_TX3f\_V\_FCC.png/.txt

Measurement Type : Radiated Field  
 Polarisation : Horizontal  
 Table Angle : 0 - 360°  
 Antenna Height : 1 - 4m



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 9701 Pts/zone

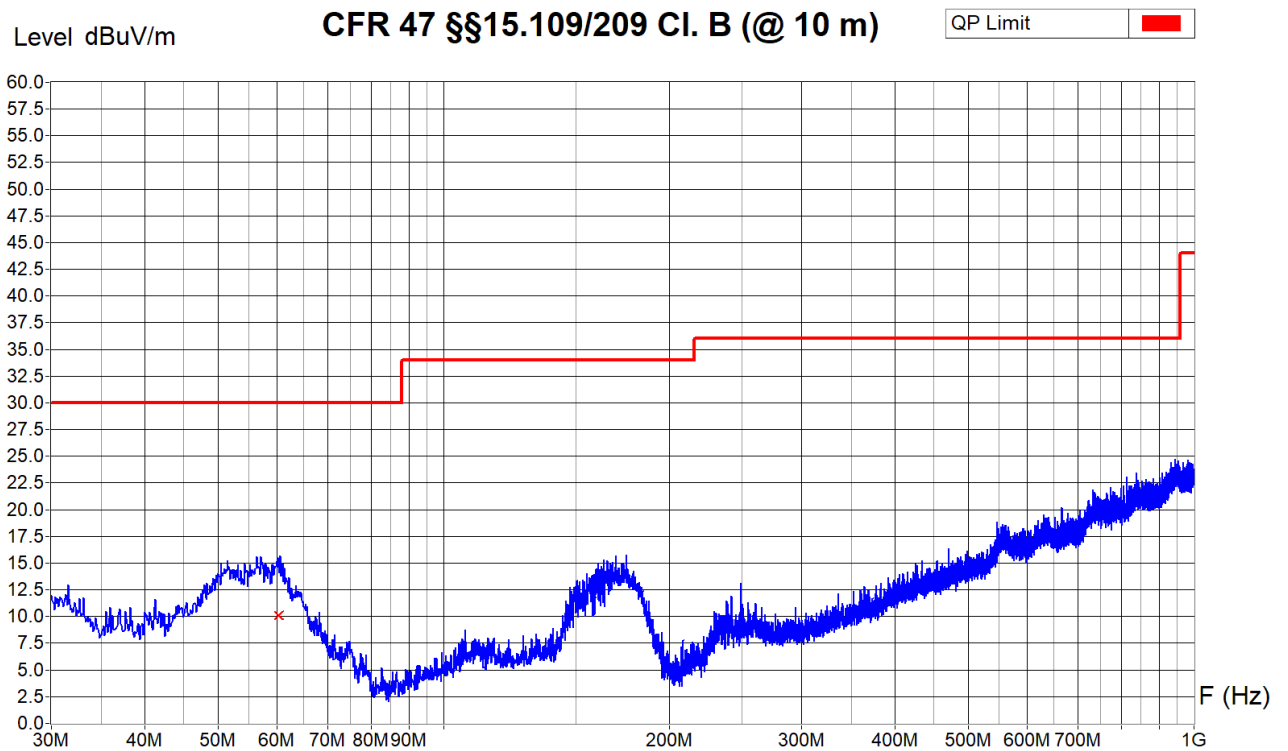

Zone	30 MHz - 1 GHz
Video Bandwidth	500 KHz
Resol Bandwidth	120 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
60.30 MHz	16.6 dBuV/m	10.1 dBuV/m	-4.2 dBuV/m	19.9 dB

Operator: B. Itzcovich  
 Date/Time: 28.08.2018 09:22  
 Filename:  
 02\_RE\_30M-  
 1G\_TX3f\_H\_FCC.png/.txt

**6.10.3 1 GHz to 18 GHz**

Test site:  semi-anechoic chamber (ferrites)  semi-anechoic chamber (foam)

Distance:  1 m  3 m  10 m  30 m

Position of EUT: 1.5 m (height of the equipment under test above floor)

Meas. Uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarizations, and aimed at the source by tilting. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value (peak) of all the disturbances appearing while the apparatus is under test.

Modifications:  None  1  2  3  4  5

Climatic conditions: Temperature: 24 °C Humidity: 47 % Pressure QFE: 938 hPa

Test set-up:

Remarks: - Limit values expressed in dBµV/m and transformed to a measuring distance of 1m (factor used = 20 dB/decade) if necessary. E.g.: for f = 1 GHz the limit is 500 µV/m at 3 m;

$$20 \log\left(\frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}}\right) + 20 \log\left(\frac{3m}{1m}\right) = 63.5 \frac{dB\mu V}{m} \text{ at } 1m$$

- Emissions near band-edges may seem over limits due to selectivity of 07-53 Analyzer at 1 MHz RBW and notch filter. They are checked under §§ 6.7 and 6.8
- Average measurement determined from the peak field strength after correcting for the worst-case duty cycle according to § 4.1.4.2.4 of ANSI C63.10:2013. Correction factor:  $\delta(dB) = 20\log(\Delta) = 20 \log(0.1974) = -14.09 \text{ dB}$

Test equipment:


Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Preamplifier	<input type="checkbox"/> 05-56	<input type="checkbox"/> 05-87	<input checked="" type="checkbox"/> 14-27			
Antenna (horn)	<input type="checkbox"/> 90-24	<input checked="" type="checkbox"/> 07-31				
Cables	<input checked="" type="checkbox"/> 10-75	<input checked="" type="checkbox"/> 11-61				
Filters	<input checked="" type="checkbox"/> 13-14	<input checked="" type="checkbox"/> 12-06	<input type="checkbox"/> 13-05			
Attenuator 10dB	<input type="checkbox"/> 11-36					

**Result:**  pass  fail  not applicable  not tested

Measurement Type : Radiated Field  
 Polarisation : Vertical  
 Table Angle : 0 - 360°  
 Antenna Height : 1 - 3m (aimed at the source by tilting)



Equipment Under Test : Roger Select iN (TX32), proto 01  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 3001 Pts/zone  
 Zone 1 - 7 GHz with notch filter  
 Zone 7 - 18 GHz with HP filter

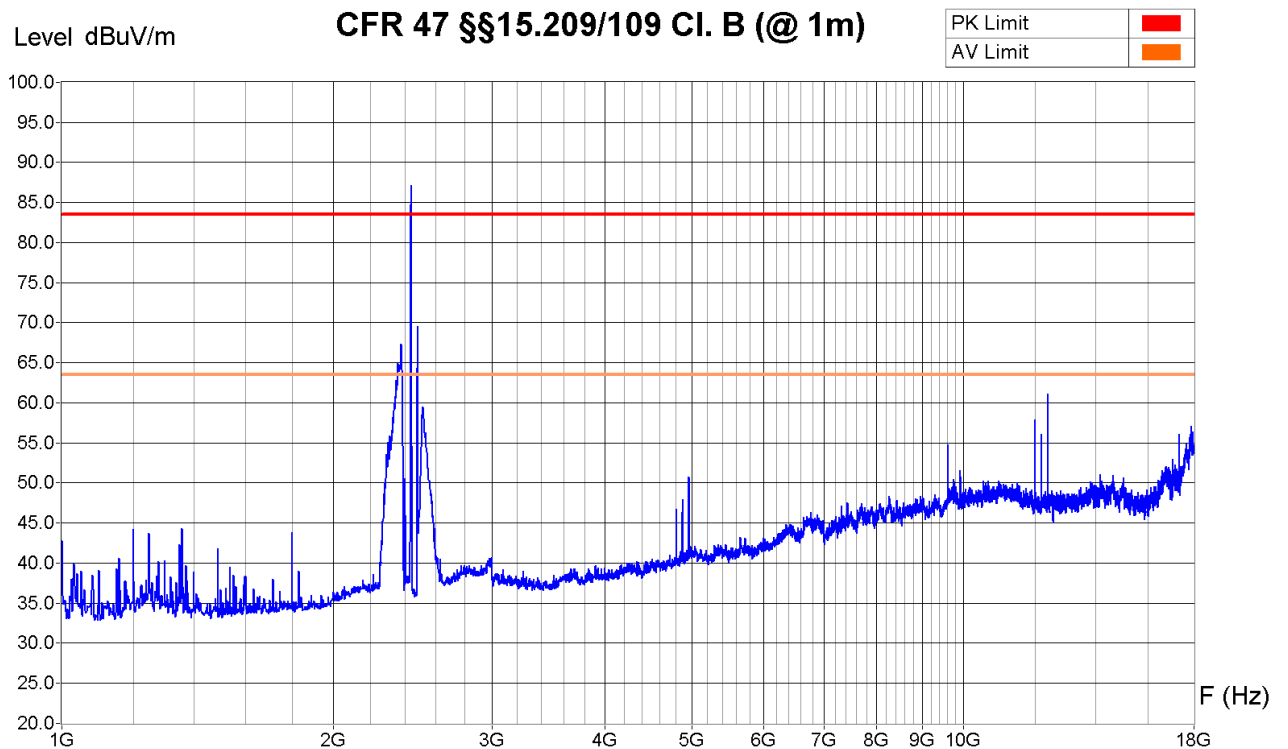

Zone	1 GHz - 7 GHz	7 GHz - 13 GHz	13 GHz - 18 GHz
Video Bandwidth	3 MHz	3 MHz	3 MHz
Resol Bandwidth	1 MHz	1 MHz	1 MHz


Sample calculation with all conversion and correction factors used						
Frequency [GHz]	Analyzer Peak value [dBuV]	Cable att. corr. [dB]	Preamp. gain corr. [dB]	Antenna factor corr. [dB]	Attenuator corr. [dB]	Peak field [dBuV/m]
4.960	56.7	+1.1	-39.3	+32.3	0.0	= 50.8

Operator: B. Itzcovich  
 Date/Time: 30.08.2018 15:28  
 Filename:  
 21\_RE\_1-18G\_TX3f\_V\_FCC.png/  
 .txt

Measurement Type : Radiated Field  
 Polarisation : Horizontal  
 Table Angle : 0 - 360°  
 Antenna Height : 1 - 3m (aimed at the source by tilting)



Equipment Under Test : Roger Select iN (TX32), proto 01  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 3001 Pts/zone  
 Zone 1 - 7 GHz with notch filter  
 Zone 7 - 18 GHz with HP filter

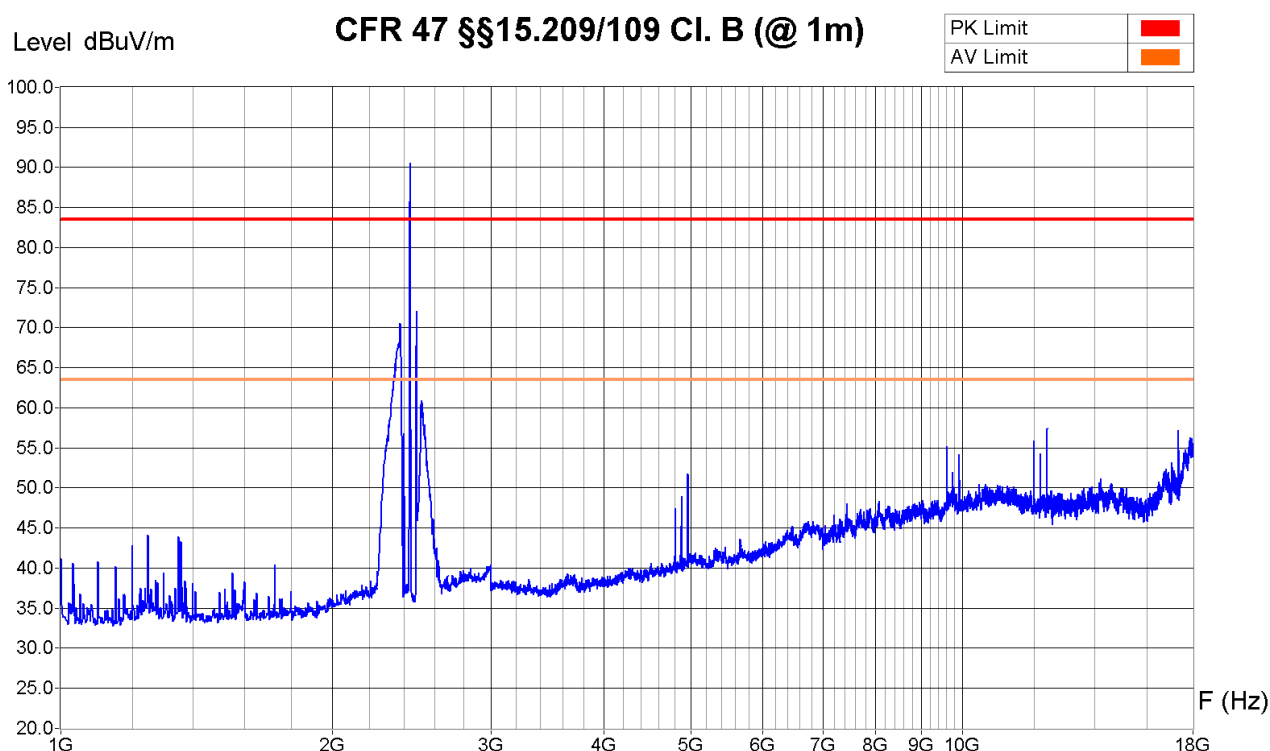

Zone	1 GHz - 7 GHz	7 GHz - 13 GHz	13 GHz - 18 GHz
Video Bandwidth	3 MHz	3 MHz	3 MHz
Resol Bandwidth	1 MHz	1 MHz	1 MHz

Operator: B. Itzcovich  
 Date/Time: 30.08.2018 15:12  
 Filename:  
 22\_RE\_1-18G\_TX3f\_H\_FCC.png/  
 .txt

**6.10.4 18 GHz to 26 GHz (FCC / industry Canada)**

Test site:  semi-anechoic chamber (foam)  semi-anechoic chamber (ferrites)

Distance:  1 m  3 m  10 m  30 m

Position of EUT: 1.5 m (height of the equipment under test above floor)



Meas. Uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is placed at the same height as the EUT successively with horizontal and vertical polarizations. The EUT is placed successively in standing and lying positions. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value (peak) of all the disturbances appearing while the apparatus is under test.

Modifications:  None  1  2  3  4  5

Climatic conditions: Temperature: 24 °C Humidity: 45 % Pressure QFE: 936 hPa

Test set-up:

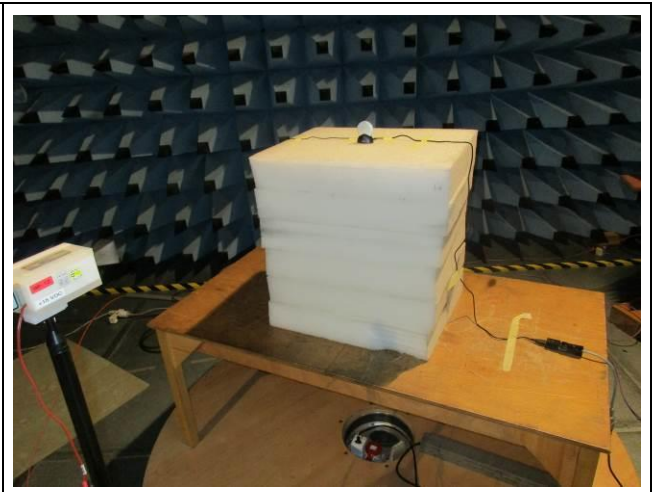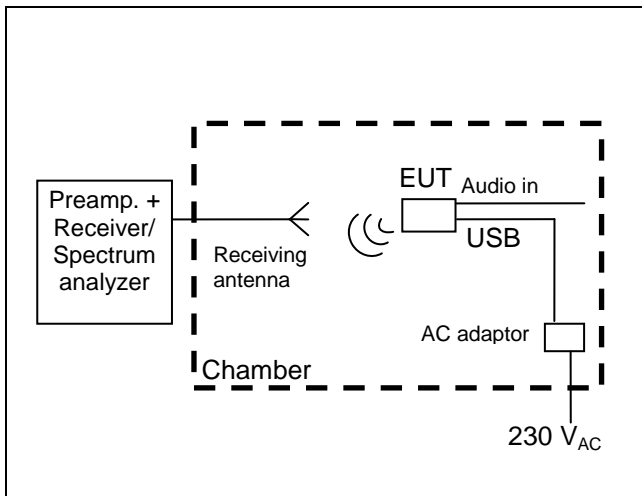

Remarks: *Limit values expressed in dBµV/m and transformed to a measuring distance of 1m (factor used = 20 dB/decade) if necessary*  
 e.g.: for f = 18 GHz the limit is 500 µV/m at 3 m;

$$20 \log\left(\frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}}\right) + 20 \log\left(\frac{3m}{1m}\right) = 63.5 \frac{dB\mu V}{m} \text{ at } 1m$$

Test equipment:


Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Antenna with mixer & preamp.	<input checked="" type="checkbox"/> 98-12					
Cables	<input checked="" type="checkbox"/> 11-62	<input checked="" type="checkbox"/> 10-81				
Power supply	<input checked="" type="checkbox"/> 06-62					
Multimeter	<input checked="" type="checkbox"/> 04-47					

**Result:**  pass  fail  not applicable  not tested

Measurement Type : Radiated Field  
 Polarisation : Horizontal  
 Table Angle : 0 - 360°  
 Antenna Height : 1.5 m



Equipment Under Test : Roger Select iN (TX32), proto 01  
 Set-Up : EUT standing (h = 1.5m). See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 4001 Pts/zone

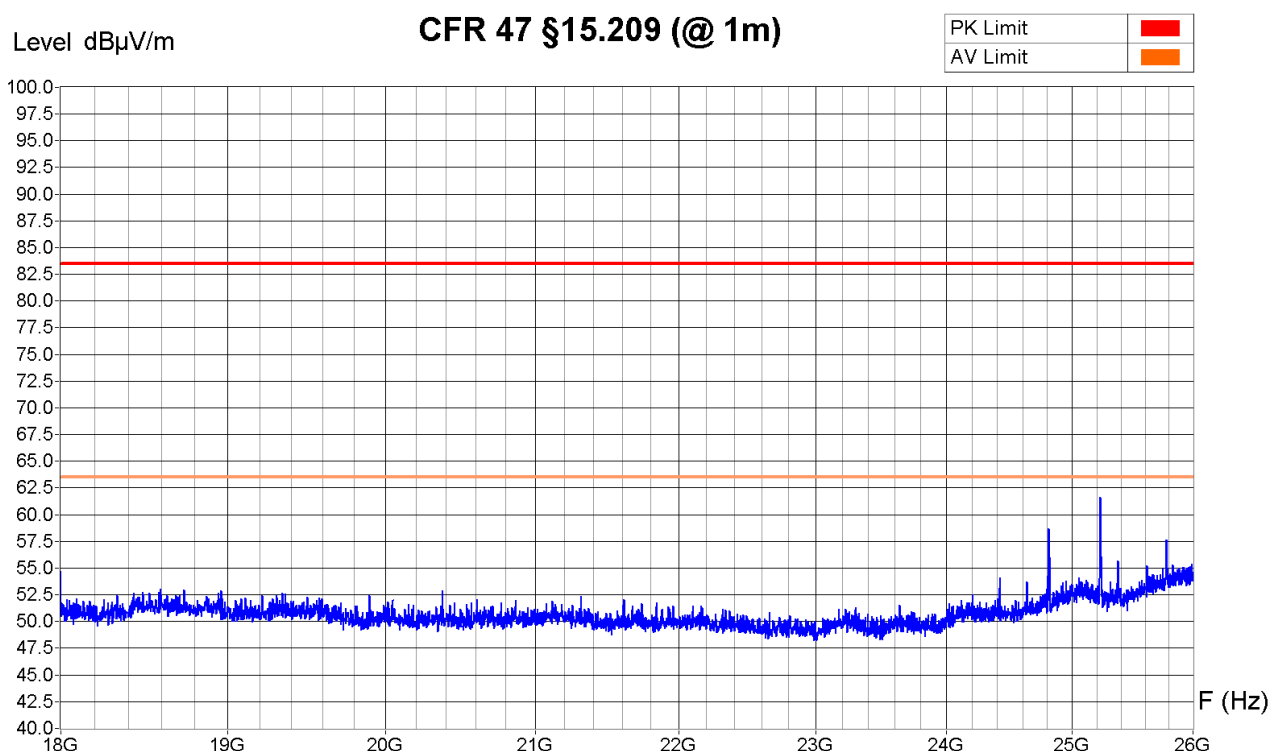

Zone	18 GHz - 26 GHz
Video Bandwidth	3 MHz
Resol Bandwidth	1 MHz

Sample calculation with all conversion and correction factors used			
Frequency [GHz]	Analyzer Peak value [dBµV]	Antenna factor corr. [dB]	Peak field [dBµV/m]
24.812	34.6	+24.1	= 58.7


Operator:	B. Itzcovich
Date/Time:	31.08.2018 11:19
Filename:	26_RE_18-26G_TX_Stand_H.png/.txt



Measurement Type : Radiated Field  
 Polarisation : Vertical  
 Table Angle : 0 - 360°  
 Antenna Height : 1.5 m



Equipment Under Test : Roger Select iN (TX32), proto 01  
 Set-Up : EUT standing (h = 1.5m). See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 4001 Pts/zone

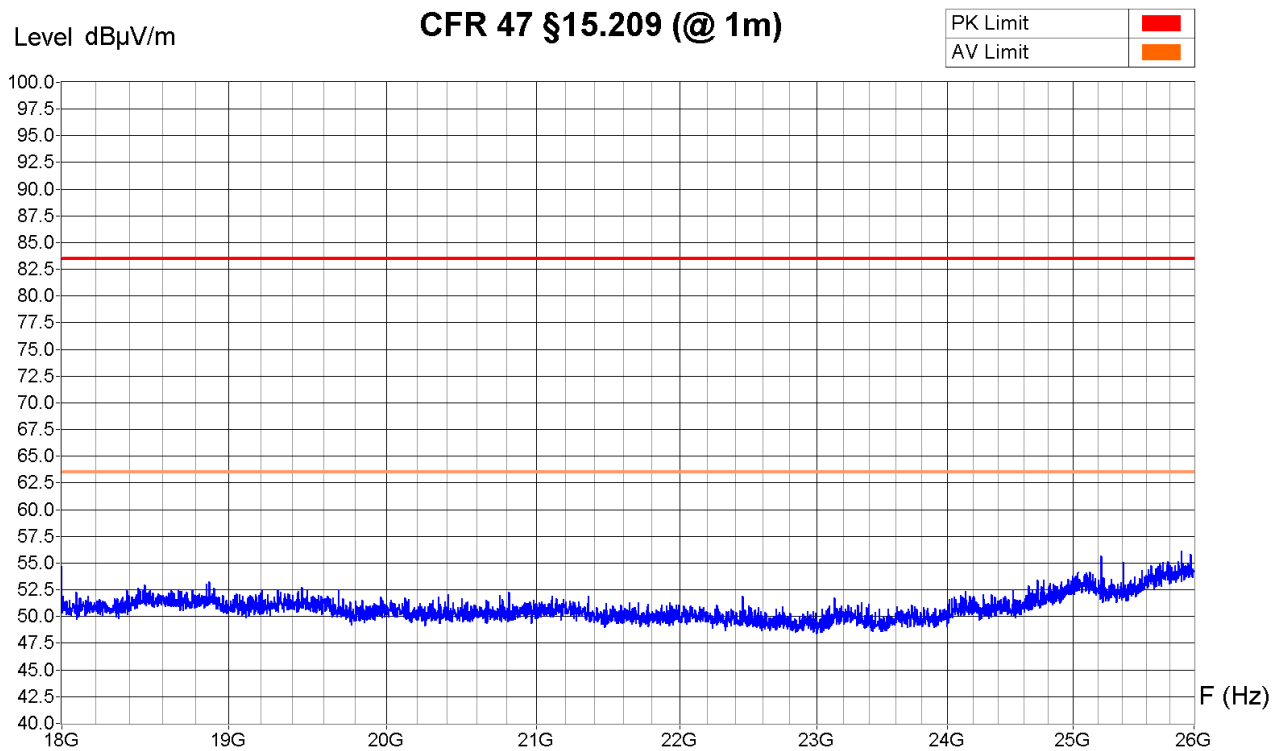


Zone	18 GHz - 26 GHz
Video Bandwidth	3 MHz
Resol Bandwidth	1 MHz

Operator: B. Itzcovich
Date/Time: 31.08.2018 11:32
Filename: 25_RE_18-26G_TX_Stand_V.png/ .txt

Measurement Type : Radiated Field  
 Polarisation : Horizontal  
 Table Angle : 0 - 360°  
 Antenna Height : 1.5 m



Equipment Under Test : Roger Select iN (TX32), proto 01  
 Set-Up : EUT lying (h = 1.5m). See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 4001 Pts/zone

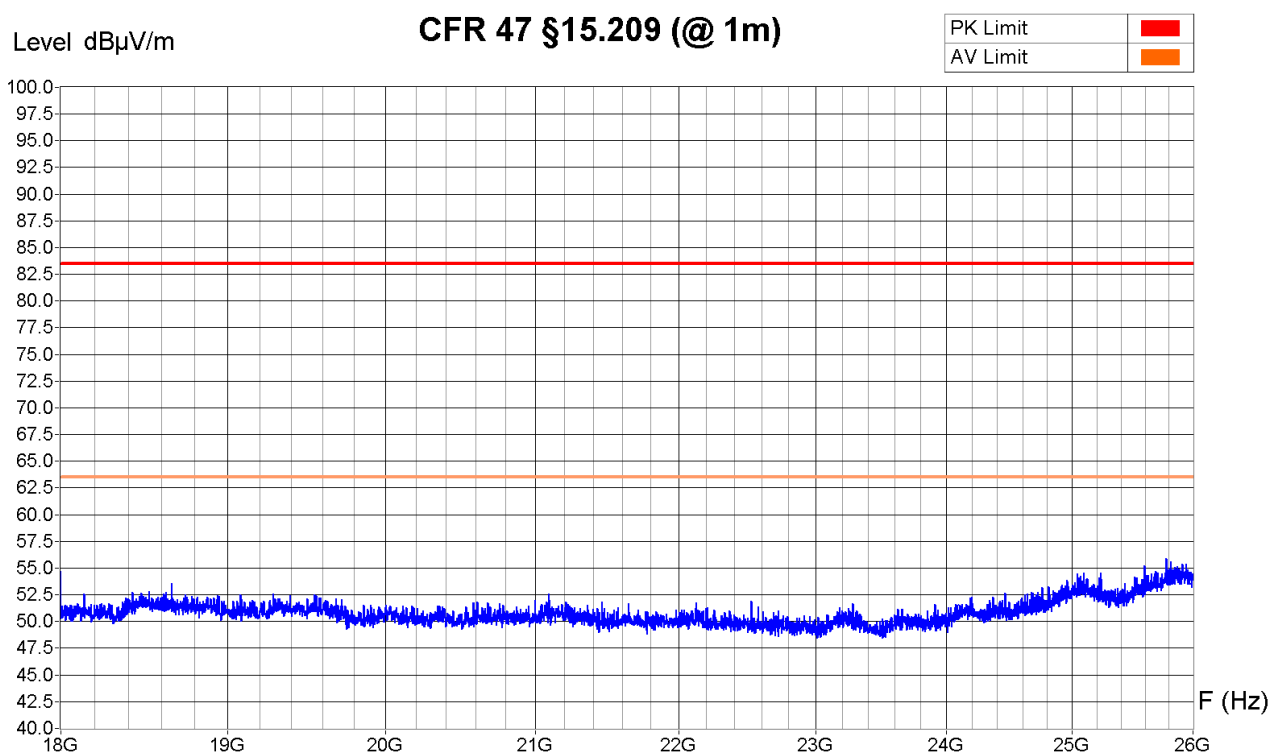


Zone	18 GHz - 26 GHz
Video Bandwidth	3 MHz
Resol Bandwidth	1 MHz

Operator:	B. Itzcovich
Date/Time:	31.08.2018 11:24
Filename:	28_RE_18-26G_TX_Lying_H.png/ .txt

Measurement Type : Radiated Field  
 Polarisation : Vertical  
 Table Angle : 0 - 360°  
 Antenna Height : 1.5 m



Equipment Under Test : Roger Select iN (TX32), proto 01  
 Set-Up : EUT lying (h = 1.5m). See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 4001 Pts/zone

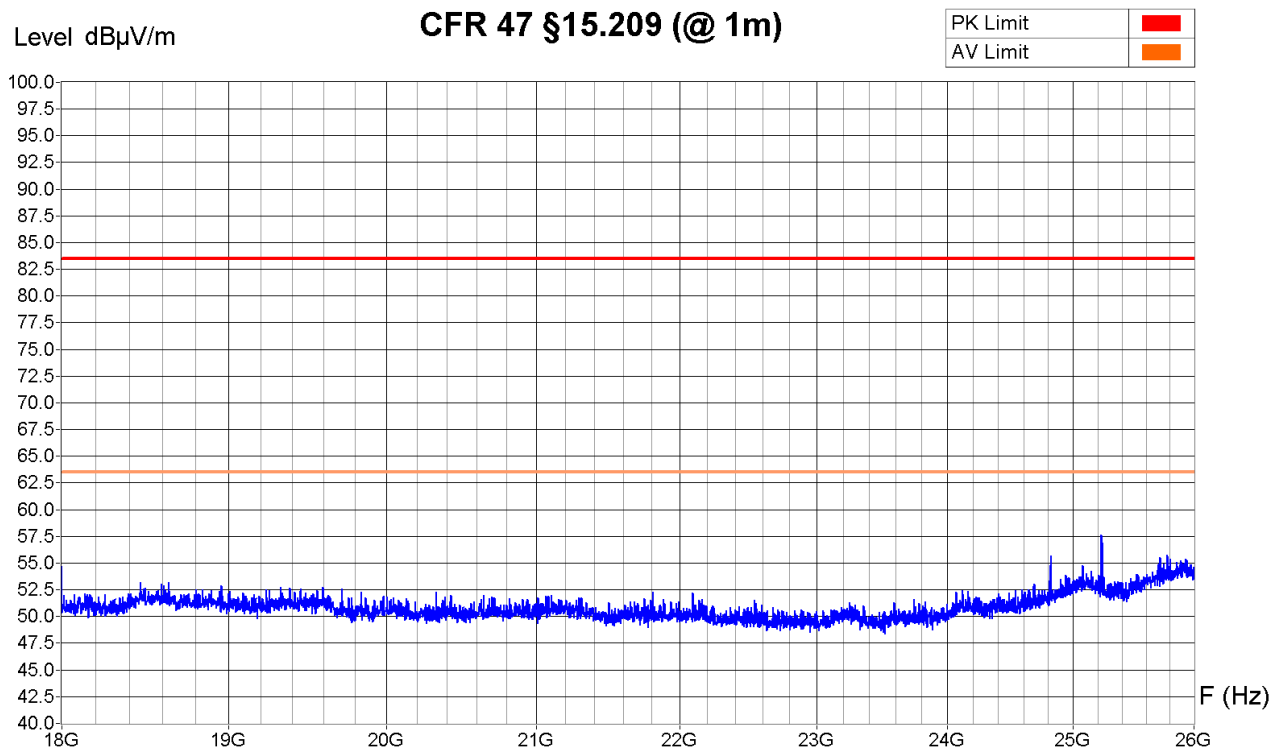

Zone	18 GHz - 26 GHz
Video Bandwidth	3 MHz
Resol Bandwidth	1 MHz

Operator: B. Itzcovich
Date/Time: 31.08.2018 11:28
Filename: 27_RE_18-26G_TX_Lying_V.png/ .txt

**6.11 Spurious emissions, receive mode – radiated**

**6.11.1 30 MHz to 1 GHz**

Test site:  semi-anechoic chamber (foam)  open test site  
 semi-anechoic chamber (ferrites)  .....

Distance:  3 m  10 m  30 m

Position of EUT: 0.8 m (height of the equipment under test above floor)

Meas. Uncertainty: ± 4.6 dB (30 – 300 MHz) / ± 3.7 dB (300 – 1000 MHz)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarizations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbances appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding a limit are re-measured manually using a receiver.

Modifications:  None  1  2  3  4  5

Climatic conditions: Temperature: 23 °C Humidity: 44 % Pressure QFE: 935 hPa

Test set-up:

Remarks: - Limit values expressed in dBµV/m and transformed to a measuring distance of 10 m (factor used = 20 dB/decade) if necessary  
 e.g.: for f = 40 MHz the limit is 100 µV/m at 3 m;

$$20 \log\left(\frac{100 \frac{\mu V}{m}}{1 \frac{\mu V}{m}}\right) + 20 \log\left(\frac{3 m}{10 m}\right) = 29.54 \frac{dB\mu V}{m} \text{ at } 10 m$$

Test equipment:


Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 10-70
Receiver	<input type="checkbox"/> 85-04	<input type="checkbox"/> 90-43	<input type="checkbox"/> 94-35	<input type="checkbox"/> 04-29	<input checked="" type="checkbox"/> 10-70	
Preamplifier	<input type="checkbox"/> 90-01	<input type="checkbox"/> 95-86	<input type="checkbox"/> 05-56	<input checked="" type="checkbox"/> 05-59	<input type="checkbox"/> 05-62	<input type="checkbox"/> 05-87
Antenna (bilog)	<input type="checkbox"/> 94-03	<input checked="" type="checkbox"/> 05-38				
Cables	<input checked="" type="checkbox"/> 06-01					

**Result:**  pass  fail  not applicable  not tested

Measurement Type : Radiated Field  
 Polarisation : Vertical  
 Table Angle : 0 - 360°  
 Antenna Height : 1 - 4m



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : RX (f = 2440 MHz), charging  
 Remarks : Peak detector sweep, 9701 Pts/zone

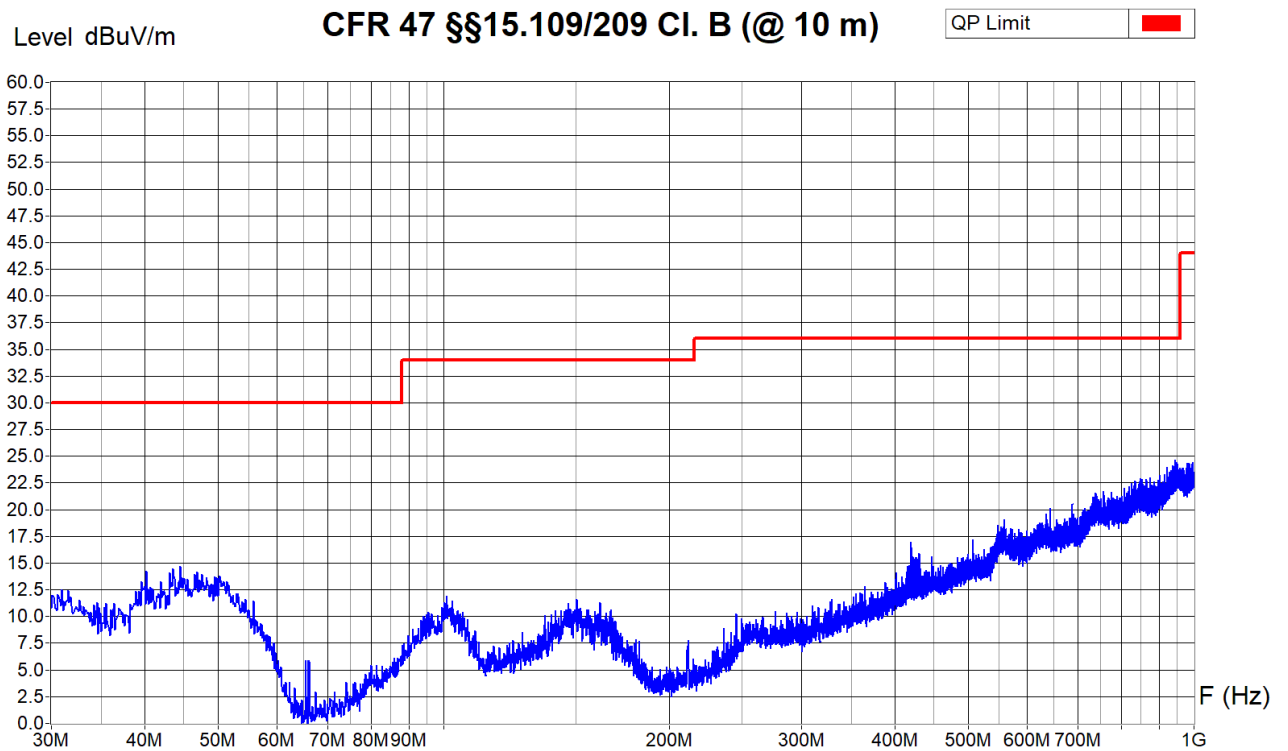


Zone	30 MHz - 1 GHz
Video Bandwidth	500 KHz
Resol Bandwidth	120 KHz

Operator: B. Itzcovich  
 Date/Time: 28.08.2018 09:52  
 Filename:  
 03\_RE\_30M-1G\_RX\_V\_FCC.png/  
 .txt

Measurement Type : Radiated Field  
 Polarisation : Horizontal  
 Table Angle : 0 - 360°  
 Antenna Height : 1 - 4m



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : RX (f = 2440 MHz), charging  
 Remarks : Peak detector sweep, 9701 Pts/zone

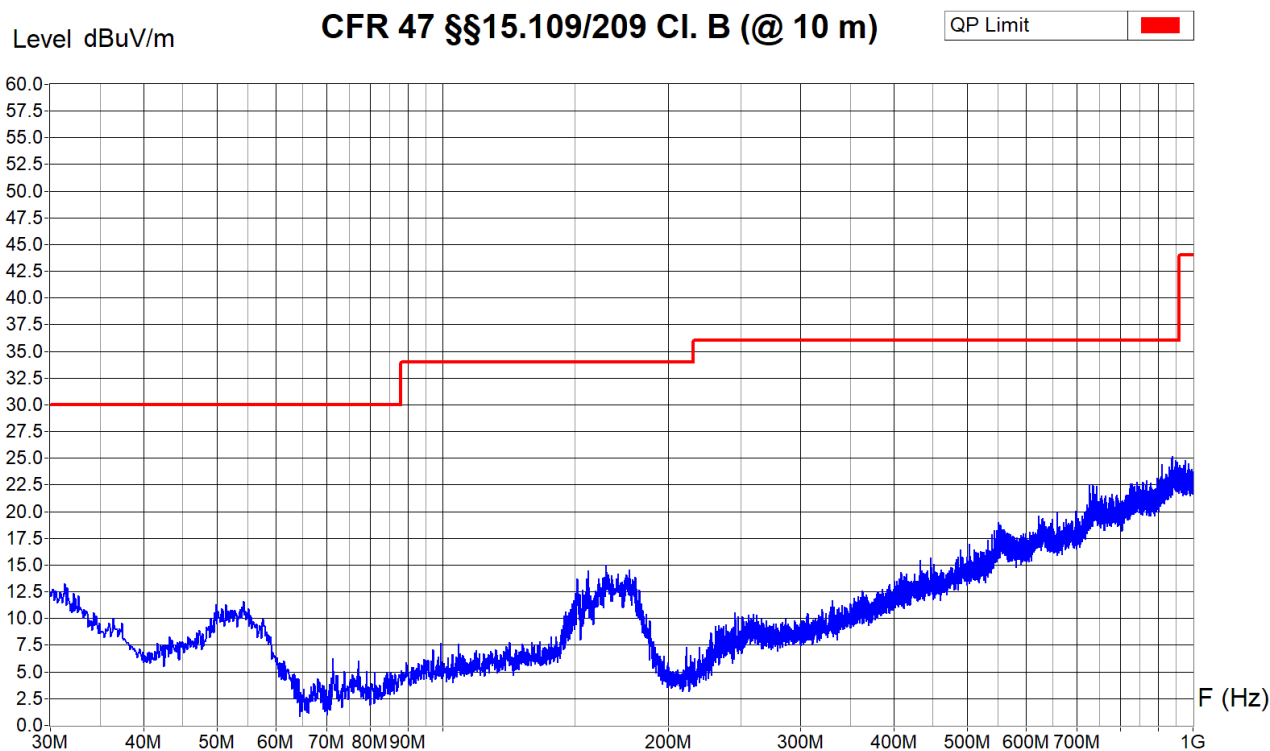

Zone	30 MHz - 1 GHz
Video Bandwidth	500 KHz
Resol Bandwidth	120 KHz

Operator: B. Itzcovich  
 Date/Time: 28.08.2018 09:42  
 Filename:  
 04\_RE\_30M-1G\_RX\_H\_FCC.png/  
 .txt

**6.11.2 1 GHz to 13 GHz**

Test site:  semi-anechoic chamber (ferrites)  semi-anechoic chamber (foam)

Distance:  1 m  3 m  10 m  30 m

Position of EUT: 1.5 m (height of the equipment under test above floor)

Meas. Uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarizations, and aimed at the source by tilting. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value (peak) of all the disturbances appearing while the apparatus is under test.

Modifications:  None  1  2  3  4  5

Climatic conditions: Temperature: 24 °C Humidity: 47 % Pressure QFE: 938 hPa

Test set-up:

Remarks: *Limit values expressed in dBµV/m and transformed to a measuring distance of 1m (factor used = 20 dB/decade) if necessary*  
 e.g.: for f = 1 GHz the limit is 500 µV/m at 3 m;

$$20 \log \left( \frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left( \frac{3m}{1m} \right) = 63.5 \frac{dB\mu V}{m} \text{ at } 1m$$

Test equipment:


Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 07-53
Preamplifier	<input type="checkbox"/> 05-56	<input type="checkbox"/> 05-87	<input checked="" type="checkbox"/> 14-27			
Antenna (horn)	<input type="checkbox"/> 90-24	<input checked="" type="checkbox"/> 07-31				
Cables	<input checked="" type="checkbox"/> 10-75	<input checked="" type="checkbox"/> 1011-61				
Filters	<input type="checkbox"/> 13-14	<input type="checkbox"/> 12-06	<input type="checkbox"/> 13-05			

**Result:**  pass  fail  not applicable  not tested

Measurement Type : Radiated Field  
 Polarisation : Vertical  
 Table Angle : 0 - 360°  
 Antenna Height : 1 - 3m (aimed at the source by tilting)



Equipment Under Test : Roger Select iN (TX32), proto 01  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : RX (2440 MHz), charging  
 Remarks : Peak detector sweep, 3001 Pts/zone

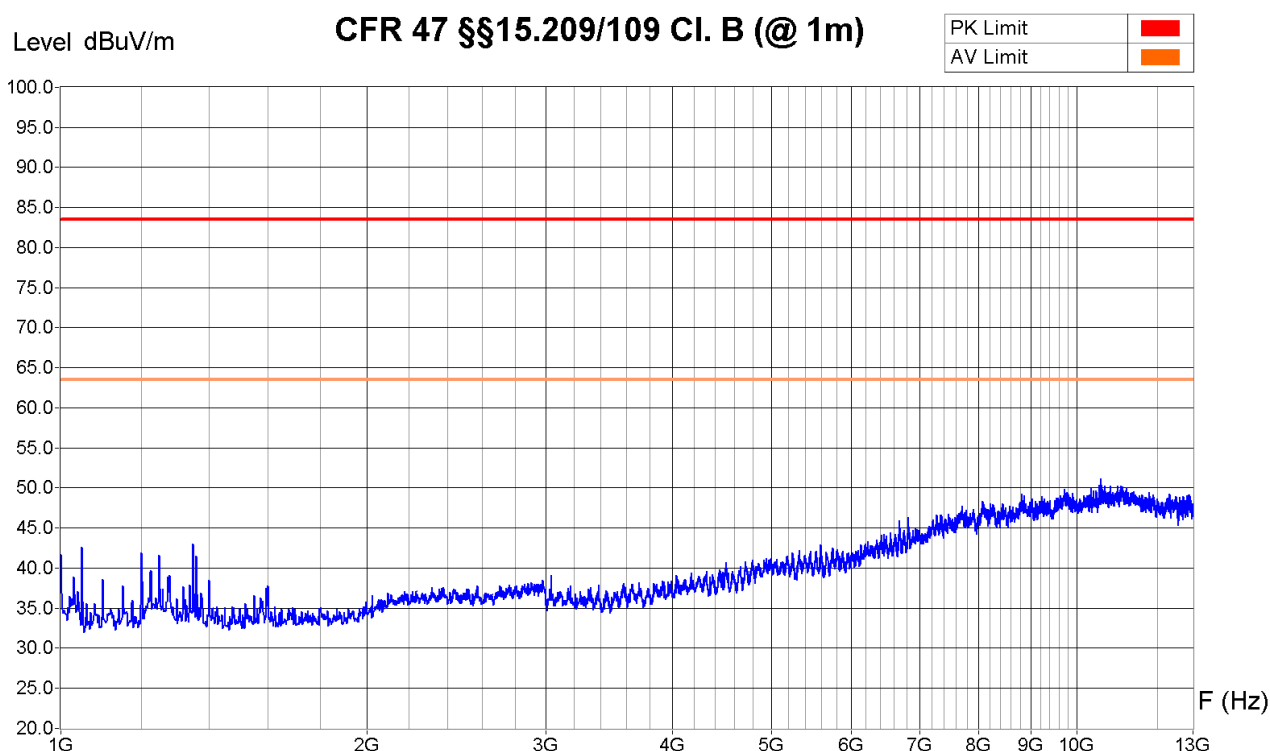

Zone	1 GHz - 7 GHz	7 GHz - 13 GHz
Video Bandwidth	3 MHz	3 MHz
Resol Bandwidth	1 MHz	1 MHz


Operator:	B. Itzcovich
Date/Time:	30.08.2018 16:13
Filename:	23_RE_1-13G_RX_V_FCC.png/ .txt



Measurement Type : Radiated Field  
 Polarisation : Horizontal  
 Table Angle : 0 - 360°  
 Antenna Height : 1 - 3m (aimed at the source by tilting)



Equipment Under Test : Roger Select iN (TX32), proto 01  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : RX (2440 MHz), charging  
 Remarks : Peak detector sweep, 3001 Pts/zone

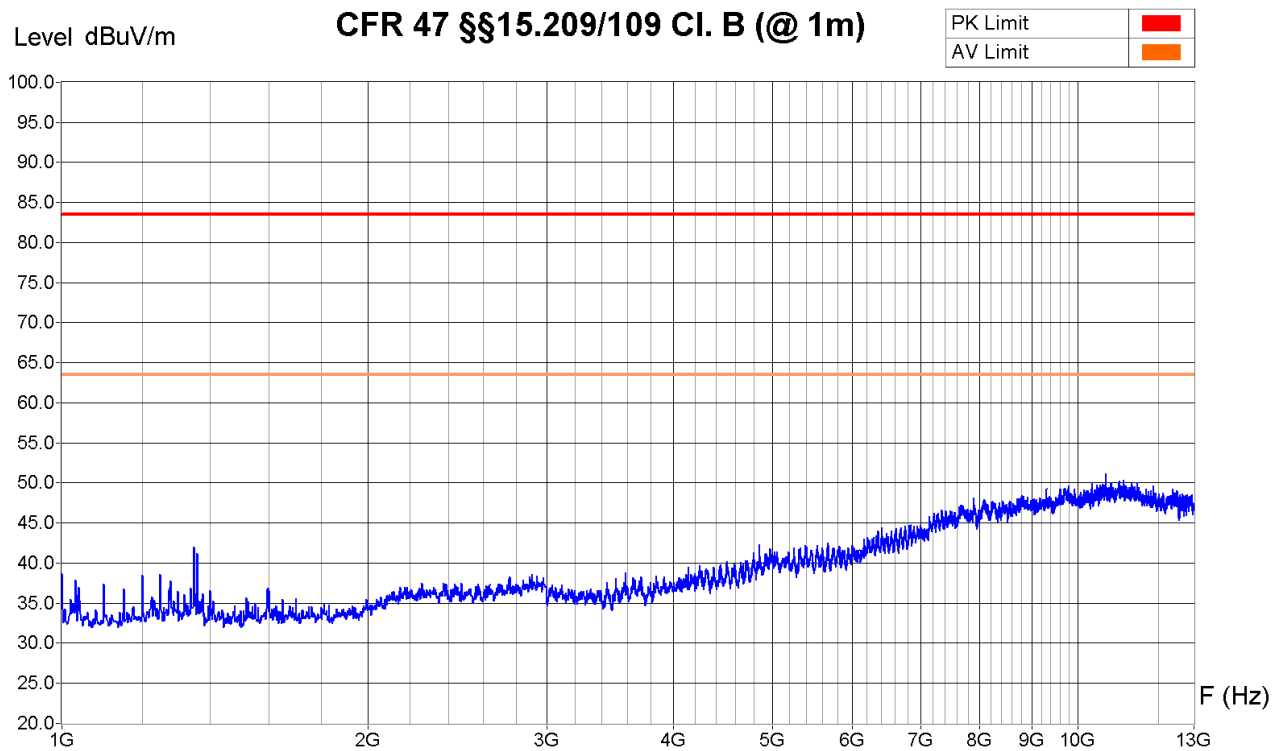

Zone	1 GHz - 7 GHz	7 GHz - 13 GHz
Video Bandwidth	3 MHz	3 MHz
Resol Bandwidth	1 MHz	1 MHz

Operator: B. Itzcovich
Date/Time: 30.08.2018 16:26
Filename: 24_RE_1-13G_RX_H_FCC.png/ .txt

**6.12 Conducted emission – Interference voltage**

Test site:  semi-anechoic chamber (foam)  shielded room  
 Semi-anechoic chamber (ferrites)  laboratory

Meas. Uncertainty: ± 3.6 dB

Measuring method: The conducted disturbance is measured using a spectrum analyzer and a line impedance substitution network (LISN). The measurement of the voltage against the earth is carried out successively. The peak values are recorded continuously on the graph. The values that exceed the limit are re-measured with a measuring receiver.

Modifications:  None  1  2  3  4  5

Climatic conditions: Temperature: 24 °C Humidity: 44 % Pressure QFE: 937 hPa

Test set-up:

Remarks: ---

**Test equipment:**


Spectrum analyzer	<input type="checkbox"/> 88-14	<input type="checkbox"/> 94-24	<input type="checkbox"/> 02-06	<input type="checkbox"/> 03-45	<input type="checkbox"/> 05-39	<input checked="" type="checkbox"/> 10-70
Receiver	<input type="checkbox"/> 85-12	<input type="checkbox"/> 90-11	<input checked="" type="checkbox"/> 10-70	<input type="checkbox"/> 04-28	<input type="checkbox"/> 06-29	
LISN	<input type="checkbox"/> 85-13	<input type="checkbox"/> 90-08	<input type="checkbox"/> 94-36	<input type="checkbox"/> 94-40	<input type="checkbox"/> 95-12	<input checked="" type="checkbox"/> 00-43
Protection 10 dB	<input type="checkbox"/> 95-33	<input type="checkbox"/> 95-35	<input checked="" type="checkbox"/> 95-30	<input type="checkbox"/> 96-38	<input type="checkbox"/> included in LISN	
Protection 20 dB	<input type="checkbox"/> 91-46	<input type="checkbox"/> 95-33	<input type="checkbox"/> 95-38	<input type="checkbox"/> included in LISN		
Variable transformer	<input checked="" type="checkbox"/> 75-04					
Multimeter	<input checked="" type="checkbox"/> 04-47					
Cables	<input checked="" type="checkbox"/> 06-01	<input type="checkbox"/> 10-41				

**Result:**  pass  fail  not applicable  not tested

Measurement Type : Voltage Interference  
 Supply : Line 1  
 Other : AC Adaptor Mains  
 120 V / 50 Hz



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 14901 Pts/zone

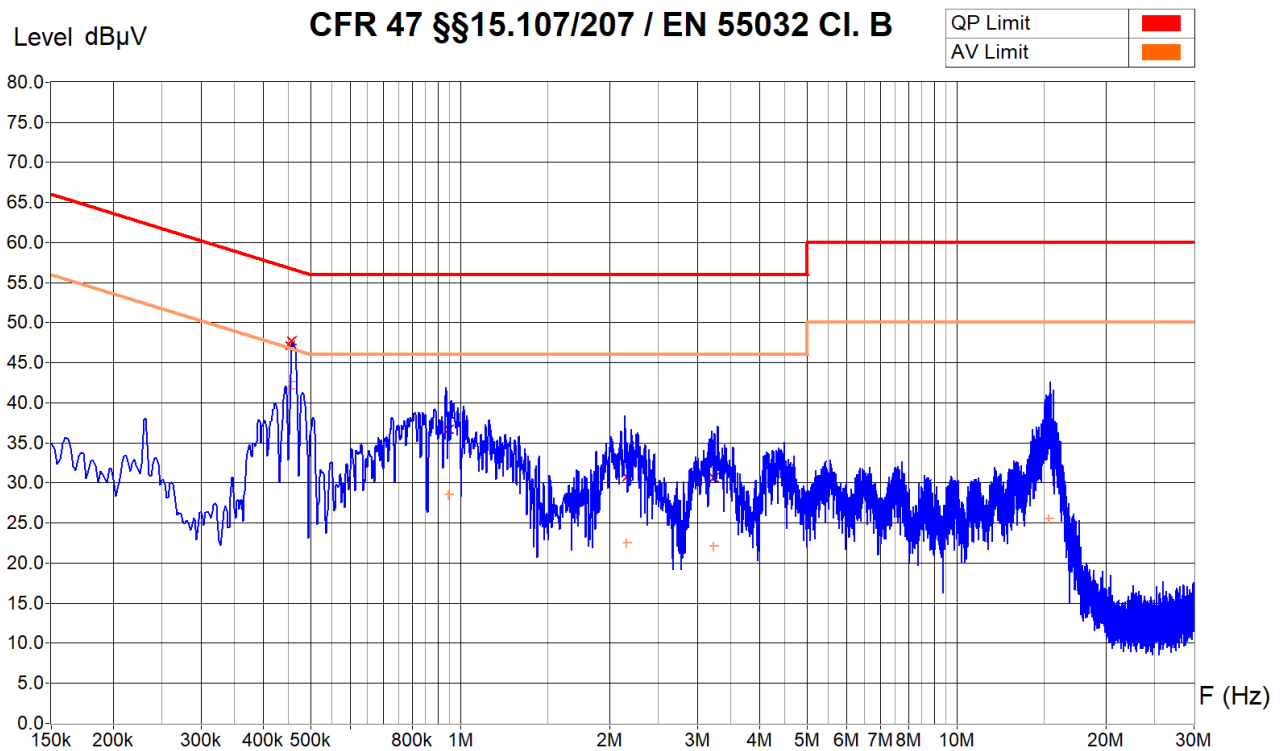

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
454 KHz	51.2 dBµV	47.1 dBµV	41.7 dBµV	9.7 dB
457 KHz	49.6 dBµV	47.7 dBµV	42.6 dBµV	9.1 dB
945 KHz	40.3 dBµV	36.7 dBµV	28.6 dBµV	19.3 dB
2.16 MHz	35.0 dBµV	30.7 dBµV	22.5 dBµV	25.3 dB
3.23 MHz	35.8 dBµV	30.7 dBµV	22.2 dBµV	25.3 dB
15.32 MHz	42.5 dBµV	36.0 dBµV	25.5 dBµV	24.0 dB


Sample calculation with all conversion and correction factors used				
Frequency [kHz]	Receiver QP value [dBµV]	Cable att. corr. [dB]	Attenuator corr. [dB]	QP voltage [dBµV]
457	37.6	+0.1	+ 10.0	= 47.7

Operator: B. Itzcovich
Date/Time: 28.08.2018 11:26
Filename: 05_CV_150k- -30M_TX3f_120V_L.png/.txt

Measurement Type : Voltage Interference  
 Supply : Neutral  
 Other : AC Adaptor Mains  
 120 V / 50 Hz



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 14901 Pts/zone

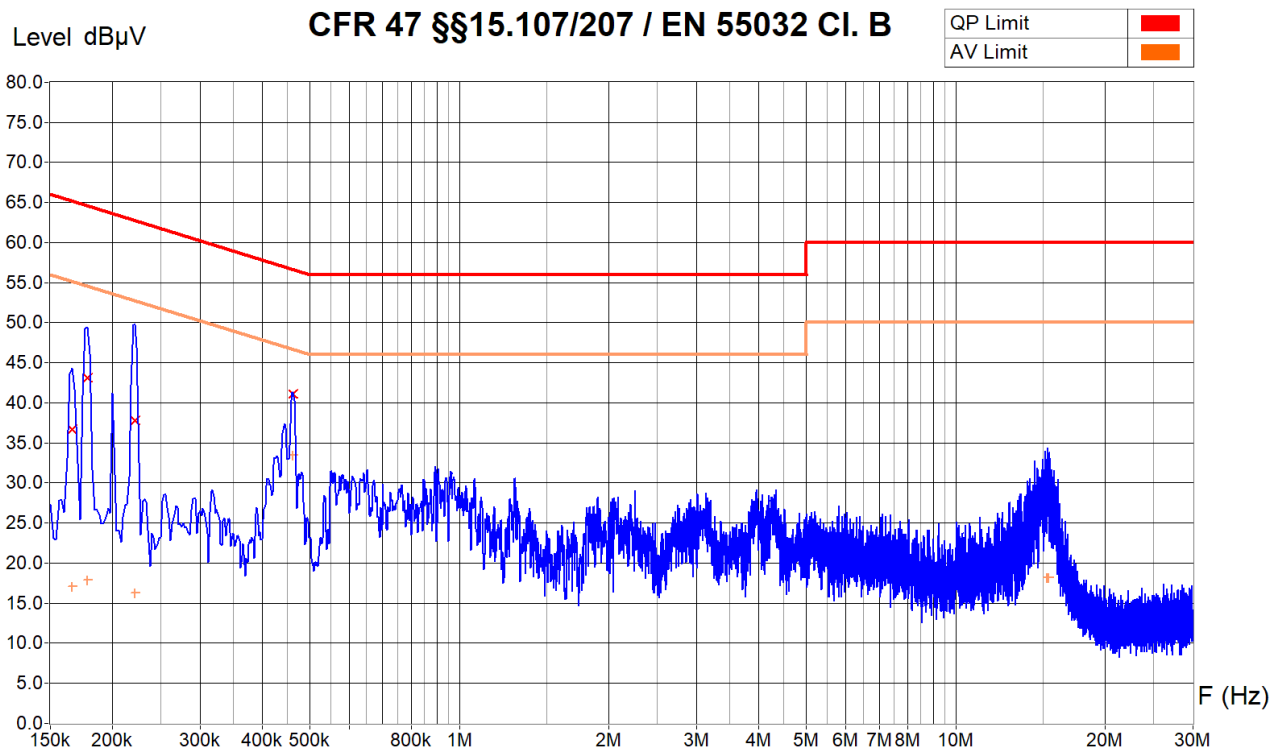

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
166 KHz	55.5 dBµV	36.7 dBµV	17.1 dBµV	28.5 dB
178 KHz	63.9 dBµV	43.1 dBµV	17.8 dBµV	21.4 dB
222 KHz	61.7 dBµV	37.8 dBµV	16.3 dBµV	25.0 dB
462 KHz	50.0 dBµV	41.1 dBµV	33.5 dBµV	15.5 dB
15.25 MHz	34.5 dBµV	29.2 dBµV	18.1 dBµV	30.8 dB
15.35 MHz	34.3 dBµV	29.0 dBµV	18.2 dBµV	31.0 dB

Operator: B. Itzcovich
Date/Time: 28.08.2018 11:48
Filename: 06_CV_150k- -30M_TX3f_120V_N.png/.txt

Measurement Type : Voltage Interference  
 Supply : Line 1  
 Other : AC Adaptor Mains  
 230 V / 50 Hz



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 14901 Pts/zone

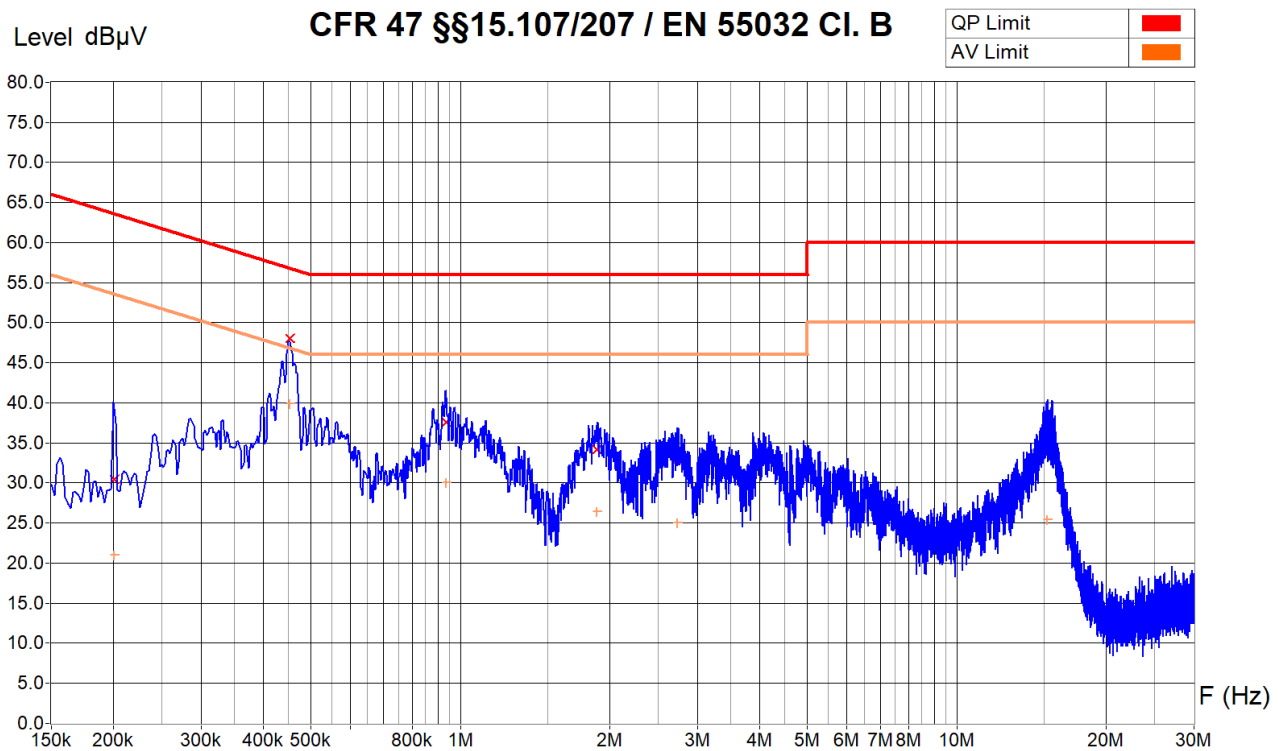

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
201 KHz	48.0 dBµV	30.4 dBµV	21.0 dBµV	33.2 dB
453 KHz	57.5 dBµV	48.0 dBµV	39.9 dBµV	8.8 dB
937 KHz	42.2 dBµV	37.6 dBµV	30.0 dBµV	18.4 dB
1.88 MHz	38.4 dBµV	34.2 dBµV	26.4 dBµV	21.8 dB
2.74 MHz	36.7 dBµV	33.0 dBµV	25.0 dBµV	23.0 dB
15.21 MHz	41.0 dBµV	35.3 dBµV	25.5 dBµV	24.7 dB

Operator: B. Itzcovich
Date/Time: 28.08.2018 11:54
Filename: 07_CV_150k- -30M_TX3f_230V_L.png.txt

Measurement Type : Voltage Interference  
 Supply : Neutral  
 Other : AC Adaptor Mains  
 230 V / 50 Hz



Equipment Under Test : Roger Select iN (TX32)  
 Set-Up : With AC adaptor, USB and audio cables connected. See photos  
 Operating Conditions : Hopping TX (f = 2402 / 2440 / 2480 MHz), modulated, Pmax (05), charging  
 Remarks : Peak detector sweep, 14901 Pts/zone

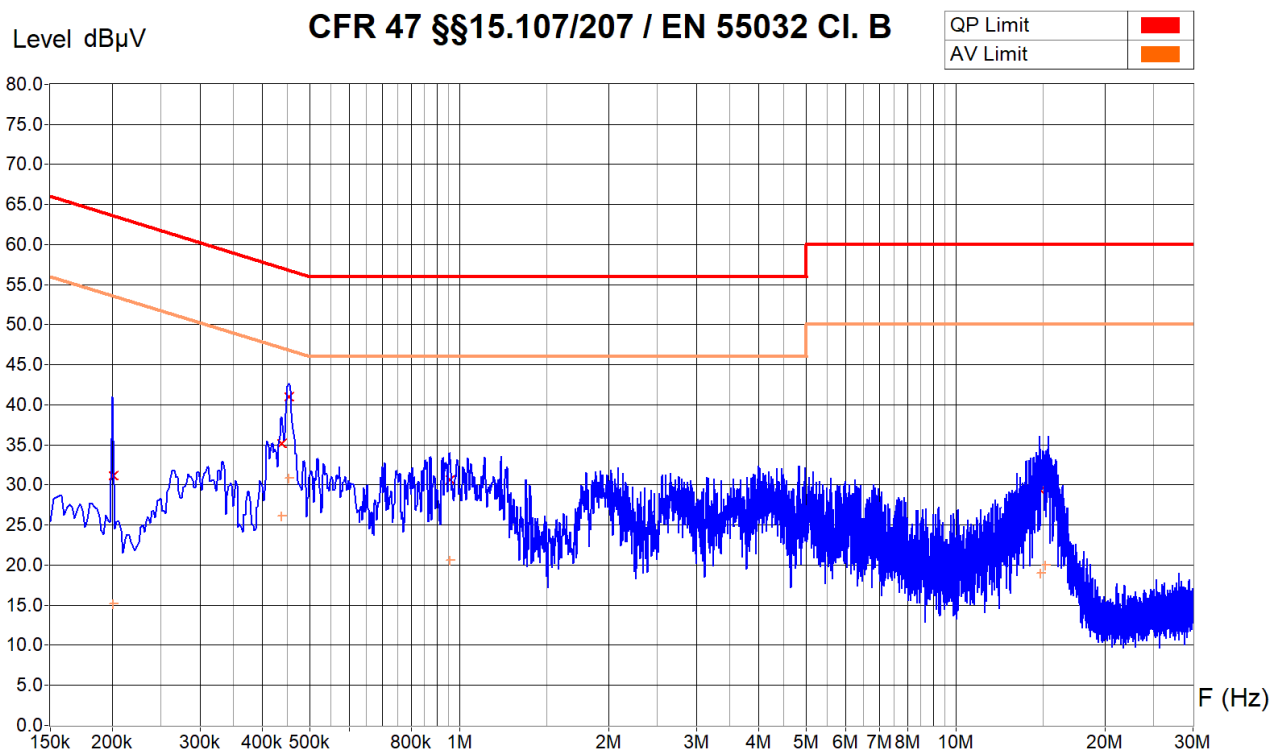

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
201 KHz	58.4 dBµV	31.1 dBµV	15.2 dBµV	32.4 dB
439 KHz	39.1 dBµV	35.2 dBµV	26.1 dBµV	21.9 dB
453 KHz	61.4 dBµV	41.0 dBµV	30.9 dBµV	15.8 dB
958 KHz	42.2 dBµV	30.7 dBµV	20.6 dBµV	25.3 dB
14.78 MHz	35.4 dBµV	29.3 dBµV	19.0 dBµV	30.7 dB
15.16 MHz	36.1 dBµV	30.7 dBµV	20.0 dBµV	29.3 dB

Operator: B. Itzcovich  
 Date/Time: 28.08.2018 11:59  
 Filename:  
 08\_CV\_150k-  
 -30M\_TX3f\_230V\_N.png/.txt



## 7. Appendix



## 7.1 Test equipment

Inventory No.	Designation	Manufacturer	Type	Serial No.	Cal. Date	Next calibr.	Cal. Period [year]
04-79	Loop antenna	Rohde&Schwarz	HFH2-Z2	872 177/39	08 Jun 2018	08 Jun 2021	3
05-38	Bi-Log antenna	Chase	CBL6111	1056	30 Aug 2017	30 Aug 2019	2
07-31	Horn antenna	Schwarzbeck	BBHA 9120 D	9120D-632	30 Aug 2017	30 Aug 2019	2
98-12	Horn Antenna + Preamp + Mixer	Emco + Miteq + Hewlett Packard	3160-09 + JDM2W-18002650- 27-10P-R + 11970K	9809-1121 + 1707479 + 2332A01295	01 Jun 2017	01 Jun 2022	5
00-52	Dipole antenna	Schwarzbeck	UHA 9125 D	112	11 May 2017	11 May 2022	5
12-06	HP Filter	BSC	SH 6472	2304801	23 May 2017	23 May 2019	2
13-14	Filter	A-INFOMW	Cavity Band Reject Filter	J10811304070 02	12 Jun 2018	12 Jun 2020	2
95-30	Attenuator	Montena EMC	10 dB	1	09 Mar 2017	09 Mar 2019	2
05-59	Preamplifier	Montena EMC	AM-1300	432972	22 Mar 2017	22 Mar 2019	2
14-27	Preamplifier	Montena EMC	AFS42-00101800- 25-S-42	- - -	03 May 2017	03 May 2019	2
13-16	Signal Generator	Anapico	APSIN20G	121- 213550500- 0096	10 Jul 2018	10 Jul 2019	2
06-00	Cable	Huber&Suhner	ST18A ST18A SF106PA	6224/18A 8399/18A 463/6PA	02 Jun 2017	02 Jun 2019	2
06-01	Cable	Huber&Suhner	SF106PA SF106PA SF106PA	415/6PA 414/6PA 412/6PA	25 Jan 2018	25 Jan 2020	2
10-75	Cable	Huber&Suhner	ST18A	8385/18A	10 May 2017	10 May 2019	2
11-30	Cable	Huber&Suhner	ST18A	8742/18A	30 Jan 2018	30 Jan 2020	2
11-61	Cable	Huber&Suhner	SF106PA	413/6PA	01 Jun 2017	01 Jun 2019	2
11-13	Cable	Huber&Suhner	SF104	332033/4	10 May 2017	10 May 2019	2
10-51	Cable	Huber&Suhner	SF104	222093/4	10 May 2017	10 May 2019	2
10-81	Cable	Huber&Suhner	SF104P	44159/4P	01 Jun 2017	01 Jun 2019	2
11-62	Cable	Huber&Suhner	SF104P	51338/4P	01 Jun 2017	01 Jun 2019	2
00-43	LISN	Rohde&Schwarz	ESH3-Z5	890 604/026	06 Jun 2018	06 Jun 2020	2
07-53	Spectr. Analyzer	Hewlett Packard	E4407B	SG45101517	15 Nov 2016	15 Nov 2018	2
10-70	Receiver + Spectr. Analyzer	Rohde&Schwarz	ESU8 1302.6005K08	100231	12 Sep 2017	12 Sep 2019	2
09-04	Power sensor	Agilent	E9304A H19	MY41498789	26 Feb 2018	26 Feb 2020	2
03-12	Wattmeter	Agilent	E4418B	GB40207055	02 Nov 2016	02 Nov 2018	2
04-47	Multimeter	Meterman	37XR	040310963	10 Apr 2017	10 Apr 2019	2
06-62	Power supply	Elektro-Automatik	EA-PS 2016-050	2006100338	NO CAL	NO CAL	-
75-04	Transformer	Variac	W10HMT	-	NO CAL	NO CAL	-

Remark: The test equipment, for which no calibration date is defined, is controlled during the test by another calibrated equipment. E.g. the output of a power supply with variable transformer is verified by a calibrated multimeter.