



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Code of Federal Regulations 47 Part 15 – Radio Frequency Devices

Subpart C – Intentional Radiators

Section 15.231

Periodic operation in the band 40.66 - 40.70 MHz
and above 70 MHz

&

Section 15.209

Radiated Emission Limits: General Requirements

THE FOLLOWING **MEETS** THE ABOVE TEST SPECIFICATION

Formal Name: Smart Sense Infant Transmitter

Kind of Equipment: Wireless Infant Security Device

Frequency Range: 318 MHz and 262 kHz (Model 9450-6262)
318 MHz and 66 kHz (Model 9450-6066)

Test Configuration: Body-worn, battery operated device tested in three orthogonal positions.

Model Number(s): 9450-6262, 9450-6066

Model(s) Tested: 9450-6262, 9450-6066

Serial Number(s): none (Test Sample)

Date of Tests: March 5th and 6th, 2012

Test Conducted For: RF Technologies, Inc.
3125 N. 126th Street
Brookfield, WI 53005

NOTICE: “This test report relates only to the items tested and must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government”. Please see the "Description of Test Sample" page listed inside of this report.

© Copyright 1983 - 2012 D.L.S. Electronic Systems, Inc.

COPYRIGHT NOTICE

This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems, Inc.



166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
Project Number:

RF Technologies
9450-6262 and 9450-6066
17709
5108

SIGNATURE PAGE

Report By:

A handwritten signature in black ink that reads "Craig Brandt". The signature is written in a cursive style with a long horizontal stroke at the end.

Craig Brandt
Test Engineer

Reviewed By:

A handwritten signature in black ink that reads "William Stumpf". The signature is written in a cursive style with a long horizontal stroke at the end.

William Stumpf
OATS Manager

Approved By:

A handwritten signature in black ink that reads "Brian J. Mattson". The signature is written in a cursive style with a long horizontal stroke at the end.

Brian Mattson
General Manager



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Table of Contents

| | | |
|------|---|----|
| i. | Cover Page | 1 |
| ii. | Signature Page | 2 |
| iii. | Table of Contents | 3 |
| iv. | NVLAP Certificate of Accreditation | 4 |
| 1.0 | Summary of Test Report | 5 |
| 2.0 | Introduction | 5 |
| 3.0 | Test Facilities | 6 |
| 4.0 | Description of Test Sample | 6 |
| 5.0 | Test Equipment | 8 |
| 6.0 | Test Arrangements | 8 |
| 7.0 | Test Conditions | 9 |
| 8.0 | Modifications Made To EUT For Compliance | 9 |
| 9.0 | Additional Descriptions | 9 |
| 10.0 | Results | 10 |
| 11.0 | Conclusion | 10 |
| | Appendix A – Test Setup Photos | 11 |
| | Appendix B – Measurement Data | 15 |
| 1.0 | Emission Bandwidth – 20 dB | 15 |
| 2.0 | Automatic Deactivation | 17 |
| 3.0 | Periodic Transmissions | 19 |
| 4.0 | Field Strength of Emissions – Fundamental and Spurious (318 MHz) | 22 |
| 5.0 | Duty Cycle Correction (318 MHz) | 24 |
| 6.0 | Field Strength of Emissions – Fundamental and Spurious (66 & 262 kHz) | 29 |
| 7.0 | Duty Cycle Correction (66 & 262 kHz) | 32 |




166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
Project Number:

RF Technologies
9450-6262 and 9450-6066
17709
5108

United States Department of Commerce
National Institute of Standards and Technology

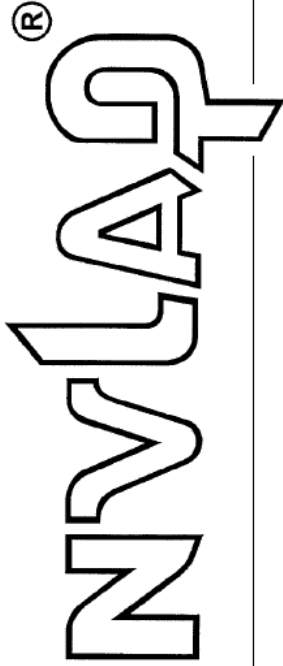

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
Wheeling, IL

is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to Joint ISO-ILAC-IAF Communiqué dated January 2009).



2011-10-01 through 2012-09-30

Effective dates

Sally A. Buice
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2009-01-28)



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
 Model Tested: 9450-6262 and 9450-6066
 Report Number: 17709
 Project Number: 5108

1.0 Summary of Test Report

It was determined that the Smart Sense Infant Transmitter, Models 9450-6262 and 9450-6066, comply with the requirements of CFR 47 Part 15 Subpart C Section 15.231 and 15.209.

Subpart C Applicable Technical Requirements Tested:

| Section | Description | Procedure | Note | Compliant? |
|--------------|--|------------------------------------|-------|-------------|
| 15.231(c) | 20 dB Emission Bandwidth | ANSI C63.4-2009 & ANSI C63.10-2009 | 2 | Yes |
| 15.231(a)(2) | Transmission Deactivation | ANSI C63.4-2009 & ANSI C63.10-2009 | 2 | Yes |
| 15.231(a)(3) | Periodic Transmissions | ANSI C63.4-2009 & ANSI C63.10-2009 | 2 | Yes |
| 15.231(b) | Field Strength of Emissions - Fundamental and Spurious - | ANSI C63.4-2009 & ANSI C63.10-2009 | 1,2 | Yes |
| 15.35(c) | Duty Cycle Correction for Pulsed operation | ANSI C63.4-2009 & ANSI C63.10-2009 | 2 | Informative |
| 15.209 | Intentional Radiator - General Requirements - | ANSI C63.4-2009 & ANSI C63.10-2009 | 1,2,3 | Yes |

Note 1: Tested in 3 orthogonal planes.

Note 2: Radiated emission measurement.

Note 3: 66 kHz and 262 kHz intentional radiators exempt from certification (See additional descriptions).

2.0 Introduction

On March 5th and 6th, 2012 the Smart Sense Infant Transmitter, Models 9450-6262 and 9450-6066, as provided from RF Technologies Inc. was tested to the requirements of CFR 47 Part 15 Subpart C Section 15.231 and 15.209. To meet these requirements, the procedures contained within this report were performed by personnel of D.L.S Electronic Systems, Inc.



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

3.0 Test Facilities

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

Wisconsin Test Facility:

D.L.S. Electronic Systems, Inc.
166 S. Carter Street
Genoa City, Wisconsin 53128

Wheeling Test Facility:

D.L.S. Electronic Systems, Inc.
1250 Peterson Drive
Wheeling, IL 60090

4.0 Description of Test Sample

Description:

The device is a wireless security device intended to prevent the abduction of an infant from a healthcare facility. The device is attached to the ankle of an infant with a stretchable band material and it is this attachment which enables the monitoring features. Once enabled, the device will periodically send status OK messages wirelessly on a 318 MHz RF signal to a central computer server which means the infant is safe and within the safe boundary at the healthcare facility. The device can sense security breaches using one or more of the following features: physical cutting of the stretchy band material, a change in resistance of the band material, a change in temperature of the device or a change in capacitive patient proximity measurement. Once a security breach is experienced, the device sends a special alarm signal wirelessly on a 318 MHz RF signal to a central computer server thereby notifying the facility staff. The device also transmits wirelessly periodically at 262 kHz (or 66 kHz depending on the model) which will cause wireless receivers mounted for example at doors to indicate a security breach in the event the device is brought in appropriate proximity to those receivers. The transmitters do not transmit simultaneously.

Type of Equipment / Frequency Range:

Body-Worn / 318 MHz and 262 kHz or 318 MHz and 66 kHz

Physical Dimensions of Equipment Under Test:

Length: 1.6 in. x Width: 1.2 in. x Height: 0.675 in.



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

4.0 Description of Test Sample (continued)

Power Source:

3.6 VDC battery

Internal Frequencies:

4.194304 MHz

Transmit Frequencies Used For Test Purpose:

318 MHz, 262 kHz, and 66 kHz

Type of Modulation(s) / Antenna Type:

OOK / 262 kHz and 66 kHz transmitters use a coil on the circuit board
315 MHz transmitter uses a short non-resonant strip on the circuit board.

Description of Circuit Board(s) / Part Number:

| | |
|---------------------------------|------------------|
| Circuit Board (9450-6262 model) | 0200-0166 Rev. A |
| Circuit Board (9450-6066 model) | 0200-0166 Rev. A |



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
 Model Tested: 9450-6262 and 9450-6066
 Report Number: 17709
 Project Number: 5108

5.0 Test Equipment

A list of the equipment used can be found in the table below. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.

D.L.S. Wisconsin – OATS Site 3 - Test Equipment:

| Description | Manufacturer | Model Number | Serial Number | Frequency Range | Cal Dates | Cal Due Dates |
|------------------|-----------------|--------------|---------------|------------------|-----------|---------------|
| Receiver | Rohde & Schwarz | ESI 40 | 837808/005 | 20 Hz – 40 GHz | 7/11 | 7/12 |
| Antenna | EMCO | 3104C | 9701-4785 | 20 MHz – 200 MHz | 9/10 | 9/12 |
| Antenna | Electro-Metrics | LPA-25 | 1114 | 200 MHz – 1 GHz | 7/11 | 7/13 |
| Preamp | Ciao | CA118-4010 | 101 | 1 GHz -18 GHz | 2/12 | 2/13 |
| Horn Antenna | EMCO | 3115 | 9903-5731 | 1-18GHz | 6/11 | 6/13 |
| High Pass Filter | Q-Microwave | 100460 | 1 | 1-18GHz | 5/11 | 5/12 |
| Loop Antenna | EMCO | 6502 | 2038 | 9 kHz – 30 MHz | 9/10 | 9/12 |

6.0 Test Arrangements

Radiated Emissions Measurement Arrangement:

All radiated emission measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to ANSI C63.4-2009 and ANSI C63.10-2009, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for additional photos of the test set up.

Unless otherwise noted, the bandwidth of the measuring receiver / analyzer used during testing is shown below.

| Frequency Range | Bandwidth (-6 dB) |
|-------------------|-------------------|
| 10 to 150 kHz | 200 Hz |
| 150 kHz to 30 MHz | 9 kHz |
| 30 MHz to 1 GHz | 120 kHz |
| Above 1 GHz | 1 MHz |



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

7.0 Test Conditions

Temperature and Humidity:

70°F at 22% RH

Battery Voltage:

3.6 VDC

8.0 Modifications Made To EUT For Compliance

None noted at time of test.

9.0 Additional Descriptions

All tests were performed with a new battery to comply with 15.31(e). The battery voltage was verified before and after each test.

This device uses circuit board antennas that are not user serviceable, which complies with the requirements of 15.203.

This device uses periodic transmissions for security or safety application as defined in FCC Part 15.231(a) (3) and does not exceed a total transmission time of two seconds per hour. Appendix B of this report shows data to confirm compliance with this rule section.

The EUT was programmed to transmit in a special test mode that allowed it to stay transmitting for one second, then off for three seconds, and then repeat that sequence continuously. For testing done in “normal operation mode” the EUT was programmed to use the largest duty cycle possible during normal operation.

Note that the 66 kHz and 262 kHz transmitters are exempt from certification as defined by section 15.201(a). All emissions from those transmitters are greater than 40dB below the limit. Measurement data can be seen in Appendix B of this report.

Both models, 9450-6262 and 9450-6066, were tested for fundamental and spurious emissions and measurement data can be seen in Appendix B of this report.



166 South Carter, Genoa City, WI 53128

| | |
|-----------------|-------------------------|
| Company: | RF Technologies |
| Model Tested: | 9450-6262 and 9450-6066 |
| Report Number: | 17709 |
| Project Number: | 5108 |

10.0 Results

Measurements were performed in accordance with ANSI C63.4-2009 and ANSI C63.10-2009. Graphical and tabular data can be found in Appendix B at the end of this report.

11.0 Conclusion

The Smart Sense Infant Transmitter, Models 9450-6262 and 9450-6066 as provided from RF Technologies, Inc., tested on March 5th and 6th, 2012 **meets** the requirements of CFR 47 Part 15 Subpart C Section 15.231 and 15.209.



166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
Project Number:

RF Technologies
9450-6262 and 9450-6066
17709
5108

Appendix A – Test Setup Photos

Photo Information and Test Setup:

Item: EUT – Smart Sense Infant Transmitter

Radiated X Position





166 South Carter, Genoa City, WI 53128

Company:
Model Tested:
Report Number:
Project Number:

RF Technologies
9450-6262 and 9450-6066
17709
5108

Appendix A

Radiated Y Position





166 South Carter, Genoa City, WI 53128

| | |
|-----------------|-------------------------|
| Company: | RF Technologies |
| Model Tested: | 9450-6262 and 9450-6066 |
| Report Number: | 17709 |
| Project Number: | 5108 |

Appendix A

Radiated Z Position



Appendix A

Radiated above 1 GHz





166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B – Measurement Data

1.0 Emission Bandwidth – 20 dB

Rule Part:

Section 15.231 (c)

Test Procedure:

ANSI C63.4-2009 and ANSI C63.10-2009

Limit:

Section 15.231 (c):

$318 \text{ MHz} \times 0.25\% = 795 \text{ kHz}$

Results:

Compliant
20 dB bandwidth: **21.04 kHz**

Sample Equation(s):

None

Notes:

This was a radiated emissions measurement. The maximum field strength of the emission was determined and the bandwidth was measured from the points at 20 dB down from the modulated carrier.



166 South Carter, Genoa City, WI 53128


Company: RF Technologies
 Model Tested: 9450-6262 and 9450-6066
 Report Number: 17709
 Project Number: 5108

Appendix B

Test Date: 03-06-2012
 Company: RF Technologies
 EUT: 9450-6262: Safe Place Infant Tx 262 kHz w/ Smart Sense
 Test: 20 dB Bandwidth
 Operator: Craig B

Comment: SPAN 2 to 5 times occupied bandwidth
 RBW between 1% and 5% of occupied bandwidth

20 dB Bandwidth = 21.04 kHz

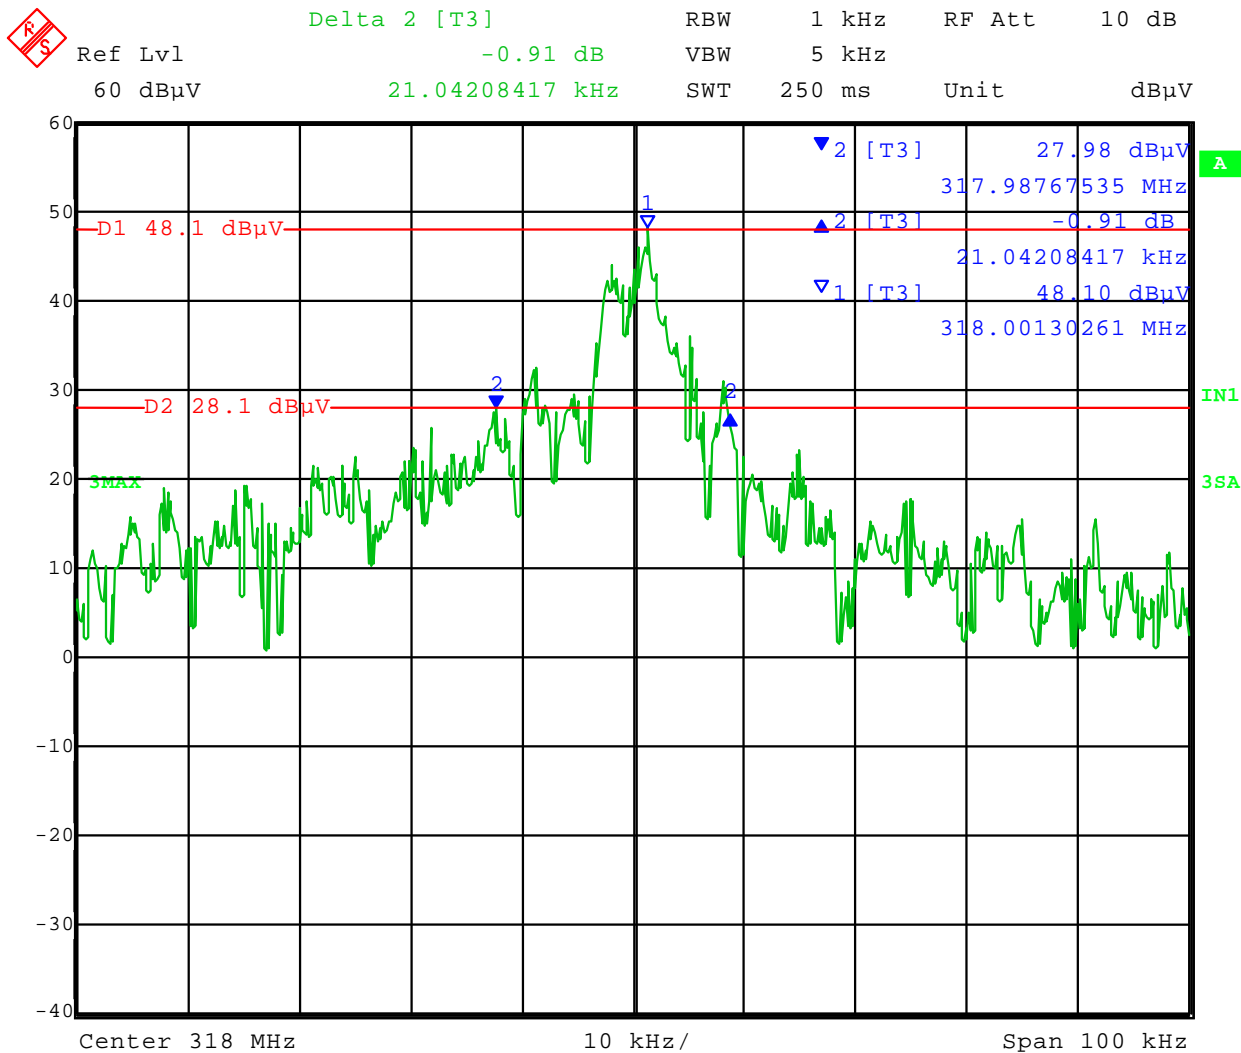

Date: 6.MAR.2012 13:57:45



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

2.0 Automatic Deactivation

Rule Part:

15.231 (a) (2)

Test Procedure:

ANSI C63.4-2009 and ANSI C63.10-2009

Limit:

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Results:

Compliant

Sample Equation(s):

None

Notes:

No transmission for five seconds after deactivation.




166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

Test Date: 03-05-2012
Company: RF Technologies
EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
Test: Dwell Time
Operator: Craig B

Comment: A transmitter activated automatically shall cease transmission within 5 seconds after activation.

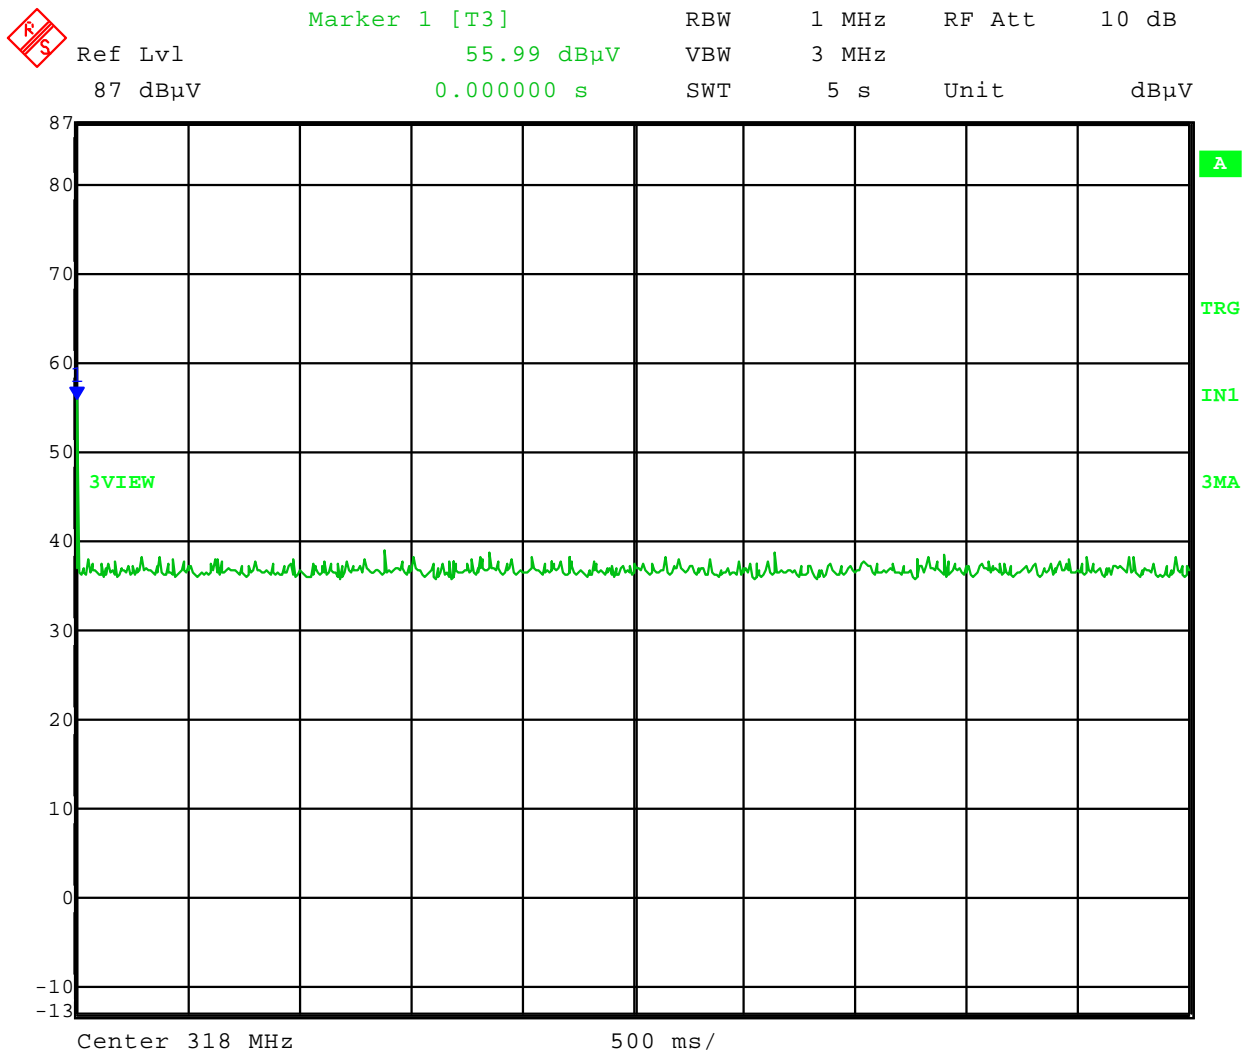

Date: 5.MAR.2012 09:02:14



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

3.0 Periodic Transmissions

Rule Part:

15.231 (a) (3)

Test Procedure:

ANSI C63.4-2009 and ANSI C63.10-2009

Limit:

Total transmission time does not exceed two seconds per hour.

Results:

Compliant
Total time of transmission in an hour: 1.91 seconds

Sample Equation(s):

None

Notes:

Worst case predetermined transmissions observed.



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108


Appendix B

Test Date: 03-05-2012
Company: RF Technologies
EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
Test: Periodic transmissions over one hour
Operator: Craig B
Comment: EUT transmits at regular predetermined intervals for supervision purposes.
Total transmission time must not exceed two seconds per hour.

Transmission time = 5.6 ms.
Transmission every 10.77 seconds = 335 transmissions per hour.
Total transmission time for one hour = 335 x 5.6 ms = 1.9 seconds.

Transmission Time:

Table with 4 columns: Delta 1 [T3], RBW, RF Att, and Unit. Values include -19.18 dB, 1 MHz, 10 dB, 5.591182 ms, 3 MHz, 10 ms, and dBuV.

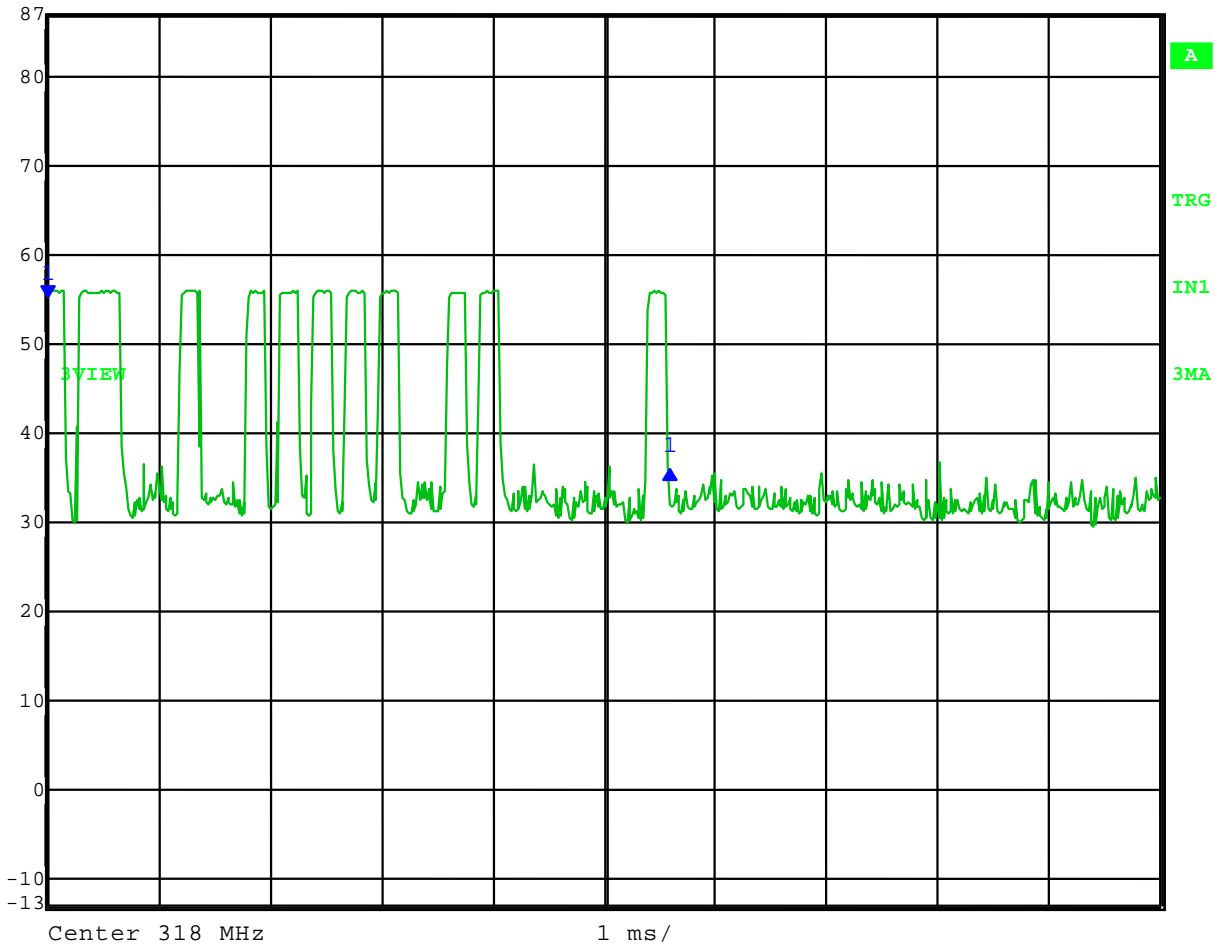

Date: 5.MAR.2012 09:04:33



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
 Model Tested: 9450-6262 and 9450-6066
 Report Number: 17709
 Project Number: 5108

Appendix B

Test Date: 03-05-2012
 Company: RF Technologies
 EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
 Test: Periodic transmissions over one hour
 Operator: Craig B

Comment: EUT transmits at regular predetermined intervals for supervision purposes.
 Total transmission time must not exceed two seconds per hour.


Transmission time = 5.6 ms.

Transmission every 10.77 seconds = 335 transmissions per hour.

Total transmission time for one hour = 335 x 5.6 ms = 1.9 seconds.

Time between transmissions:

| | | | | | |
|--|---------------|-------------|---------|--------|-------|
| | Delta 1 [T3] | RBW | 500 kHz | RF Att | 10 dB |
| | Ref Lvl | 0.07 dB | VBW | 1 MHz | |
| | 87 dB μ V | 10.771543 s | SWT | 25 s | Unit |

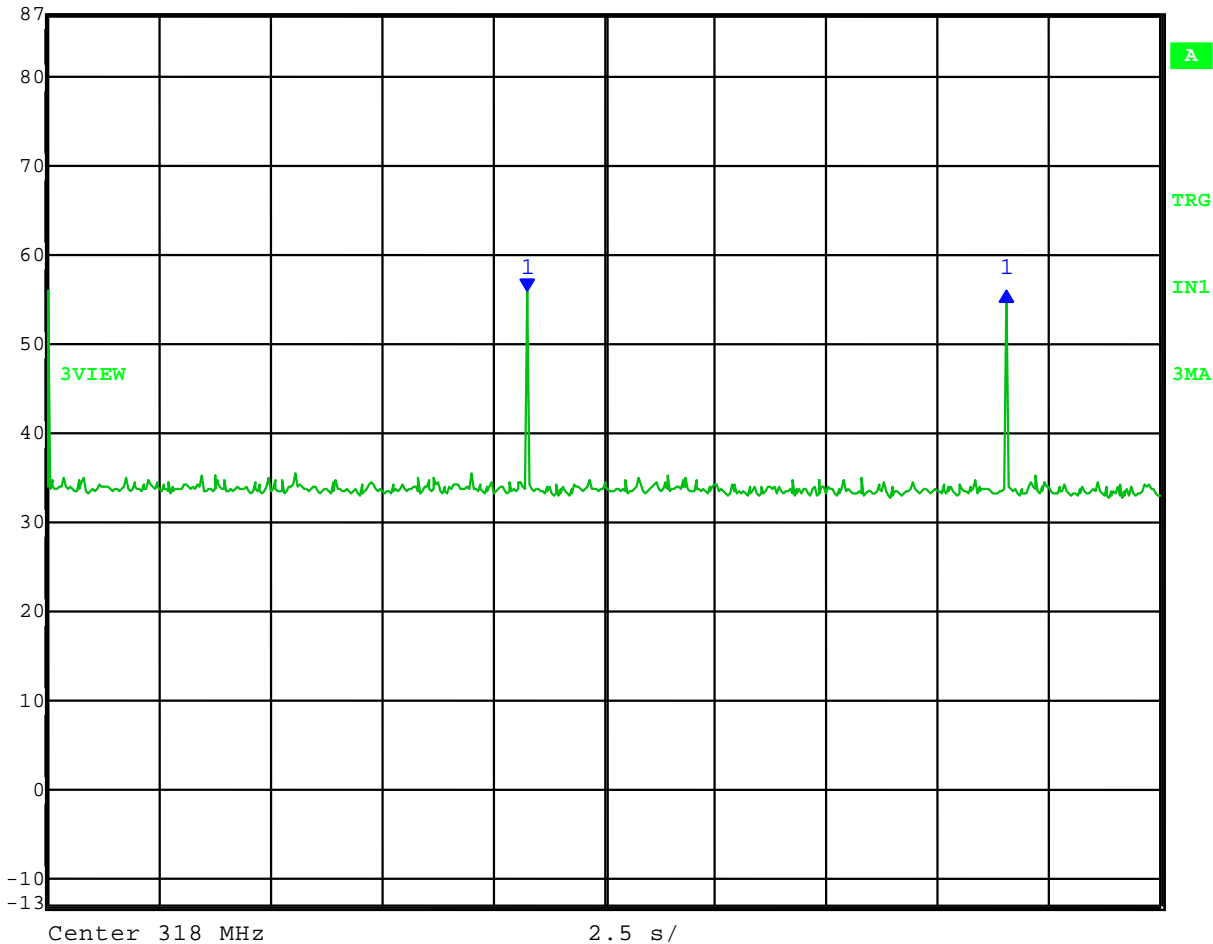

Date: 5.MAR.2012 09:07:29



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

4.0 Field Strength of Emissions – Fundamental and Spurious (318 MHz)

Rule Part:

15.231 (b) including 15.205

Test Procedure:

ANSI C63.4-2009 and ANSI C63.10-2009

Limit:

Fundamental (F) $\mu\text{V}/\text{m}$ at 3 meters: 41.6667(F) – 7083.3333

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

Results:

Compliant

Sample Equation(s):

$$41.6667(\text{F}) - 7083.3333 = 6166.67 \mu\text{V}/\text{m} \text{ at } 3 \text{ meters}$$

$$20 * \log(6166.67) = 75.80 \text{ dB } \mu\text{V}/\text{m} \text{ at } 3 \text{ meters}$$

$$\text{Final Corrected} = \text{Total Level} - \text{Duty Cycle Correction}$$

$$\text{Margin} = \text{Limit} - \text{Final Corrected}$$

$$\text{Total Level} = \text{Level} + \text{System Loss} + \text{Antenna Factor}$$

Notes:

The emissions were measured of the fundamental and spurious at a distance of three meters between the EUT and the measuring antenna. The EUT was rotated in 3 orthogonal planes and the highest emission was recorded. Since the unit was not able to transmit continuously at a 100 % duty cycle, compliance is determined by comparing peak data, minus duty cycle correction, to the average limit. Both models were evaluated. The worst-case emissions are recorded (model 9600-6262 was found to be worst-case by less than one dB at the fundamental, and less than 3 dB at the harmonics).

Radiated Fundamental and Spurious Emissions – 30 MHz to 3.2 GHz

Tested at a 3 Meter Distance

EUT: 9450-6066: Safe Place Infant Tx 262 kHz w/ Smart Sense
Manufacturer: RF Technologies
Operating Condition: 70 deg F; 22% R.H.
Test Site: Site 3
Operator: Craig B
Test Specification: FCC Part 15.231(b)
Comment: Battery Operated
Date: 03-05-2012

Notes: All other emissions at least 20 dB under the limit.
 Since unit was not able to transmit continuously, all measurements were made with a peak detector.

| Frequency (MHz) | Measurement Type | Antenna Polarization | Level (dBuV) | Antenna Factor (dB/m) | System Loss (dB) | Total Level (dBuV/m) | Duty Cycle Correction | Final Corrected (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | EUT Angle (deg) | Comment |
|-----------------|------------------|----------------------|--------------|-----------------------|------------------|----------------------|-----------------------|--------------------------|----------------|-------------|--------------------|-----------------|---------|
| 318.000 | Max Peak | Vertical | 50.97 | 14.78 | 3.8 | 69.55 | 0 | 69.55 | 95.80 | 26.3 | 1.7 | 255 | F |
| | Average | | | | | | 20 | 49.55 | 75.80 | | | | |
| | Max Peak | Horizontal | 51.51 | 14.78 | 3.8 | 70.09 | 0 | 70.09 | 95.80 | 25.7 | 1.0 | 240 | F |
| | Average | | | | | | 20 | 50.09 | 75.80 | | | | |
| 636.000 | Max Peak | Vertical | 36.26 | 19.66 | 5.6 | 61.52 | 0 | 61.52 | 75.80 | 14.3 | 1.5 | 270 | H |
| | Average | | | | | | 20 | 41.52 | 55.80 | | | | |
| | Max Peak | Horizontal | 36.58 | 19.66 | 5.6 | 61.84 | 0 | 61.84 | 75.80 | 14.0 | 1.2 | 250 | H |
| | Average | | | | | | 20 | 41.84 | 55.80 | | | | |
| 954.000 | Max Peak | Vertical | 30.69 | 23.72 | 7.1 | 61.51 | 0 | 61.51 | 75.80 | 14.3 | 1.4 | 275 | H |
| | Average | | | | | | 20 | 41.51 | 55.80 | | | | |
| | Max Peak | Horizontal | 32.92 | 23.72 | 7.1 | 63.74 | 0 | 63.74 | 75.80 | 12.1 | 1.2 | 250 | H |
| | Average | | | | | | 20 | 43.74 | 55.80 | | | | |
| 1272.000 | Max Peak | Vertical | 73.77 | 24.41 | -37.7 | 60.48 | 0 | 60.48 | 74.00 | 13.5 | 1.3 | 300 | H / RB |
| | Average | | | | | | 20 | 40.48 | 54.00 | | | | |
| | Max Peak | Horizontal | 74.53 | 24.41 | -37.7 | 61.24 | 0 | 61.24 | 74.00 | 12.8 | 1.4 | 135 | H / RB |
| | Average | | | | | | 20 | 41.24 | 54.00 | | | | |
| 1590.000 | Max Peak | Vertical | 68.07 | 25.49 | -38.7 | 54.86 | 0 | 54.86 | 74.00 | 19.1 | 1.2 | 290 | H / RB |
| | Average | | | | | | 20 | 34.86 | 54.00 | | | | |
| | Max Peak | Horizontal | 69.70 | 25.49 | -38.7 | 56.49 | 0 | 56.49 | 74.00 | 17.5 | 1.1 | 170 | H / RB |
| | Average | | | | | | 20 | 36.49 | 54.00 | | | | |
| 1908.000 | Max Peak | Vertical | 68.14 | 26.93 | -39.2 | 55.87 | 0 | 55.87 | 75.80 | 19.9 | 1.3 | 30 | H |
| | Average | | | | | | 20 | 35.87 | 55.80 | | | | |
| | Max Peak | Horizontal | 68.75 | 26.93 | -39.2 | 56.48 | 0 | 56.48 | 75.80 | 19.3 | 1.0 | 265 | H |
| | Average | | | | | | 20 | 36.48 | 55.80 | | | | |
| 2226.000 | Max Peak | Vertical | 55.81 | 28.00 | -39.2 | 44.61 | 0 | 44.61 | 74.00 | 29.4 | 1.4 | 180 | H / RB |
| | Average | | | | | | 20 | 24.61 | 54.00 | | | | |
| | Max Peak | Horizontal | 55.95 | 28.00 | -39.2 | 44.75 | 0 | 44.75 | 74.00 | 29.3 | 1.5 | 190 | H / RB |
| | Average | | | | | | 20 | 24.75 | 54.00 | | | | |

Legend: H=Harmonic ; RB=Restricted Band ; F=Fundamental
Level = Total Level - System Loss - Antenna Factor
Final Corrected = Total Level - Duty Cycle Correction
Margin = Limit - Final Corrected



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

5.0 Duty Cycle Correction (318 MHz)

Rule Part:

15.35 (c)

Test Procedure:

ANSI C63.4-2009 and ANSI C63.10-2009

Limit:

Informative

Results:

Informative

Sample Equation(s):

See data

Notes:

Since the unit was not able to transmit continuously, compliance is determined by comparing peak data, minus duty cycle correction, to the average limit.



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
 Model Tested: 9450-6262 and 9450-6066
 Report Number: 17709
 Project Number: 5108

Appendix B


Normal Operation

Test Date: 03-05-2012
 Company: RF Technologies
 EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
 Test: Duty Cycle – worst case for normal operation
 Operator: Craig B

Comment: One wide pulse: 0.42084 ms
 Ten narrow pulses: 0.22044 ms each
 Total ON time in 100 ms = 2.63 ms
 Duty Cycle correction = $20 \text{ Log} (2.63/100) = -31.6 \text{ dB}$

100 ms sweep:

| | | | | | | |
|--|---------------|--------------|-----|--------|--------|------------|
| | | Delta 1 [T3] | RBW | 1 MHz | RF Att | 10 dB |
| | Ref Lvl | -21.45 dB | VBW | 3 MHz | | |
| | 87 dB μ V | 5.611222 ms | SWT | 100 ms | Unit | dB μ V |

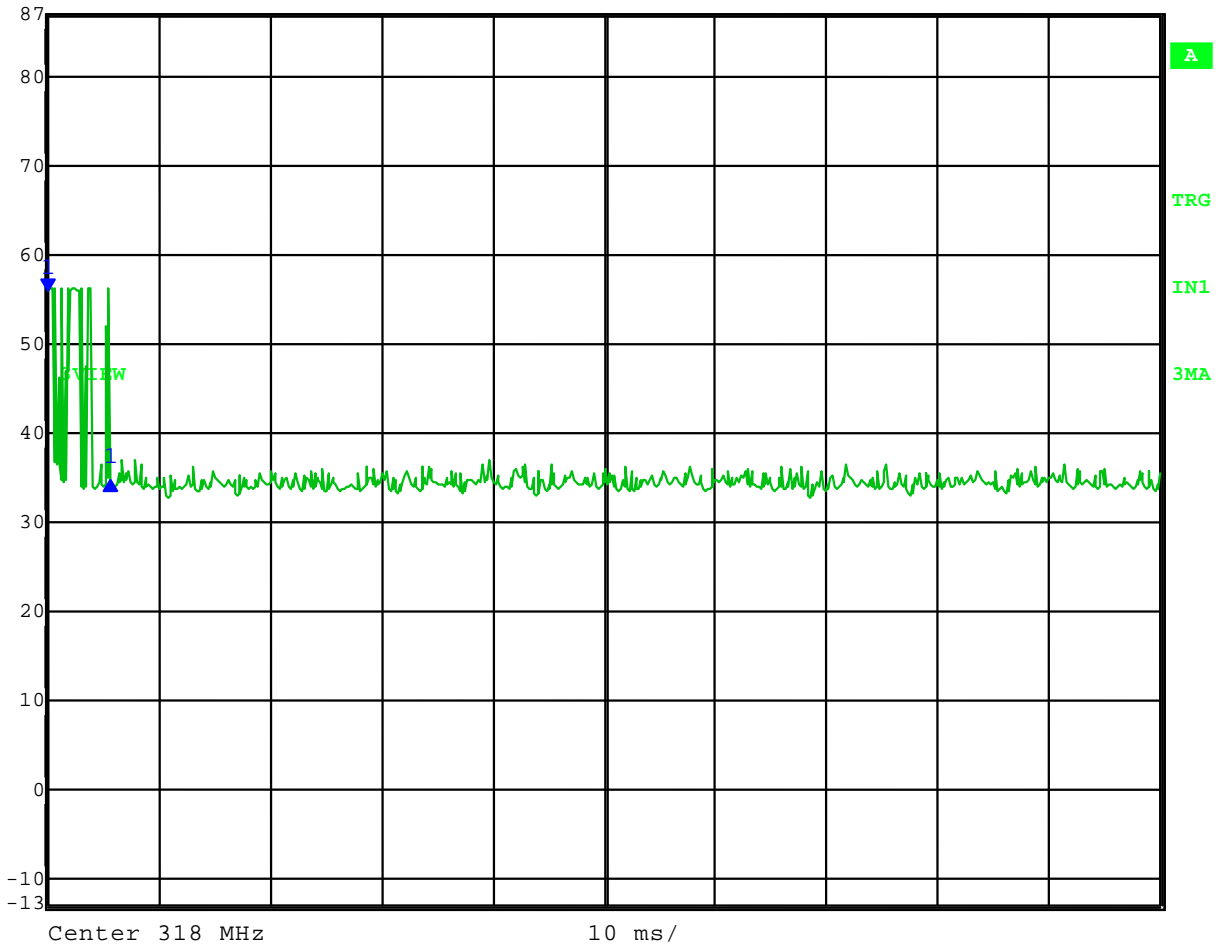

Date: 5.MAR.2012 08:53:10



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B


Normal Operation

Test Date: 03-05-2012
Company: RF Technologies
EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
Test: Duty Cycle – worst case for normal operation
Operator: Craig B

Comment: One wide pulse: 0.42084 ms
Ten narrow pulses: 0.22044 ms each
Total ON time in 100 ms = 2.63 ms
Duty Cycle correction = $20 \text{ Log} (2.63/100) = -31.6 \text{ dB}$

ON time of wide pulse:

| | | | | | |
|--|---------------|--------------------|-------|--------|-----------------|
| | Delta 1 [T3] | RBW | 1 MHz | RF Att | 10 dB |
| | Ref Lvl | 2.07 dB | VBW | 3 MHz | |
| | 87 dB μ V | 420.841683 μ s | SWT | 10 ms | Unit dB μ V |

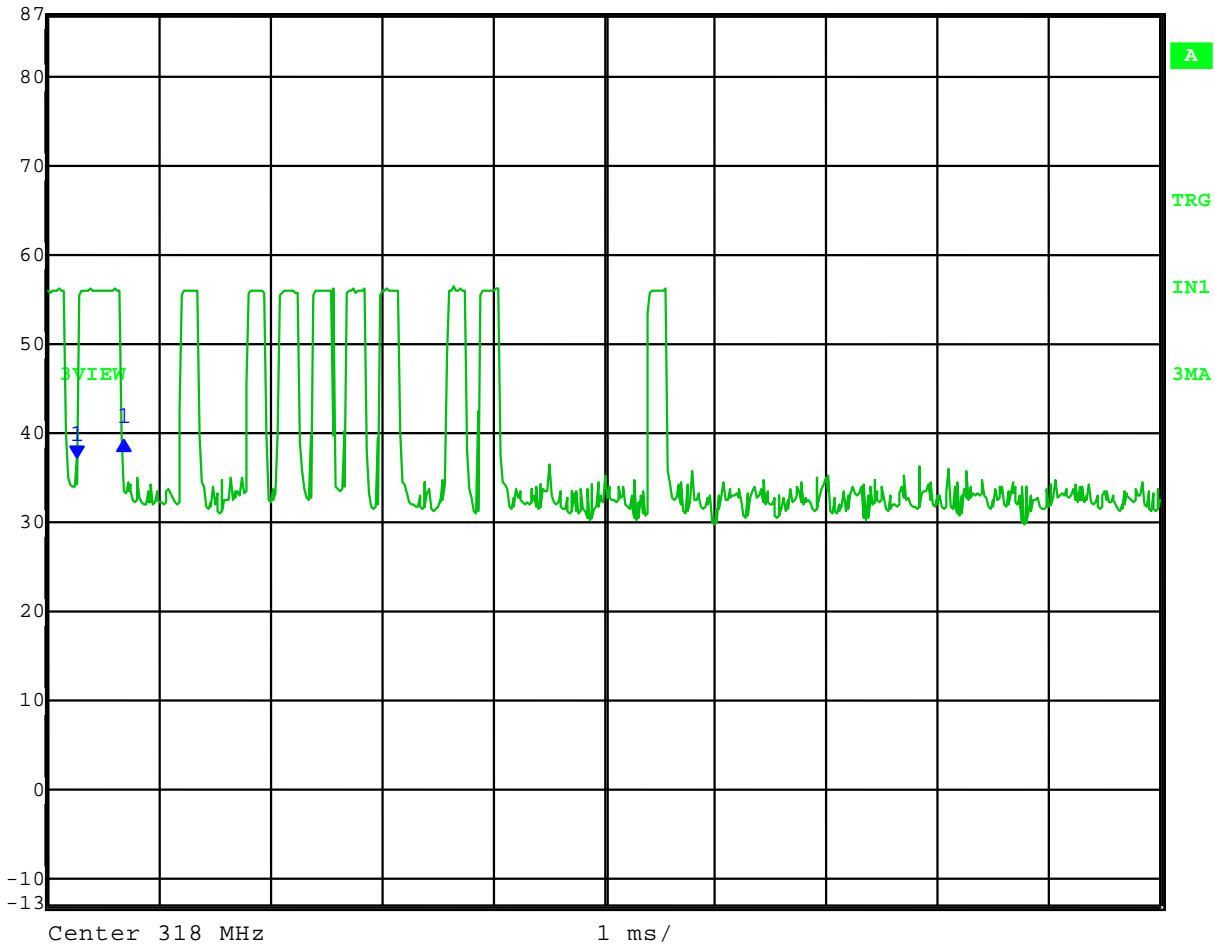

Date: 5.MAR.2012 08:54:56



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B


Normal Operation

Test Date: 03-05-2012
Company: RF Technologies
EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
Test: Duty Cycle – worst case for normal operation
Operator: Craig B

Comment: One wide pulse: 0.42084 ms
Ten narrow pulses: 0.22044 ms each
Total ON time in 100 ms = 2.63 ms
Duty Cycle correction = $20 \text{ Log} (2.63/100) = -31.6 \text{ dB}$

ON time of narrow pulse:

| | | | | | |
|---------------|--------------------|-----|-------|--------|------------|
| | Delta 1 [T3] | RBW | 1 MHz | RF Att | 10 dB |
| Ref Lvl | -1.39 dB | VBW | 3 MHz | | |
| 87 dB μ V | 220.440882 μ s | SWT | 10 ms | Unit | dB μ V |

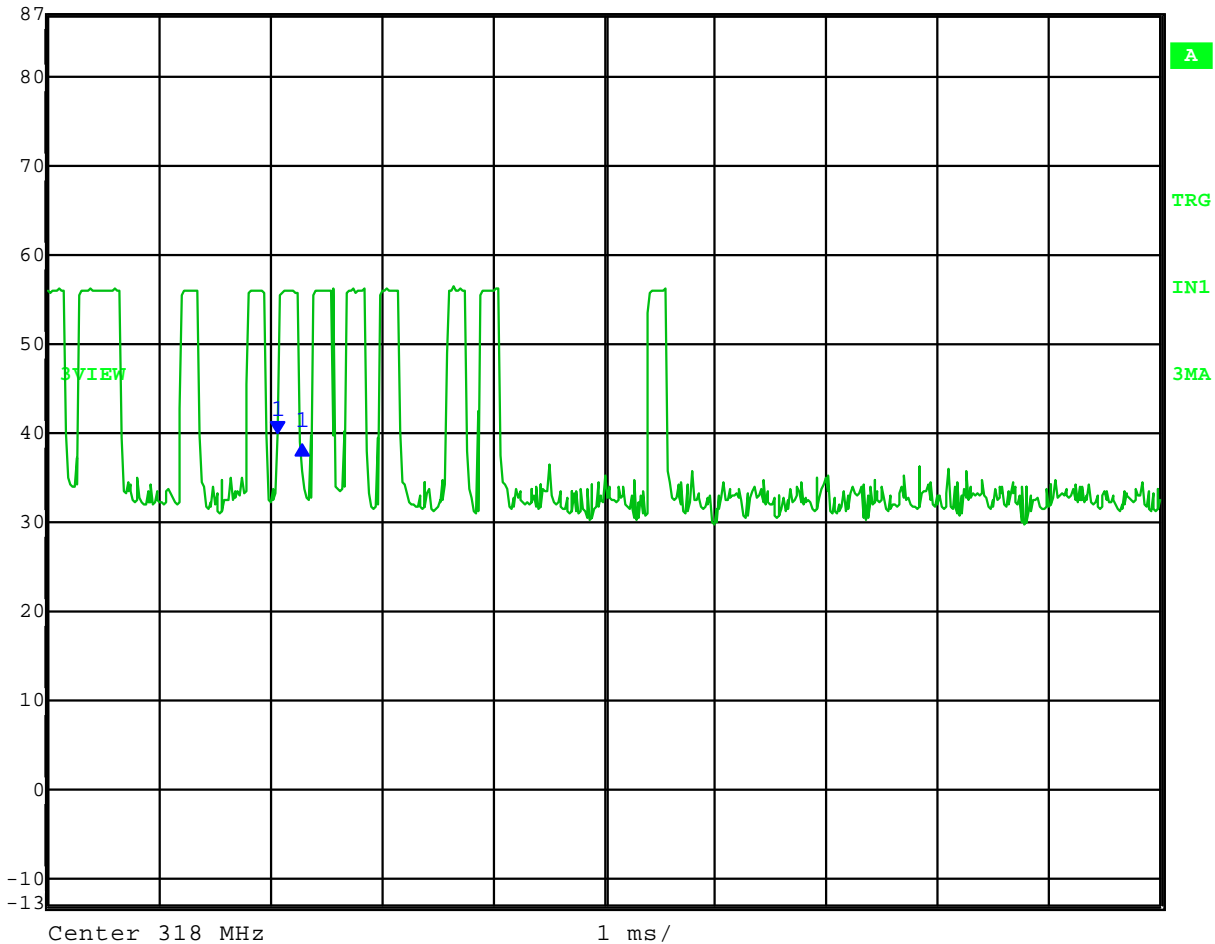

Date: 5.MAR.2012 08:55:58



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
 Model Tested: 9450-6262 and 9450-6066
 Report Number: 17709
 Project Number: 5108


Appendix B

Test Mode

Test Date: 03-05-2012
 Company: RF Technologies
 EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
 Test: Duty Cycle – special mode for testing purposes
 Operator: Craig B

Comment: One wide pulse: 1 second
 Total ON time in 100 ms = 100 ms
 Duty Cycle: ON for 1 second, OFF for 3 seconds

| | | | | | |
|--|--------------|------------|-------|--------|-------|
| | Delta 1 [T3] | RBW | 1 MHz | RF Att | 10 dB |
| | Ref Lvl | -20.57 dB | VBW | 3 MHz | |
| | 87 dBμV | 1.010020 s | SWT | 6 s | Unit |

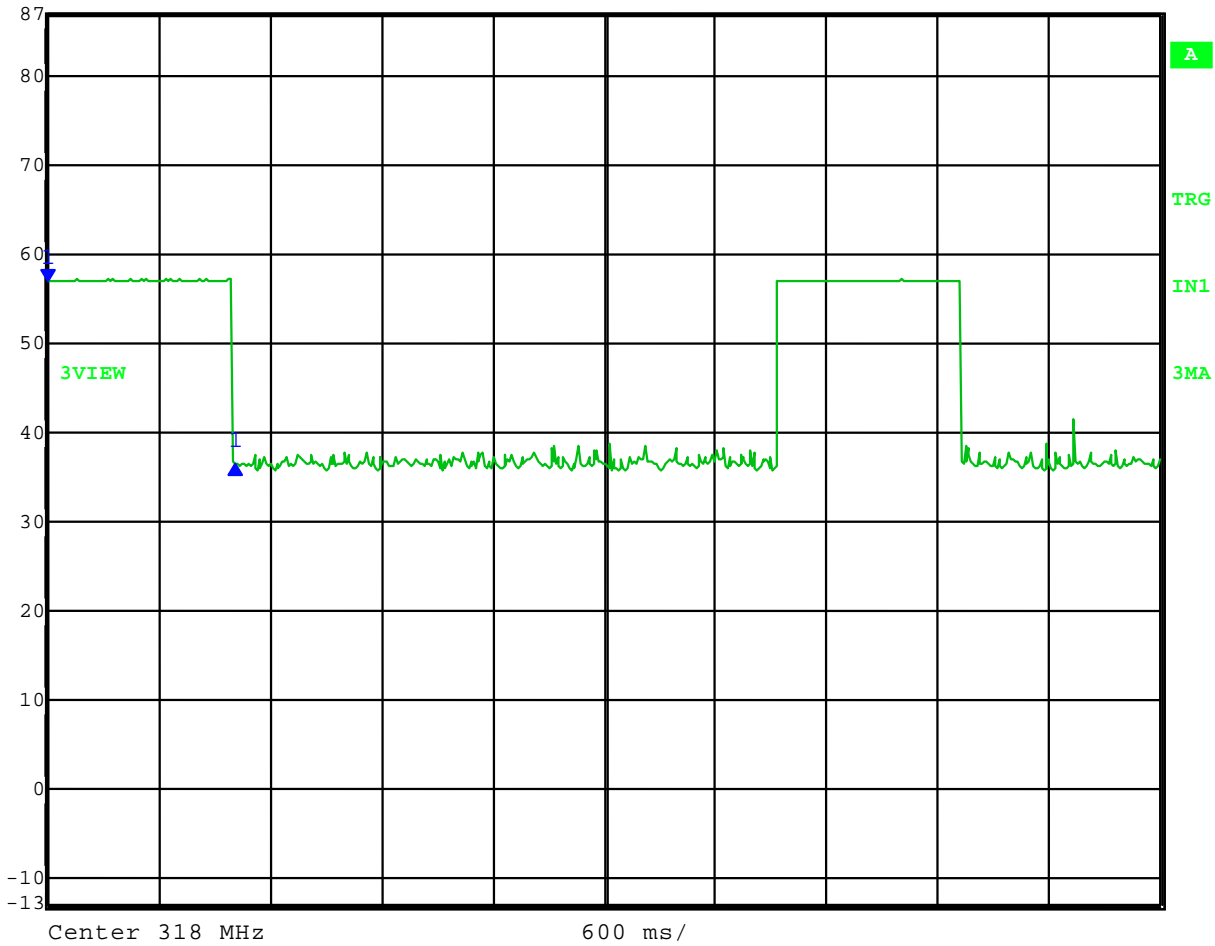

Date: 5.MAR.2012 09:16:34



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

6.0 Field Strength of Emissions – Fundamental and Spurious (66 & 262 kHz)

Rule Part: Section 15.209

Test Procedure: ANSI C63.4-2009

Limits:
15.209 (a)

Results: Compliant
Note that the 66 kHz and 262 kHz transmitters are exempt from certification as defined by section 15.201(a).

Sample Equations:

Total Level = Level + System Loss + Antenna Factor
Final Corrected = Total Level - Duty Cycle Correction
Margin = Limit - Final Corrected

Notes:

Tested at a 3 meter distance.
All other emissions at least 60 dB below the limit.
Since the EUT was not able to transmit continuously, compliance is shown by measurement with a peak detector and applying a duty cycle corrected value to the average limit (see above equations).

Radiated Fundamental and Spurious Emissions – 9 kHz to 30 MHz

Tested at a 3 Meter Distance

EUT: 9450-6262: Safe Place Infant Tx, 262 kHz w/ Smart Sense
Manufacturer: RF Technologies
Operating Condition: 70 deg F; 24% R.H.
Test Site: Site 3
Operator: Craig B
Test Specification: FCC Part 15.209
Comment: Battery Operated
Date: 03-06-2010

Notes: All other emissions at least **60** dB under the limit.
 Since unit was not able to transmit continuously, compliance is shown by comparing Peak data against the Average limits.

| Frequency (kHz) | Measurement Type | Antenna Polarization | Level (dBuV) | Antenna Factor (dB/m) | System Loss (dB) | Total Level (dBuV/m) | Duty Cycle Correction | Final Corrected (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | EUT Angle (deg) | Comment |
|-----------------|------------------|----------------------|--------------|-----------------------|------------------|----------------------|-----------------------|--------------------------|----------------|-------------|--------------------|-----------------|---------|
| 196.000 | Max Peak | Vert | 52.93 | 10.40 | 0.0 | 63.33 | 0 | 63.33 | 121.74 | 58.4 | 1.0 | 100 | Spur |
| | Average | | | | | | 20 | 43.33 | 101.74 | | | | |
| 262.000 | Max Peak | Vert | 68.14 | 10.34 | 0.1 | 78.58 | 0 | 78.58 | 119.24 | 40.7 | 1.0 | 100 | Fund |
| | Average | | | | | | 20 | 58.58 | 99.24 | | | | |
| 524.000 | Max Peak | Vert | 39.74 | 10.28 | 0.1 | 50.12 | 0 | 50.12 | 93.22 | 43.1 | 1.0 | 100 | Harm |
| | Average | | | | | | 20 | 30.12 | 73.22 | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

Legend: H=Harmonic ; RB=Restricted Band ; F=Fundamental

Level = Total Level - System Loss - Antenna Factor

Final Corrected = Total Level - Duty Cycle Correction

Margin = Limit - Final Corrected

Radiated Fundamental and Spurious Emissions – 9 kHz to 30 MHz

Tested at a 3 Meter Distance

EUT: 9450-6066: Safe Place Infant Tx, 66 kHz w/ Smart Sense
Manufacturer: RF Technologies
Operating Condition: 72 deg F; 23% R.H.
Test Site: Site 3
Operator: Craig B
Test Specification: FCC Part 15.209
Comment: Battery Operated
Date: 03-05-2012

Notes: All other emissions at least **60** dB under the limit.
 Since unit was not able to transmit continuously, compliance is shown by comparing Peak data against the Average limits.

| Frequency (kHz) | Measurement Type | Antenna Polarization | Level (dBuV) | Antenna Factor (dB/m) | System Loss (dB) | Total Level (dBuV/m) | Duty Cycle Correction | Final Corrected (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | EUT Angle (deg) | Comment |
|-----------------|------------------|----------------------|--------------|-----------------------|------------------|----------------------|-----------------------|--------------------------|----------------|-------------|--------------------|-----------------|---------|
| 65.530 | Max Peak | Vert | 75.69 | 10.38 | 0.0 | 86.07 | 0 | 86.07 | 131.28 | 45.2 | 1.0 | 90 | Fund |
| | Average | | | | | | 20 | 66.07 | 111.28 | | | | |
| 131.060 | Max Peak | Vert | 43.83 | 10.33 | 0.1 | 54.26 | 0 | 54.26 | 125.26 | 71.0 | 1.0 | 90 | Harm |
| | Average | | | | | | 20 | 34.26 | 105.26 | | | | |
| 196.590 | Max Peak | Vert | 31.84 | 10.40 | 0.0 | 42.24 | 0 | 42.24 | 121.74 | 79.5 | 1.0 | 90 | Harm |
| | Average | | | | | | 20 | 22.24 | 101.74 | | | | |

Legend: H=Harmonic ; RB=Restricted Band ; F=Fundamental

Level = Total Level - System Loss - Antenna Factor

Final Corrected = Total Level - Duty Cycle Correction

Margin = Limit - Final Corrected



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

7.0 Duty Cycle Correction (66 & 262 kHz)

Rule Part:

15.35 (c)

Test Procedure:

ANSI C63.4-2009 and ANSI C63.10-2009

Limit:

Informative

Results:

Informative

Sample Equation(s):

See data

Notes:

Since the unit was not able to transmit continuously, compliance is determined by comparing peak data, minus duty cycle correction, to the average limit. Both models use the same duty cycle.



166 South Carter, Genoa City, WI 53128


Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

Normal Operation

Test Date: 03-05-2012
Company: RF Technologies
EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
Test: Duty Cycle – worst case for normal operation
Operator: Craig B
Comment: Eight pulses at 0.6313 ms each
Total ON time in 100 ms = 5.05 ms
Duty Cycle correction = $20 \text{ Log}(5.05/100) = -25.93 \text{ dB}$

100 ms sweep:

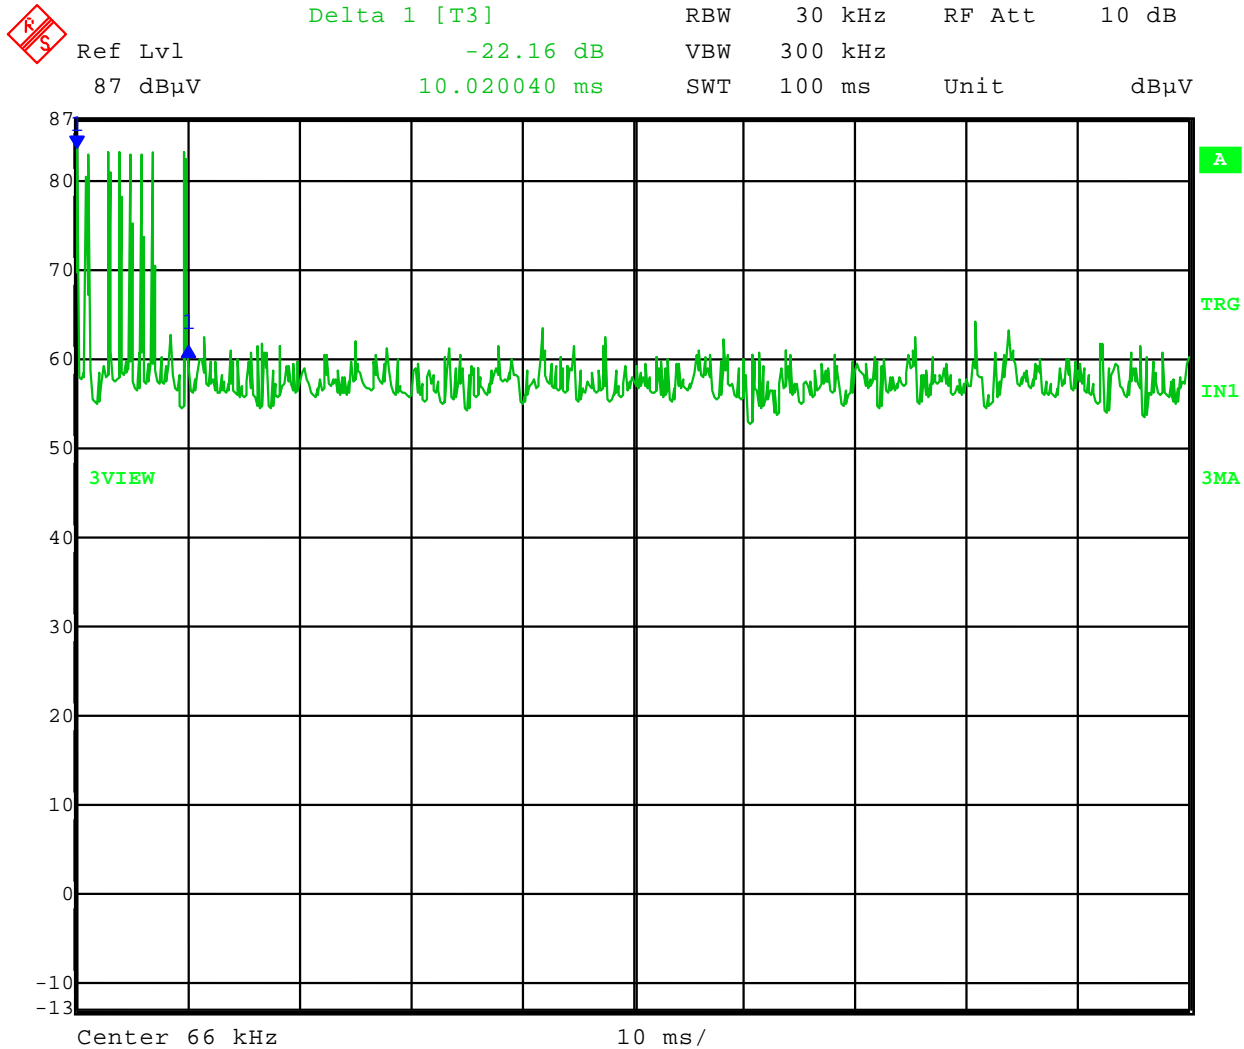

Date: 5.MAR.2012 14:53:02



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108


Appendix B

Normal Operation

Test Date: 03-05-2012
Company: RF Technologies
EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
Test: Duty Cycle – worst case for normal operation
Operator: Craig B
Comment: Eight pulses at 0.6313 ms each
Total ON time in 100 ms = 5.05 ms
Duty Cycle correction = $20 \text{ Log}(5.05/100) = -25.93 \text{ dB}$

ON time of one pulse:

| | | | | | | |
|--|---------|---------------|-----|--------|--------|-------|
| | Ref Lvl | Delta 1 [T3] | RBW | 3 kHz | RF Att | 10 dB |
| | 87 dBμV | 0.87 dB | VBW | 10 kHz | | |
| | | 631.262525 μs | SWT | 15 ms | Unit | dBμV |

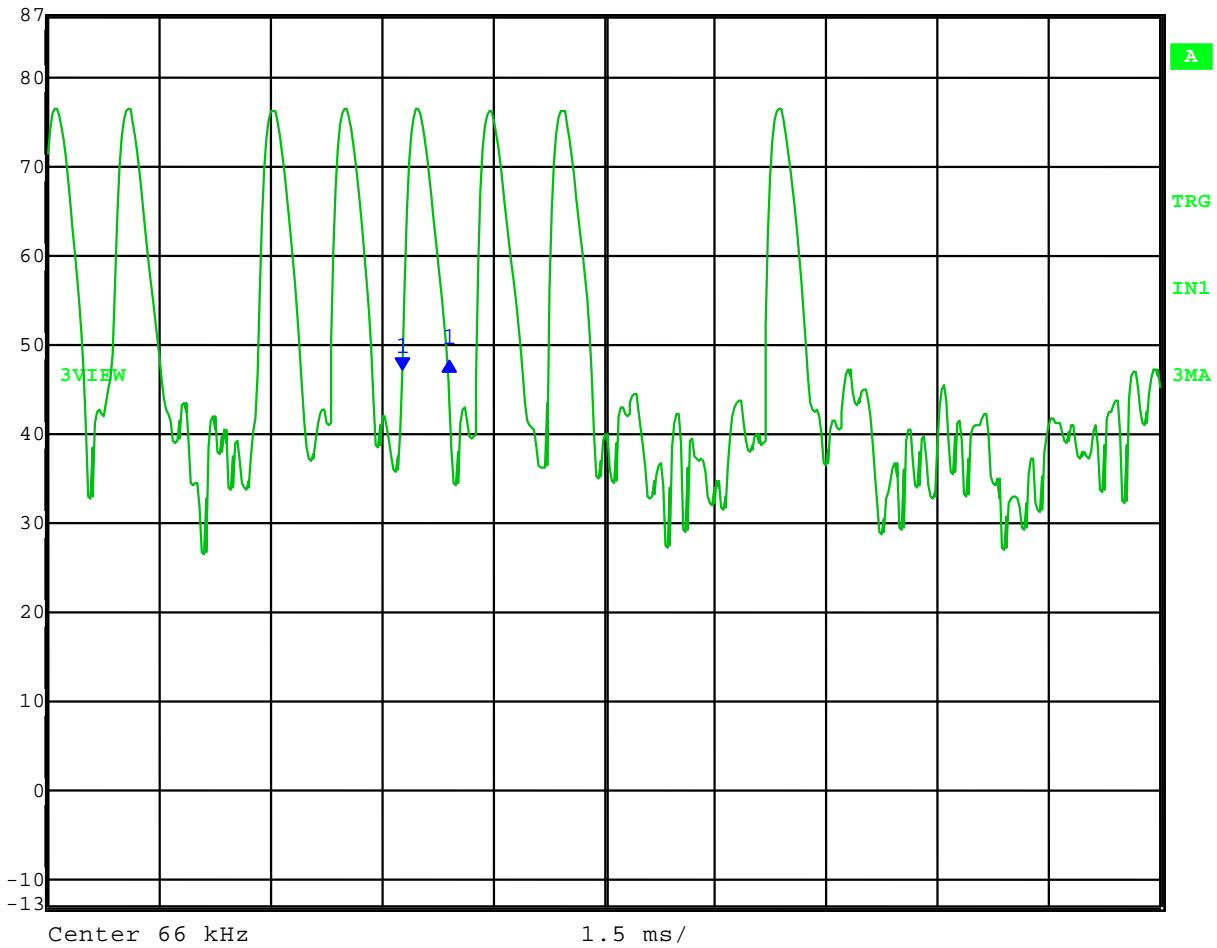

Date: 5.MAR.2012 14:55:29



166 South Carter, Genoa City, WI 53128


Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

Appendix B

Test Mode

Test Date: 03-05-2012
Company: RF Technologies
EUT: 9450-6066: Safe Place Infant Tx 66 kHz w/ Smart Sense
Test: Duty Cycle – special mode for testing purposes
Operator: Craig B

Comment: ON for 1 second, OFF for 3 seconds.

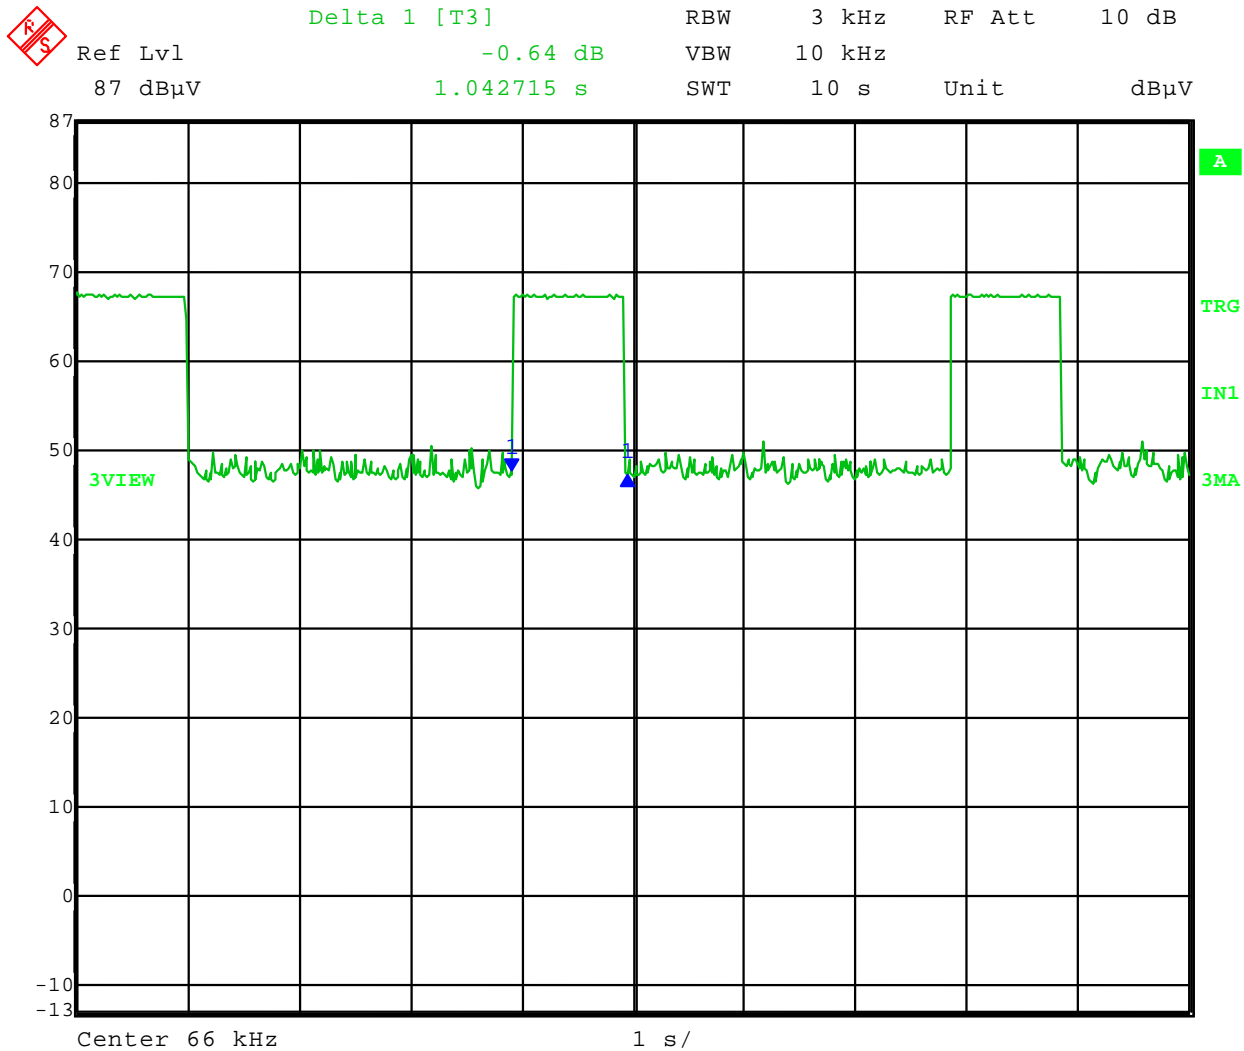

Date: 5.MAR.2012 15:07:59



166 South Carter, Genoa City, WI 53128

Company: RF Technologies
Model Tested: 9450-6262 and 9450-6066
Report Number: 17709
Project Number: 5108

END OF REPORT

| Revision # | Date | Comments | By |
|------------|------------|---|----|
| 1.0 | 03-07-2012 | Initial Release | CB |
| 1.1 | 03-12-2012 | Corrected limit listed on cover sheet page 22 | CB |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |