



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

FCC Rules and Regulations / Intentional Radiators

Periodic operational in the 40.66-40.70 MHz Band and above 70 MHz.

Part 15, Subpart C, Section 15.231

THE FOLLOWING **"MEETS"** THE ABOVE TEST SPECIFICATION

Formal Name: Seeker Mobile Locating System  
Kind of Equipment: RFID Reader  
Test Configuration: Self contained unit (Tested at 120 vac, 60 Hz)  
Model Number(s): 1000-8250  
Model(s) Tested: 1000-8250  
Serial Number(s): 00002  
Date of Tests: February 2, 3 & 6, 2006  
Test Conducted For: RF Technologies, Inc.  
3125 N. 126th St  
Brookfield, Wisconsin 53005

**NOTICE:** "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report. This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems.



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

SIGNATURE PAGE

Report By:

Arnom C. Rowe  
Test Engineer  
EMC-001375-NE

Reviewed By:

William Stumpf  
OATS Manager

Approved By:

Brian Mattson  
General Manager

Company Official:

RF Technologies, Inc.



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009

## TABLE OF CONTENTS

i.	Cover Page .....	1
ii.	Signature Page .....	2
iii.	Table of Contents.....	3
iv.	NVLAP Certificate of Accreditation .....	5
v.	NVLAP Scope of Accreditation .....	6
1.0	Summary of Test Report.....	14
2.0	Introduction.....	14
3.0	Object.....	14
4.0	Test Set-Up .....	15
5.0	Test Equipment .....	16
6.0	Ambient Measurements .....	17
7.0	Description of Test Sample.....	18
8.0	Additional Description of Test Sample.....	19
9.0	Photo Information and Test Set-Up .....	20
10.0	Radiated Photos Taken During Testing .....	21
10.0	Conducted Photos Taken During Testing.....	29
11.0	Results of Tests.....	31
12.0	Conclusion .....	31
	TABLE 1 – EQUIPMENT LIST .....	32



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009

## TABLE OF CONTENTS

Appendix A – Electric Field Radiated Emissions Test.....	34
1.0 Conducted Emission Measurements.....	35
1.0 Conducted Data and Graph(s) taken during testing.....	36
2.0 Pulsed Operation (Duty Cycle Correction Factor).....	43
2.0 Graph(s) taken of the Pulsed Operation (DCCF).....	44
3.0 Bandwidths .....	48
3.0 Graph(s) taken of the Bandwidth Emissions .....	49
4.0 Field Strength of Spurious Emission Measurements.....	51
4.0 Data taken of the Fundamental and Spurious Emissions.....	52
5.0 Restricted Bands .....	54



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009

United States Department of Commerce  
National Institute of Standards and Technology



# Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 100276-0

**D.L.S. Electronic Systems, Inc.**  
Wheeling, IL

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in  
*NIST Handbook 150:2001 and all requirements of ISO/IEC Guide 17025:1999.*  
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**



For the National Institute of Standards and Technology


2005-10-01 through 2006-09-30  
Effective dates

NVLAP-01C (REV. 2005-05-19)



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009



**SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999**

**D.L.S. Electronic Systems, Inc.**  
 1250 Peterson Drive  
 Wheeling, IL 60090-6454  
 Mr. Brian J. Mattson  
 Phone: 847-537-6400 Fax: 847-537-6488  
 E-Mail: [bmattson@dlsemc.com](mailto:bmattson@dlsemc.com)  
 URL: <http://www.dlsemc.com>

**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

*NVLAP Code Designation / Description*

**Emissions Test Methods:**

- 12/160D21 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 21 - Emission of Radio Frequency Energy
- 12/300220a EN 300 220-1 V1.3.1 (2000-09): Electromagnetic compatibility and Radio spectrum Matters; Short Range Devices; Radio equipment to be used in the 25 MHz to 1000 MHz frequency range with power levels ranging up to 500 mW; Part 1: Technical characteristics and test methods
- 12/300386a EN 300 386 V.1.2.1: Electromagnetic compatibility and radio spectrum matter (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements
- 12/C63.17 ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
- 12/C6317a ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
- 12/CIS11 IEC/CISPR 11 + A1 (1997), EN 55011 (1998), AS/NZS CISPR 11 (2002), and CNS 13803 (1997): Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific, and Medical Radio-Frequency Equipment

2005-10-01 through 2006-09-30


*Effective dates*

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/CIS13	IEC/CISPR 13 (2001-04), EN 55013 (2001), AS/NZS CISPR 13 (2003), and CNS 13439 (2001): Sound and television broadcast receivers and associated equipment - Radio disturbance characteristics - Limits and methods of measurement
12/CIS14	CISPR 14-1 (March 30, 2000): Limits and Methods of Measurement of Radio interference Characteristics of Household Electrical Appliances, Portable Tools and Similiar Electrical Apparatus - Part 1: Emissions
12/CIS14a	EN 55014-1 (1993), A1 (1997), A2 (1999):
12/CIS14d	IEC/CISPR 14-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emissions
12/CIS14e	EN 55014-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS14f	AS/NZS 1044 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS14g	CNS 13783-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS15	IEC/CISPR 15 (2000) + A1 (2001): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15a	AS/NZS CISPR 15 (2002): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15b	CNS 13439 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15c	EN 55015 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS22	IEC/CISPR 22 (1997) & EN 55022 (1998) + A1(2000): Limits and methods of measurement of radio disturbance characteristics of information technology equipment

2005-10-01 through 2006-09-30


*Effective dates*

*For the National Institute of Standards and Technology*



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/CIS22a	IEC/CISPR 22 (1993) and EN 55022 (1994): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1 (1995) and Amendment 2 (1996)
12/CIS22b	CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment
12/EM02a	IEC 61000-3-2, Edition 2.1 (2001-10), EN 61000-3-2 (2000), and AS/NZS 2279.1 (2000): Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current <= 16 A)
12/EM03	IEC 61000-3-3(1995); EN 61000-3-3(1995); AS/NZS 2279.3(1995): EMC - Part 3: Limits - Section 3. Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current up to 16A
12/F18	FCC OST/MP-5 (1986): FCC Methods of Measurement of Radio Noise Emissions for ISM Equipment (cited in FCC Method 47 CFR Part 18 - Industrial, Scientific, and Medical Equipment)
12/FCC15b	ANSI C63.4 (2003) with FCC Method 47 CFR Part 15, Subpart B: Unintentional Radiators
12/FCC15c	ANSI C63.4 (2003) with FCC Method 47 CFR Part 15, Subpart C: Intentional Radiators
12/FCC15d	ANSI C63.17(1998) and ANSI C63.4 (2003): with FCC Method - 47 CFR Part 15, Subpart D: Unlicensed Personal Communications Service Devices
12/FCC15e	ANSI C63.4 (2003) with FCC Method 47 CFR Part 15, Subpart E: Unlicensed National Information Infrastructure Service Devices
12/T51a	AS/NZS CISPR 22 (2004): Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
12/VCCIa	VCCI: Agreement of Voluntary Control Council for Interference by Information Technology Equipment - Technical Requirements: V-3/2005.04

2005-10-01 through 2006-09-30

*Effective dates*


*For the National Institute of Standards and Technology*





Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

*NVLAP Code Designation / Description*

**Immunity Test Methods:**

- 12/1089a GR-1089-CORE, Issue 3, October 2002: Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment (sections 2, 3.3, and 3.5)
- 12/160D16 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 16 - Power Input
- 12/160D17 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 17 - Voltage Spike
- 12/160D18 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 18 - Audio Frequency Conducted Susceptibility - Power Inputs
- 12/160D19 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 19 - Induced Signal Susceptibility
- 12/160D20 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 20 - Radio Frequency Susceptibility (Radiated and Conducted)
- 12/160D22 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 22 - Lightning Induced Transient Susceptibility
- 12/160D25 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 25 - Electrostatic Discharge (ESD)
- 12/101 IEC 61000-4-2, Ed. 1.2 (2001) + A1, A2; EN 61000-4-2: Electrostatic Discharge Immunity Test
- 12/102 IEC 61000-4-3, Ed. 2.0 (2002-03); EN 61000-4-3 (2002): Radiated Radio-Frequency Electromagnetic Field Immunity Test
- 12/103 IEC 61000-4-4(1995), A1(2000), A2(2001); EN 61000-4-4: Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical Fast Transient/Burst Immunity Test

2005-10-01 through 2006-09-30


*Effective dates*

*For the National Institute of Standards and Technology*



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/I04	IEC 61000-4-5, Ed. 1.1 (2001-04); EN 61000-4-5: Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test
12/I05	IEC 61000-4-6, Ed. 2.0 (2003-05); EN 61000-4-6: Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields
12/I06	IEC 61000-4-8, Ed. 1.1 (2001); EN 61000-4-8: Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test
12/I07	IEC 61000-4-11, Ed. 1.1 (2001-03); EN 61000-4-11: Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests
12/J111324	SAE J1113/24: Immunity to radiated electromagnetic fields; 10 kHz to 200 MHz - Crawford TEM cell and 10 kHz to 5 GHz - Wideband TEM cell
12/J111341	SAE J1113/41 (1995-07): Limits and methods of measurement of radio disturbance characteristics of components and modules for the protection of receivers used on board vehicles

**Radio Test Methods**

12/RSS119	RSS-119, Issue 6 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 27.41 to 960 MHz
12/RSS123	RSS-123, Issue 1, Rev. 2 (November 6, 1999): Low Power Licensed Radiocommunication Devices
12/RSS125	RSS-125 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 1.705 to 50.0 MHz, Primarily Amplitude Modulated
12/RSS131	RSS-131, Issue 2 (July 2003): Zone Enhancers for the Land Mobile Service
12/RSS132	RSS-132, Issue 1 (August 2002): 800 MHz Cellular Telephones Employing New Technologies
12/RSS133	RSS-133, Issue 3 (June 2005): 2GHz Personal Communications Services

2005-10-01 through 2006-09-30

*Effective dates*




*For the National Institute of Standards and Technology*



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/RSS134	RSS-134, Issue 1, Rev. 1 (March 25, 2000): 900 MHz Narrowband Personal Communication Service
12/RSS135	RSS-135, Issue 1 (October 26, 1996): Digital Scanner Receivers
12/RSS136	RSS-136, Issue 5 (October 2002): Land and Mobile Station Radiotelephone Transmitters and Receivers Operating in the 26.960 - 27.410 MHz General Radio Service Band
12/RSS137	RSS-137, Issue 1, Rev. 1 (September 25, 1999): Location and Monitoring Service (902 - 928 MHz)
12/RSS139	RSS-139, Issue 1 (February 5, 2000): Licensed Radiocommunications Devices in the Band 2400 - 2483.5 MHz
12/RSS141	RSS-141, Issue 1, Revision 1 (February 7, 2004): Aeronautical Radiocommunication Equipment in the Frequency Band 117.975 - 137 MHz
12/RSS142	RSS-142, Issue 2 (August 2002): Narrowband Multipoint Communication Systems in the 1,427 - 1,430 MHz and 1,493.5 - 1,496.5 MHz Bands
12/RSS170	RSS-170, Issue 1, Rev. 1 (November 6, 1999): Satellite Mobile Earth Stations
12/RSS191	RSS-191, Issue 2 (August 2002): Local Multipoint Communication Systems in the 28 GHz Band; Point-to-Point and Point-to-Multipoint Broadband Communication Systems in the 24 GHz and 38 GHz Bands
12/RSS192	RSS-192, Issue 2 (2004): Fixed Wireless Access Systems in the Band 3450 - 3650 MHz
12/RSS193	RSS-193, Issue 1 (July 2003): Multipoint and Point-to-Point Communication Systems (MCS) in the Fixed Service Operating in the 2,150 - 2,160 MHz, 2,500 - 2,596 MHz and 2,686 - 2,690 MHz Bands
12/RSS210	RSS-210, Issue 6 (Sept. 2005): Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
12/RSS212	RSS-212, Issue 1 (February 27, 1999): Test Facilities and Test Methods for Radio Equipment

2005-10-01 through 2006-09-30


*Effective dates*

*For the National Institute of Standards and Technology*



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY  
AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/RSS213	RSS-213, Issue 1 (April 24, 1999): 2 GHz Licence-Exempt Personal Communications Service Devices (PCS)
12/RSS215	RSS-215, Issue 1 (November 6, 1999): Analogue Scanner Receivers
12/RSS310	RSS-310, Issue 1 ( Sept. 2005): Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment
12/RSSgen	RSS-Gen, Issue 1 (Sept. 2005): General Requirements and Information for the Certification of Radiocommunication Equipment

**Telecommunications Test Methods:**

12/FCC2a2	TIA/EIA 603-B (2002) with 47 CFR Part 2: Public Mobile Services in 47 CFR Part 22
12/FCC2b2	TIA/EIA 603-B (2002) with 47 CFR Part 2: Private Land Mobile Radio Services in 47 CFR Part 90
12/FCC2d1	TIA/EIA 603-B (2002) with 47 CFR Part 2: Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional Services in 47 CFR Part 74
12/FCC2e1	TIA/EIA 603-B (2002) with 47 CFR Part 2: International Fixed Public Radiocommunication Services in 47 CFR Part 23

**MIL-STD-462 : Conducted Emissions:**

12/A13	MIL-STD-462 Version D Method CE101
12/A14	MIL-STD-462 Version D Method CE102
12/A16	MIL-STD-461 Version E Method CE101
12/A17	MIL-STD-461 Version E Method CE102
12/A18	MIL-STD-461 Version E Method CE106

**MIL-STD-462 : Conducted Susceptibility:**

12/B12	MIL-STD-462 Version D Method CS101
--------	------------------------------------

2005-10-01 through 2006-09-30


*Effective dates*

For the National Institute of Standards and Technology



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY  
 AND TELECOMMUNICATIONS**

**NVLAP LAB CODE 100276-0**

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/B13	MIL-STD-462 Version D Method CS103
12/B25	MIL-STD-461 Version E Method CS114
12/B26	MIL-STD-461 Version E Method CS115
12/B27	MIL-STD-461 Version E Method CS116

**MIL-STD-462 : Radiated Emissions:**

12/D04	MIL-STD-462 Version D Method RE101
12/D05	MIL-STD-462 Version D Method RE102
12/D06	MIL-STD-462 Version D Method RE103

**MIL-STD-462 : Radiated Susceptibility:**

12/E08	MIL-STD-462 Version D Method RS101
12/E09	MIL-STD-462 Version D Method RS103

2005-10-01 through 2006-09-30

*Effective dates*

*For the National Institute of Standards and Technology*



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009

## 1.0 SUMMARY OF TEST REPORT

It was found that the Seeker Mobile Locating System, Model Number(s) 1000-8250, "**meets**" the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.231 for periodic operational in the 40.66-40.70 MHz Band and above 70 MHz.

This test report relates only to the items tested and contains the following number of pages.

Text: 54

## 2.0 INTRODUCTION

On February 2, 3 & 6, 2006, a series of radio frequency interference measurements was performed on Seeker Mobile Locating System, Model Number(s) 1000-8250, Serial Number: 00002. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2003. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

## 3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.33, 15.35, 15.205, 15.209 & 15.231 for Intentional Radiators operating in the Band 40.66-40.70 and above 70 MHz.



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009

#### 4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2003, Section 8, (Figures 11a and 11b).

The conducted tests were performed with the test item placed on a non-conductive table (table top equipment), located in the test room. Equipment normally operated on the floor was tested by placing it on the metal ground plane. The ground plane has an electrical isolation layer over its surface approximately 7mm thick. The power line supplied was connected to a dual line impedance stabilization network electrically bonded to the ground plane, located on the floor. The networks were constructed per the requirements of the American National Standards Institute, ANSI C63.4-2003, Section 4, (Figure 2).

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2003, Sections 6 and 8.



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009

## 5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and/or ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2003, Section 4.2.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.





Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009

## 6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in MP-5 or ANSI C63.4-2003, as appropriate.



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 6009

7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

7.1 Description:

The primary use for the Seeker is finding assets within a hospital environment. In this application the reader is used to determine if an individual tag is within the range of the reader, thus creating a simple finder application.

Another possibility for use is in inventorying assets. The Hand Held Reader applications could include inventorying tags in lumberyards or utility storage areas. The driver of a vehicle could drive through the lot and create an inventory through the reader.

7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

Length: 57mm Width: 43mm Height: 12mm

7.3 LINE FILTER USED:

Battery Operated

7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

N/A

Clock Frequencies:

4.194304 MHz, 14.7456 MHz

7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

1. None



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:  
(See also Paragraph 7.0)

1: There were no additional descriptions noted at the time of test.

Four configurations were tested. Three orthogonal positions and in Charging Cradle.

I certify that the above, as described in paragraph 7.0, describes the equipment tested and will be manufactured as stated.

By: \_\_\_\_\_  
Signature Title

For: \_\_\_\_\_  
Company Date



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

## 9.0 PHOTO INFORMATION AND TEST SET-UP

Item 0 Seeker Mobile Locating System

Model Number: 1000-8250 Serial Number: 00002

Item 1 Koss Headphones

Item 2 Dell XSU Cradle

Model Number: HDC44; SN: TW-CT6214-72371-58P-C1D7

Item 3 Dell AC Adapter

Model No: ADP 13CB; SN: CN-OT2411-48661-4A0-0445

Item 4 Shielded Koss Headphones USB Cable with Metal Shells. 2m

Item 5 Gateway Laptop Computer

Model No: SOLO 2550 SN: B-2509470610


1250 Peterson Dr., Wheeling, IL 60090

## 10.0 RADIATED PHOTOS TAKEN DURING TESTING



1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T):

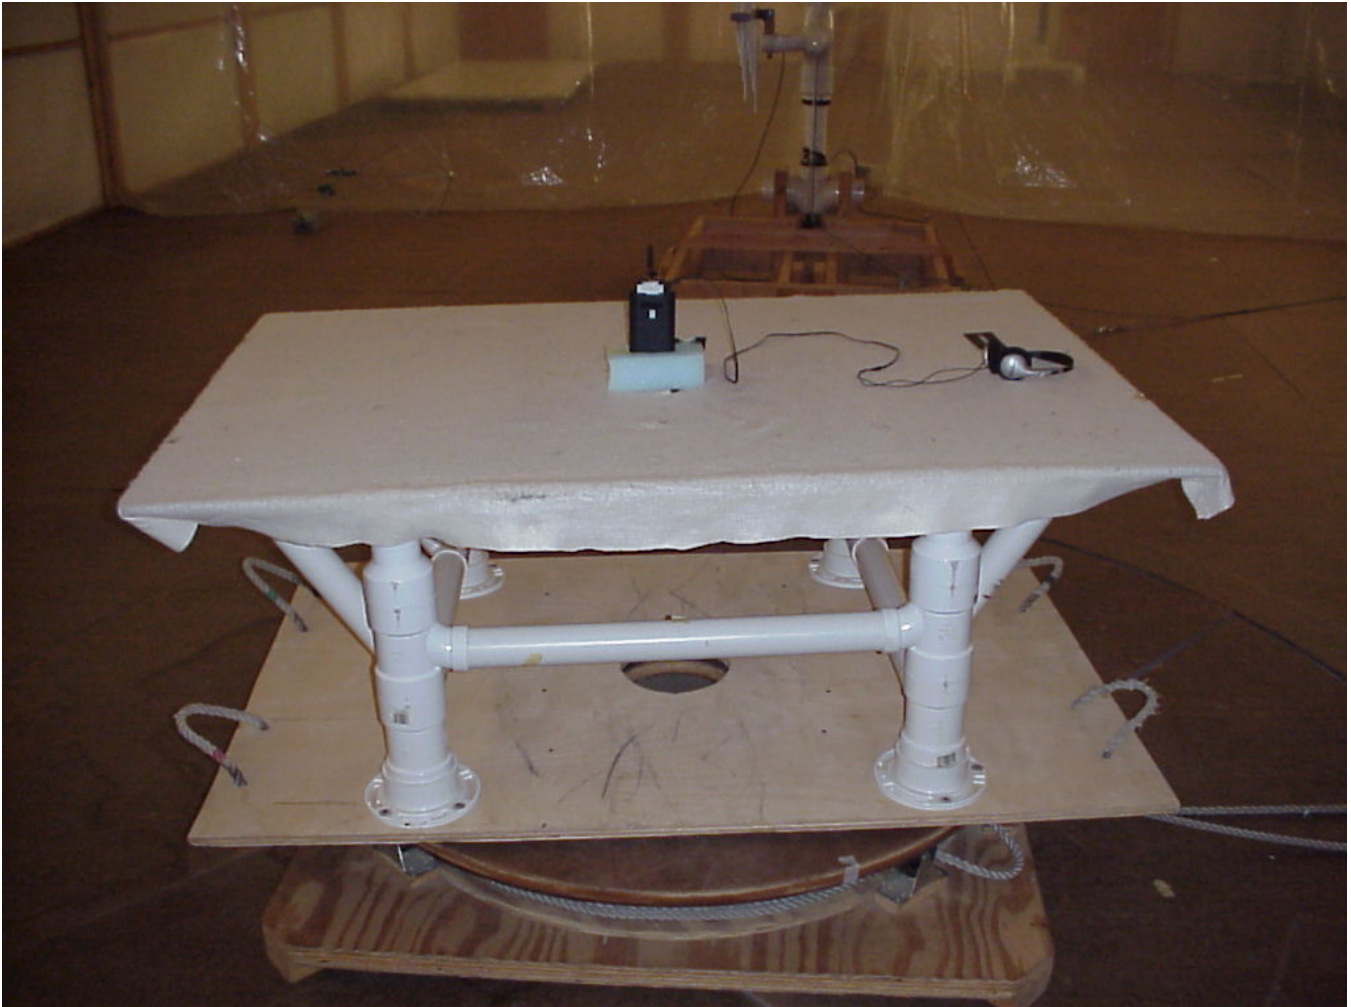

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T):



1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T):






1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T):



1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T):

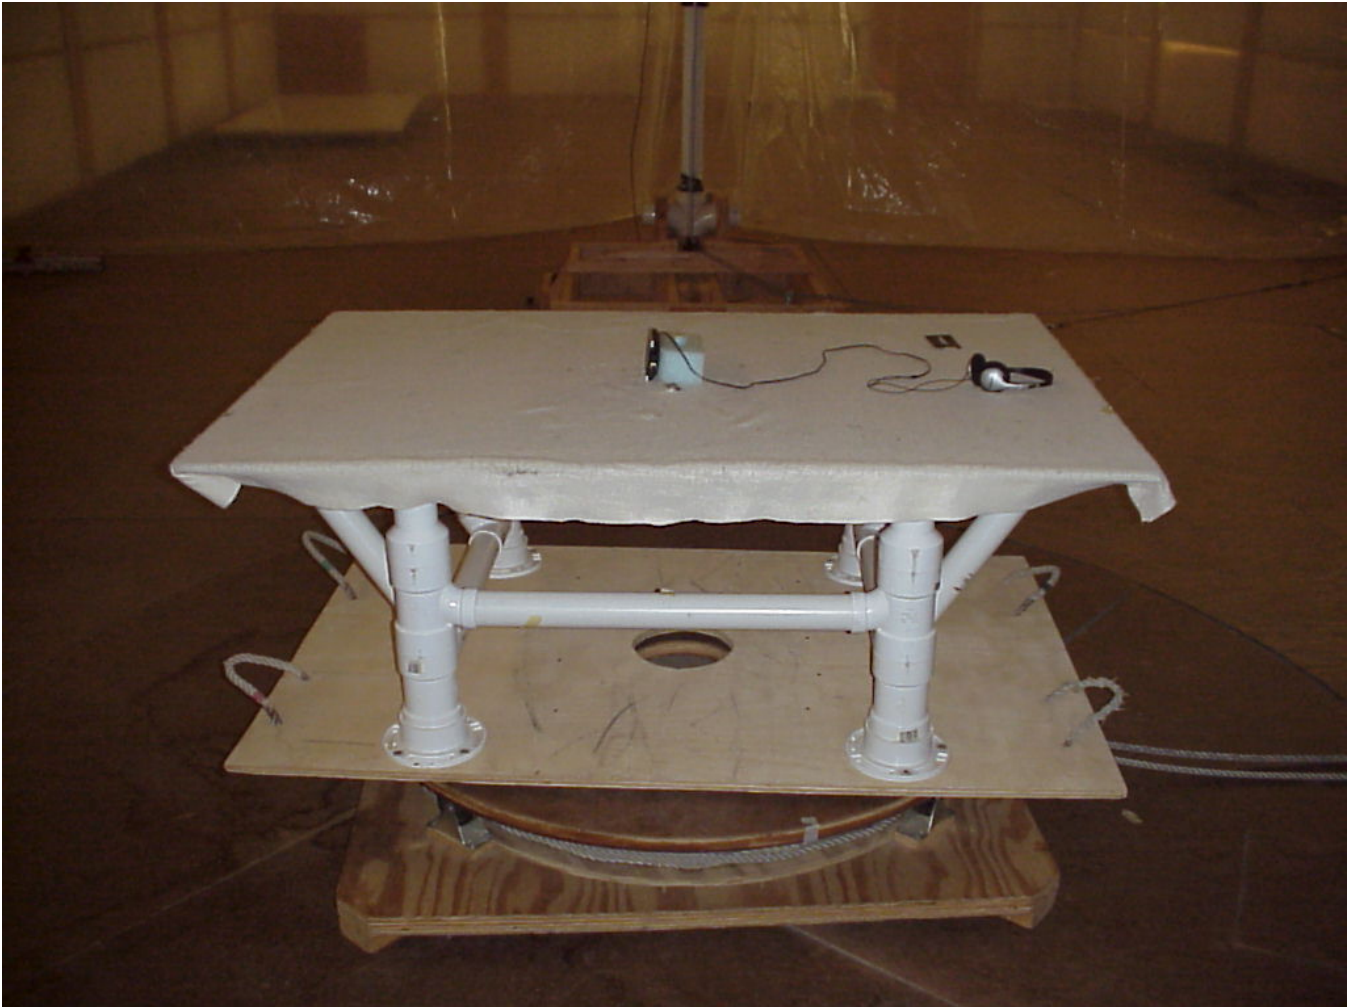

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T):



1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING (CON'T):



1250 Peterson Dr., Wheeling, IL 60090

## 10.0 CONDUCTED PHOTOS TAKEN DURING TESTING



1250 Peterson Dr., Wheeling, IL 60090

10.0 CONDUCTED PHOTOS TAKEN DURING TESTING (CON'T):





Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

## 11.0 RESULTS OF TESTS

The radio interference emission charts results can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report. Points on the emission charts shown with a yellow mark are background frequencies that were verified during testing.

## 12.0 CONCLUSION

It was found that the Seeker Mobile Locating System, Model Number(s) 1000-8250 "**meets**" the radio interference conducted and radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.231 for periodic operational in the 40.66-40.70 MHz Band and above 70 MHz.



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	11/06
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	12/06
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	12/06
Antenna	EMCO	3104C	00054891	20 MHz – 200 MHz	2/07
Antenna	Electrometrics	LPA-25	1114	200 MHz – 1 GHz	3/06
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	3/06
Antenna	Electrometrics	3146	1205	200 MHz – 1 GHz	3/06
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	2/07
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	3/06
Antenna	EMCO	3115	2479	1 GHz – 18 GHz	8/06
Antenna	EMCO	3115	99035731	1 GHz – 18 GHz	4/06
Antenna	Rohde & Schwarz	HUF-Z1	829381001	20 MHz – 1 GHz	2/07
Antenna	Rohde & Schwarz	HUF-Z1	829381005	20 MHz – 1 GHz	8/06

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.





Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Frequency Range</b>	<b>Cal Due Dates</b>
LISN	Solar	8012-50-R-24-BNC	8305116	10 MHz – 30 MHz	8/06
LISN	Solar	8012-50-R-24-BNC	814548	10 MHz – 30 MHz	8/06
LISN	Solar	9252-50-R-24-BNC	961019	10 MHz – 30 MHz	12/06
LISN	Solar	9252-50-R-24-BNC	971612	10 MHz – 30 MHz	10/06
LISN	Solar	9252-50-R-24-BNC	92710620	10 MHz – 30 MHz	7/06

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### TEST PROCEDURE

Part 15, Subpart C, Section 15.231

ELECTRIC FIELD RADIATED EMISSIONS TEST



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### TEST PROCEDURE

#### ELECTRIC FIELD RADIATED EMISSIONS TEST

##### 1.0 CONDUCTED EMISSION MEASUREMENTS

Conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in FCC Part 15, Subpart C, Section 15.207 & ANSI C63.4-2003. Since the device is operated from the public utility lines, the 120 Vac, 60 Hz power leads, high (hot) and low (neutral) sides, were measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. During the test, the cables were placed and items moved (when appropriate) to maximize emissions. All signals were then recorded. The allowed levels for Intentional Radiators which is designed to connected to the public utility (AC) power line shall not exceed 250 uV (47.96 dBuV) from 150 kHz to 30 MHz

##### **NOTE:**

All test measurements were made at a screen room temperature of **70°F** at **29%** relative humidity.



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

TEST PROCEDURE

ELECTRIC FIELD RADIATED EMISSIONS TEST

**CONDUCTED DATA AND GRAPH(S) TAKEN  
DURING TESTING**

**PART 15.207**


**FCC Part 15 Class B**

**Voltage Mains Test**

EUT: SKRCF02  
Manufacturer: RF Technologies  
Operating Condition: 70 deg. F, 29% R.H.  
Test Site: DLS OF Screen Room  
Operator: Jason L  
Test Specification: 120 VAC, 60 Hz  
Comment: Line 1 - Transmit Mode - 433.92 MHz  
Date: 02-06-2006

**SCAN TABLE: "Line Cond. Scrn Room"**

Short Description:			Line Conducted Emissions			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	LISN DLS#128
			Average			

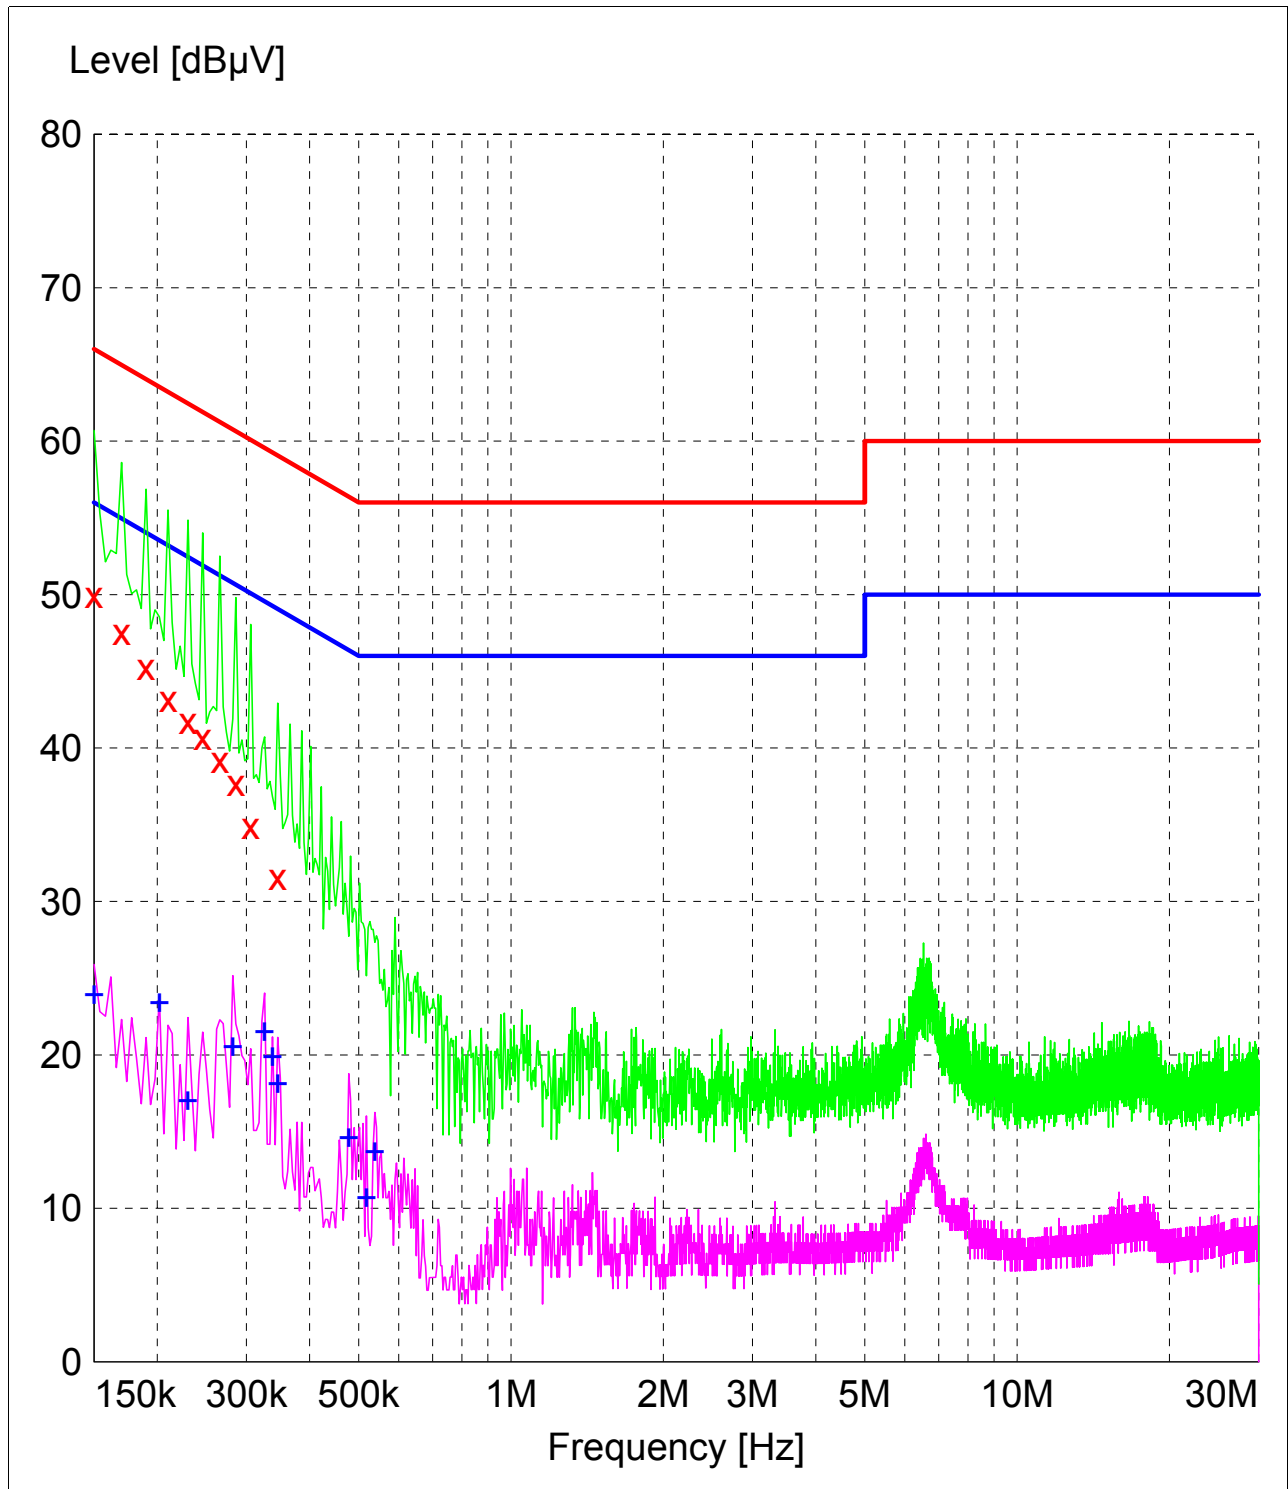

x x	MES	skcf02r211_fin	QP		
+ +	MES	skcf02r211_fin	AV		
—	MES	skcf02r211_pre	PK		
—	MES	skcf02r211_pre	AV		
—	LIM	FCC ClassB V	QP New	Voltage Amplitude	QP Limit
—	LIM	FCC ClassB V	AV New	Voltage Amplitude	AVG Limit

**MEASUREMENT RESULT: "skcf02r211\_fin QP"**

2/6/2006 10:20AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	50.00	11.5	66	16.0	---	---
0.170000	47.60	11.2	65	17.4	---	---
0.190000	45.30	11.0	64	18.7	---	---
0.210000	43.20	10.9	63	20.0	---	---
0.230000	41.80	10.7	62	20.6	---	---
0.246000	40.70	10.7	62	21.2	---	---
0.266000	39.20	10.6	61	22.0	---	---
0.286000	37.70	10.6	61	22.9	---	---
0.306000	34.90	10.6	60	25.2	---	---
0.346000	31.60	10.4	59	27.5	---	---

**MEASUREMENT RESULT: "skcf02r211\_fin AV"**

2/6/2006 10:20AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	23.90	11.5	56	32.1	---	---
0.202000	23.40	10.9	54	30.1	---	---
0.230000	17.00	10.7	52	35.4	---	---
0.282000	20.50	10.6	51	30.2	---	---
0.326000	21.50	10.5	50	28.0	---	---
0.338000	19.90	10.5	49	29.4	---	---
0.346000	18.10	10.4	49	30.9	---	---
0.478000	14.60	10.2	46	31.8	---	---
0.518000	10.70	10.2	46	35.3	---	---
0.538000	13.70	10.2	46	32.3	---	---

**FCC Part 15 Class B**


**Voltage Mains Test**

EUT: SKRCF02  
Manufacturer: RF Technologies  
Operating Condition: 70 deg. F, 29% R.H.  
Test Site: DLS OF Screen Room  
Operator: Jason L  
Test Specification: 120 VAC, 60 Hz  
Comment: Line 2 - Transmit Mode - 433.92 MHz  
Date: 02-06-2006

**SCAN TABLE: "Line Cond. Scrn Room"**

Short Description:			Line Conducted Emissions			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	LISN DLS#128
			Average			



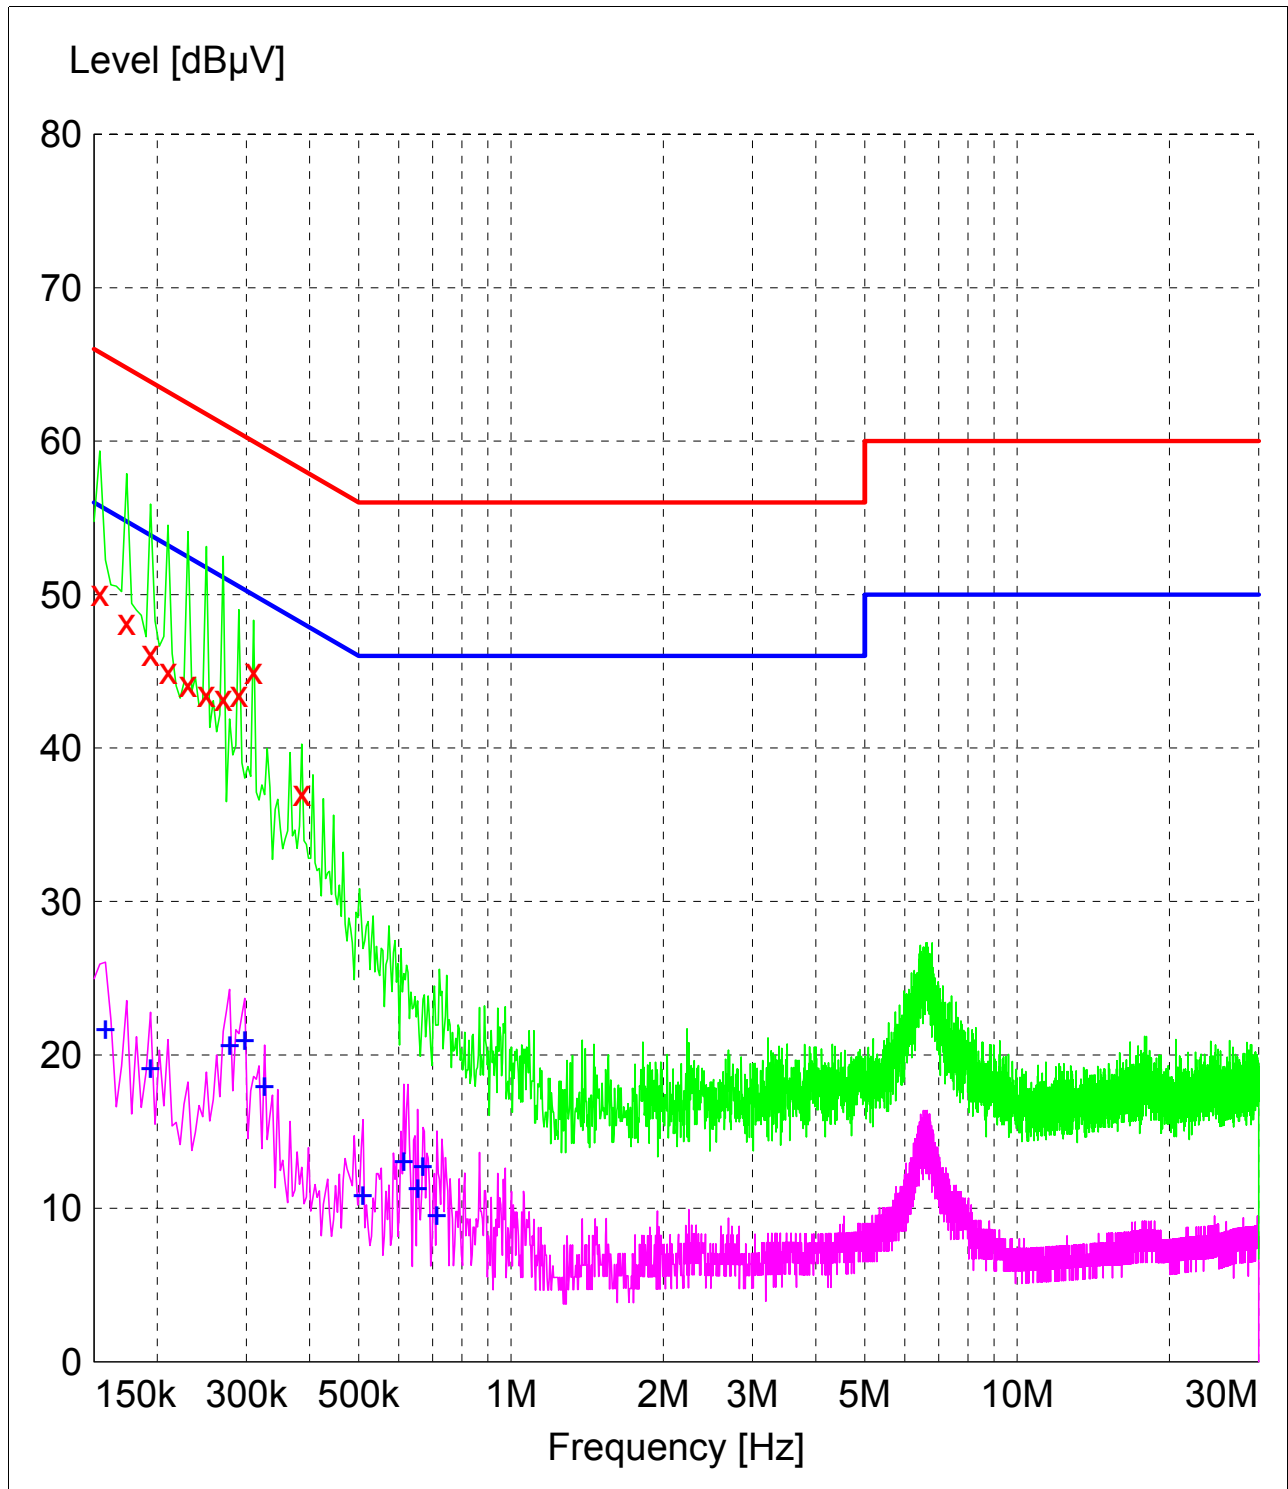

x x	MES	skcf02r212_fin	QP		
+ +	MES	skcf02r212_fin	AV		
—	MES	skcf02r212_pre	PK		
—	MES	skcf02r212_pre	AV		
—	LIM	FCC ClassB V	QP	New	Voltage Amplitude QP Limit
—	LIM	FCC ClassB V	AV	New	Voltage Amplitude AVG Limit

**MEASUREMENT RESULT: "skcf02r212\_fin QP"**

2/6/2006 10:24AM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.154000	50.10	11.5	66	15.7	---	---
0.174000	48.20	11.2	65	16.6	---	---
0.194000	46.20	11.0	64	17.7	---	---
0.210000	45.00	10.9	63	18.2	---	---
0.230000	44.20	10.7	62	18.3	---	---
0.250000	43.50	10.6	62	18.3	---	---
0.270000	43.30	10.6	61	17.8	---	---
0.290000	43.50	10.6	61	17.0	---	---
0.310000	45.00	10.5	60	15.0	---	---
0.386000	37.10	10.3	58	21.0	---	---

**MEASUREMENT RESULT: "skcf02r212\_fin AV"**

2/6/2006 10:24AM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.158000	21.60	11.4	56	34.0	---	---
0.194000	19.10	11.0	54	34.7	---	---
0.278000	20.60	10.6	51	30.3	---	---
0.298000	20.90	10.6	50	29.4	---	---
0.326000	17.90	10.5	50	31.6	---	---
0.510000	10.80	10.2	46	35.2	---	---
0.614000	13.00	10.2	46	33.0	---	---
0.654000	11.30	10.2	46	34.7	---	---
0.670000	12.70	10.2	46	33.3	---	---
0.714000	9.50	10.2	46	36.5	---	---



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### TEST PROCEDURE

#### ELECTRIC FIELD RADIATED EMISSIONS TEST

##### 2.0 PULSED OPERATION (Duty Cycle Correction Factor)

The radiated emission tests made at D.L.S. Electronic Systems, Inc. for the Seeker Mobile Locating System, Model Number 1000-8250, are shown by the graphs on the following pages. The actual total "on time" during the 100 msec is 32.866 msec with a total "off time" of 67.34 msec resulting in a **9.67 Duty Cycle Correction Factor**.

To find the actual "on time" during the 100 msec period, the data word is multiplied by the number of data words per 100 msec, yielding actual on time. Taking this number and dividing it by the 100 msec period gives us the Duty Cycle. We then take the Log of the Duty Cycle and multiply it by 20. This gives us the Duty Cycle Correction Factor. The following method was used to determine the Duty Cycle Correction Factor:

Total on time during 100 msec.

.2004 usec/pulse on time (data word) \* 164 pulses (data words/100 msec) = 32.866 usec total  
"on time"

32.866 msec (total "on time") / 100 msec = 0.32866 Duty Cycle

20\*LOG10 0.32866 = **9.67 dB Duty Cycle Correction Factor**

NOTE:

For pulsed operation, the switches were set to generate their maximum "on" time, and measurements were made with the peak detector. As stated in Docket 86-422, the duty cycle of the pulse is determined from the total "on" time for the worst case condition during 100 msec. Using the percentage of the total "on" time over a 100 msec period, the total absolute average value was determined. As stated in Section 3, a maximum of 20 dB can be used.

See the following pages for the graphs of the actual measurements that were made:



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

## GRAPH(S) TAKEN OF THE PULSED OPERATION

PART 15.231

### GRAPHS TAKEN OF THE PULSE TRAIN SHOWING THE FOLLOWING:

1. Number of Bits per Data Word
2. Number of Pulses per 100 msec
3. Off Time between Data Words
4. Data Word On Time




Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 02-02-2006  
 Company: RF Technologies  
 EUT: 1000-8250  
 Test: Duty Cycle  
 Operator: Jason Lauer  
 Comment: Total ON Time during 10 ms = 24 \* 0.2004 ms = 4.81 ms  
 On Time during 100 ms = 68.34 ms  
 Total ON Time during 100 ms = (4.81ms/10ms)\*68.34ms = 32.87 ms  
 $20 \log (32.87\text{ms}/100\text{ms}) = -9.66$   
**duty cycle correction factor = 9.66 dB**

	Delta 1 [T2]	RBW	20 kHz	RF Att	30 dB
	Ref Lvl	1.32 dB	VBW	20 kHz	
	100 dBμV	200.400802 μs	SWT	10 ms	Unit dBμV

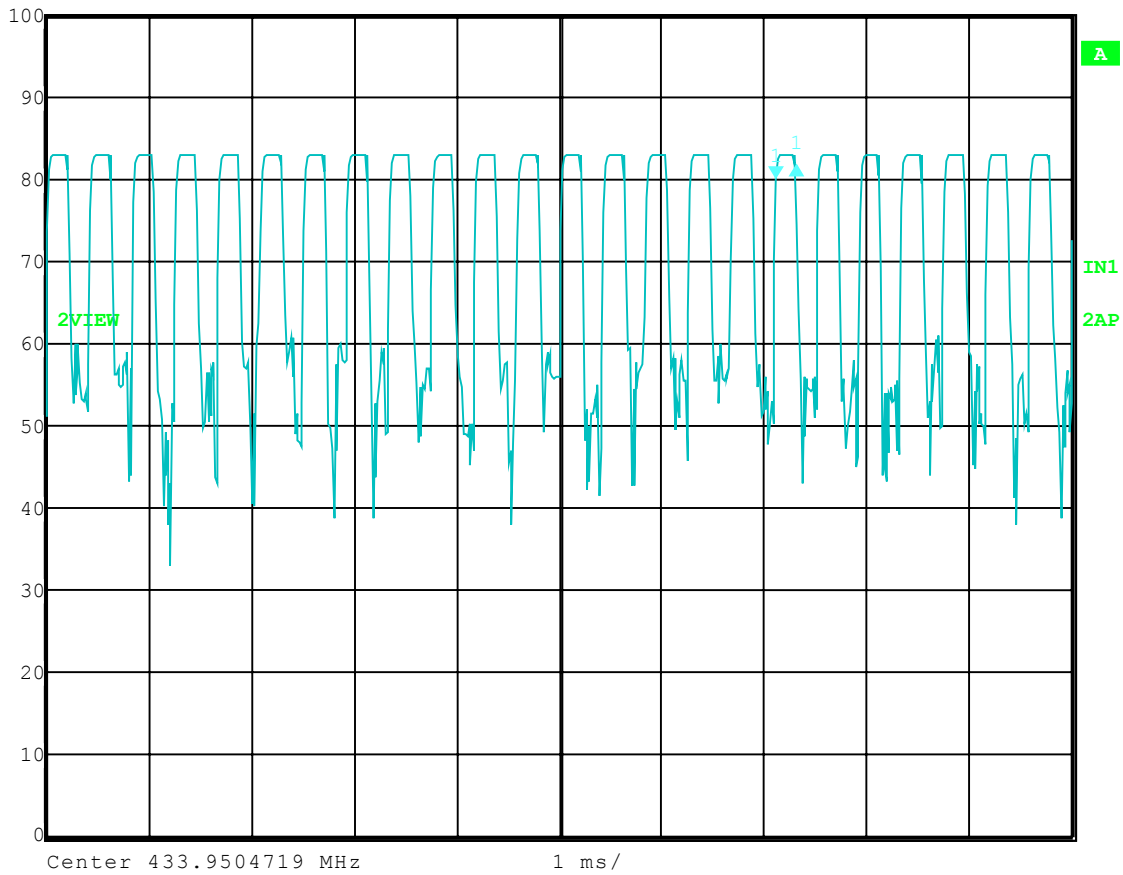


Date: 2.FEB.2006 10:15:57




Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 02-02-2006  
Company: RF Technologies  
EUT: 1000-8250  
Test: Duty Cycle  
Operator: Jason Lauer  
Comment: 100 ms sweep

 Delta 1 [T2] RBW 20 kHz RF Att 30 dB  
Ref Lvl -3.64 dB VBW 20 kHz  
100 dB $\mu$ V 68.336673 ms SWT 100 ms Unit dB $\mu$ V

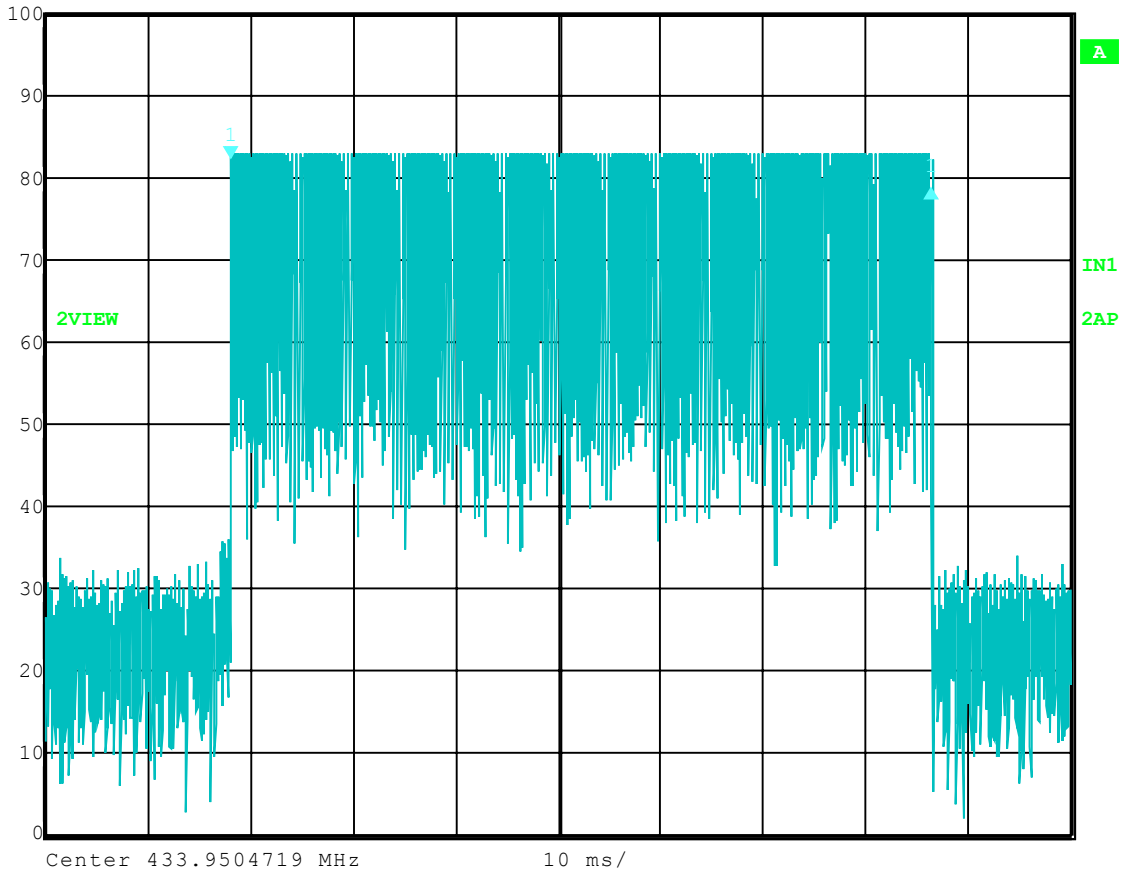

Date: 2.FEB.2006 10:19:55




Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 02-03-2006  
Company: RF Technologies  
EUT: 1000-8250  
Test: On Time after Activation  
Operator: Jason Lauer  
Comment: Frequency – 433.92 MHz

### PULSE TRAIN ON TIME AFTER ACTIVATION (5 SECONDS)

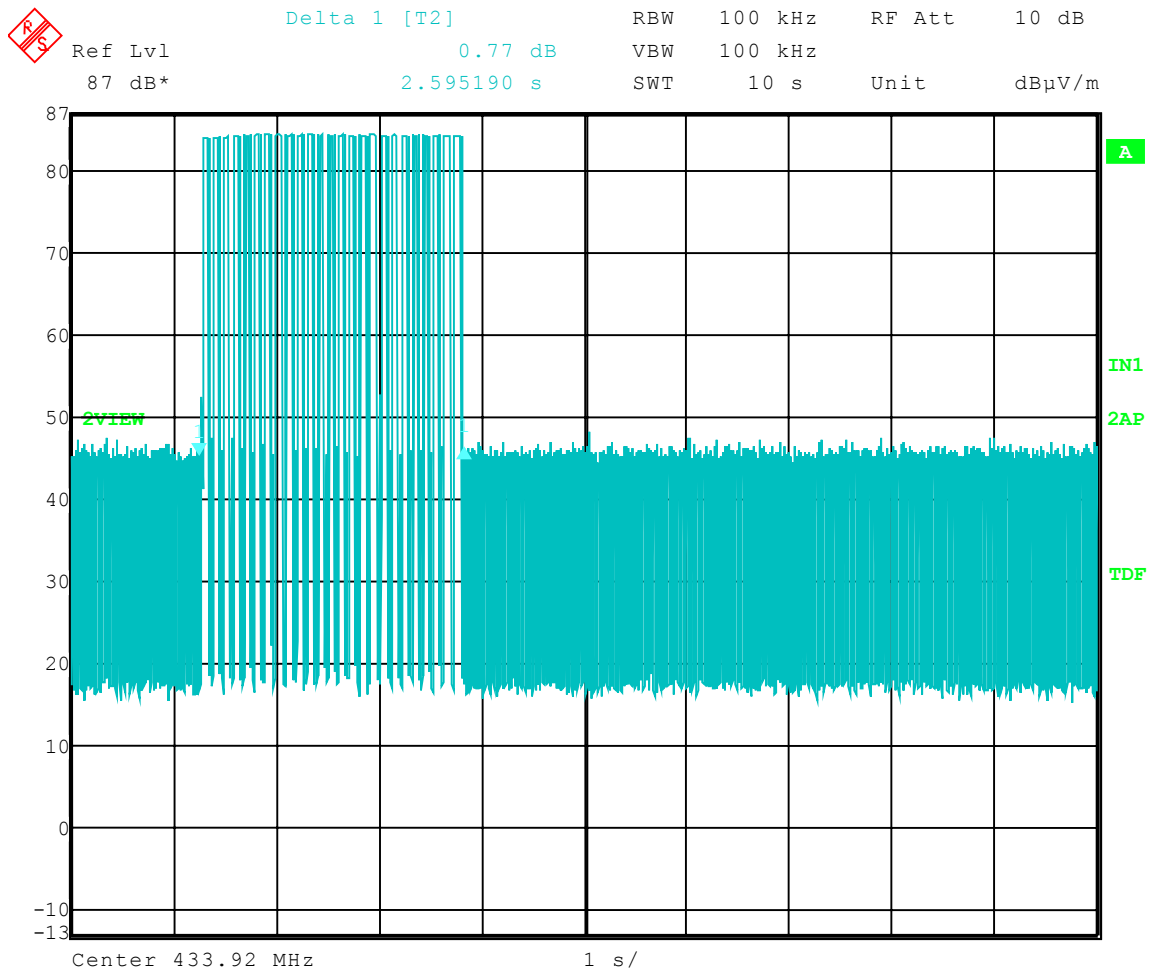

Date: 3.FEB.2006 10:05:27



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

## APPENDIX A

### TEST PROCEDURE

#### ELECTRIC FIELD RADIATED EMISSIONS TEST

#### 3.0 BANDWIDTHS

The bandwidth of the transmitter shall be confined to the following specifications as specified in Section 15.231c & d:

40.66 MHz to 40.7 MHz	±.01% within the band edges
70 MHz to 900 MHz	.25% of the center frequency
Above 900 MHz	.50% of the center frequency

The bandwidth is determined at the points 20 dB down from the modulated carrier.

As shown by the graph(s) on the following page(s), the bandwidth for the Seeker Mobile Locating System was measured at 117.03 kHz, which meets the above specification. With a fundamental frequency of 433.92 MHz, the FCC Bandwidth limit is 1084.8 kHz when multiplying the fundamental by 0.0025%, with a margin of 967.77 kHz.





Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

GRAPH(S) TAKEN OF THE BANDWIDTH EMISSIONS

PART 15.231c & d




Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 02-02-2006  
Company: RF Technologies  
EUT: 1000-8250  
Test: 20 dB Bandwidth (FCC Part 15.231)  
Operator: Jason Lauer  
Comment: Frequency – 433.92 MHz

**20 dB Bandwidth = 117.03 kHz**

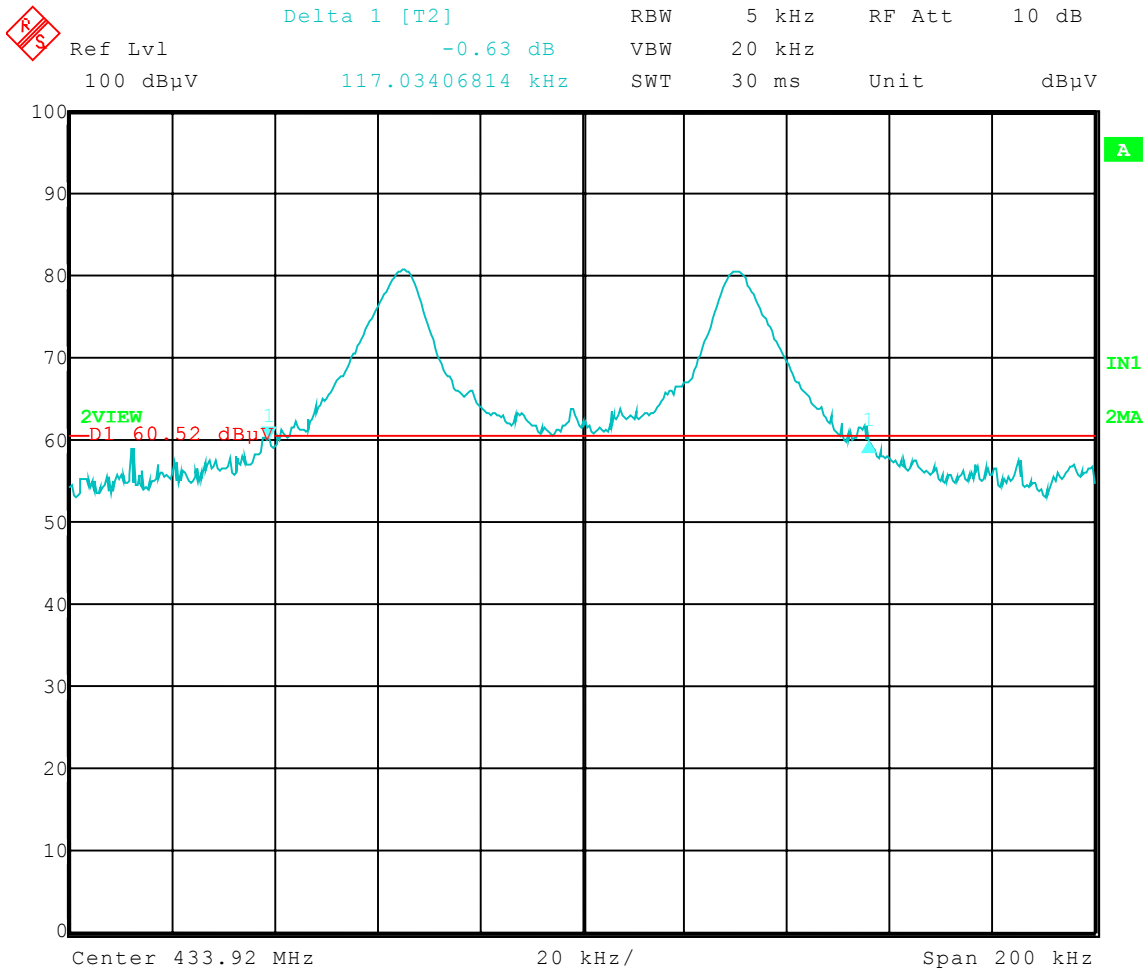

Date: 2.FEB.2006 10:42:03



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

TEST PROCEDURE

ELECTRIC FIELD RADIATED EMISSIONS TEST

4.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS - SECTION 15.231(b)

For operation in the band 40.66 to 40.70 MHz and above 70 MHz the field strength of any emissions within this band shall not exceed the following table at a distance of 3 meters as specified in FCC, Part 15, Section 15.231(b), based on the average value of the measured emissions. The limits are shown in the following table.

Fundamental Frequency in MHz	Field Strength of Fundamental (uV/m at 3m)	Field Strength of Harmonics (uV/m at 3m)
40.66 to 40.70	2250 (67.04 dBuV)	225 (47.04 dBuV)
70 to 130	1250 (61.94 dBuV)	125 (41.94 dBuV)
130 to 174	1250 (61.94 dBuV) to 3750 (71.48 dBuV)	125 (41.94 dBuV) to 375 (51.48 dBuV)
174 to 260	3750 (71.48 dBuV)	375 (51.48 dBuV)
260 to 470	3750 (71.48 dBuV) to 12500 (81.84 dBuV)	375 (51.48 dBuV) to 1250 (61.94 dBuV)
470 and above	12500 (81.84 dBuV)	1250 (61.94 dBuV)

**NOTE:**

Preliminary radiation measurements may have been performed at a 3 meter or ten meter test distance. The frequency range from 30 MHz to 1000 MHz was scanned at receive antenna heights from one to four meters, and with a 360° rotation of the EUT. Plots were made and the worst-case emissions were recorded.

As stated in 15.35b the 20 dB peak-to-average limit is applicable to all devices measured using an average detector.



Company: RF Technologies, Inc.  
Model Tested: 1000-8250  
Report Number 12022

1250 Peterson Dr., Wheeling, IL 60090

## DATA TAKEN OF FUNDAMENTAL AND SPURIOUS EMISSIONS

PART 15.231b



Company: RF Technologies, Inc.  
 Model Tested: 1000-8250  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

**Radiated Fundamental and Spurious Emissions – 30 MHz to 5 GHz  
 Tested at a 3 Meter Distance**

**EUT:** 1000-8250  
**Manufacturer:** RF Technologies  
**Operating Condition:** 72 deg F; 31 % R.H.  
**Test Site:** DLS OF Site 3  
**Operator:** Jason L  
**Test Specification:** FCC Part 15.231  
**Date:** 2-2/2-3-2006

**Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.  
 (2) All other emissions at least 20 dB under the limit.

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Duty Cycle Correction (dB)	Final Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
176.95	Max Peak	Hz	17.14	15.61	2.7	35.4	-9.66	25.7	60.8	35.1	1.80	270	Spurious
250.68	Max Peak	Hz	17.34	12.49	3.3	33.1	-9.66	23.4	60.8	37.4	1.00	270	Spurious
265.44	Max Peak	Hz	18.14	13.00	3.4	34.5	-9.66	24.8	60.8	36.0	1.00	90	Spurious
294.92	Max Peak	Hz	20.39	14.42	3.6	38.4	-9.66	28.7	60.8	32.1	1.00	45	Spurious
294.92	Max Peak	Vt	18.02	14.42	3.6	36.1	-9.66	26.4	60.8	34.4	1.70	325	Spurious
324.41	Max Peak	Hz	18.25	15.26	3.8	37.3	-9.66	27.6	60.8	33.2	1.00	270	Spurious
324.41	Max Peak	Vt	17.99	15.26	3.8	37.0	-9.66	27.3	60.8	33.5	1.30	180	Spurious
353.89	Max Peak	Hz	22.72	14.98	4.0	41.7	-9.66	32.0	60.8	28.8	1.00	90	Spurious
383.37	Max Peak	Vt	17.66	15.35	4.1	37.1	-9.66	27.4	60.8	33.4	1.20	45	Spurious
433.95	Max Peak	Hz	64.76	16.14	4.5	85.4	-9.66	75.7	80.8	5.1	1.80	90	Fundamental
433.95	Max Peak	Vt	69.08	16.14	4.5	89.7	-9.66	80.0	80.8	.8	1.20	225	Fundamental
867.90	Max Peak	Hz	18.95	22.50	6.8	48.2	-9.66	38.5	60.8	22.3	1.00	45	Harmonic
867.90	Max Peak	Vt	18.41	22.50	6.8	47.7	-9.66	38.0	60.8	22.8	1.10	60	Harmonic
1301.70	Max Peak	Vt	47.30	24.91	-37.5	34.7	-9.66	25.0	54.0	29.0	1.30	0	Res. Band
1301.80	Max Peak	Hz	47.90	24.91	-37.5	35.3	-9.66	25.6	54.0	28.4	1.30	45	Res. Band
1735.70	Max Peak	Hz	50.00	26.32	-38.5	37.8	-9.66	28.1	60.8	32.7	1.20	270	Harmonic
1735.70	Max Peak	Vt	48.40	26.32	-38.5	36.2	-9.66	26.5	60.8	34.3	1.30	325	Harmonic
2169.60	Max Peak	Hz	48.91	27.79	-38.7	38.0	-9.66	28.3	60.8	32.5	1.20	90	Harmonic
2169.60	Max Peak	Vt	49.03	27.79	-38.7	38.2	-9.66	28.5	60.8	32.3	1.00	180	Harmonic



Company: RF Technologies, Inc.  
 Model Tested: SKRCF02  
 Report Number: 12022

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

TEST PROCEDURE

ELECTRIC FIELD RADIATED EMISSIONS TEST

5.0 RESTRICTED BANDS

As stated in Section 15.205a, the fundamental emission from the Seeker Mobile Locating System shall not fall within any of the bands listed below:

Frequency in MHz	Frequency in MHz	Frequency in MHz	Frequency in GHz
.0900 to .1100	162.0125 to 167.17	2310.0 to 2390	9.30 to 9.50
.4900 to .5100	167.7200 to 173.20	2483.5 to 2500	10.60 to 12.70
2.1735 to 2.1905	240.000 to 285.00	2655.0 to 2900	13.25 to 13.40
8.362 to 8.3660	322.200 to 335.40	3260.0 to 3267	14.47 to 14.50
13.36 to 13.410	399.900 to 410.00	3332.0 to 3339	15.35 to 16.20
25.50 to 25.670	608.000 to 614.00	3345.8 to 3358	17.70 to 21.40
37.50 to 38.250	960.000 to 1240.00	3600.0 to 4400	22.01 to 23.13
73.00 to 75.500	1300.000 to 1427.00	4500.0 to 5250	23.60 to 24.00
108.00 to 121.94	1435.000 to 1626.50	5350.0 to 5450	31.20 to 31.80
123.00 to 138.00	1660.000 to 1710.00	7250.0 to 7750	36.43 to 36.50
149.90 to 150.00	1718.800 to 1722.20	8025.0 to 8500	ABOVE 38.60
156.70 to 156.90	2200.000 to 2300.00	9000.0 to 9200	

**NOTE:**

The noise floor within the Restricted Bands for the EMC Receiver and HP Spectrum Analyzer will typically lay 20 dB below the limit.