


Maximum Hold Mode.

- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10 dB margin would be retested one by one using the quasi-peak method.

5.4 Test Setup

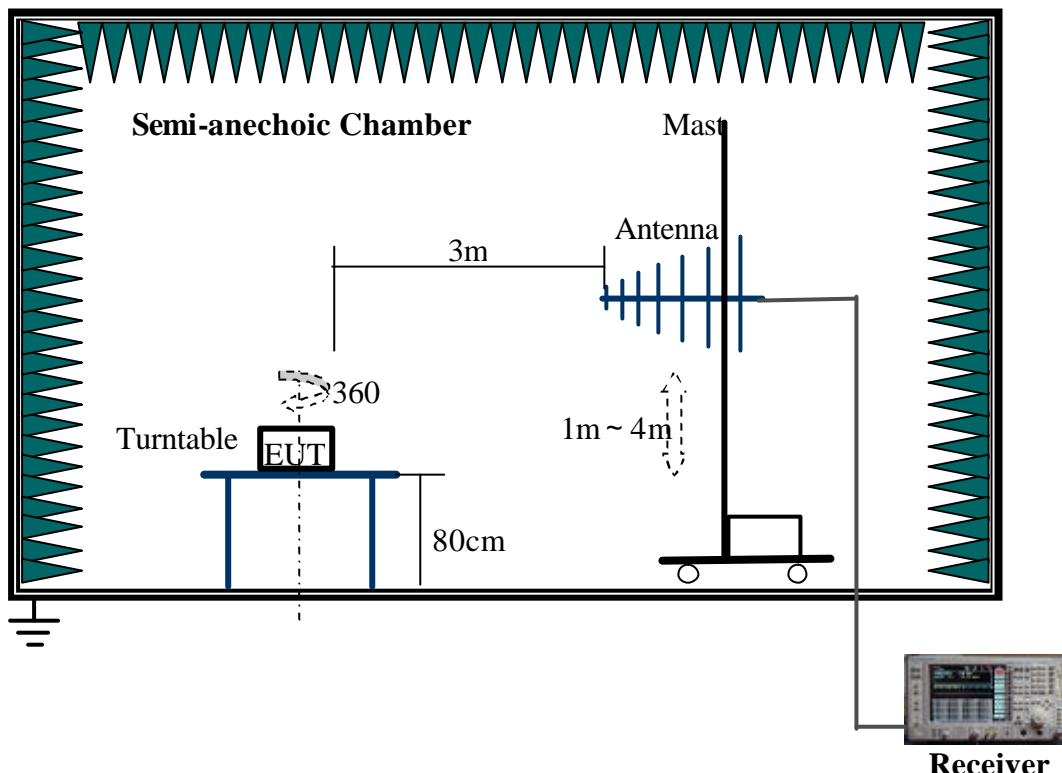

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

5.5 EUT Operating Conditions

The EUT was powered by 120V AC Mains.

The EUT was running Hwin.exe, at maximum brightness and contrast with resolution 1024*768 75Hz, scrolls “H” in 14 full screen.

The frequency range is: H-Sync 30-60 kHz, V-Sync 50-75 Hz