



(2004)量认(国)字(H2402)号 No.L1659

FCC TEST REPORT

of

Color LCD Monitor

Brand name: /
Model No.: L7XXX
Serial No.: N/A
Report No.: FCC06-8009
Date: March 10, 2006

Prepared for

China Greatwall Computer Shenzhen Co., Ltd. Shiyan Branch

Greatwall Computer Industry Park, Baoshi East Rd. Shiyan County, Baoan District,
Shenzhen, China

Prepared by

ShenZhen Electronic Product Quality Testing Center

Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen,
518055, P. R. China. Tel: 86 755 26627338 Fax: 86 755 26627238

This test report consists of 33 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by SET. The test results in the report only apply to the tested sample. The Test Report shall be invalid without all the signatures of testing engineers, reviewer and approver.

Table of Contents

1	General Description of EUT	3
2	Summary of Test Results.....	5
3	Test Report Certification	5
4	Conducted Emission Test	6
	4.1 Limits of Conducted Emission.....	6
	4.2 Test Instruments	6
	4.3 Test Procedure	6
	4.4 Test Setup	7
	4.5 EUT Operating Conditions	7
	4.6 Test Results	7
5	Radiated Emission Test	16
	5.1 Limits of Radiated Emission.....	16
	5.2 Test Instruments	16
	5.3 Test Procedure	16
	5.4 Test Setup	17
	5.5 EUT Operating Conditions	17
	5.6 Test Results	18
	Appendix I : Photographs of the EUT.....	26
	Appendix II : Photographs of Test Configuration.....	33

1 General Description of EUT

Product: Color LCD Monitor

Brand name: /

Model No.: L7XXX

Power Supply: AC 100~240V 50/60Hz 1.0AMax

I/O Signal Ports: VGA

Applicant: China Greatwall Computer Shenzhen Co., Ltd. Shiyang Branch

Applicant Address: Greatwall Computer Industry Park, Baoshi East Rd. Shiyang County, Baoan District, Shenzhen, China

Manufacturer: China Greatwall Computer Shenzhen Co., Ltd.

Manufacturer Address: Greatwall Computer Industry Park, Baoshi East Rd. Shiyang County, Baoan District, Shenzhen, China

NOTE:

1. The EUT is 17inch LCD Monitor--class B information technology equipment according to FCC Part 15. For a more detailed features description about the EUT, please refer to User's Manual.
2. The models L7XXX are a series of color LCD monitor, X can be A to Z or 0 to 9 or none, stands for different customers.
3. This series of color LCD monitor have different on the panel and main-board.

All panels, main-boards and adaptors are listed below:

Panel	No	Manufacture	Model	Main-board	No	Model
	1	BOE	HT170E01-101		1	TSUM56AL
	2	SVA	SVA 170SX01TB		2	TSUM16AL
	3	HANSTAR	HSD 170MEN1- A00			

The EMC tests were performed on the samples listed below to represent the other models:

Sample No.	Panel	Main-board
1	BOE HT170E01-101	TSUM56AL
2	SVA SVA 170SX01TB	
3	HANSTAR HSD 170MEN1- A00	
4	BOE HT170E01-101	TSUM16AL
5	SVA SVA 170SX01TB	
6	HANSTAR HSD 170MEN1- A00	

2 Summary of Test Results

The EUT has been tested according to FCC part 15, Class B. The test procedure is according to ANSI C63.4: 2003. The test results are as following:

EMISSION		
Standard	Test Type	Result
FCC Part15 Class B	Radiated Emission	☒ PASS ☐ Fail ☐ Inapplicable
	Conducted Emission	☒ PASS ☐ Fail ☐ Inapplicable

3 Test Report Certification

We, ShenZhen Electronic Product Quality Testing Center, hereby certify that the Equipment Under Test (EUT) described above has been tested in our facility. The test record, data evaluation and EUT configuration represented herein are true and accurate accounts of measurements of the sample's EMC characteristics under the conditions herein specified.

Tested by: Zhu Qi, Date: March 10, 2006
Zhu Qi

Checked by: Smart Li, Date: Mar 10 2006
Smart Li



Approved by: Wang Keqin, Date: Mar. 11, 2006
Wang Keqin

4 Conducted Emission Test

4.1 Limits of Conducted Emission

The radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30Mhz shall not exceed the limits in the following table, as measured

Frequency range (MHz)	Conducted Limit (dB μ V), Class B digital device	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

1. The lower limit shall apply at the band edges.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.


4.2 Test Instruments

Description	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Test Receiver	Schwarzbeck	FCKL1528	1528-158	Jun.10, 2005	Jun.10, 2006
LISN	Schwarzbeck	NSLK8127	8127-396	Jun.10, 2005	Jun.10, 2006
Shield Room	Nanbo Tech	Site 3	RF-1023	Mar.18, 2005	Mar.18, 2007

4.3 Test Procedure

- a. The EUT was placed 0.4 meters from the conducting wall of shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provide 50 Ω /50 μ H of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.

4.4 Test Setup

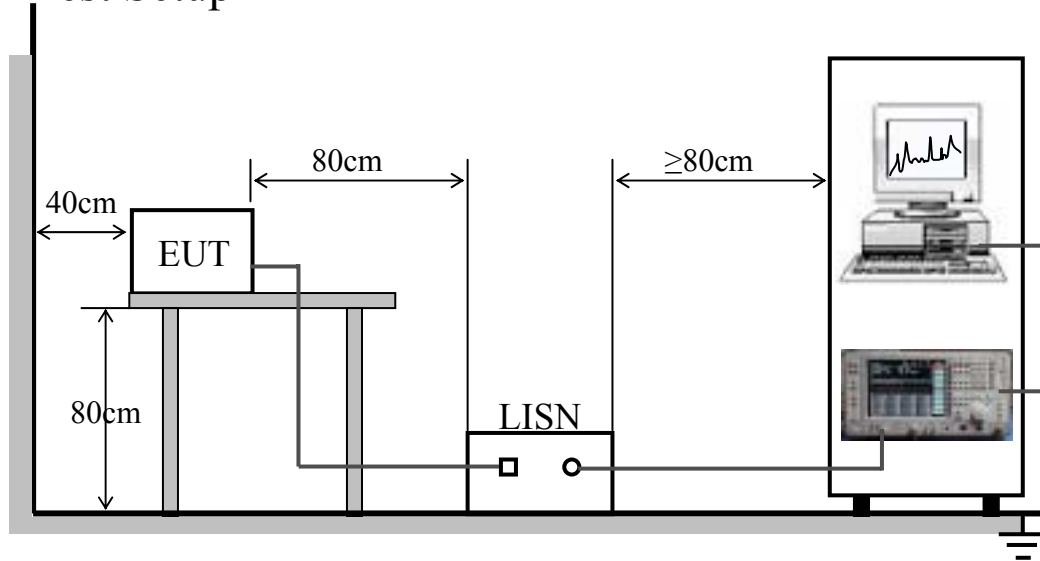

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

4.5 EUT Operating Conditions

The EUT was powered by 120V AC Mains.

The EUT was running Hwin.exe, at maximum brightness and contrast with resolution 1024*768 75Hz, scrolls "H" in 14 full screen.

The frequency range is: H-Sync 30-60 kHz, V-Sync 50-75 Hz

4.6 Test Results

Sample 1:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.2805	60.8	50.8	39.00	--
2	1.1760	56.0	46.0	30.88	--
3	1.2435	56.0	46.0	34.19	--
4	23.1765	60.0	50.0	33.25	--

Sample 2:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.2805	60.8	50.8	39.08	--

2	1.1760	56.0	46.0	30.29	--
3	1.2435	56.0	46.0	34.39	--
4	23.1765	60.0	50.0	33.21	--

Sample 3:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.2805	60.8	50.8	39.07	--
2	1.1760	56.0	46.0	30.56	--
3	1.2435	56.0	46.0	34.23	--
4	23.1765	60.0	50.0	33.22	--

Sample 4:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.2805	60.8	50.8	39.00	--
2	1.1760	56.0	46.0	30.88	--
3	1.2435	56.0	46.0	34.19	--
4	23.1765	60.0	50.0	33.25	--

Sample 5:

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.2805	60.8	50.8	39.08	--
2	1.1760	56.0	46.0	30.29	--
3	1.2435	56.0	46.0	34.39	--
4	23.1765	60.0	50.0	33.21	--

Sample 6:


No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.2805	60.8	50.8	39.07	--
2	1.1760	56.0	46.0	30.56	--

3	1.2435	56.0	46.0	34.23	--
4	23.1765	60.0	50.0	33.22	--


NOTE:

1. QP and AV are abbreviations of the quasi-peak and average individually.
2. If the emission levels measured with QP detector are lower than AV limits, there is unnecessary to measure with AV detector.
3. The emission levels recorded above is the larger ones of both L phase and N phase.


1. Mains terminal disturbance voltage, QP detector, L phase, Sample 1

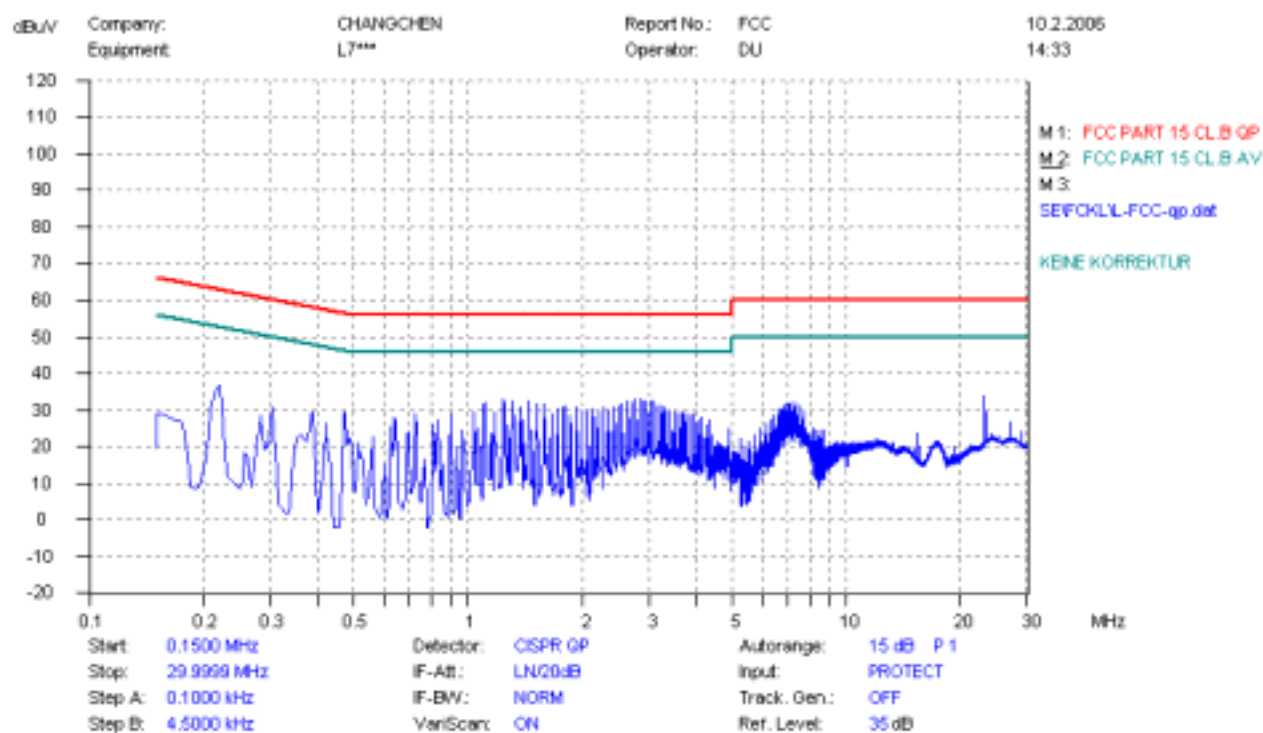


2. Mains terminal disturbance voltage, QP detector, N phase, Sample 1

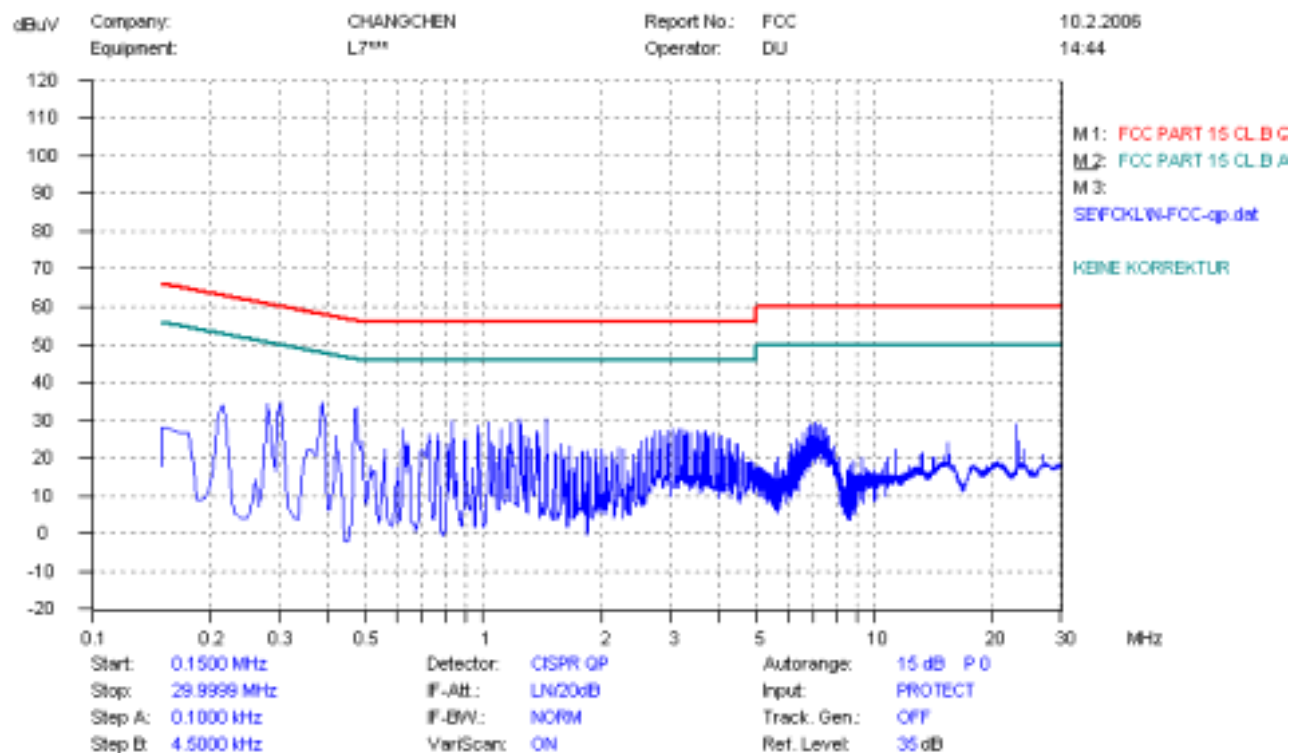


3. Mains terminal disturbance voltage, QP detector, L phase, Sample 2

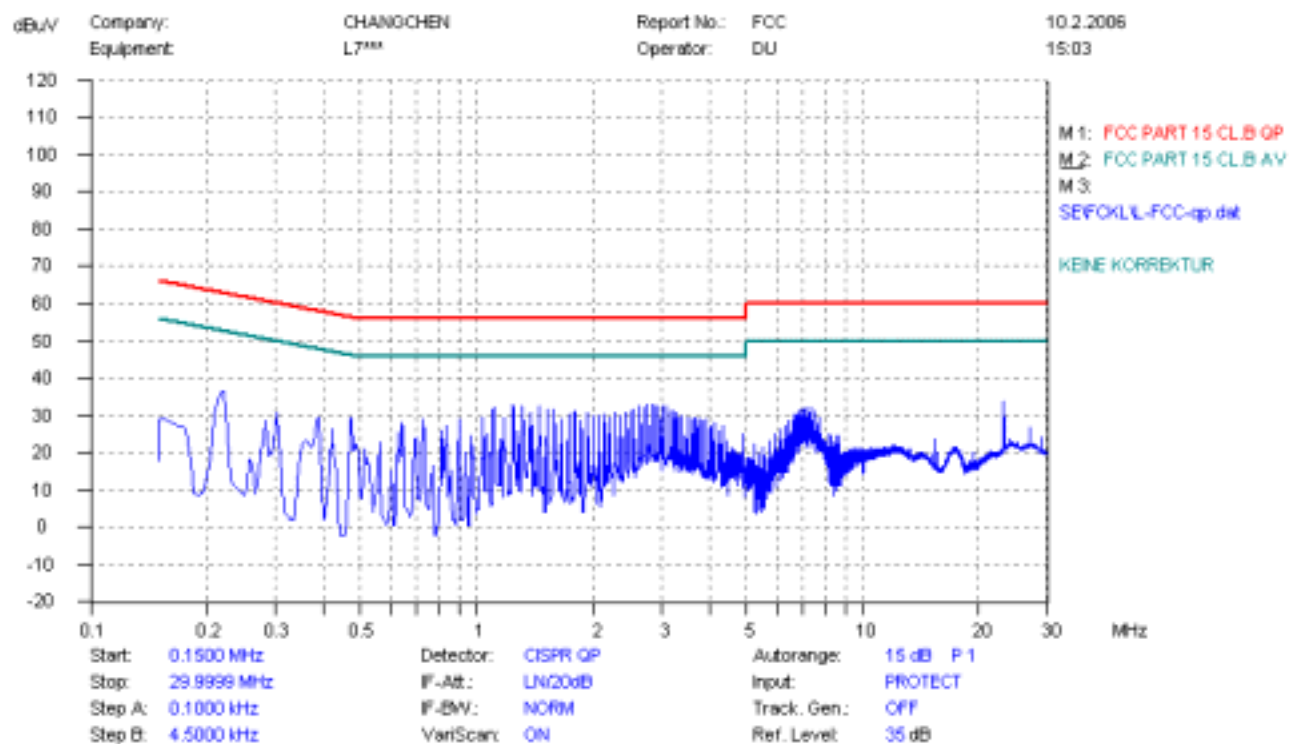


4. Mains terminal disturbance voltage, QP detector, N phase, Sample 2

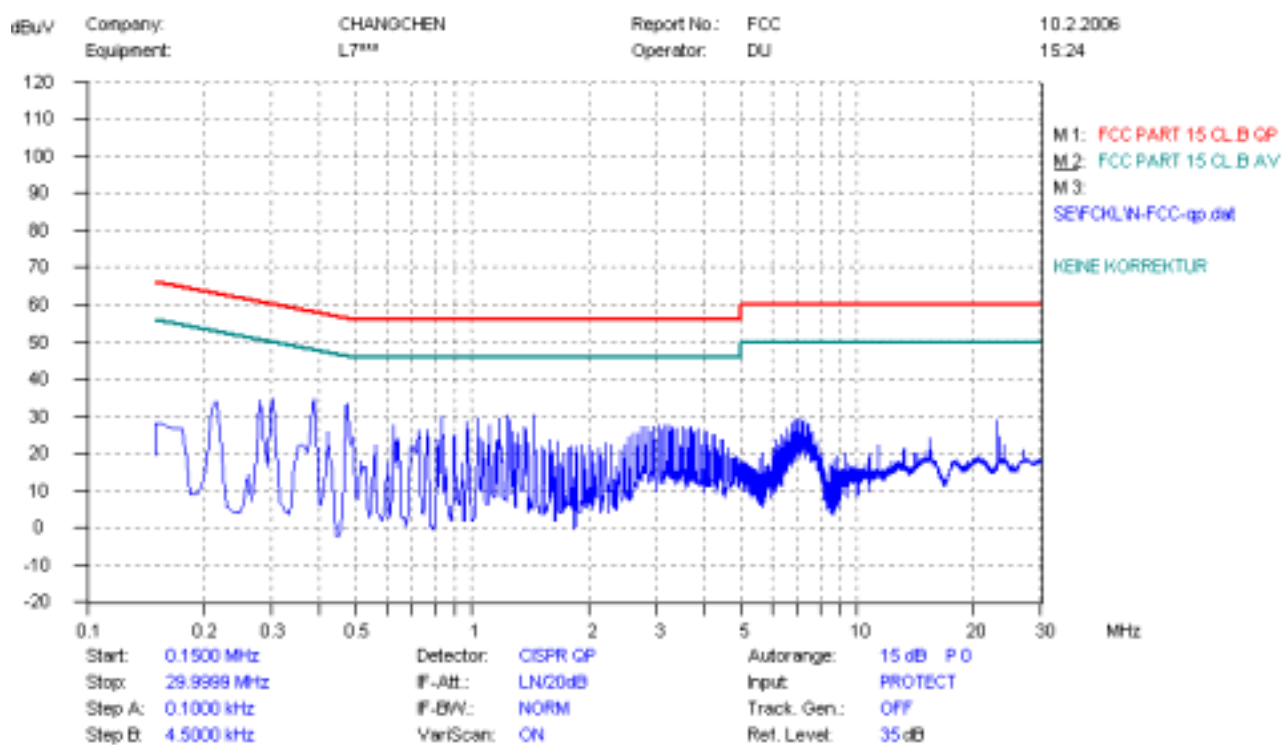


5. Mains terminal disturbance voltage, QP detector, L phase, Sample 3

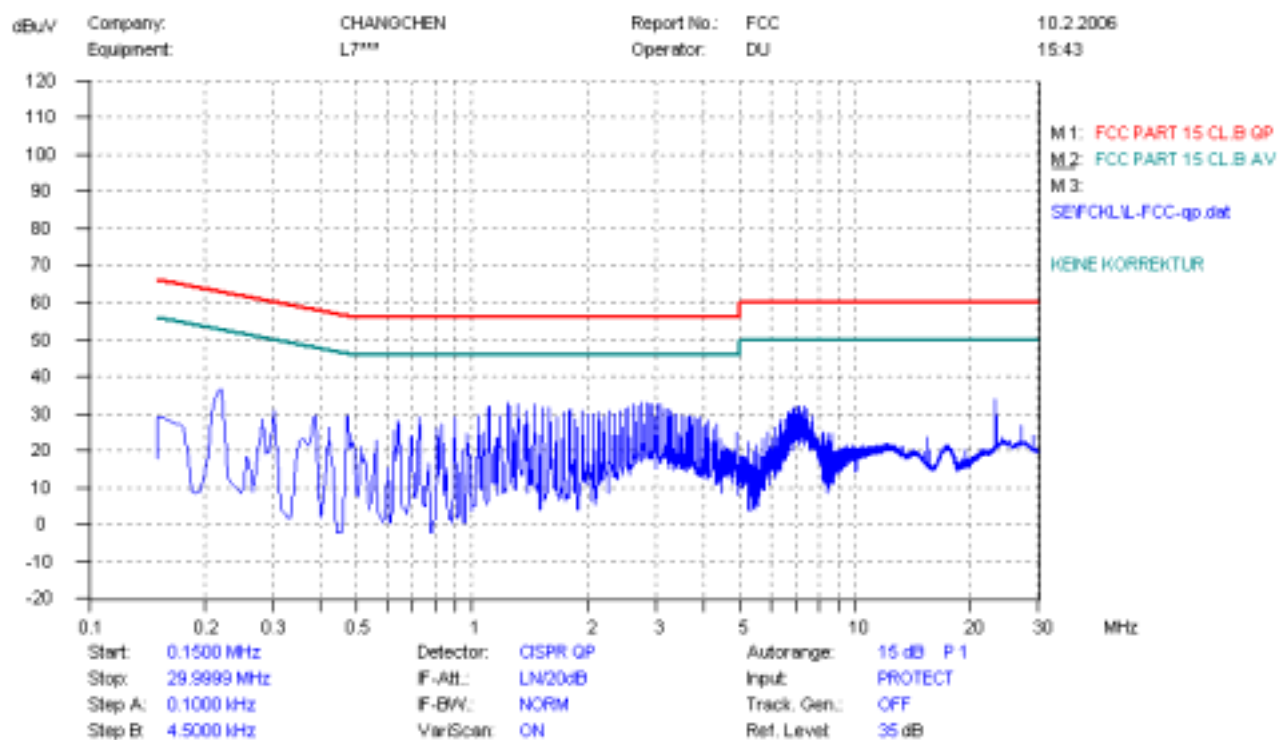


6. Mains terminal disturbance voltage, QP detector, N phase, Sample 3

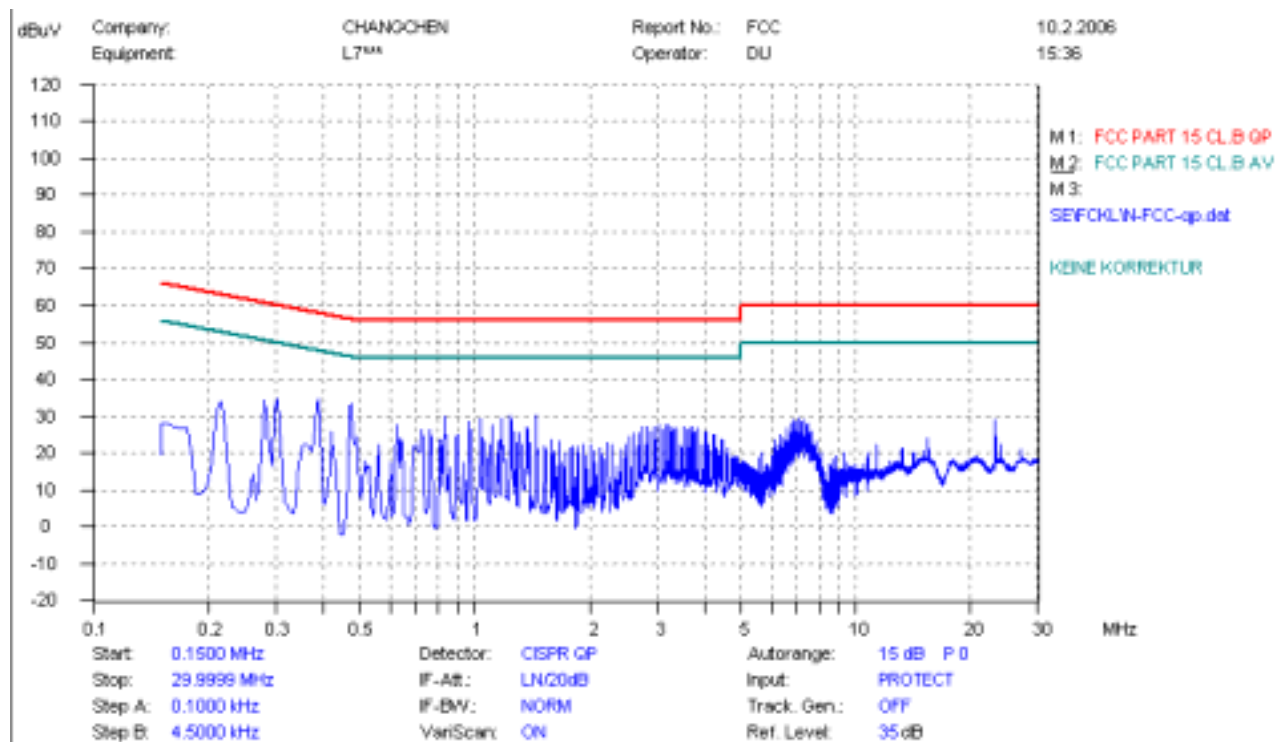


7. Mains terminal disturbance voltage, QP detector, L phase, Sample 4

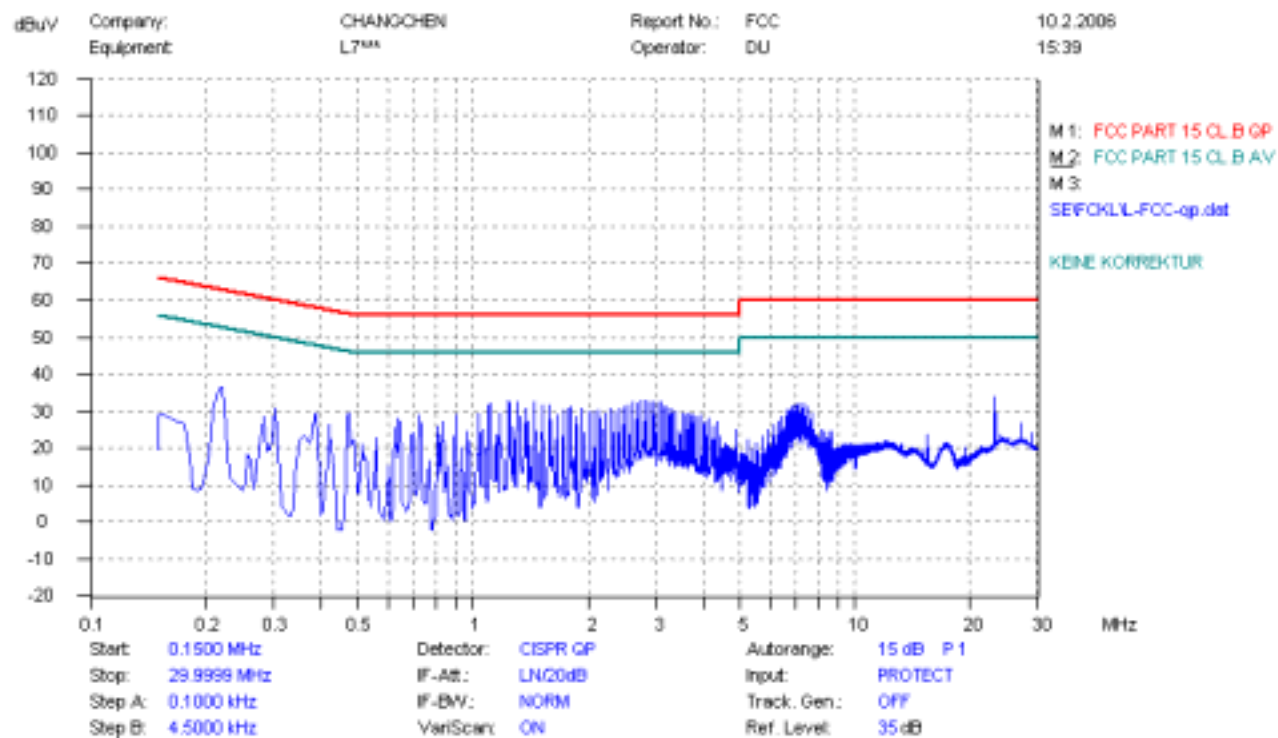


8. Mains terminal disturbance voltage, QP detector, N phase, Sample 4

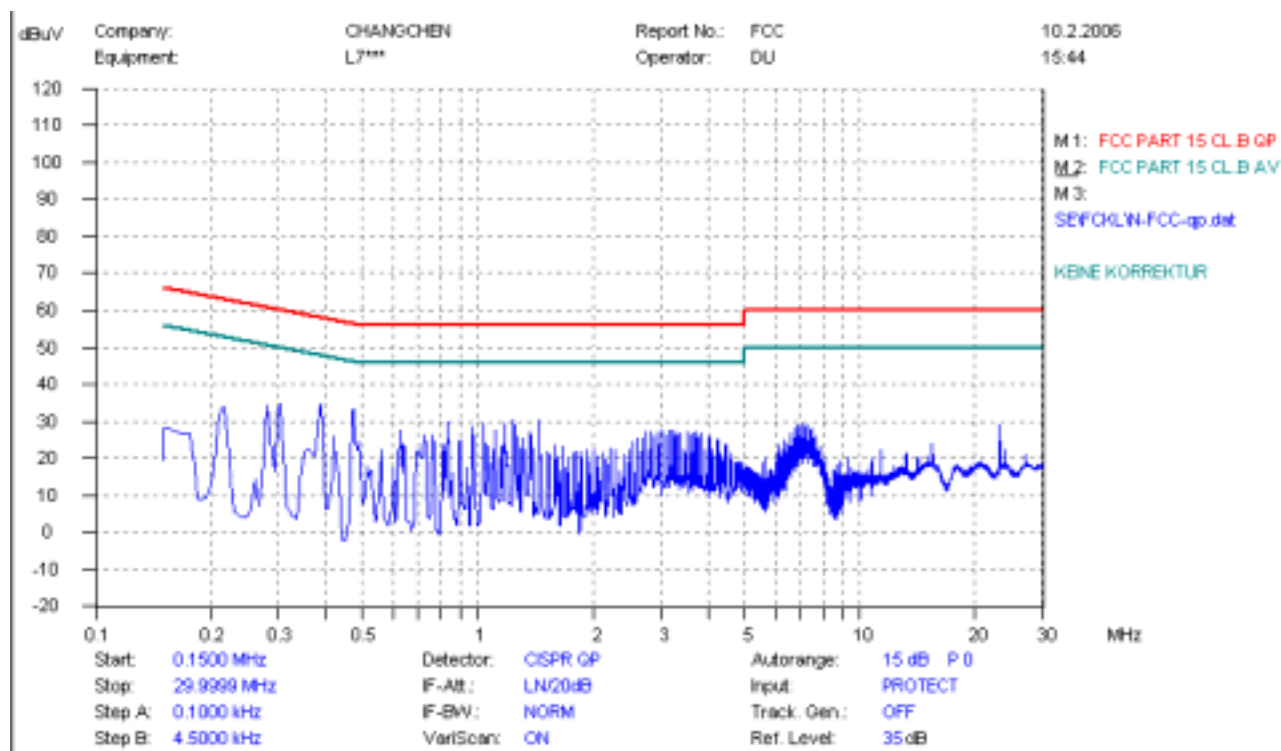


9. Mains terminal disturbance voltage, QP detector, L phase, Sample 5

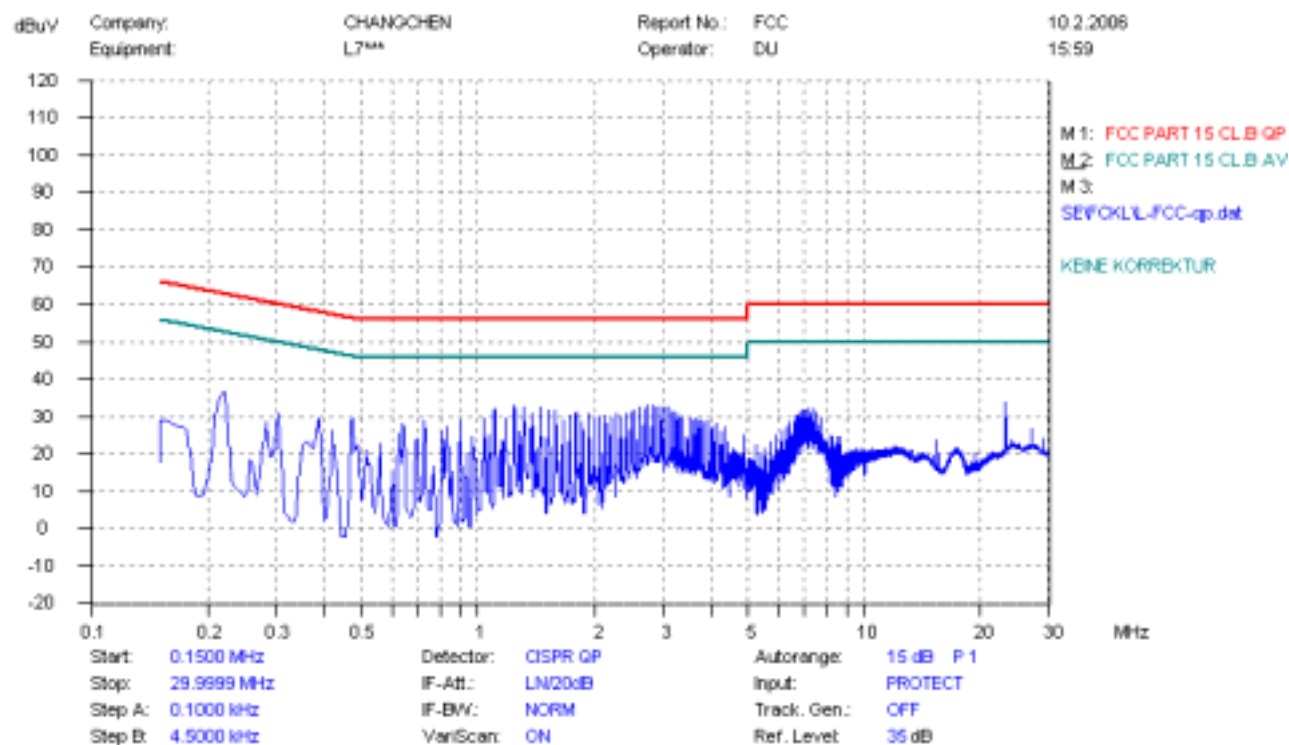


10. Mains terminal disturbance voltage, QP detector, N phase, Sample 5

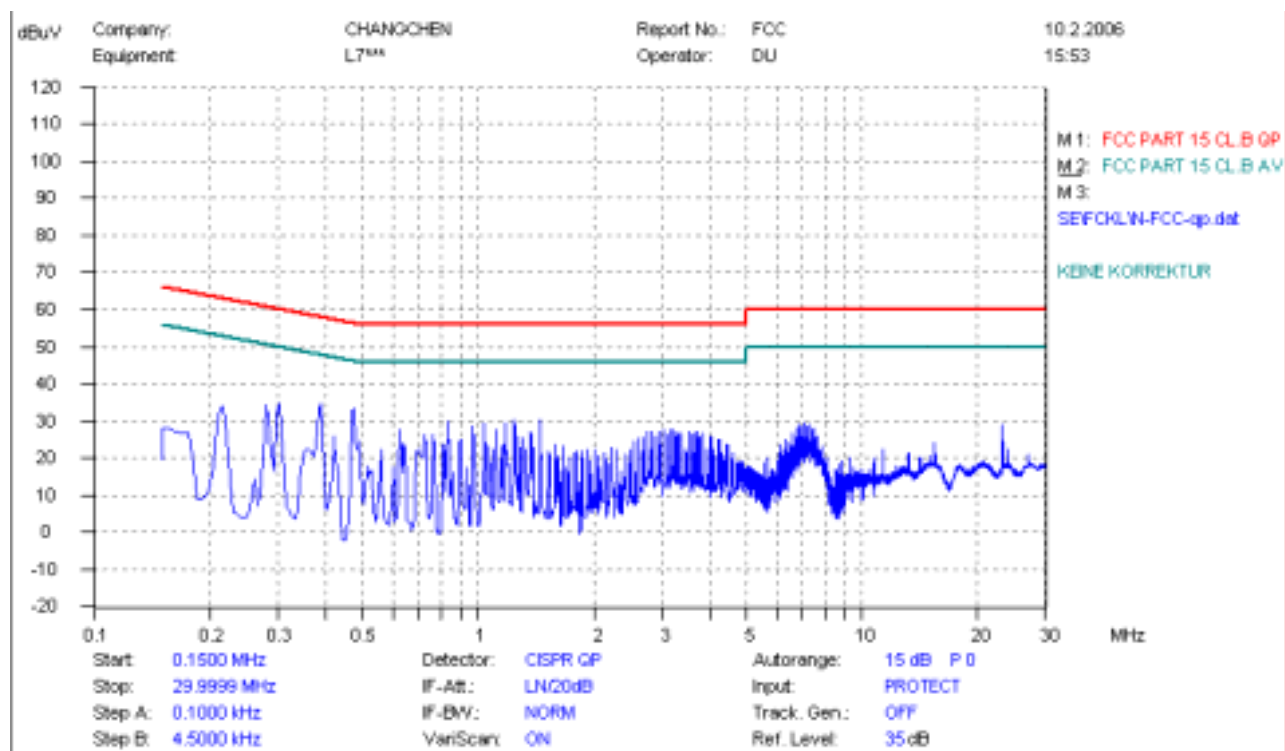

11. Mains terminal disturbance voltage, QP detector, L phase, Sample 6

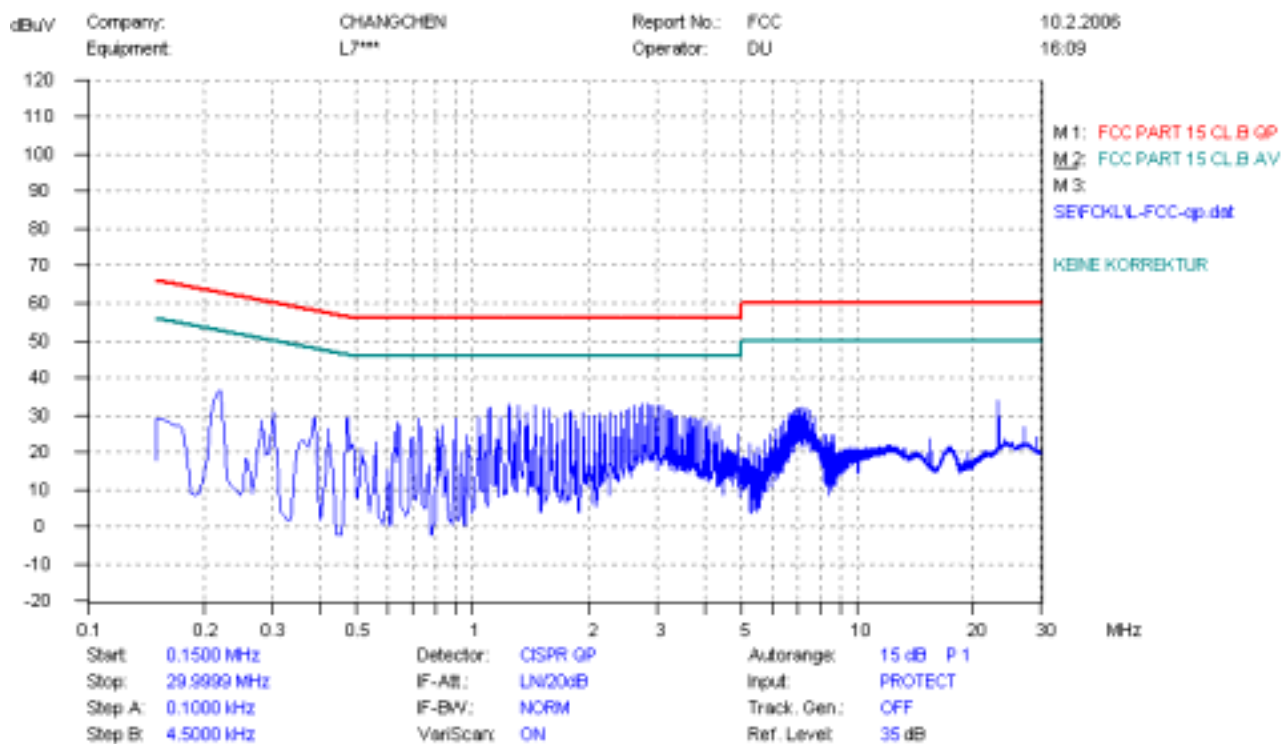

12. Mains terminal disturbance voltage, QP detector, N phase, Sample 6

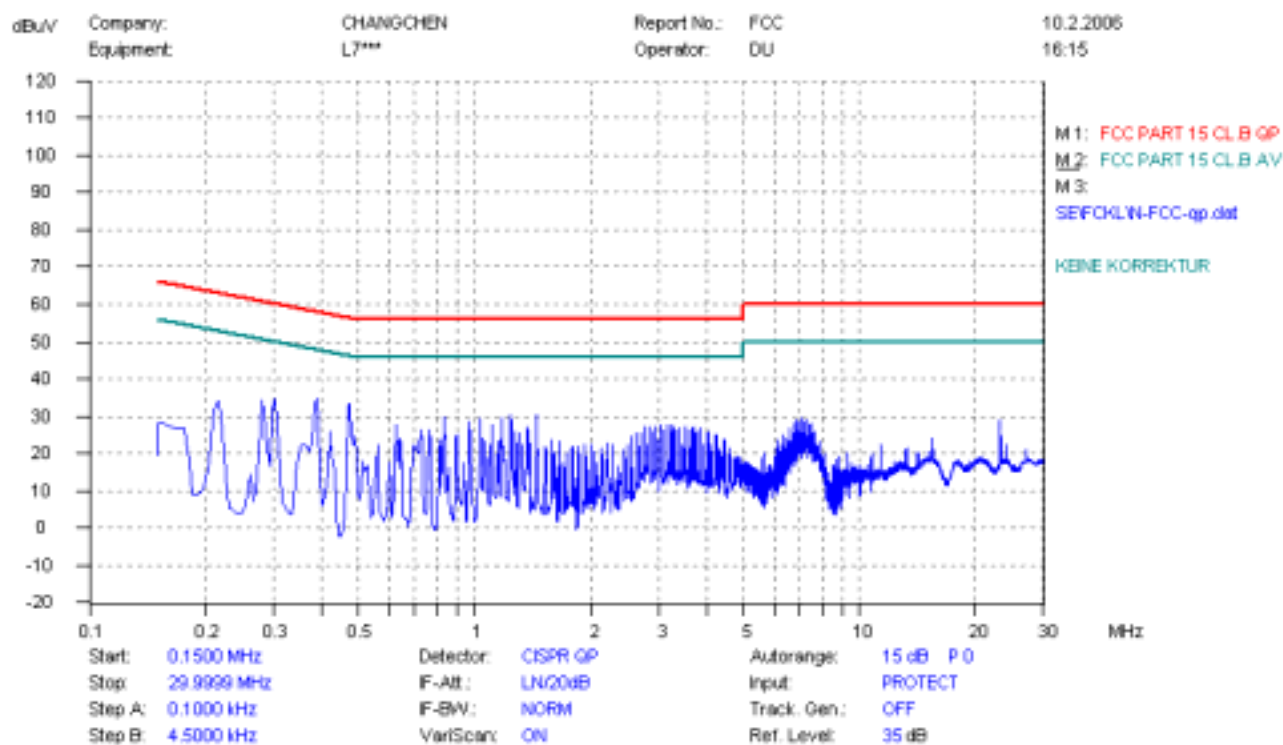

5 Radiated Emission Test

5.1 Limits of Radiated Emission

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40
88 -216	150	43.5
216 - 960	200	46
Above 960	500	54

NOTE:

1. Field Strength (dB $\mu\text{V/m}$)=20log Field Strength ($\mu\text{V/m}$).
2. In the emission tables above, the tighter limit applies at the band edges.

5.2 Test Instruments

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Test Receiver	ROHDE&SCHWARZ	ESIB26	100130	Jun.10, 2005	Jun.10, 2006
Ultra Broadband Ant.	ROHDE&SCHWARZ	HL562	100089	Jun.5, 2005	Jun.5, 2006
Semi-Anechoic Chamber	Albatross	H-249	P21505-016-001	Apr.18, 2005	Apr.18, 2006


5.3 Test Procedure

- a. The EUT was placed on the top of a ratable 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the heights from 1 to 4 meters and the ratable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detector Function and Specified Bandwidth with

Maximum Hold Mode.

- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10 dB margin would be retested one by one using the quasi-peak method.

5.4 Test Setup

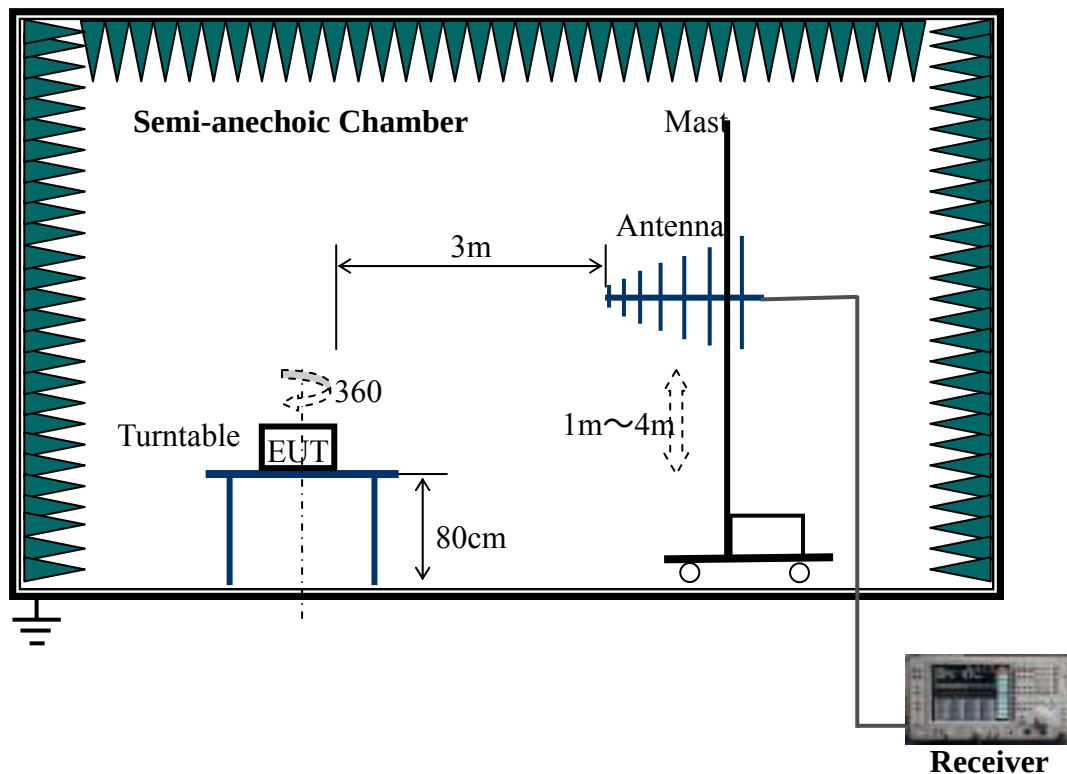

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

5.5 EUT Operating Conditions

The EUT was powered by 120V AC Mains.

The EUT was running Hwin.exe, at maximum brightness and contrast with resolution 1024*768 75Hz, scrolls "H" in 14 full screen.

The frequency range is: H-Sync 30-60 kHz, V-Sync 50-75 Hz

5.6 Test Results

Sample1:

No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	40.56	Vertical	100	0	40	35.09
2	104.82	Vertical	100	0	43.5	35.35
3	118.20	Vertical	100	0	43.5	35.20
4	116.64	Horizontal	150	0	43.5	30.10
5	194.10	Horizontal	150	0	43.5	34.01

Sample2:

No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	40.56	Vertical	100	0	40	35.06
2	114.06	Vertical	100	0	43.5	31.03

Sample3:

No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	108.06	Horizontal	150	180	43.5	30.28
2	398.87	Horizontal	150	0	46	28.76
3	431.84	Vertical	100	0	46	32.77
4	599.78	Vertical	100	0	46	33.22

Sample4:

No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	40.56	Vertical	100	0	40	35.18
2	104.82	Vertical	100	0	43.5	35.46
3	118.20	Vertical	100	0	43.5	35.27
4	116.64	Horizontal	150	0	43.5	29.87
5	194.10	Horizontal	150	0	43.5	34.08

Sample5:


No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	40.56	Vertical	100	0	40	35.17

2	114.06	Vertical	100	0	40	31.06
---	--------	----------	-----	---	----	-------


Sample6:

No.	Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	108.06	Horizontal	150	180	43.5	30.09
2	398.87	Horizontal	150	0	46	28.74
3	431.84	Vertical	100	0	46	32.72
4	599.78	Vertical	100	0	46	33.11


1. Radiation disturbances, antenna polarization: Vertical Sample1

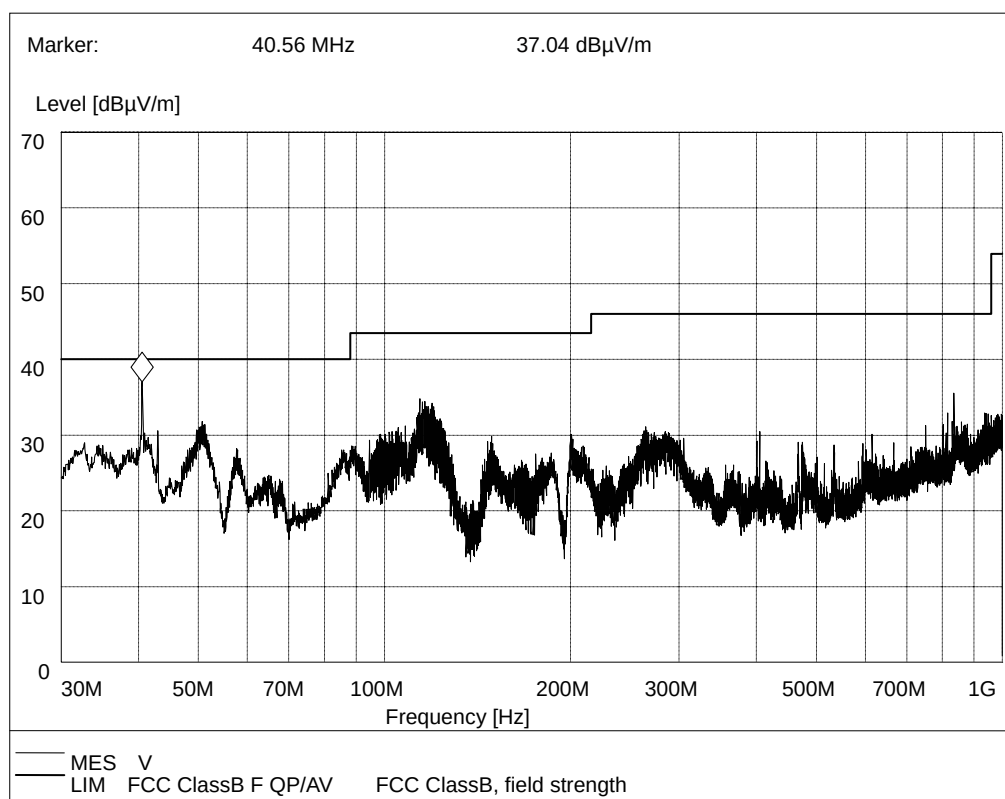


2. Radiation disturbances, antenna polarization: Horizontal Sample1

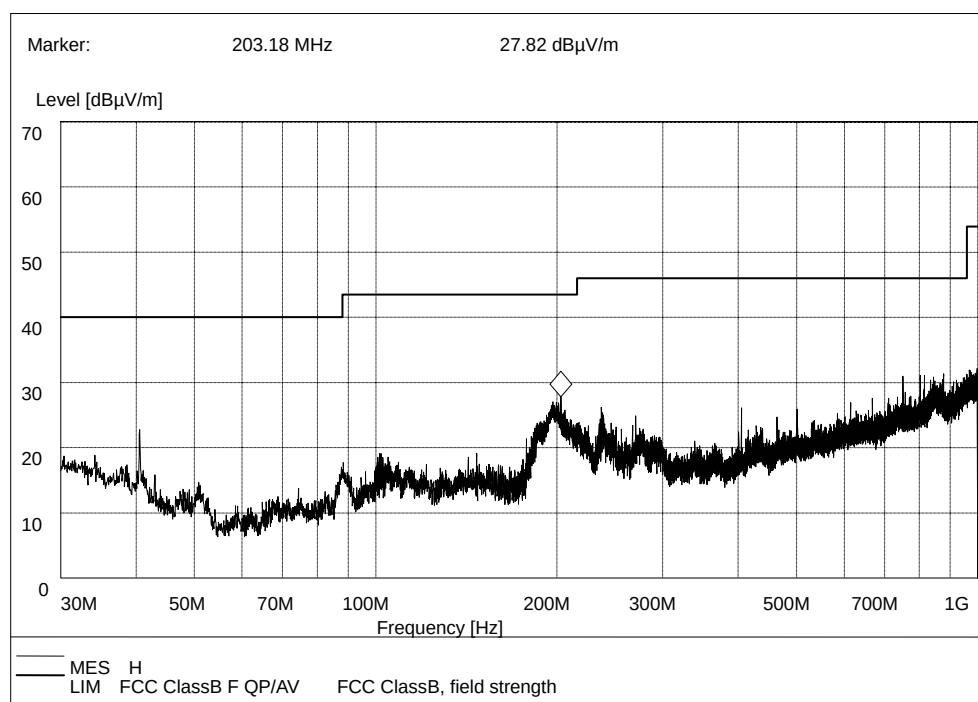

3. Radiation disturbances, antenna polarization: Vertical, Sample2

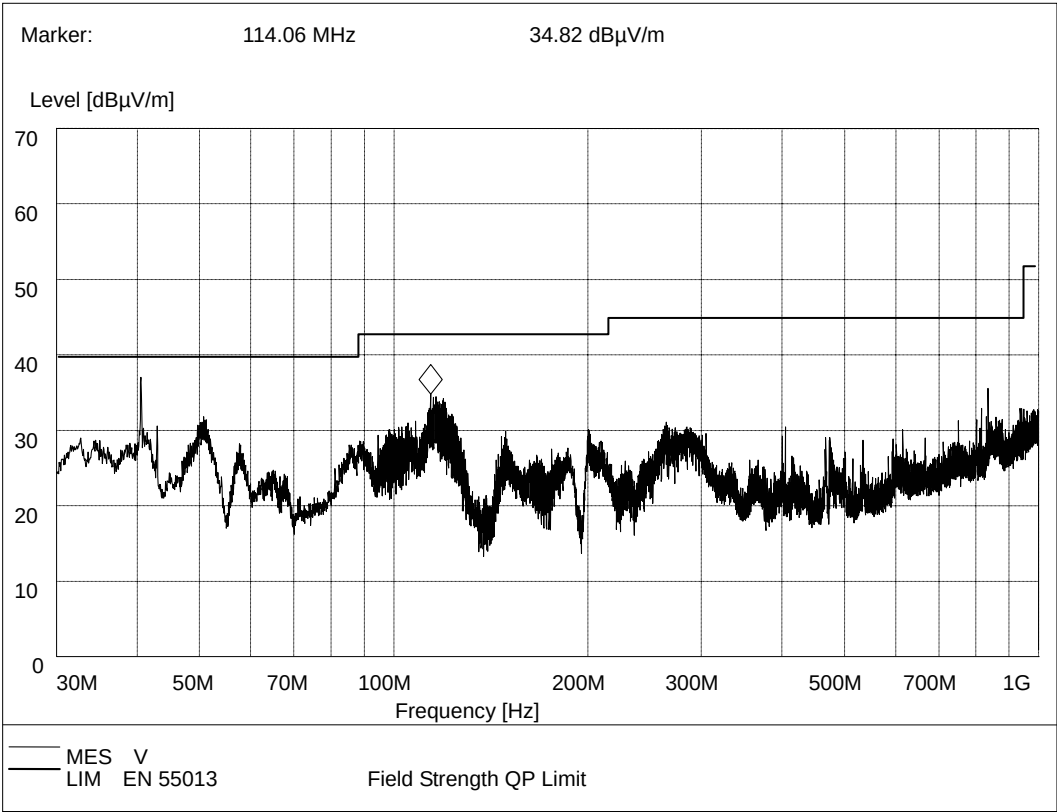


4. Radiation disturbances, antenna polarization: Horizontal, Sample2

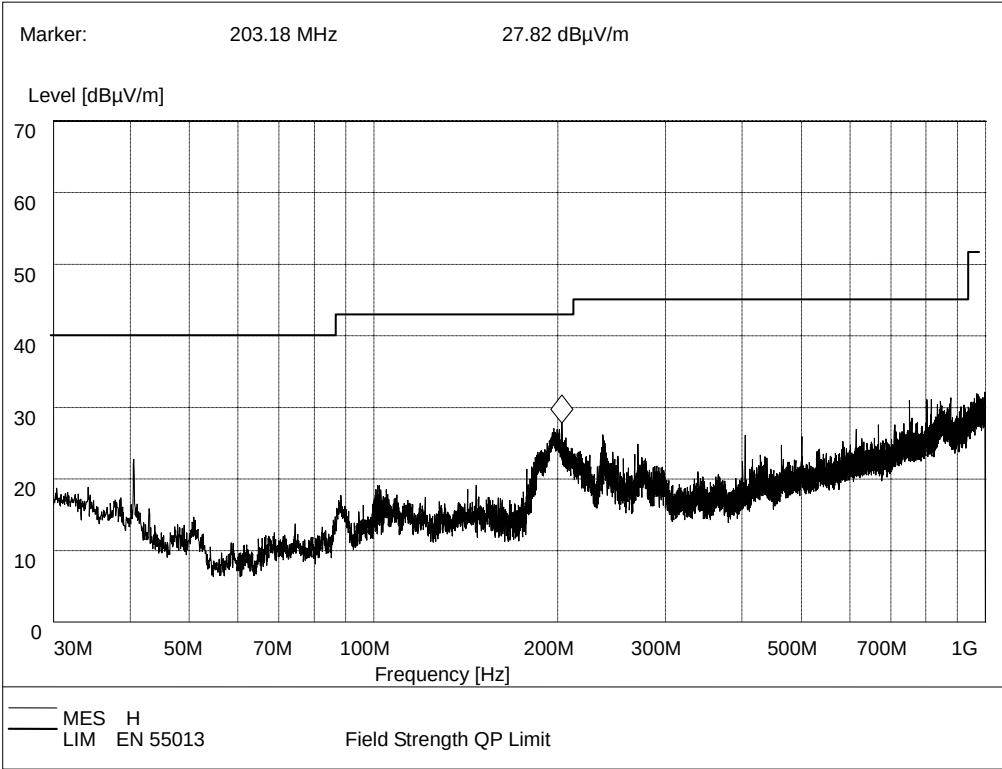





5. Radiation disturbances, antenna polarization: Vertical, Sample3

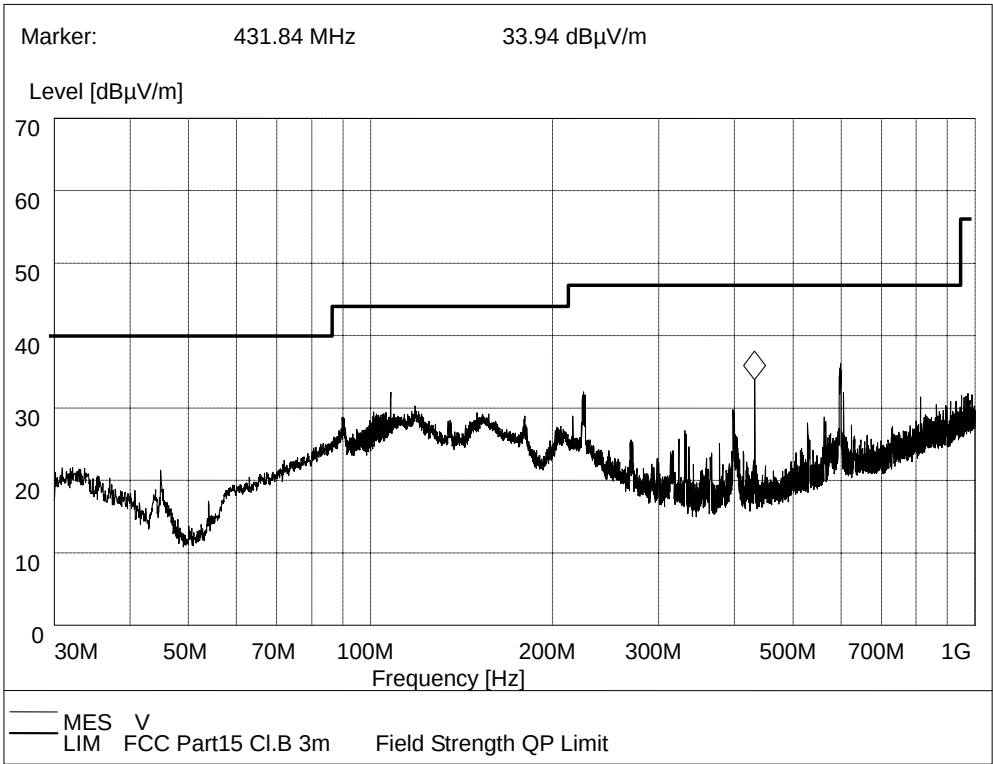


6. Radiation disturbances, antenna polarization: Horizontal, Sample3

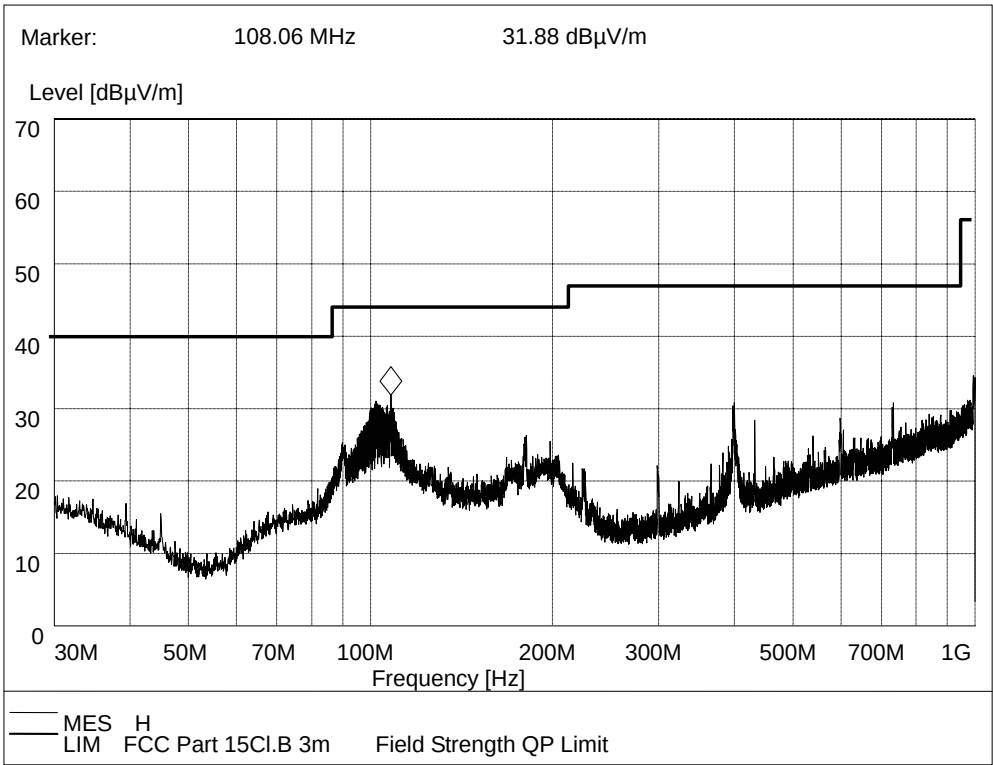


7. Radiation disturbances, antenna polarization: Vertical Sample4

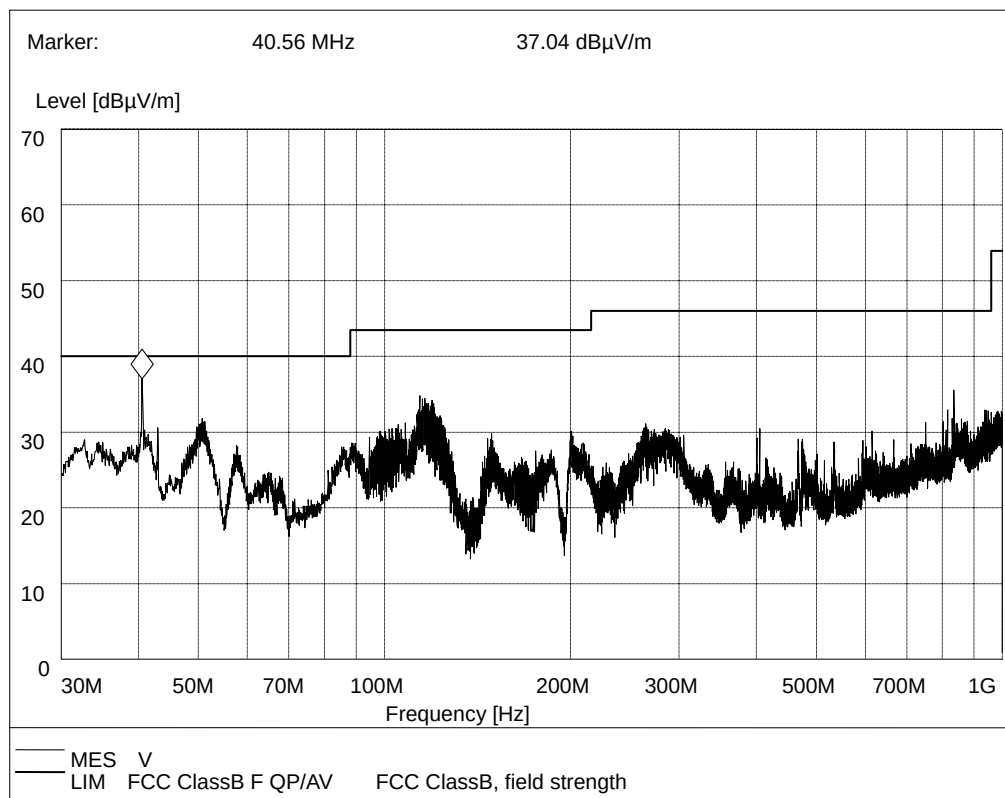


8. Radiation disturbances, antenna polarization: Horizontal Sample4

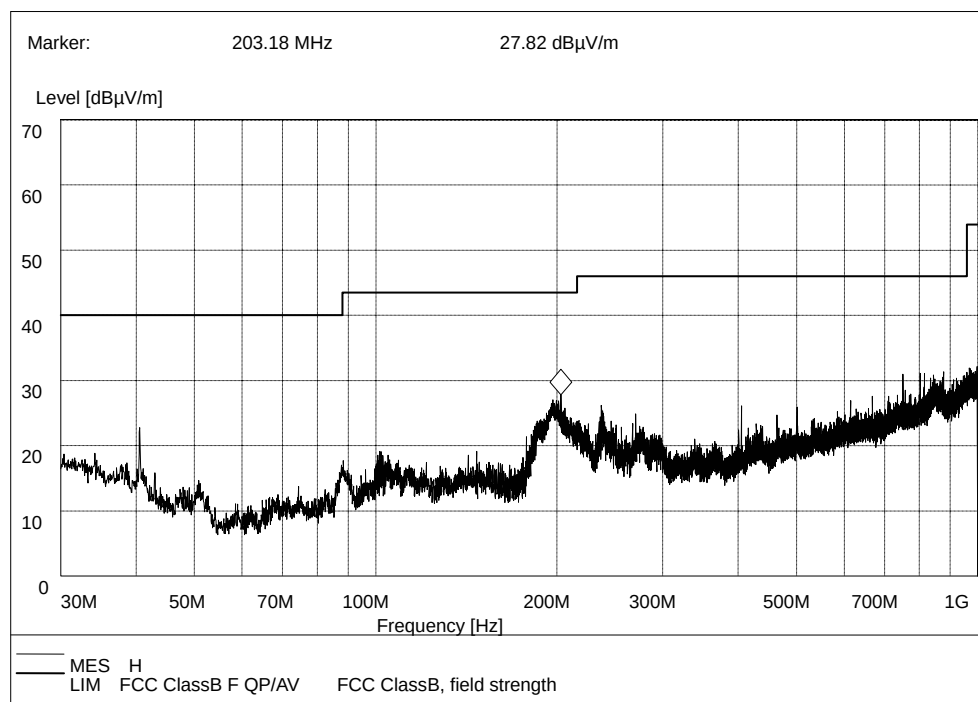


9. Radiation disturbances, antenna polarization: Vertical, Sample5

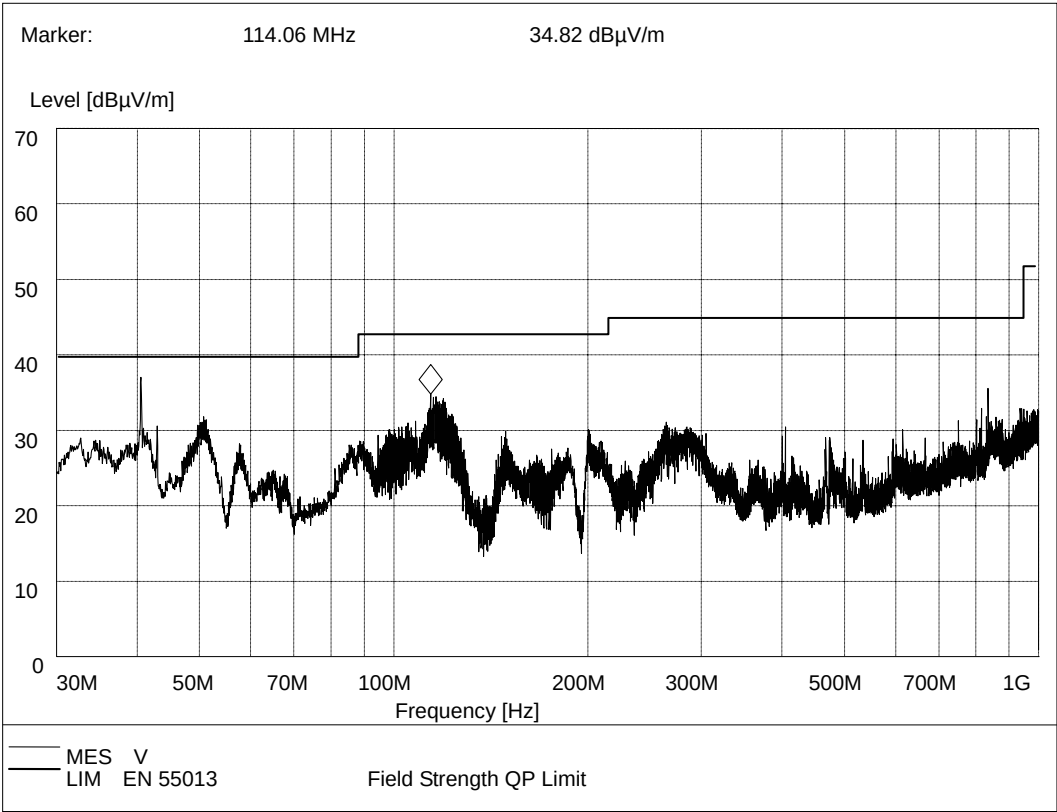


10. Radiation disturbances, antenna polarization: Horizontal, Sample5

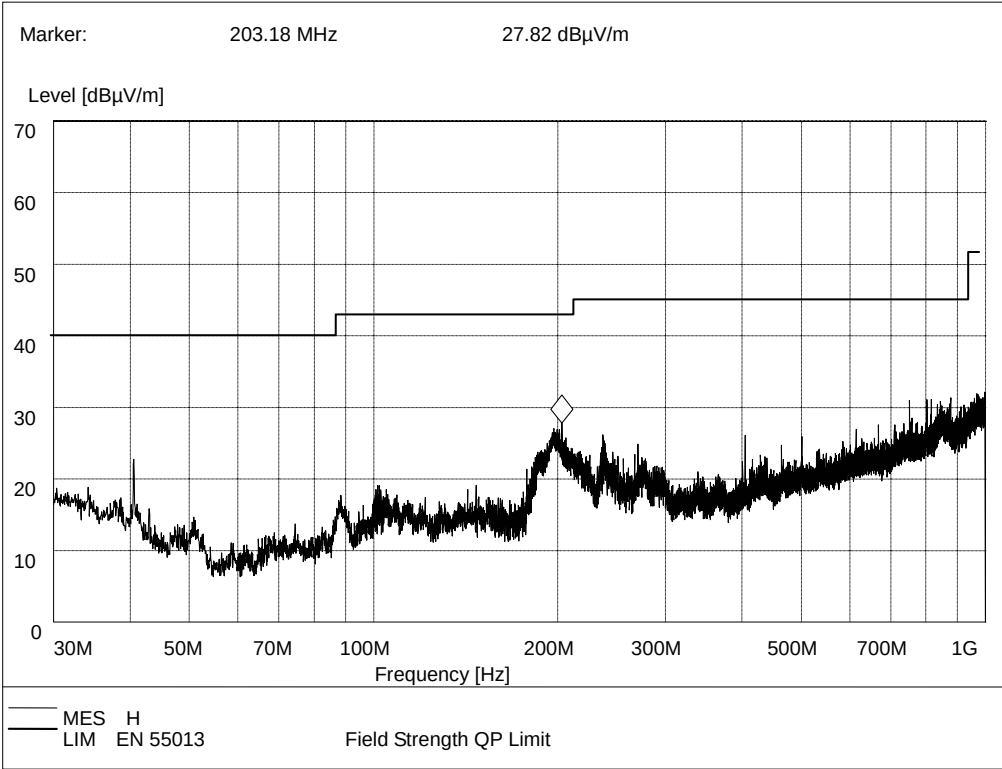

11. Radiation disturbances, antenna polarization: Vertical, Sample6

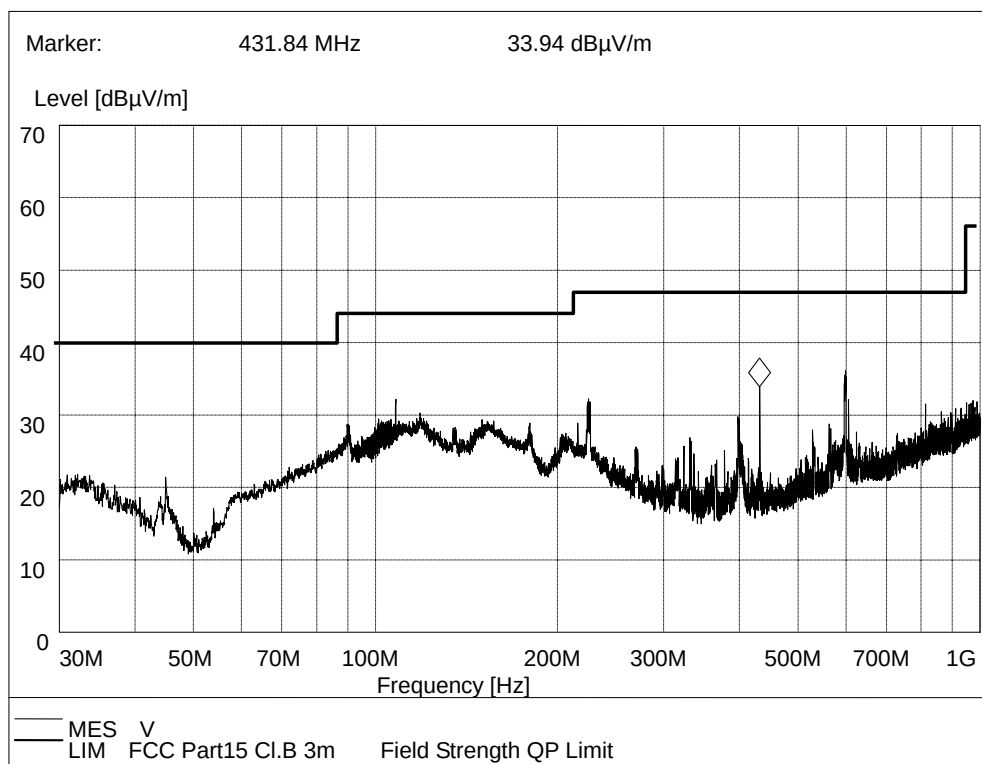

12. Radiation disturbances, antenna polarization: Horizontal, Sample36

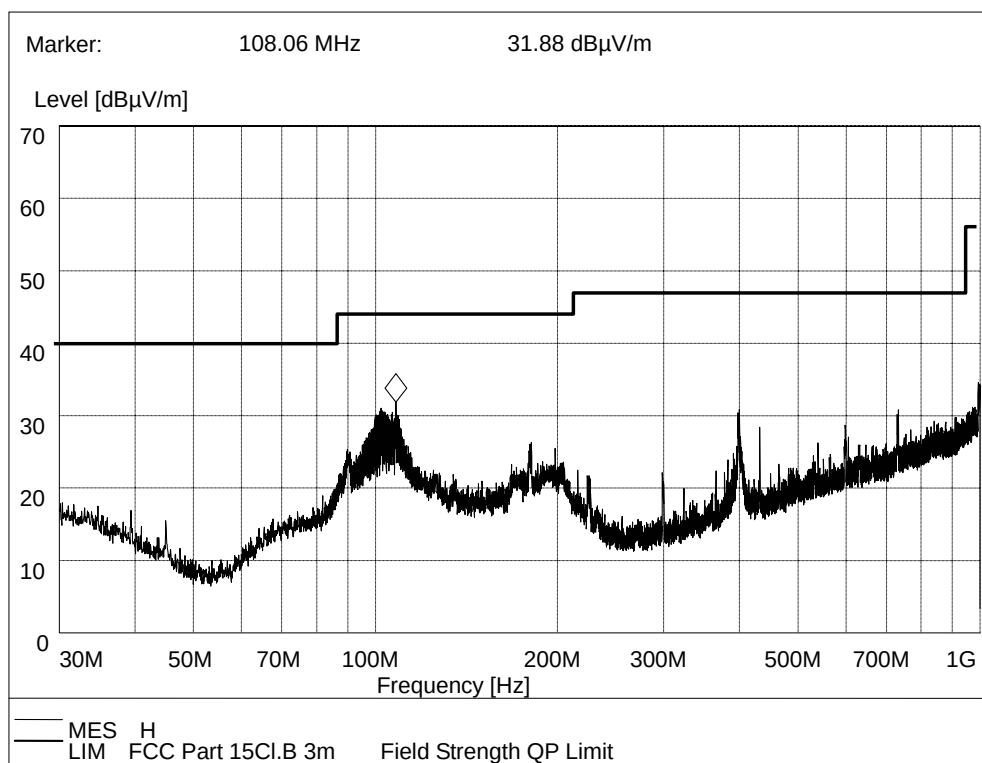

Appendix I : Photographs of the EUT

1. Appearance



2. Panel BOE



SVA




HANSTAR





3. Inside



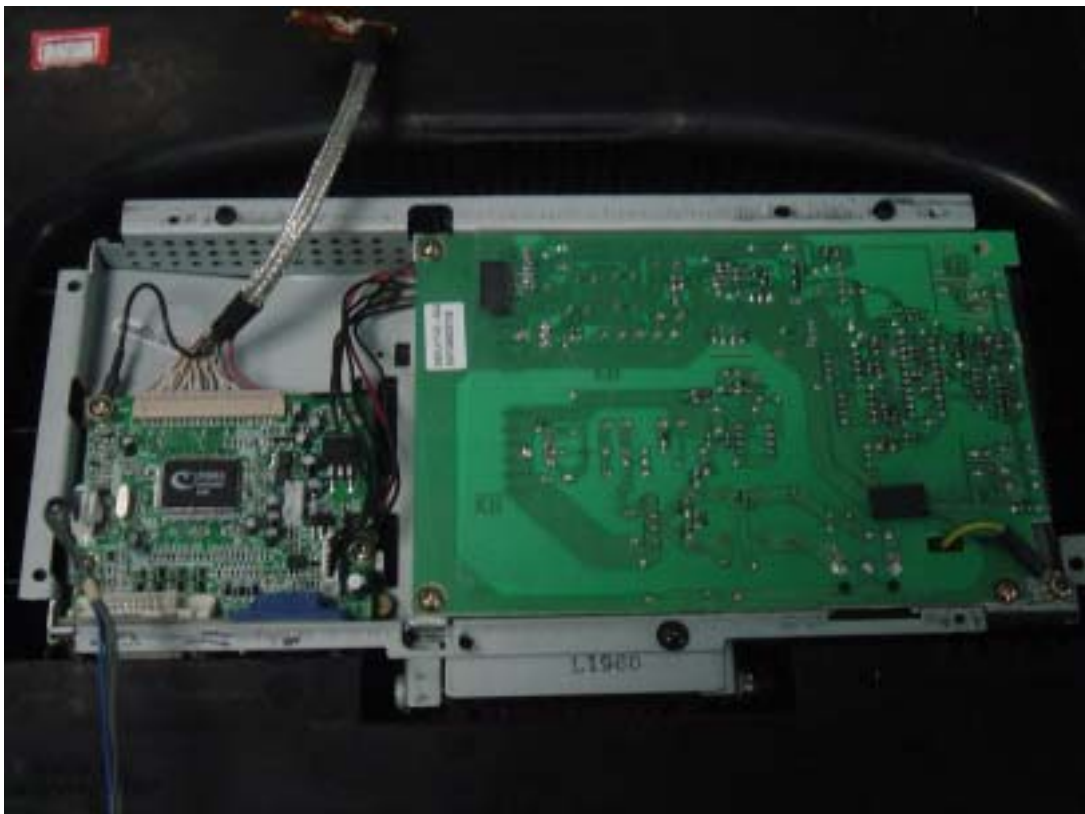


5. Main board
TSUM56AL

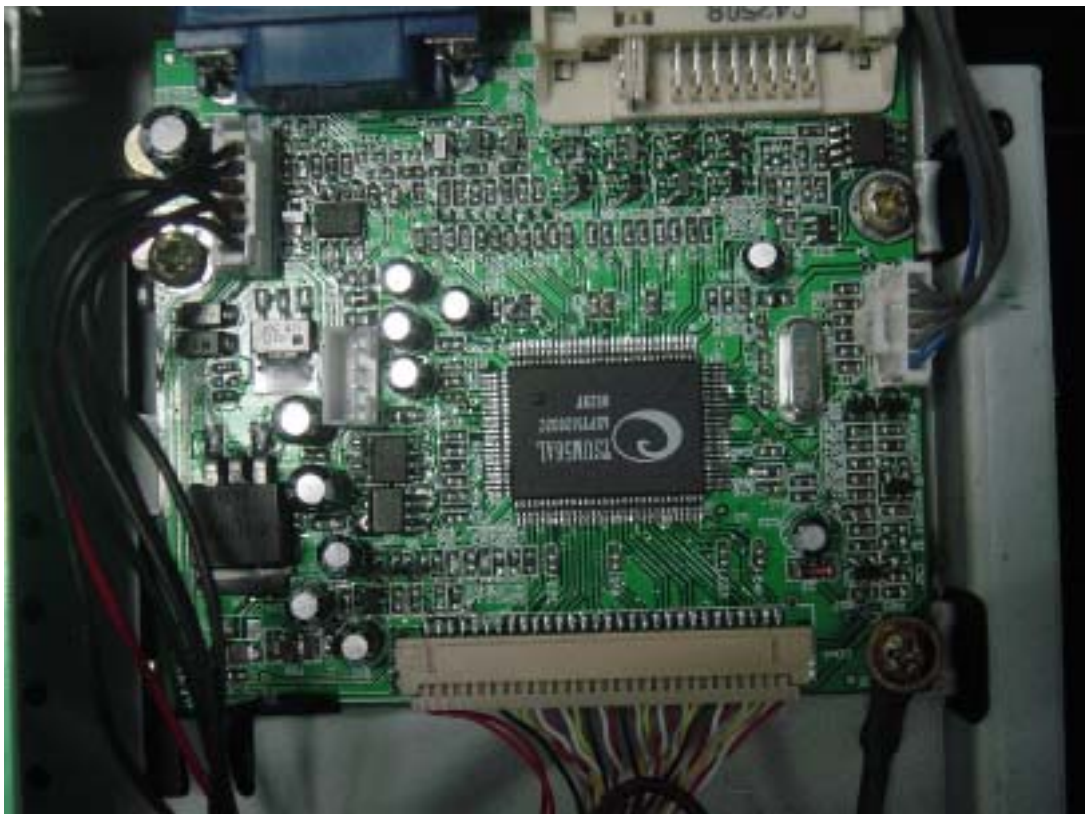

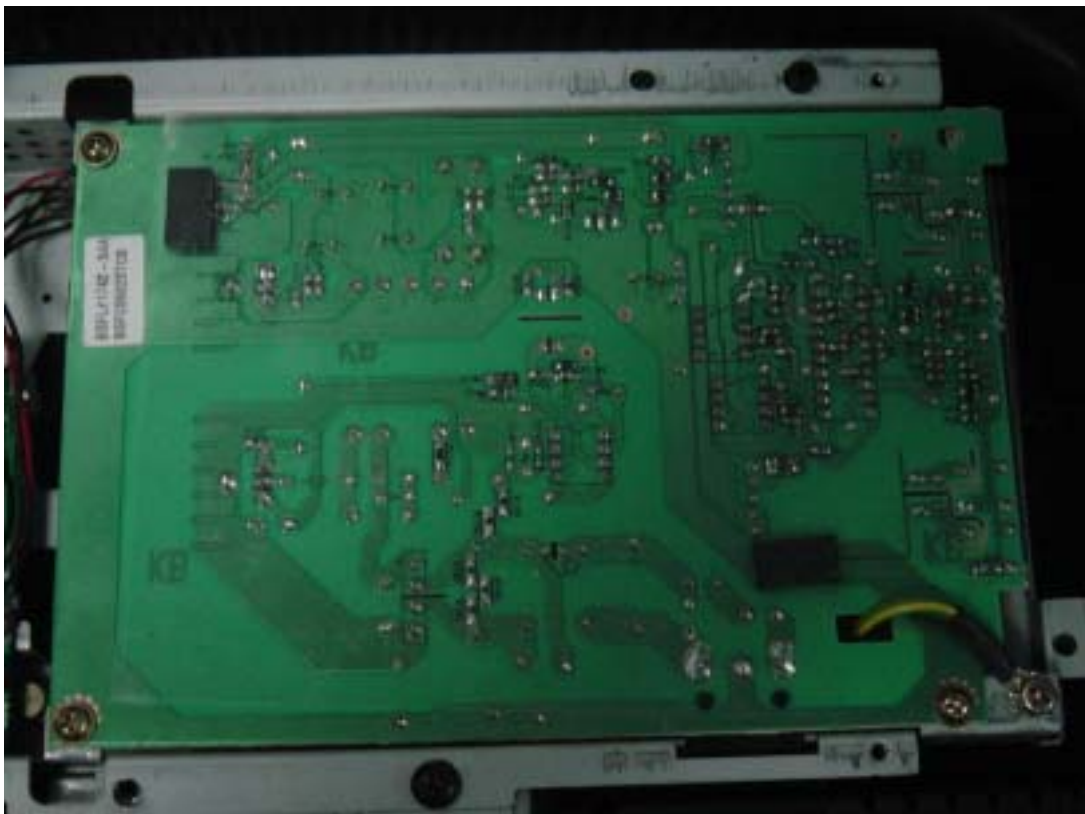

TSUM16AL



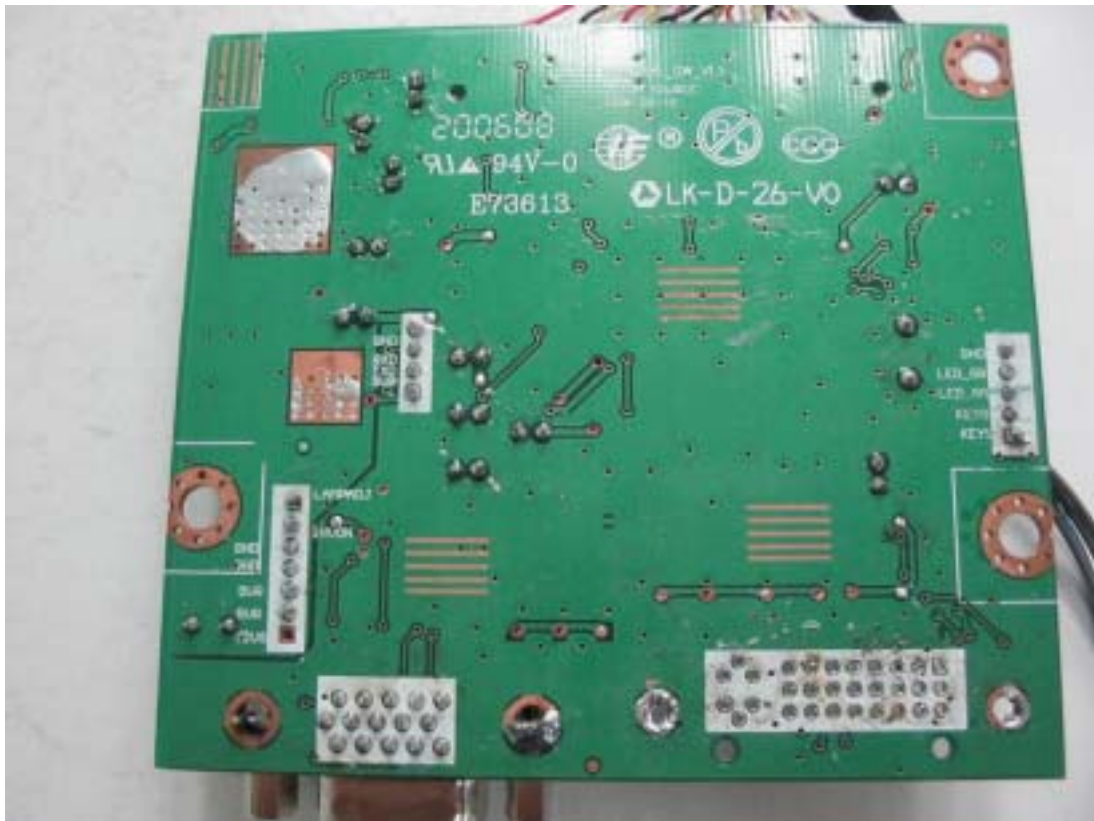

6. Power board





Appendix II : Photographs of Test Configuration

1. Mains Terminal Disturbance Voltage Measurement



2. Radiated Field Strength Measurement

