

Hong Kong Standards and Testing Centre


Date : 2005-02-01 No. : HM152831 TEST REPORT

Page 1 of 17


Supreme Toys (H.K.) Ltd. **Applicant:** Rm 1114-5, 11/F Tower A, New Mandarin Plaza, 14 Science Museum Road, Tsimshatsui East, Kowloon, Hong Kong. **Description of Samples:** Model name: **4** Transistors Miniature Walkie Talkie Model no.: 99200 Brand name: JACKPOT INDUSTRIAL LIMITED. FCC ID: L2599200 **Date Samples Received:** 2004-11-08 **Date Tested:** 2005-11-12 **Investigation Requested:** FCC Part 15 Subpart C The submitted product COMPLIED with the **Conclusions:** requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report. **Remarks:** K C Lee, EMC for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.

香港新界大埔工業村大宏街 10 號

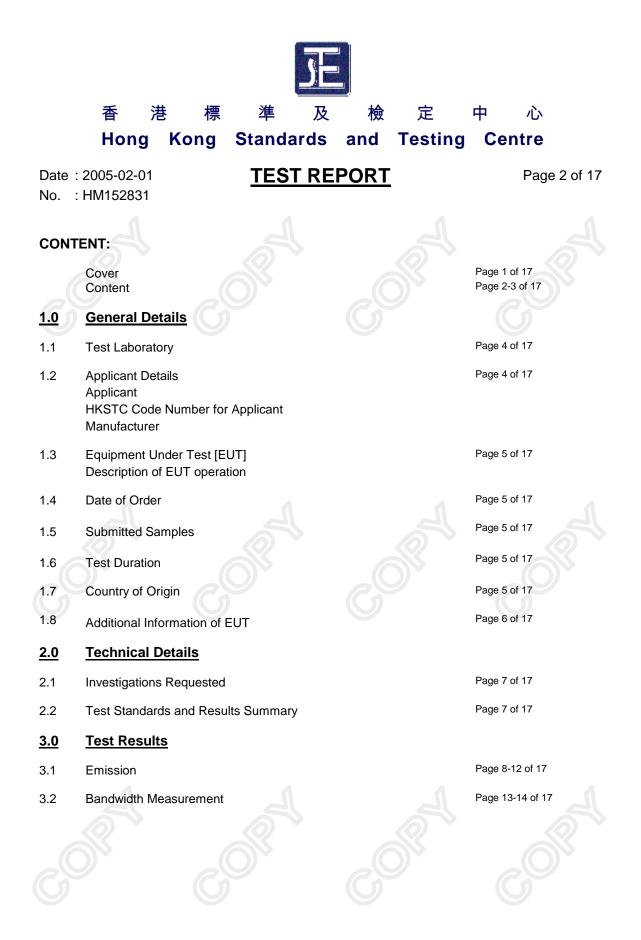

#### 香港新界大埔工業村大宏街 10號

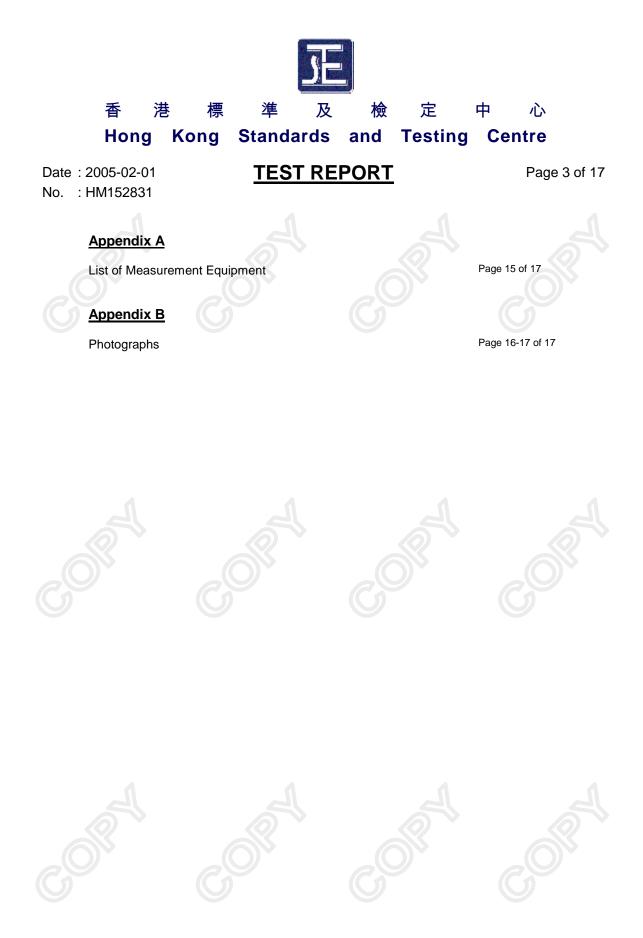

#### 香港新界大埔工業村大宏街 10號



Hong Kong Standards and Testing Centre

Date : 2005-02-01

No. : HM152831

# **TEST REPORT**

Page 4 of 17

## 1.0 General Details

## 1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

Telephone:852 2666 1888Fax:852 2664 4353

#### 1.2 Applicant Details Applicant

Supreme Toys (H.K.) Ltd. Rm 1114-5, 11/F Tower A, New Mandarin Plaza, 14 Science Museum Road, Tsimshatsui East, Kowloon, Hong Kong.

### **HKSTC Code Number for Applicant**

<u>SUT002</u>

### Manufacturer

Jackpot Plastic & Metal Manufactory Feng Gang, Guan Jing Tou, Shur Ku District, Dongguan



### 香港新界大埔工業村大宏街 10號



Hong Kong Standards and Testing Centre

**TEST REPORT** 

Page 5 of 17

Date : 2005-02-01

No. : HM152831

## 1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Manufacturer: Brand Name: Model Number: Input Voltage:

4 Transistors Miniature Walkie Talkie Jackpot Plastic & Metal Manufactory JACKPOT INDUSTRIAL LIMITED. 99200 6Vd.c ("AG13" size battery x 4)

#### 1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Supreme Toys (H.K.) Ltd., 4 Transistors Miniature Walkie Talkie. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by Mic and type is frequency modulation.

#### 1.4 Date of Order

2004-11-08

### 1.5 Submitted Sample(s):

2 Samples per model

#### 1.6 Test Duration

2004-11-12

#### 1.7 Country of Origin

China




#### 香港新界大埔工業村大宏街 10號



User Manual Part List Circuit Diagram Printed Circuit Board [PCB] Layout Block diagram FCC ID Label

1.8









#### 香港新界大埔工業村大宏街 10號



Hong Kong Standards and Testing Centre

Date : 2005-02-01

No. : HM152831

# TEST REPORT

Page 7 of 17

# 2.0 Technical Details

### 2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2003 for FCC Certification.

## 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary										
Test Condition Test Requirement Test Method Class / Test Result										
			Severity	Pass	Failed	N/A				
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	$\boxtimes$						
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	Class B	$\boxtimes$		Ш				
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	Class B			$\square$				

Note: N/A - Not Applicable



### 香港新界大埔工業村大宏街 10號



Hong Kong Standards and Testing Centre

Date : 2005-02-01

No. : HM152831

# TEST REPORT

Page 8 of 17

# 3.0 Test Results

# 3.1 Emission


3.1.1 Radiated Emissions (30 - 1000MHz)

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47CFR 15.235 ANSI C63.4:2003 2004-11-12 Tx mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

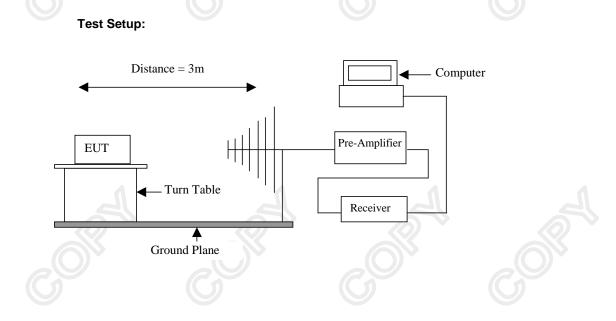

#### 香港新界大埔工業村大宏街 10號



Date : 2005-02-01

No. : HM152831

# TEST REPORT

Page 9 of 17

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.135]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Spurious Emission
	[Peak]	[Average]
[MHz]	[μV/m]	[µV/m]
49.82-49.90	100,000	10,000

### **Results: Transmitter**

Field Strength of Fundamental Emissions Peak Value										
Frequency		Correction	Field	Field	Limit @3m	E-Field				
	Level @3m		Strength	Strength		Polarity				
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m					
49.86	38.8	10.2	49.0	281.8	100,000	Vertical				

Field Strength of Fundamental Emissions Average									
Frequency	Measured	Correction	V Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m				
49.86	38.6	10.2	48.8	275.4	10,000	Vertical			

#### Remarks:

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. .Below setting for HP8572A EMI Receiver.

z

Correction Factor included Antenna Factor and Cable Attenuation. Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB

#### 香港新界大埔工業村大宏街 10號



Date : 2005-02-01

No. : HM152831

TEST REPORT

Page 10 of 17

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

#### **Results : Transmitter**

	Radiated Emissions										
	Quasi-Peak										
Frequency	Me	easured	Correction		Field		Field	Limit @3m	E-Field		
	Lev	el @3m	Factor	S	Strength		Strength		trength		Polarity
MHz	dE	BµV/m	dBµV/m	di	dBµV/m		dBµV/m µV/m		uV/m	μV/m	
99.72	<	1.0	11.0	<	12.0	<	4.0	150	Vertical		
149.58	<	1.0	9.8	<	10.8	<	3.5	150	Vertical		
199.44	<	1.0	11.5	<	12.5	<	4.2	150	Vertical		
249.30	<	1.0	15.2	<	16.2	<	6.5	200	Vertical		
299.16	<	1.0	16.9	<	17.9	<	7.9	200	Vertical		
349.02	<	1.0	19.0	<	20.0	<	10.0	200	Vertical		
398.88	<	1.0	20.6	<	21.6	<	12.0	200	Vertical		
448.74	<	1.0	19.7	<	20.7	<	10.8	200	Vertical		
498.60	<	1.0	20.6	<	21.6	<	12.0	200	Vertical		

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation. Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB

#### 香港新界大埔工業村大宏街 10號



Date : 2005-02-01

No. : HM152831

TEST REPORT

Page 11 of 17

Limits for Radiated Emissions [FCC 47 CFR 15.235 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [µV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

#### **Results: Receiver**

Radiated Emissions Quasi-Peak									
Frequency MHz	Lev	asured el @3m 3µV/m	Correction Factor dBµV/m	s	Field trength BµV/m		Field strength µV/m	Limit @3m µV/m	E-Field Polarity
49.86	7	24.2	10.2		34.4		52.5	100	Vertical
99.72	<	1.0	12.5	<	13.5	<	4.7	150	Vertical
149.58	<	1.0	9.8	<	10.8	<	3.5	150	Vertical
199.44	<	1.0	11.5	<	12.5	<	4.2	150	Vertical
249.30	<	1.0	15.9	<	16.9	<	7.0	200	Vertical
299.16	<	1.0	17.4	<	18.4	<	8.3	200	Vertical
349.02	<	1.0	17.2	<	18.2	<	8.1	200	Vertical
398.88	<	1.0	18.8	<	19.8	<	9.8	200	Vertical
448.74	<	1.0	19.7	<	20.7	<	10.8	200	Vertical
498.60	<	1.0	20.6	<	21.6	<	12.0	200	Vertical

Remark:

Calculated measurement uncertainty

30MHz to 1GHz

:

Hz ±4.1dB









#### 香港新界大埔工業村大宏街 10號



#### Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



#### 香港新界大埔工業村大宏街 10號



Hong Kong Standards and Testing Centre

Date : 2005-02-01

No. : HM152831

TEST REPORT

Page 13 of 17

### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: Test Method: Test Date: Mode of Operation:

FCC 47 CFR 15.235 ANSI C63.4:2003 (Section 13.1.7) 2005-11-12 On mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




#### 香港新界大埔工業村大宏街 10號



Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range		20B Bandwidth	1	FCC Limits
[MHz]		[KHz]		[MHz]
49.86		46.2		within 49.82-49.90
	$\mathbf{O}$		$\mathbf{O}$	$\mathbf{O}$

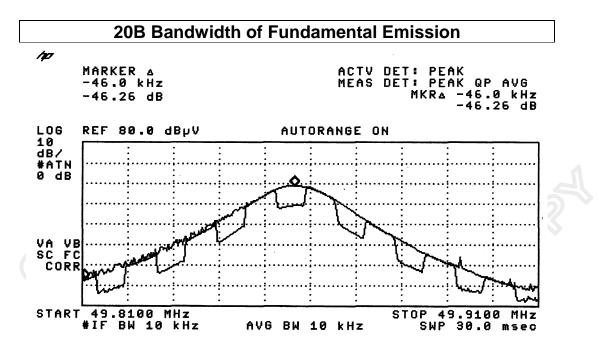



#### 香港新界大埔工業村大宏街 10號



Hong Kong Standards and Testing Centre

Date : 2005-02-01 No. : HM152831

# TEST REPORT

Page 15 of 17

Appendix A

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	15/06/04
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	15/06/04
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	15/06/04
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	15/06/04
EM011	ATTENNUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	15/06/04
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	15/06/04
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	15/06/04
EM020	HORN ANTENNA	EMCO	3115	4032	30/07/03
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	30/07/03
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/02/03
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	13/01/04
EM145	EMI TEST RECEIVER	R&S	ESCS 30	830245/021	04/10/04
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	28/10/03
EM195	ANTENNA POSITIONING MAST	EMCO	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	EMCO	2090	1662	N/A

### List of Measurement Equipment

#### Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	17/10/03
EM119	LISN	R & S	ESH3-Z5	0831.5518.52	14/10/04
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	СМ
EM142	PULES LIMITER	R&S	ESH3Z2	357.8810.52	04/08/04
EM181	EMI TEST RECEIVER	R&S	ESIB7	100072	06/01/04
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	17/10/03
EM197	LISN	EMCO	4825/2	1193	05/06/04

#### **Remarks:-**

СМ	Corrective Maintenance	
N/A	Not Applicable or Not Available	
TBD	To Be Determined	

#### 香港新界大埔工業村大宏街 10號



#### 香港新界大埔工業村大宏街 10號



Date : 2005-02-01 No. : HM152831 TEST REPORT

Page 17 of 17

Photographs of EUT



\*\*\*\*\* End of Test Report \*\*\*\*\*



#### 香港新界大埔工業村大宏街 10號