

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, MI 48109-2122  
Tel: (734) 647-1792

Measured Radio Frequency Emissions  
From

**Delphi-Delco Communiport MPC-PRO  
(FM-Band Transmitter)  
Model: 12205129 (v6.1)**

Report No. 415031-073  
February 13, 2001

Copyright © 2001


For:  
Delphi-Delco Electronics Systems  
One Corporate Center  
Kokomo, IN 46904-9005

Contact:  
Mark Cummings-Hill  
Tel: 765-451-8776  
Fax: 765-451-1340  
PO: verbal from Defiance/ Bill Lusa

Measurements made by:

Valdis V. Liepa

Tests supervised by:  
Report approved by:

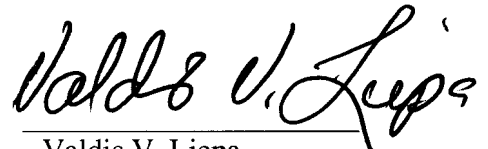

Valdis V. Liepa  
Research Scientist

---

**Summary**

Tests for compliance with FCC Regulations, Part 15, Subpart C, were performed on Delphi-Delco Communiport MPC-PRO transmitter. This device is subject to the Rules and Regulations as a transmitter; since it is used in a car, as a digital device it is exempt.

In testing performed on February 11 and 12, 2001, the device tested in the worst case met the allowed specifications for radiated emissions by 0.9 dB at fundamental and by, at least, 1.5 dB at harmonics (see p. 6). Besides harmonics, there were no other significant spurious transmitter emissions found. At the DC power-up, there is VCO "lock on" chirp emission sweeping from 108.5 MHz to the frequency of operation; this emission was neglected when considering the device for compliance.

The line conducted emission tests do not apply, since the device is powered from 12V car cigarette lighter socket. The radiated digital emission are at about Class B limit; they were not formally measured since they are exempt for devices used in transportation vehicles.

## 1. Introduction

Delphi-Delco Communiport MPC-PRO transmitter was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989, and with Industry Canada RSS-210, Issue 2, dated February 14, 1998. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland. (FCC file 31040/SIT) and with Industry Canada, Ottawa, ON (File Ref. No: IC2057).

## 2. Test Procedure and Equipment Used

The test equipment commonly used in our facility is listed in Table 2.1 below. The second column identifies the specific equipment used in these tests. The HP 8593E spectrum analyzer is used for primary amplitude and frequency reference.

Table 2.1. Test Equipment.

Test Instrument	Equipment Used	Manufacturer/Model	Cal. Date/By
Spectrum Analyzer (9kHz-22GHz)	X	Hewlett-Packard 8593A SN: 3107A01358	December 2000/UM
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E SN: 3107A01131	December 2000/HP
Spectrum Analyzer (0.1-1500 MHz)		Hewlett-Packard 182T/8558B SN: 1529A01114/543592	December 2000/UM
Preamplifier (5-1000MHz)	X	Watkins-Johnson A11 -1 plus A25-1S	December 2000/UM
Preamplifier (5-4000 MHz)	X	Avantek	Oct. 1999/ U of M Rad Lab
Broadband Bicone (20-200 MHz)	X	University of Michigan	June 1996/U of M Rad Lab
Broadband Bicone (200-1000 MHz)	X	University of Michigan	June 1996/U of M Rad Lab
Dipole Antenna Set (25-1000 MHz)	X	University of Michigan	June 2000/UM
Dipole Antenna Set (30-1000 MHz)		EMCO 3121C SN: 992	June 2000/UM
Active Loop Antenna (0.090-30MHz)		EMCO 6502 SN: 2855	December 1993/ EMCO
Active Rod (30Hz-50 MHz)		EMCO 3301B SN: 3223	December 1993/EMCO
Ridge-horn Antenna (0.5-5 GHz)	X	University of Michigan	March 1999/U of M Rad Lab
LISN Box		University of Michigan	Dec. 1997/U of M Rad Lab
Signal Cables	X	Assorted	January 1993/U of M Rad Lab
X-Y Plotter		Hewlett-Packard 7046A	During Use/U of M Rad Lab
Signal Generator (0.1-990 MHz)		Hewlett-Packard 8656A	January 1990/U of M Rad Lab
Printer	X	Hewlett-Packard 2225A	August 1989/HP

### 3. Configuration and Identification of Device Under Test

The DUT is a palm size device that interfaces with a personal organizer and a cellular telephone. It signal processes and executes voice commands and generates audio signals that are transmitted from the device to the car's FM radio. The DUT can be programmed to transmit from 88.1 to 107.9 MHz.

The DUT was designed by Delphi-Delco Electronics Systems, One Corporate Center, Kokomo, IN 46904-9005. It will be manufactured by Kodenshi/INT Corp., 570-300 832 Palbong-Dong, IKSAN, KOREA. It is identified as:

Delphi-Delco Communiport MPC-PRO  
Model: 12205129 (v6.1)  
FCC ID: L2C0014T

One fully functional device was provided, and this was programmed for operation necessary for performing the tests.

#### 3.1 EMI Relevant Modifications

During the pre-tests, modifications were made by Delphi-Delco engineer to the RF attenuator. Since these were made by Delphi-Delco, these are not listed as made by this laboratory.

### 4. Emission Limits

#### 4.1 Radiated Emission Limits

The DUT tested falls under the category of an Intentional Radiators and the Digital Devices. For FCC, it is subject to Part 15, Subpart C, (Section 15.231), Subpart B, (Section 15.109), and Subpart A, (Section 15.33). The applicable testing frequencies with corresponding emission limits are given in Tables 4.1 and 4.2 below. As a digital device, the DUT is considered as a Class B device.

Table 4.1. Radiated Emission Limits (FCC: 15.33, 15.35, 15.109).  
(Digital Class B)

Freq. (MHz)	$E_{lim}$ (3m) $\mu$ V/m	$E_{lim}$ dB( $\mu$ V/m)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-2000	500	54.0

Note: Average readings apply above 1000 MHz (1 MHz BW)  
Quasi-Peak readings apply to 1000 MHz (120 kHz BW)

## 5.2 Outdoor Measurements

After the chamber measurements, the emissions were re-measured on the outdoor 3-meter site at fundamental and harmonics up to 1 GHz using tuned dipoles and/or the high frequency bicone. Photographs in Appendix (at end of this report) show the DUT on the open in site table (OATS).

## 5.3 Computations and Results

To convert the dBm measured on the spectrum analyzer to dB( $\mu$ V/m), we use expression

$$E_3(\text{dB}\mu\text{V/m}) = 107 + P_R + K_A - K_G + K_E$$

where  $P_R$  = power recorded on spectrum analyzer, dB, measured at 3m  
 $K_A$  = antenna factor, dB/m  
 $K_G$  = pre-amplifier gain, including cable loss, dB  
 $K_E$  = pulse operation correction factor, dB (see 6.1)

When presenting the data, at each frequency the highest measured emission under all of the possible orientations is given. Computations and results are given in Table 5.1. There we see that the DUT meets the limit by 0.9 dB.

## 6. Other Measurements and Computations

### 6.1 Correction For Pulse Operation

When the transmitter is operating, it transmits continuous FM signal. See Figure 6.1. The duty factor for such is

$$K_E = 100 / 100 \text{ ms} = 1.00 \text{ or } 0.0 \text{ dB.}$$

### 6.2 Emission Spectrum

Using bicone antenna, emission spectrum was recorded and is shown in Figure 6.2. Note, there are substantial digital emissions present which are not subject to FCC regulations.

We also wish to point out that there is a turn-on "chirp" emission when the device is powered up. The VCO starts from 82 MHz and steps up to the programmed operating frequency. This emission is at the same level (peak measurement) as the operating emission level. For compliance with FCC regulations, this turn-on emission was not considered.

### 6.3 Bandwidth of the Emission Spectrum

The measured spectrum of the signal is shown in Figure 6.3. The allowed bandwidth is 200 kHz. From the plots we see that in the worst case, the bandwidth is 128.0 kHz at 97.5 MHz. The 88.1 MHz and the 107.9 MHz plots show that data the "band-edge" requirements are met.

### 6.4 Effect of Supply Voltage Variation

The DUT has been designed to be powered by 12 VDC battery. For this test, the battery was replaced by a laboratory variable power supply. Relative power radiated was measured at the fundamental (97.5 MHz) as the voltage was varied from 10.5 to 18 volts. The emission variation is shown in Figure 6.4.

### 6.5 Input Voltage at Battery Terminals

Voltage = 12.0 VDC

Current = 195 mADC

The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, Michigan 48109-2122  
(734) 647-1792

**Table 5.1 Highest Radiated Emissions Measured**

Delphi/Delco FM Tx; FCC/IC											
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3 dBμV/m	E3lim dBμV/m	Pass dB	Comments
1	107.9	Dip	H	-54.0	Pk	9.2	25.2	37.0	48.0	11.0	end
2	107.9	Dip	V	-47.7	Pk	9.2	25.2	43.3	48.0	4.7	side
3	215.8	SBic	H,V	-72.7	Pk	15.5	23.7	26.1	43.5	17.4	max. all, ambient
4	323.7	SBic	H,V	-75.2	Pk	19.2	22.3	28.6	46.0	17.4	max. all, ambient
5	431.6	SBic	H,V	-88.4	Pk	21.8	21.0	19.3	46.0	26.7	max. all, ambient
6	539.5	SBic	H,V	-83.9	Pk	23.8	19.9	27.0	46.0	19.0	max. all, ambient
7	647.4	SBic	H,V	-77.0	Pk	25.5	18.9	36.6	46.0	9.4	max. all, ambient
8	755.3	SBic	H,V	-88.6	Pk	26.9	18.1	27.2	46.0	18.8	max. all, noise
9	863.2	SBic	H,V	-73.2	QP	28.1	17.4	44.5	46.0	1.5	max. all, ambient
10	971.1	SBic	H,V	-87.9	Pk	29.1	16.3	31.9	54.0	22.1	max. all, noise
11	1079.0	Horn	H	-70.0	Pk	19.8	28.1	28.7	54.0	25.3	max. all, noise
12											
13	97.5	Dip	H	-56.5	Pk	8.3	25.3	33.4	48.0	14.6	side
14	97.5	Dip	V	-43.2	Pk	8.3	25.3	46.7	48.0	1.3	flat
15	195.0	SBic	H,V	-83.3	Pk	14.6	24.0	14.3	43.5	29.2	max. all
16	292.5	SBic	H,V	-75.3	Pk	18.2	22.7	27.2	46.0	18.8	max. all
17	390.0	SBic	H,V	-87.0	Pk	20.9	21.5	19.3	46.0	26.7	max. all, noise
18	487.5	SBic	H,V	-88.1	Pk	22.9	20.4	21.4	46.0	24.6	max. all, noise
19	585.0	SBic	H,V	-88.7	Pk	24.5	19.4	23.4	46.0	22.6	max. all, noise
20	682.5	SBic	H,V	-88.5	Pk	25.9	18.6	25.8	46.0	20.2	max. all, noise
21	780.0	SBic	H,V	-88.7	Pk	27.1	17.9	27.5	46.0	18.5	max. all, noise
22	877.5	SBic	H,V	-75.1	Pk	28.2	17.2	42.9	46.0	3.1	max. all, ambient
23	975.0	SBic	H,V	-88.0	Pk	29.2	16.3	31.9	54.0	22.1	max. all, noise
24											
25	88.1	Dip	H	-55.6	Pk	7.3	25.5	33.3	48.0	14.7	side
26	88.1	Dip	V	-41.8	QP	7.3	25.5	47.1	48.0	0.9	flat, end
27	176.2	SBic	H,V	-70.1	Pk	15.2	24.2	27.8	43.5	15.7	max. all, ambient
28	264.3	SBic	H,V	-76.3	Pk	18.6	23.1	26.3	46.0	19.7	max. all
29	352.4	SBic	H,V	-84.9	Pk	21.1	22.0	21.2	46.0	24.8	max. all, noise
30	440.5	SBic	H,V	-88.6	Pk	23.0	20.9	20.5	46.0	25.5	max. all, noise
31	528.6	SBic	H,V	-87.5	Pk	24.6	20.0	24.1	46.0	21.9	max. all, noise
32	616.7	SBic	H,V	-88.3	Pk	25.9	19.2	25.4	46.0	20.6	max. all, noise
33	704.8	SBic	H,V	-88.5	Pk	27.0	18.5	27.1	46.0	18.9	max. all, noise
34	792.9	SBic	H,V	-87.5	Pk	28.0	17.8	29.7	46.0	16.3	max. all, noise
35	881.0	SBic	H,V	-75.9	QP	28.9	17.2	42.8	46.0	3.2	max. all, ambient
36											
37											
38											
39											
40											

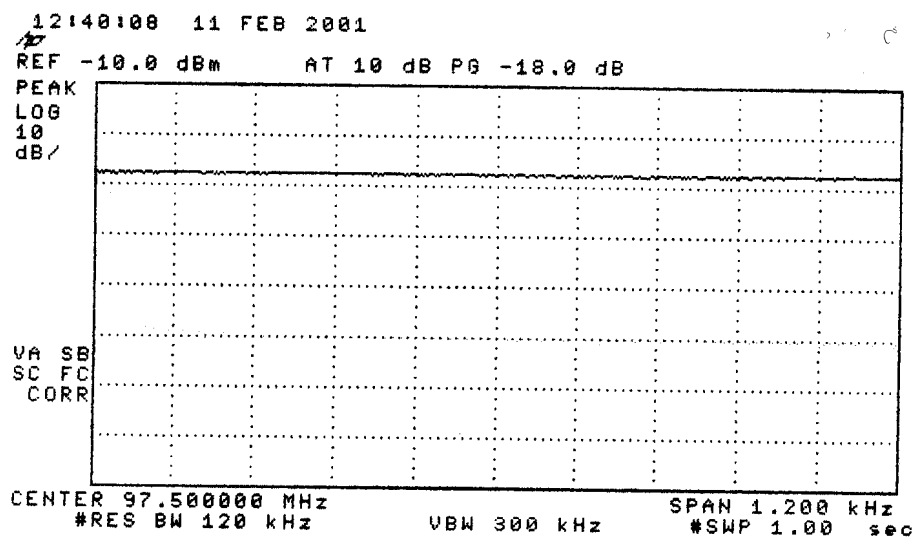


Figure 6.1. Transmissions modulation characteristics; CW-FM emission.

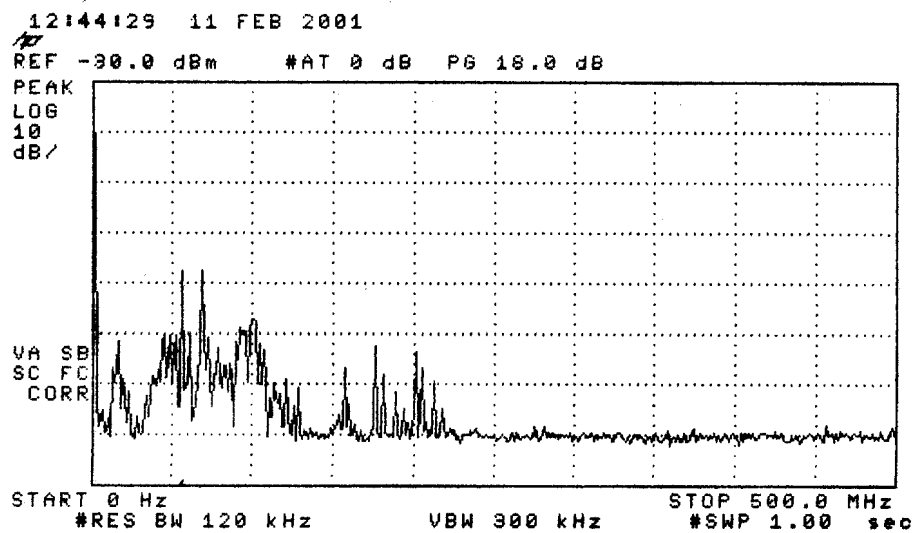
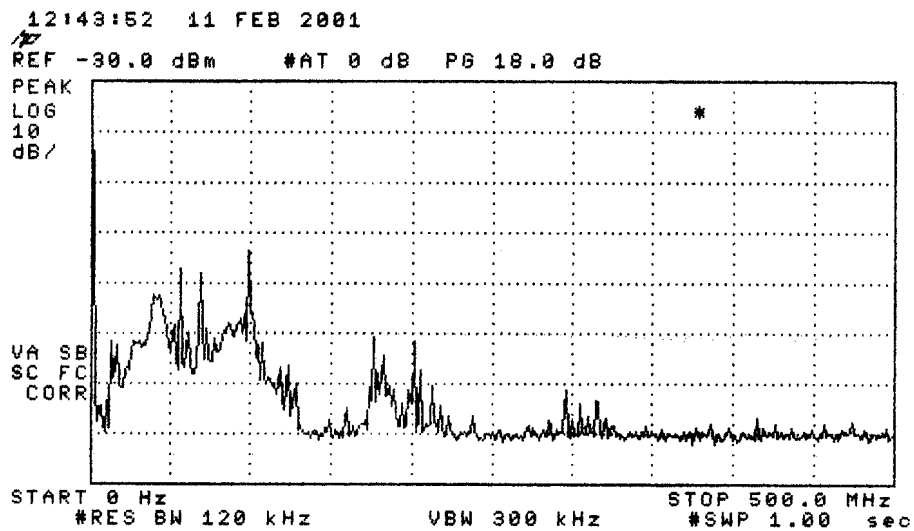


Figure 6.2. General emission spectrum of the DUT tuned to 97.5 MHz.  
Top - composite, bottom - background.

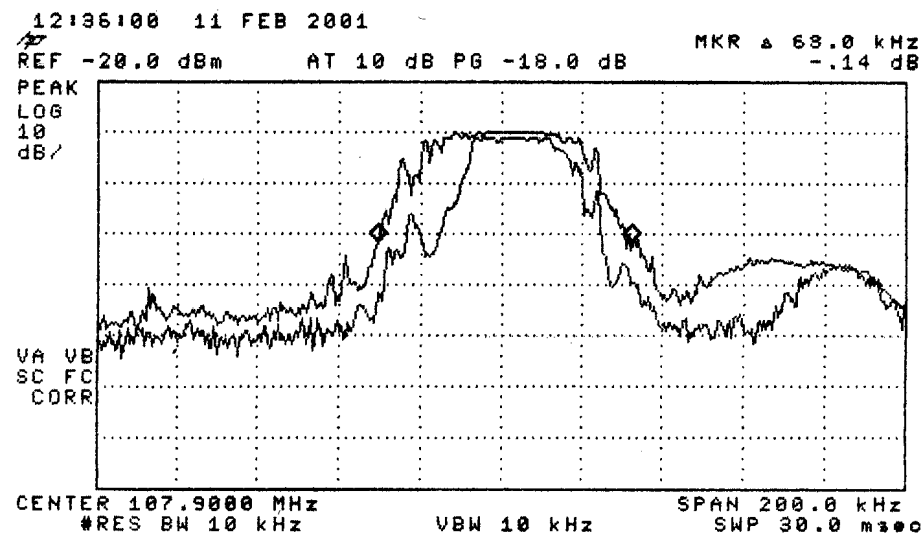
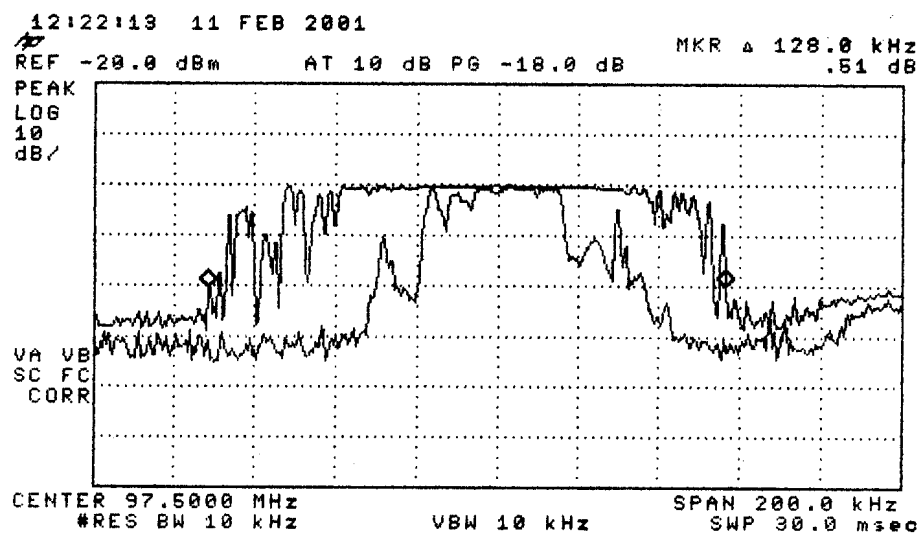
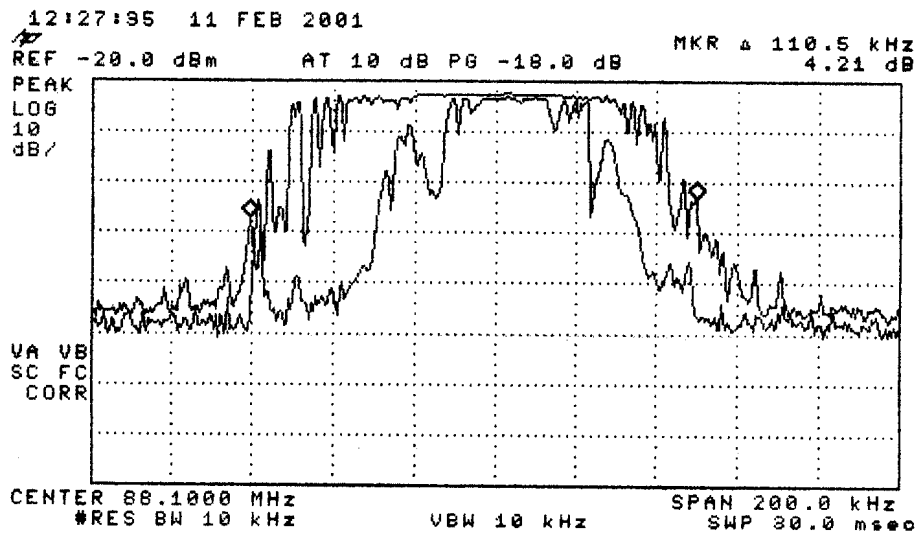


Figure 6.3. Measured (88, 108 MHz) band-edge spectrum at lowest (88.1 MHz), mid (97.5 MHz), and highest (107.9) channels.



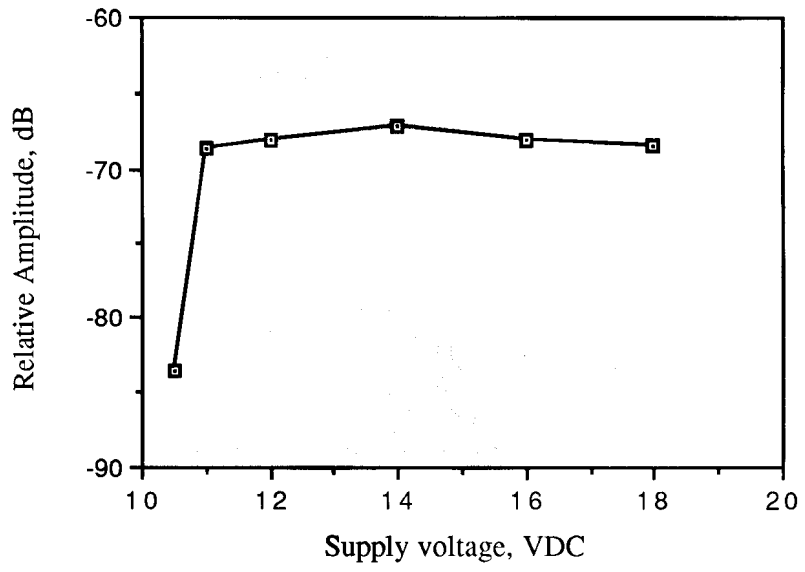


Figure 6.4. Relative emission at 97.5 MHz vs. supply voltage .