

TABLE OF CONTENTS

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA

FCC ID: L2M49433

TEST REPORT CONTAINING:

PAGE	1.....	TEST EQUIPMENT LIST & TEST PROCEDURE
PAGE	2.....	TEST PROCEDURE CONTD.
PAGE	3.....	RADIATION INTERFERENCE TEST DATA
PAGE	4.....	CALCULATION OF DUTY CYCLE
PAGE	5.....	DUTY CYCLE PLOT - SMALL PULSES
PAGE	6.....	DUTY CYCLE PLOT - LARGE PULSES
PAGE	7.....	DUTY CYCLE PLOT
PAGE	8.....	OCCUPIED BANDWIDTH
PAGE	9.....	OCCUPIED BANDWIDTH PLOT

EXHIBIT ATTACHMENTS:

EXHIBIT	1.....	BLOCK DIAGRAM
EXHIBIT	2.....	SCHEMATIC
EXHIBIT	3A-3G.....	INSTRUCTION MANUAL
EXHIBIT	4.....	FCC ID LABEL SAMPLE & SKETCH OF LOCATION
EXHIBIT	5.....	TEST SET UP PHOTO
EXHIBIT	6A.....	EXTERNAL PHOTO - FRONT VIEW
EXHIBIT	6B.....	EXTERNAL PHOTO - REAR VIEW
EXHIBIT	7A.....	INTERNAL PHOTO - COMPONENT VIEW
EXHIBIT	7B.....	INTERNAL PHOTO - COPPER VIEW
EXHIBIT	8.....	CIRCUIT DESCRIPTION
EXHIBIT	9.....	LETTER FROM APPLICANT CONFIRMING MODIFICATIONS

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA

FCC ID: L2M49433

REPORT #: T:\CUS\O\OMEGA\642U0\642U0RPT.DOC

PAGE: TABLE OF CONTENTS LIST

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA

FCC ID: L2M49433

TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
2. Biconnical Antenna: Eaton Model 94455-1, S/N 1057
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
4. Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
6. Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
11. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545
13. Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/10/00
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
20. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
21. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without
the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD
C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a prese-
lector. The bandwidth of the spectrum analyzer was 100 kHz with an
appropriate sweep speed. The analyzer was calibrated in dB above a
microvolt at the output of the antenna. The resolution bandwidth was
100KHz and the video bandwidth was 300KHz. The ambient temperature of
the UUT was 79oF with a humidity of 56%.

REPORT #: T:\CUS\O\OMEGA\642U0\642U0RPT.DOC

PAGE #: 1

TEST PROCEDURES CONTD.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings were converted to average readings based on the duration of "ON" time.

Measurements were made by TIMCO ENGINEERING INC. at the registered open field test site located at 849 N.W. State Road 45, Newberry, FL 32669.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA
FCC ID: L2M49433
REPORT #: T:\CUS\O\OMEGA\642U0\642U0RPT.DOC
PAGE #: 2

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA

FCC ID: L2M49433

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.231

REQUIREMENTS:

Fundamental Frequency MHz	Field Strength of Fundamental dBuV	Field Strength of Harmonics and Spurious (dBuV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

THE LIMIT FOR AVERAGE FIELD STRENGTH dBuV/m FOR THE FUNDAMENTAL FREQUENCY= 80.90 dBuV/m dBuV/m. NO FUNDAMENTAL IS ALLOWED IN THE RESTRICTED BANDS.

THE LIMIT FOR AVERAGE FIELD STRENGTH dBuV/m FOR THE HARMONICS AND SPURIOUS FREQUENCIES = 60.90 dBuV/m dBuV/m. SPURIOUS IN THE RESTRICTED BANDS MUST BE LESS THAN 54dBuV/m OR 15.209.

TEST DATA:

EMISSION FREQ. MHz	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	PEAK FIELD STRNGTH dBuV/m	AVERAGE FIELD STRNGTH dBuV/m	MARGIN dB	ANT.
436.50	57.70	1.60	17.84	77.14	70.69	10.21	H
873.10	32.20	2.90	23.88	58.98	52.53	8.37	V
1309.60R	25.70	1.00	25.24	51.94	45.49	8.51	V
1746.20	18.90	1.00	26.98	46.88	40.44	20.46	V
2182.70	9.80	1.06	28.46	39.31	32.87	28.03	V
2619.30	1.80	1.12	29.55	32.47	26.02	34.88	V

SAMPLE CALCULATION OF LIMIT @ 303 MHz:

(470 - 260)Mhz = 210 MHz
(12500 - 3750)uV/m = 8750 uV/m
8750uV/m/210MHz = 41.67 uV/m/MHz
(303-260)MHz = 43 MHz
43 MHz * 41.67 uV/m/MHz = 1791.81 uV/m
(1791.81 + 3750)uV/m = 5541.81 uV/m limit @ 303 MHz

The transmitter ceases transmitting when the button is released.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: JOSEPH SCOGLIO

DATE TESTED: DECEMBER 18, 2000

REPORT #: T:\CUS\O\OMEGA\642U0\642U0RPT.DOC

PAGE #: 3

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA

FCC ID: L2M49433

CALCULATION OF DUTY CYCLE:

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero(0) frequency span. A plot is then made of the pulse train with a sweep time of 100milliseconds. This sweep determines the duration of the pulse train, which in this case is 30.40 milliseconds. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100millisecond Plot the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the UUT is on within 100milliseconds. If the pulse train is longer than 100milliseconds then this number is multiplied by 100 to determine the percentage ON TIME. If the pulse train is less than 100milliseconds the total on-time is divided by the length of the pulse train and then multiplied by 100 to determine the percentage ON TIME. In this case there were 12 pulses 880.0milliseconds long and 14pulses 280.0milliseconds long for a total of 30.40milliseconds on time within either the 100milliseconds or the pulse train. The average field strength is determined by multiplying the peak field strength by the percent on time. In this case the percentage ON time was 47.6%percent.

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA

FCC ID: L2M49433

REPORT #: T:\CUS\O\OMEGA\642U0\642U0RPT.DOC

PAGE #: 4

14 SHORT PULSES
AT 280 MILLISECONDS

MKR Δ 280.0 μ sec
-0.50 dB


hp

REF -30.0 dBm ATTEN 0 dB +0 dB

10 dB/

OFFSET
-20.0
dB

DL
-80.0
dBm

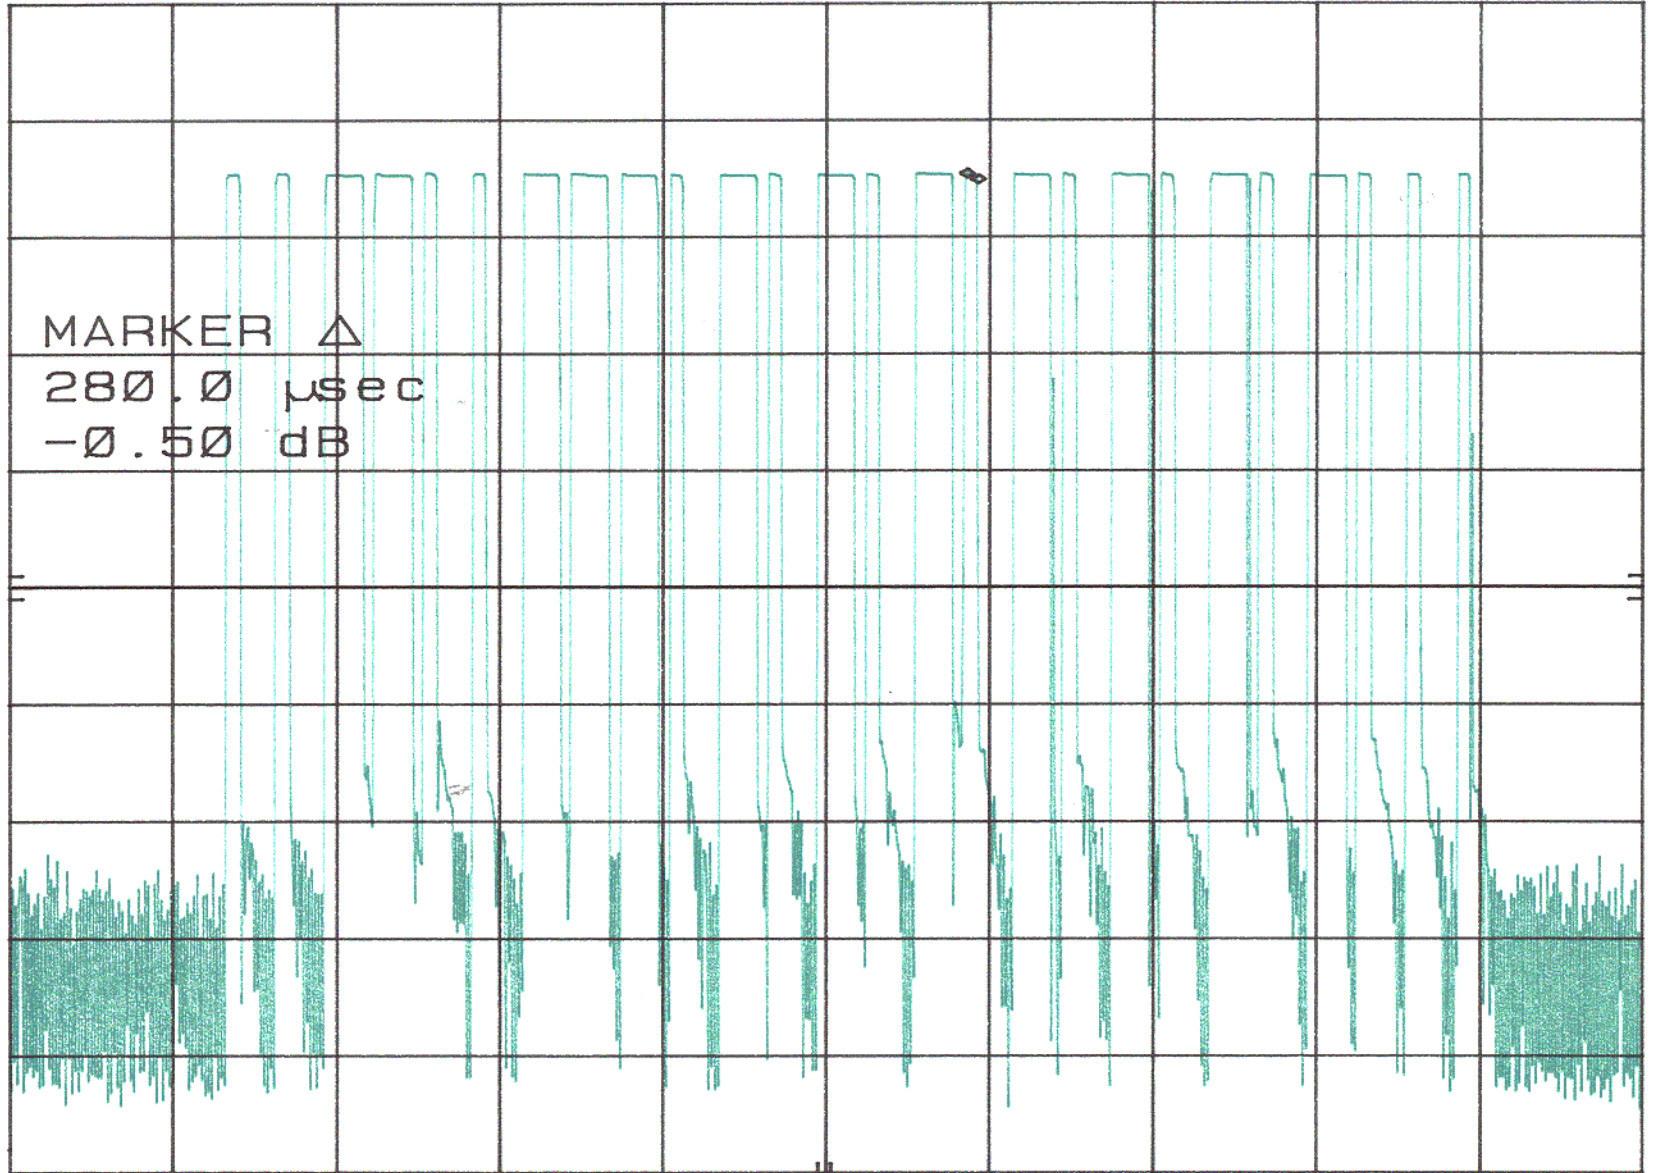

CENTER 433.970 000 MHz SPAN 0 Hz
RES BW 100 kHz (i) VBW 300 kHz SWP 40.0 msec

12 LONG PULSES AT 880.0 MILLISECONDS

MKR Δ 880.0 μ sec
-0.40 dB


hp REF -30.0 dBm ATTEN 0 dB +0 dB

10 dB/

OFFSET
-20.0
dB

DL
-80.0
dBm

MARKER Δ
880.0 μ sec
-0.40 dB

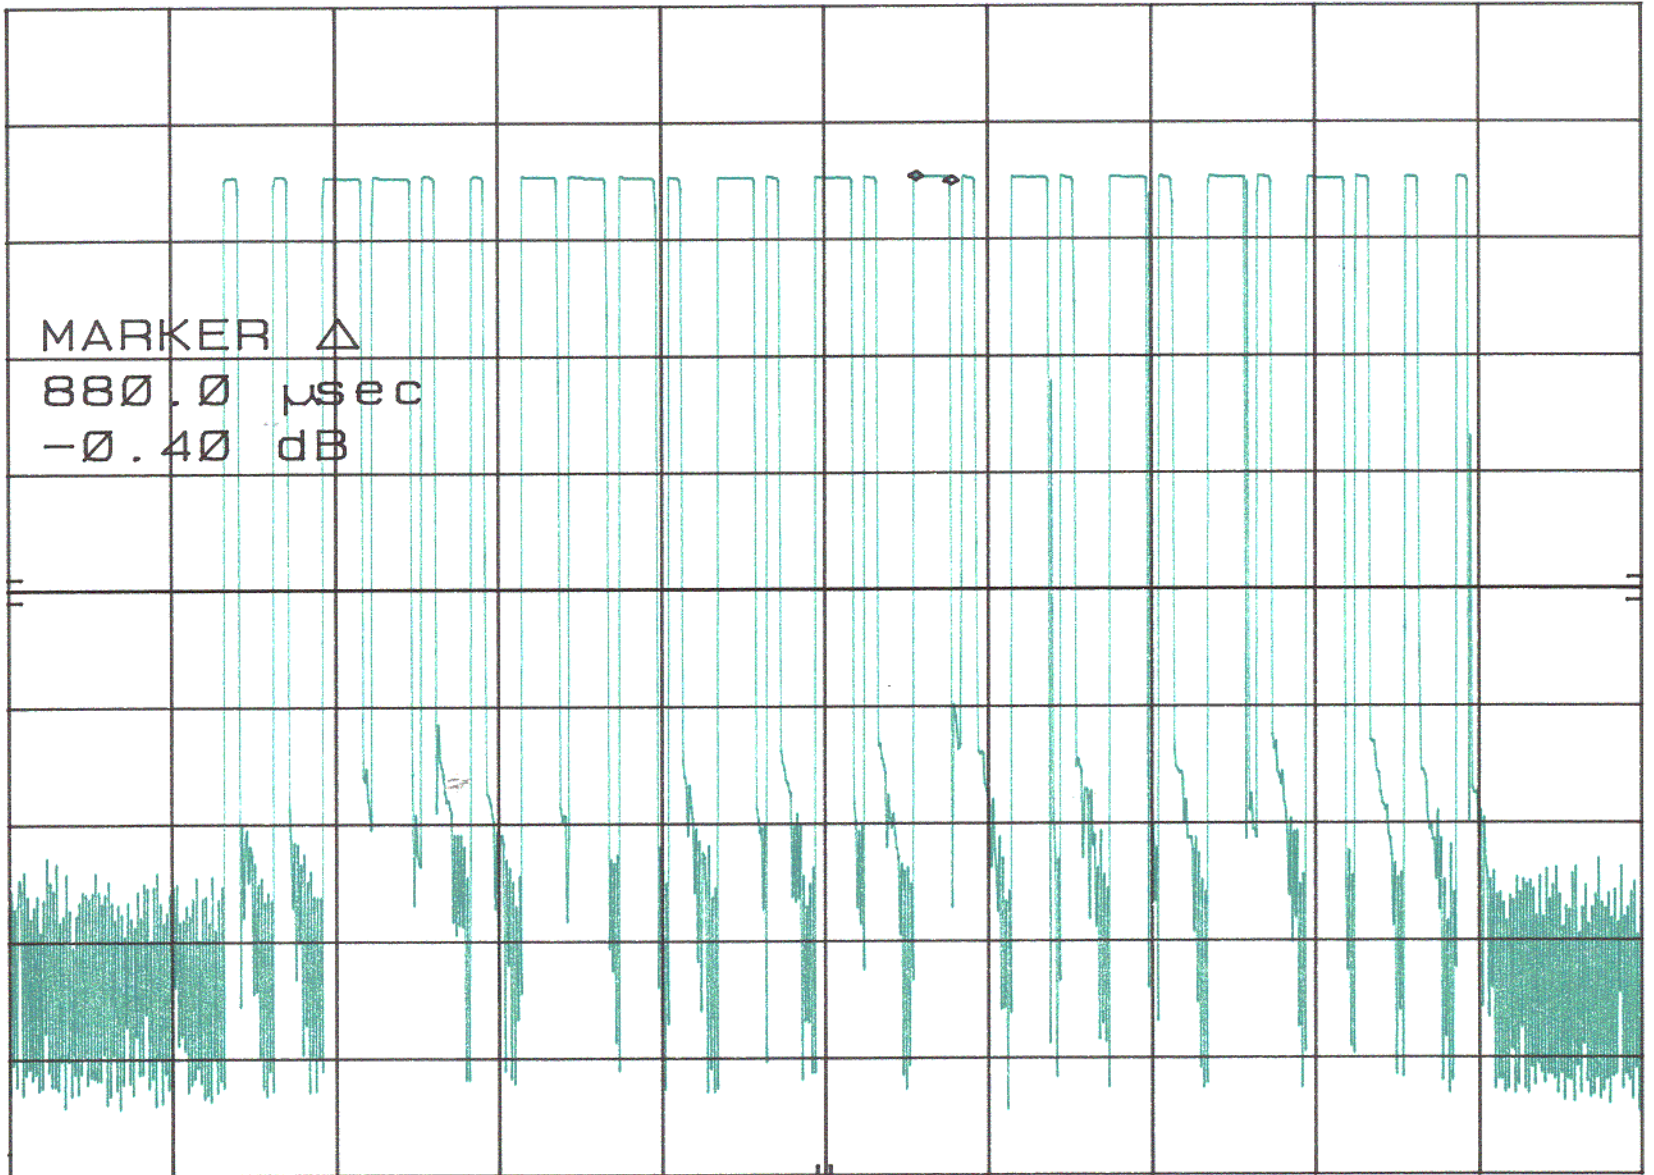

CENTER 433.970 000 MHz

RES BW 100 kHz (i) VBW 300 kHz

SPAN 0 Hz

SWP 40.0 msec

PULSE TRAIN PERIOD 30.40 MILLISECONDS


MKR Δ 30.40 msec
-0.20 dB

hp REF -30.0 dBm ATTEN 0 dB +0 dB

10 dB/

OFFSET
-20.0
dB

DL
-80.0
dBm

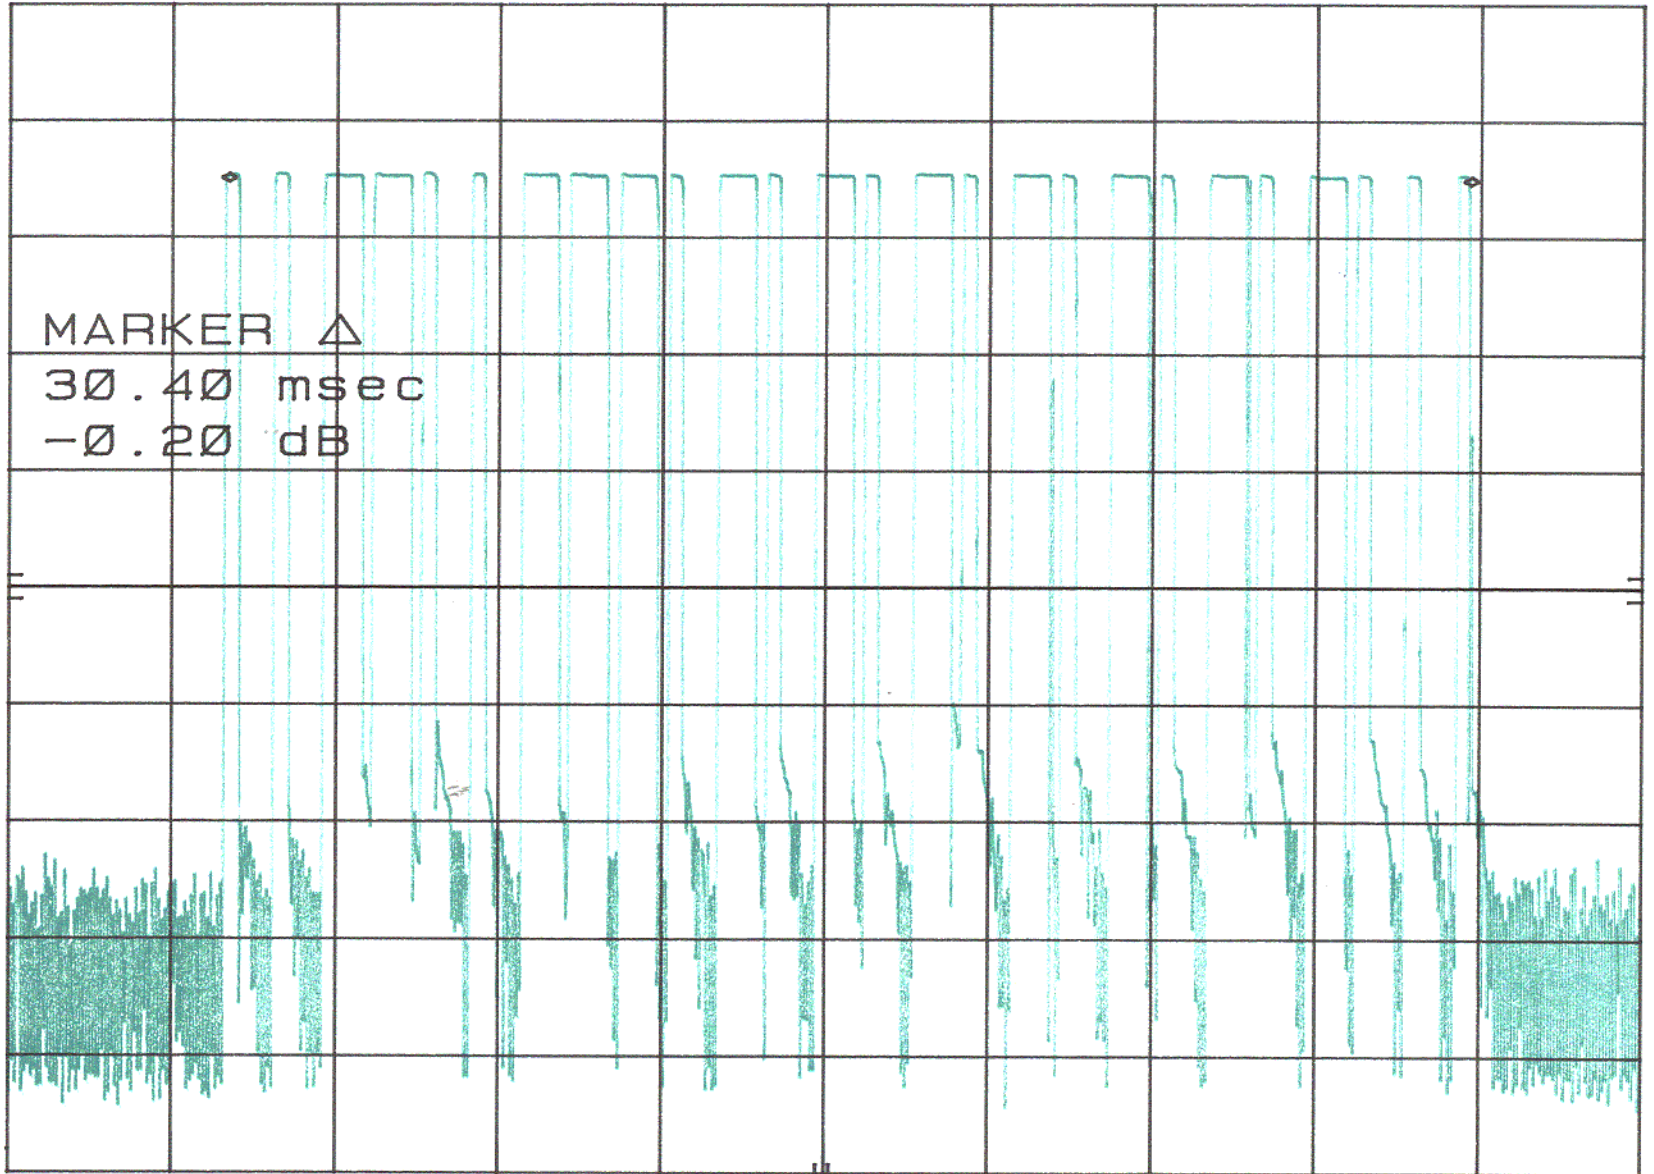

CENTER 433.970 000 MHz

RES BW 100 kHz (i) VBW 300 kHz

SPAN 0 Hz

SWP 40.0 msec

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA

FCC ID: L2M49433

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.231(C)

REQUIREMENTS: The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

$$436.50 \text{ MHz} * .0025 = 1.09125 \text{ MHz}$$
$$1.09125 \text{ MHz} / 2 = +/- 545.625 \text{ KHz}$$

THE GRAPH ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the plot in exhibit 9 was generated. The vertical scale is set to 10 dB per division: the horizontal scale is set to 100 kHz per division.

TEST RESULTS: The unit meets the FCC requirements.

PERFORMED BY: JOSEPH SCOGLIO

DATE: DECEMBER 18, 2000

APPLICANT: OMEGA RESEARCH & DEVELOPMENT, INC.
D/B/A EXCALIBUR OF AMERICA

FCC ID: L2M49433

REPORT #: T:\CUS\O\OMEGA\642U0\642U0RPT.DOC

PAGE #: 8

MKR 433.977 08 MHz

67.20 dB μ V


hp

REF 68.0 dB μ V ATTEN 10 dB +0 dB

10 dB/

OFFSET
-20.0
dB

DL
42.0
dB μ V

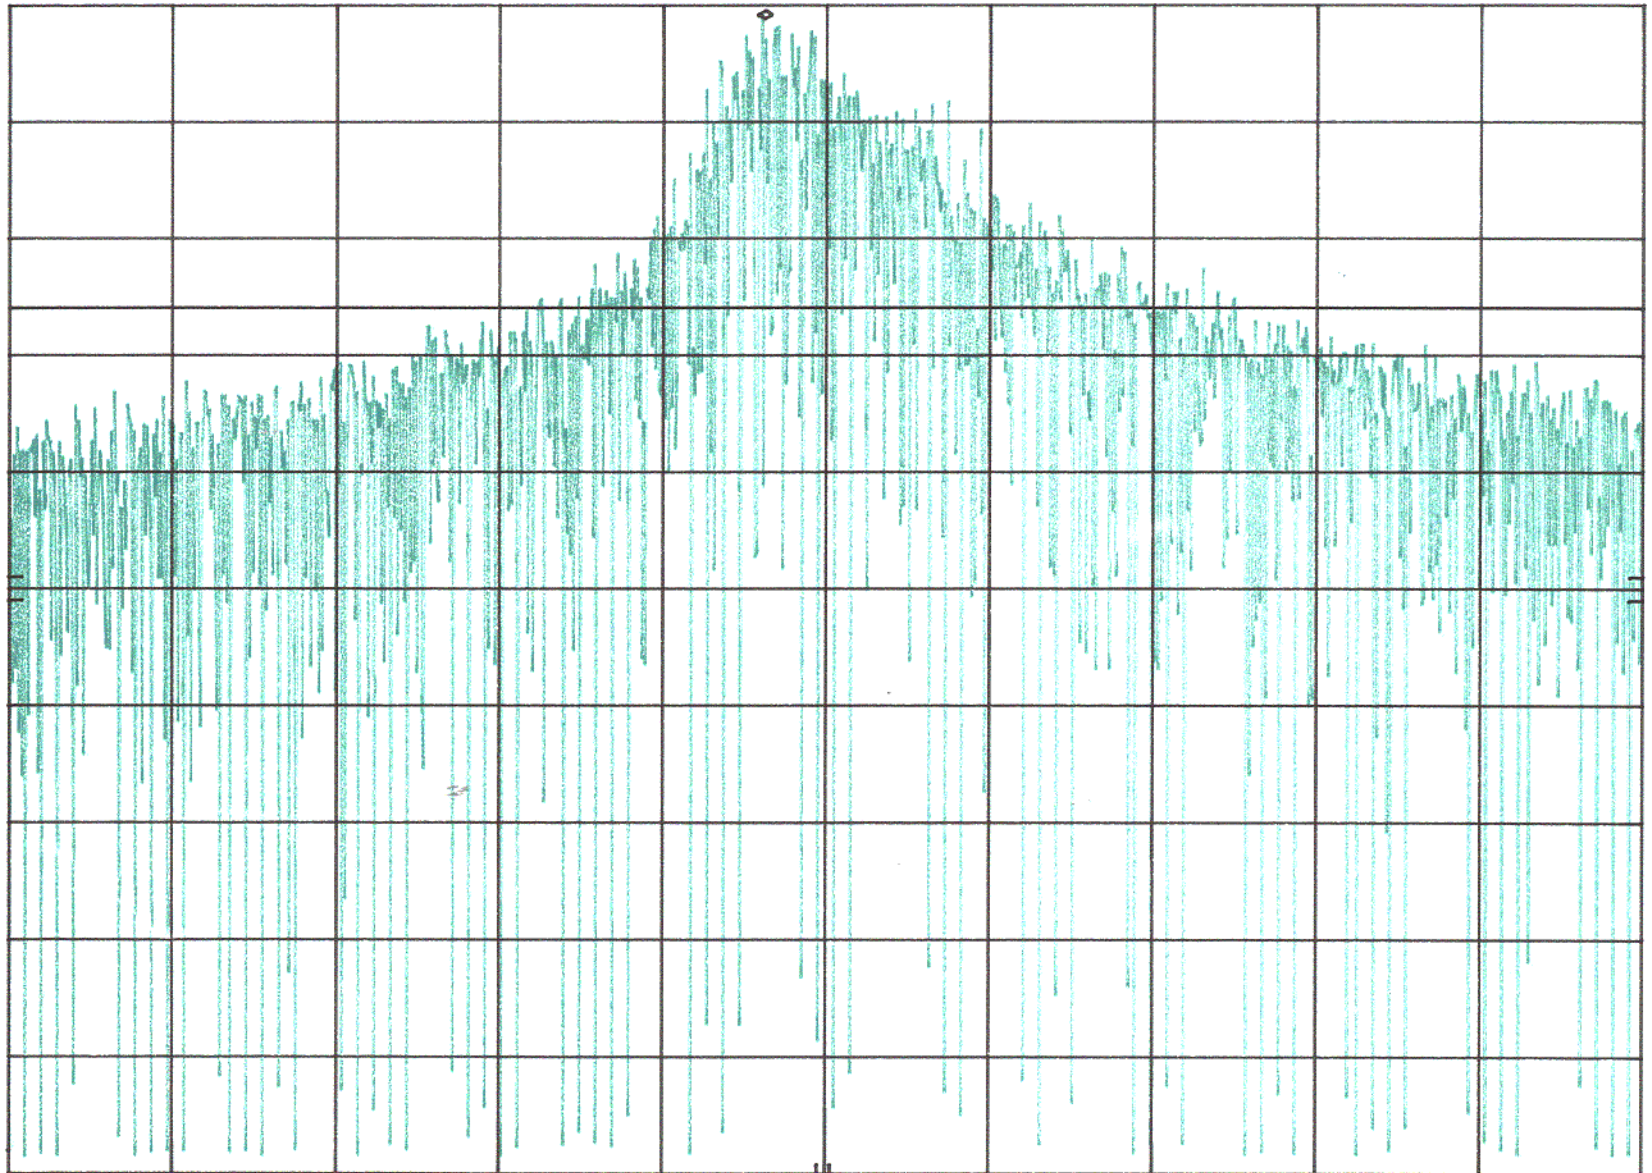

CENTER 433.978 9 MHz

RES BW 300 Hz (i) VBW 100 kHz

SPAN 50.0 kHz

SWP 4.00 sec