FCC ID: L2V-STX2-1

U.S. Technologies, Inc. FCC Part 25 Certification

Report Number: 05-0141 Issue Date: July 12, 2005

Customer: Axonn Corporation

Model: GENSTXII

2.12 Emissions from Mobile Earth Stations for Protection of Aeronautical Radionavigation-Satellite Service. (FCC Section 25.216)

25.216c(1) Emissions from the EUT were evaluated from 1559 MHz – 1605 MHz and did not exceed the limit at -70dBW/MHz, averaged over 20 milliseconds.

25.216c(2) Emissions from the EUT were evaluated from 1559 MHz – 1605 MHz and did not exceed the limit at -80dBW/MHz, averaged over 20 milliseconds.

25.216g(1) Emissions from the EUT were evaluated from 1605 MHz – 1610 MHz and did not exceed the limits ranging from –70 dBW/MHz at 1605 MHz to –10dBW/MHz at 1610 MHz, averaged over 2 milliseconds.

25.216g(2) Emissions from the EUT were evaluated from 1605 MHz – 1610 MHz and did not exceed the limits ranging from -80 dBW/MHz at 1605 MHz to –20dBW/MHz at 1610 MHz, averaged over 2 milliseconds.

25.216(i) Emissions from the EUT were evaluated from 1559 MHz – 1605 MHz and did not exceed –80 dBW/MHz over any 2 millisecond active transmission interval. (carrier off)

Emissions were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminal with the Resolution Bandwidth set to 1 MHz. Results are shown on Figures 8a -8c.

FCC Part 25 Certification

Issue Date: July 12, 2005

Report Number:

05-0141 Customer:


Axonn Corporation

Model:

GENSTXII

Figure 8a. **Emissions from Mobile Earth Stations for Protection** of Aeronautical Radionavigation-Satellite Service (25.216(c)(1))

Limit = -70 dBW/MHz + 4 dBi (-44 dBm)

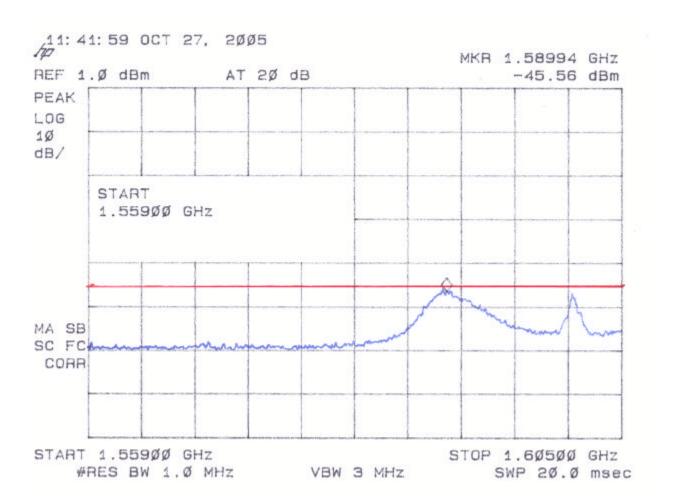

Measured Value = -45.56 + 0.25 = -45.31

FCC Part 25 Certification


Report Number: 05-0141 Issue Date: July 12, 2005

Customer: **Axonn Corporation**

Model: **GENSTXII**

Figure 8b. **Emissions from Mobile Earth Stations for Protection** of Aeronautical Radionavigation-Satellite Service(25.216(c)(2))

Limit = -80 dBW + 4 dBi = -54 dBm

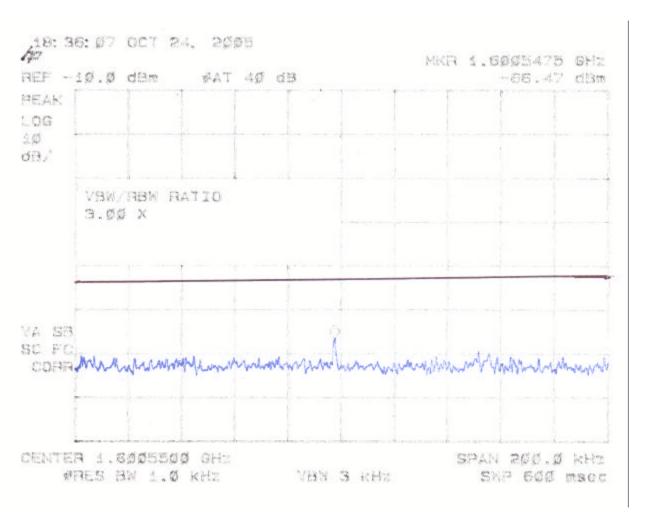

Measured Value is -66.47 + 0.25 (cable loss) = -66.22

FCC Part 25 Certification

Issue Date: July 12, 2005

Report Number: 05-0141


Customer: Axonn

Axonn Corporation

Model:

GENSTXII

Figure 8c.
Emissions from Mobile Earth Stations for Protection
of Aeronautical Radionavigation-Satellite Service(25.216(g)(1))

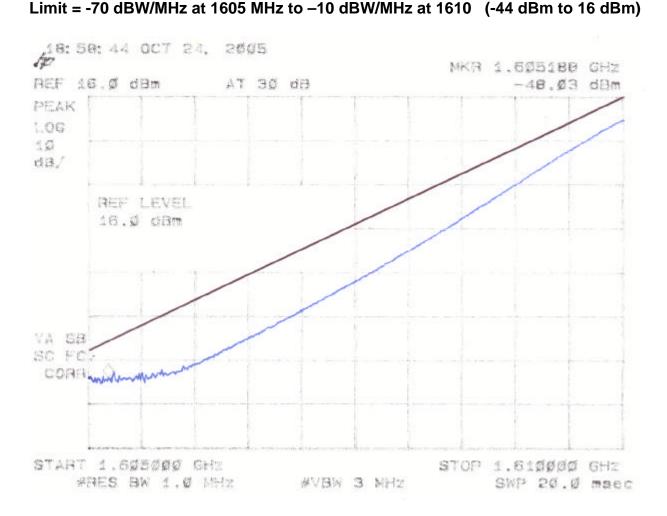

Measured Value is -48.03 + 0.25 (cable loss) = -47.78

U.S. Technologies, Inc. FCC Part 25 Certification


Report Number: 05-0141 Issue Date: July 12, 2005

Customer: Axonn Corporation

Model: GENSTXII

Figure 8d.
Emissions from Mobile Earth Stations for Protection
of Aeronautical Radionavigation-Satellite Service(25.216(g)(2))

Limit = -80 dBW/MHz at 1605 MHz to -20 dBW/MHz at 1610 (-54 dBm to 6 dBm)

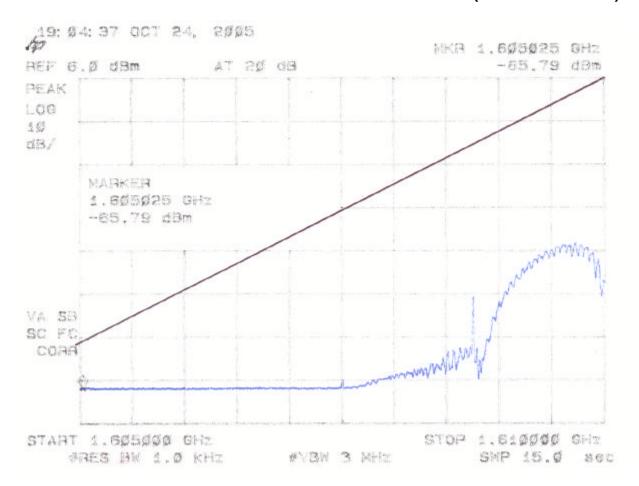

Measured Value is -65.79 + 0.25 (cable loss) = -65.54 dBm

FCC Part 25 Certification


Report Number: 05-0141 Issue Date: July 12, 2005

Customer: Axonn Corporation

Model: GENSTXII

Figure 8e.
Emissions from Mobile Earth Stations for Protection
of Aeronautical Radionavigation-Satellite Service(25.216(i)
(carrier off)

Limit = -80 dBW/MHz + 4 dBi (-54 dBm)

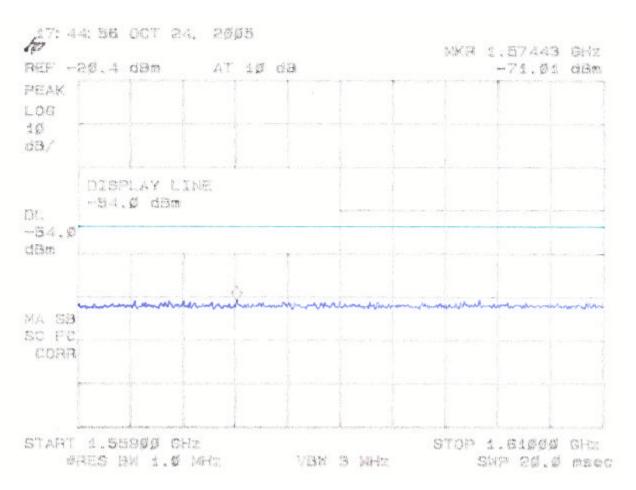

Measured Value is -71.01 + 0.25 (cable loss) = -70.76 dBm