

## STX3 Labeling Specification

This specification applies to the STX3 (2100-0333-01) and all products derived from this assembly either through firmware changes or hardware modifications.

### Label Material

All labels shall be polyimide thermal transfer labels.

Temperature Rating: -40 – 1000°F

Compliance: RoHS, REACH, Restriction use of Halogen IEC 61249-2-21

### Bar Code Label (7450-0143-01)

All units will have applied an **ESN bar code label** which has been generated using the Globalstar STX3 label printer software. **No barcode labels from any other source are to be used.** This label must be applied to the device in the specified location prior to testing on the automated test fixture. See Figure 1 for the required location of the label.

Label Physical Requirements

All labels will meet the following requirements:

- Label dimensions: 13mm x 24.5mm Max (or equivalent standard label size)
- Label Material: polyimide material
- Label Color: White
- Font Color: Black
- Location: See Figure 1

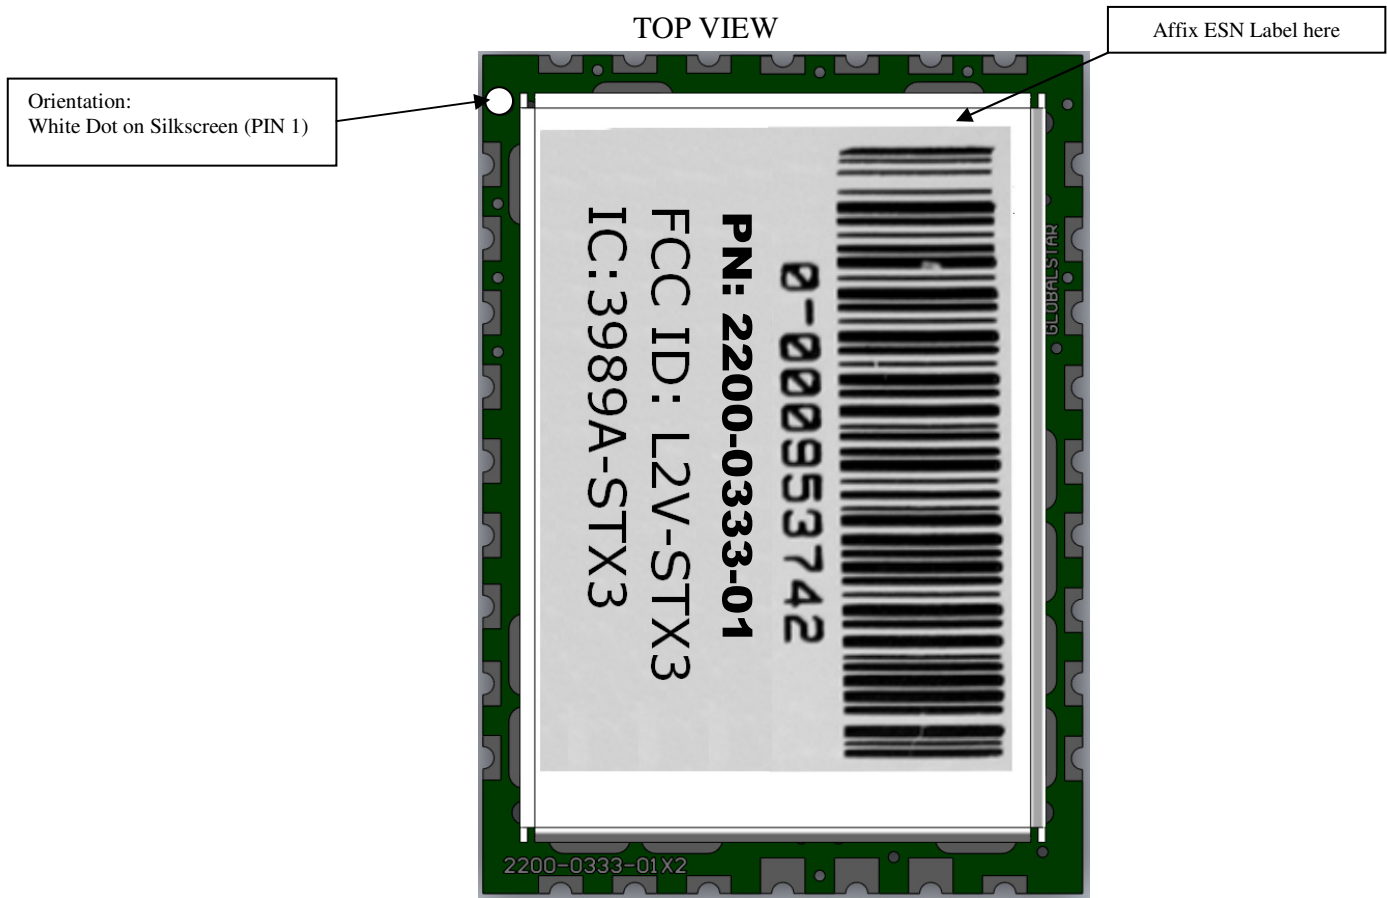


Figure 1  
STX3 Label Locations