

SECTION 2

TEST AND MEASUREMENTS

TEST AND MEASUREMENTS

2.1 Configuration of Tested System

Prepared in accordance with the requirements of the FCC Rules and Regulations Part 2 & 25. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious emissions are shown in Figure 2.

2.2 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and registered by the FCC under Registration Number 91037. Additionally, this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file IC2982.

2.3 Test Equipment

Table 2 describes test equipment used to evaluate this product.

2.4 Modifications

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 25 limits for the transmitter portion of the EUT.

FIGURE 1
TEST CONFIGURATION

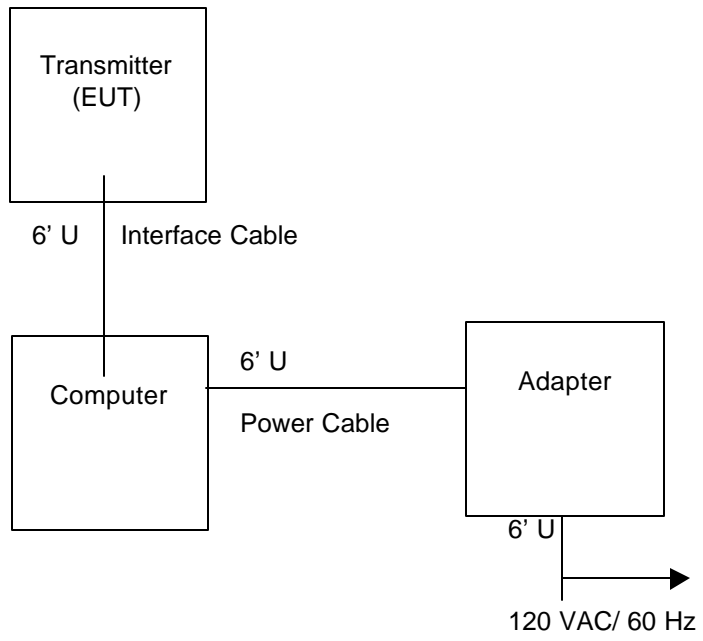


FIGURE 2a

Photograph(s) for Spurious Emissions



FIGURE 2b

Photograph(s) for Spurious Emissions (Cont.)

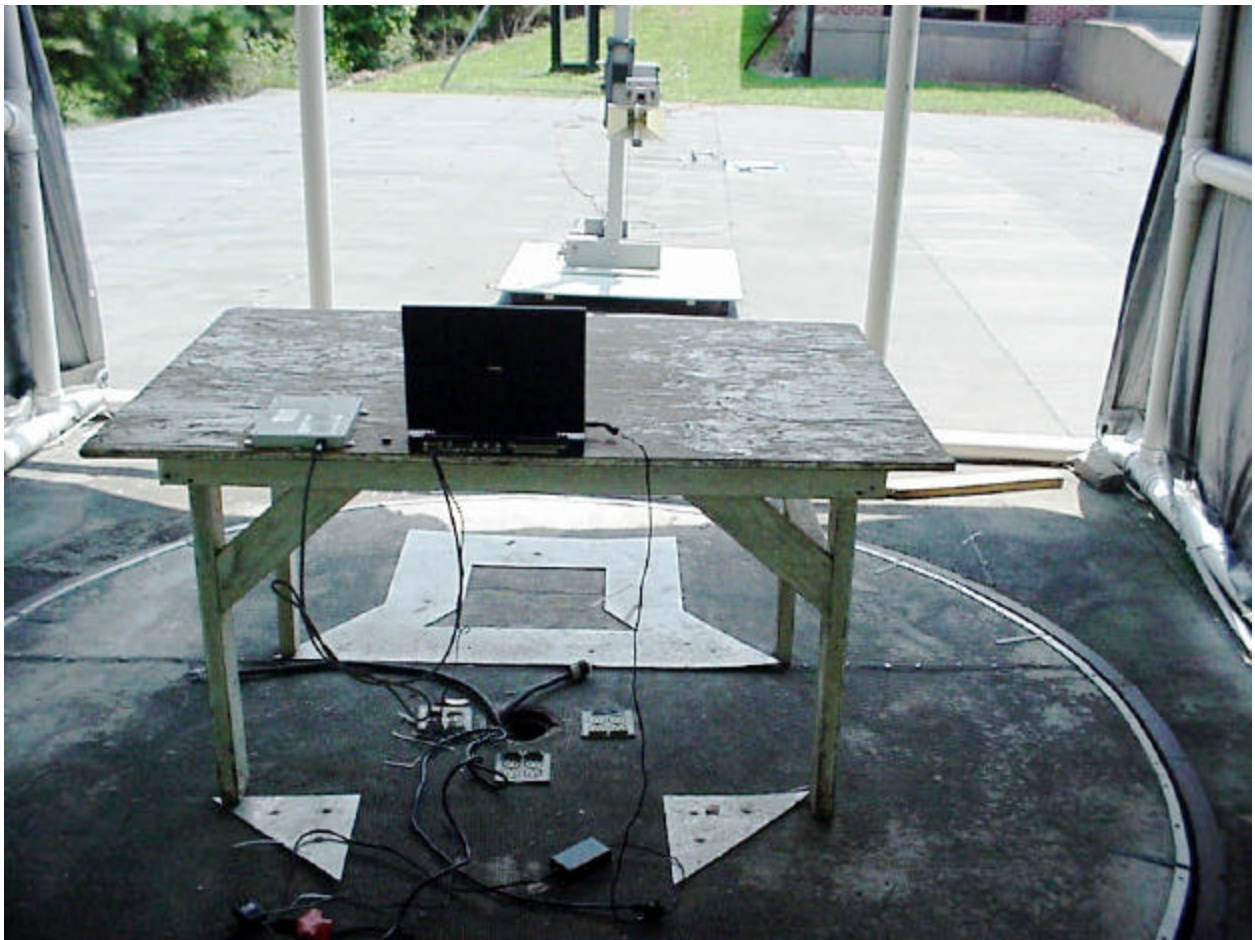


TABLE 1**EUT and Peripherals**

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Transmitter Axonn, L.L.C. (EUT)	AXTracker with G-STU SENS	None	None	6' U
Computer Dell	Inspiron 3000 TS304	L5956	IIRT530HT	6' U
Adapter Dell	P3831231877T	PA-3	N/A	6' U 120 VAC/ 60 Hz

TABLE 2
TEST INSTRUMENTS

EQUIPMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	8558B	HEWLETT-PACKARD	2332A10055	2/28/03
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	1/16/03
TEST RECEIVER	ESV	ROHDE & SCHWARZ	881485/040	11/21/02
RF PREAMP	8447D	HEWLETT-PACKARD	2944A07436	5/10/03
RF PREAMP	8449B	HEWLETT-PACKARD	3008A00480	5/30/03
LOG PERIODIC ANTENNA	3110	EMCO	3115	7/22/02
LOG PERIODIC ANTENNA	3146	EMCO	3236	12/17/02
LISN (x 2) 8028-50-TS24-BNC	8028	SOLAR ELE.	910494 & 910495	1/10/03
CALCULATION PROGRAM	N/A	N/A	Ver. 5.2	N/A

2.5 Antenna Description

According to Axonn L.L.C., the EUT will incorporate an antenna with +4 dBi gain. Additional information regarding the antenna was not provided.

2.6 RF Power Output (FCC Section 2.1046)

In bands shared coequally with terrestrial radio communications services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station operating in frequency bands between 1 and 15 GHz, shall not exceed the limits below.

For angles of elevation of the horizon greater than 5 degrees there shall be no restriction as to the equivalent isotropically radiated power transmitted by an earth station towards the horizon.

FCC Minimum Standard (FCC Section 25.204 &)

EIRP < +40 dBW in any 4 kHz band for $\theta=0$ degrees

The manufacturer has stated that the EUT has a maximum output power of +22 dBm.

**TABLE 3
RF POWER OUTPUT**

Frequency of Fundamental (MHz)	Measurement (dBm)	Measurement (Watt)
1611.25	21.65	0.146
1618.75	21.94	0.156

Note: Given the output power and antenna gain of +4 dBi, even the direct lobe of radiation meets the FCC's EIRP Requirement for $\theta = 0$ (+40 dBW)

Test Date: August 6, 2002

Tester

Signature:  **me:** David Blethen

Figure 3a.
RF Power Output


15:09:57 AUG 06, 2002

REF 29.0 dBm

AT 20 dB PG -20.0 dB

MKR 1.61108 GHz

21.94 dBm

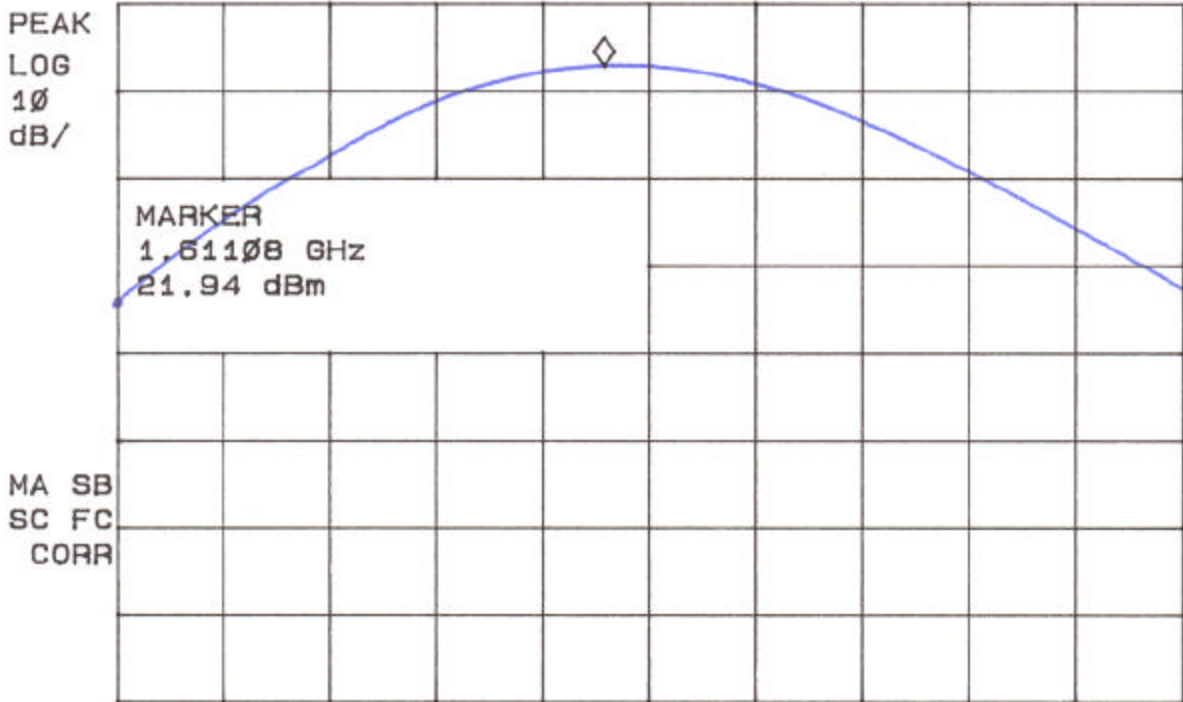

CENTER 1.61150 GHz

#RES BW 3.0 MHz

#VBW 3 MHz

SPAN 10.00 MHz

SWP 20.0 msec

Figure 3b.
RF Power Output

14:07:16 AUG 26, 2002


~~17~~

REF 29.0 dBm

#AT 30 dB PG -10.0 dB

MKR 1.61858 GHz

21.65 dBm

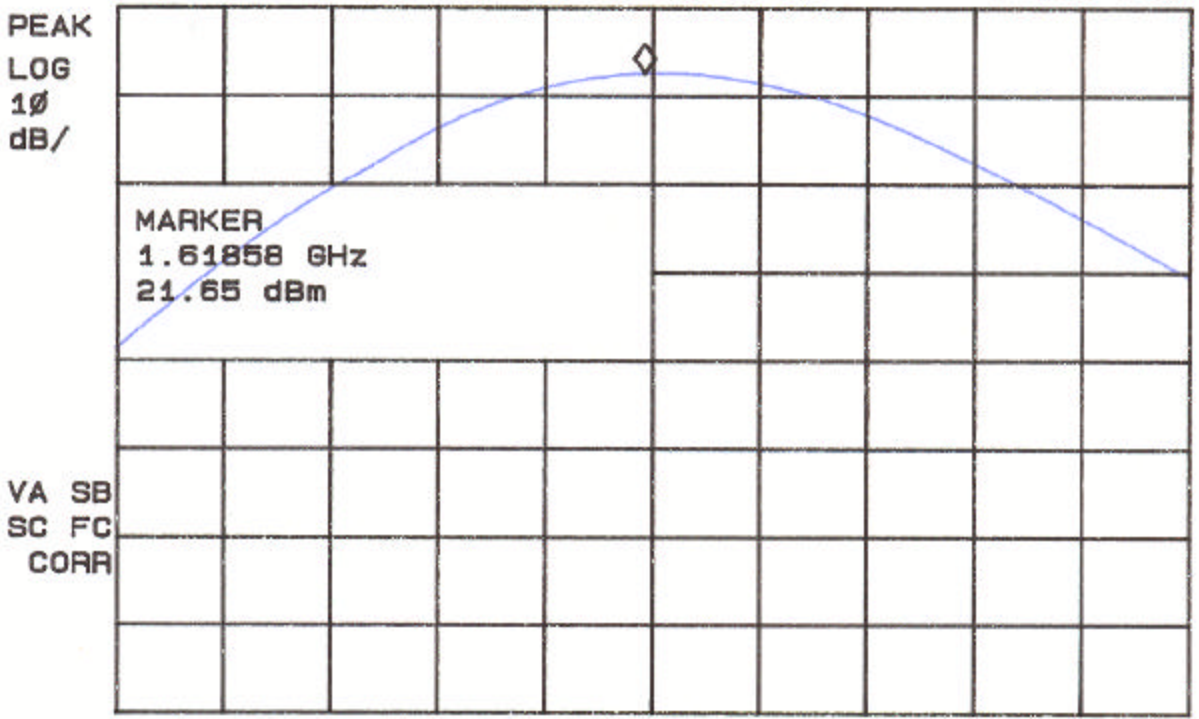

CENTER 1.61865 GHz

#RES BW 3.0 MHz

#VBW 3 MHz

SPAN 10.00 MHz

SWP 20.0 msec

2.7 Modulation Characteristics (FCC Section 2.1047)

Since the device incorporates digital modulation techniques, this information is not necessary.

**Figure 4.
Modulation Characteristics**

The EUT uses digital modulation techniques only which were employed during the tests for occupied bandwidth.

2.8 Occupied Bandwidth (FCC Section 2.1049)

EUT was modulated by its own internal sources. Low and High Channels were tested. The bandwidth of the fundamental was measured using a spectrum analyzer. The results are shown in Figure 5a through Figure 5d. Long sweep times were applied near to the fundamental to ensure a good signal was obtained.

FCC Minimum Standard (FCC Section 25.202(f))

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth (2.5 MHz), at least 25 dB.

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth (2.5 MHz), at least 35 dB.

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), at least
 $43 + 10 \log (P_{\text{Watts}})$ attenuation below the mean power of the transmitter.

For Lowest Channel = $43 + 10 \log (0.1462) = 34.6 \text{ dB}$

For Highest Channel = $43 + 10 \log (0.1563) = 34.9 \text{ dB}$

The following plots show that all emissions were at least 50.4 dB below the fundamental.

Note:

A 3 kHz RBW was used instead. This was deemed to be comparable to 4 kHz RBW.

Figure 5a.

Occupied Bandwidth 50 - 100% From Edge of Authorized Bandwidth - Low

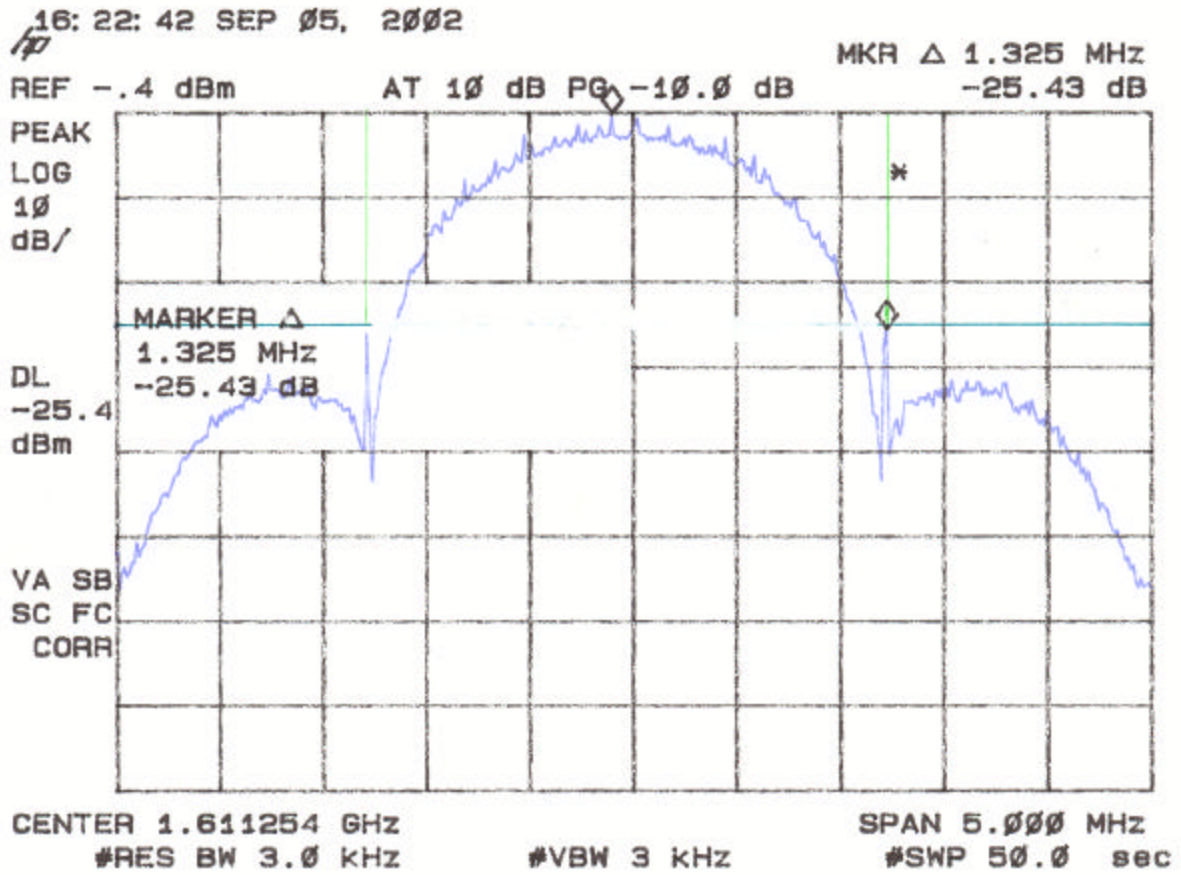


Figure 5b.

Occupied Bandwidth > 100% From Edge of Authorized Bandwidth - Low

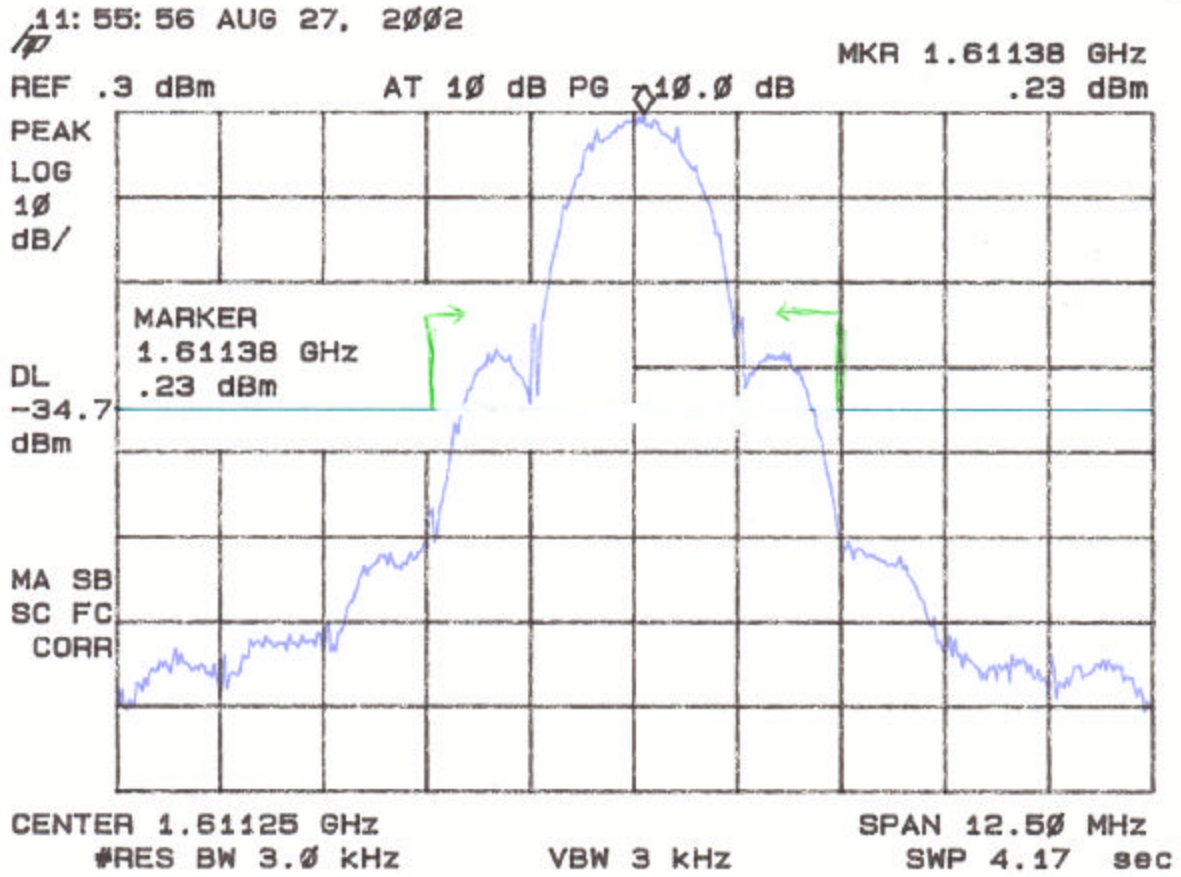


Figure 5c.
Occupied Bandwidth 50 - 100% From Edge of Authorized Bandwidth - High


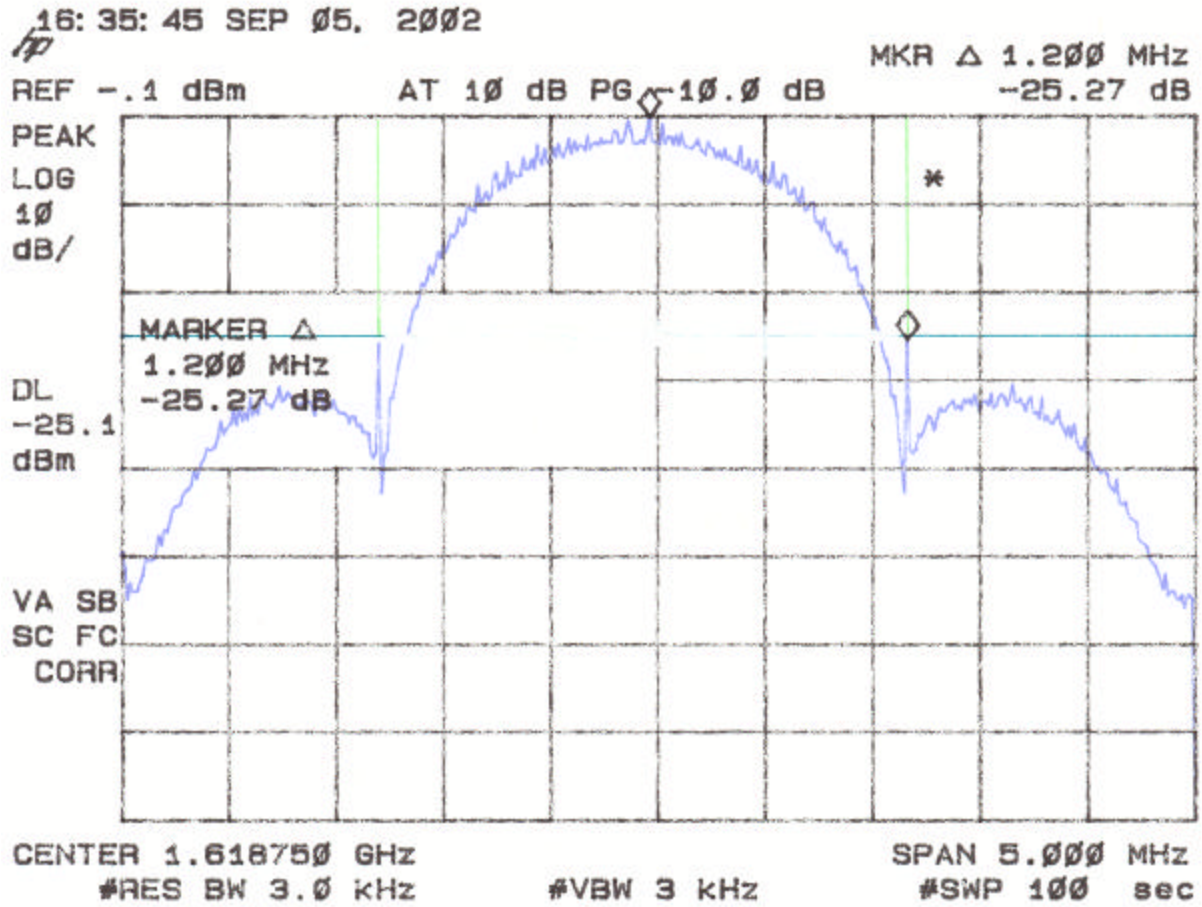


Figure 5d.
Occupied Bandwidth > 100% From Edge of Authorized Bandwidth - High

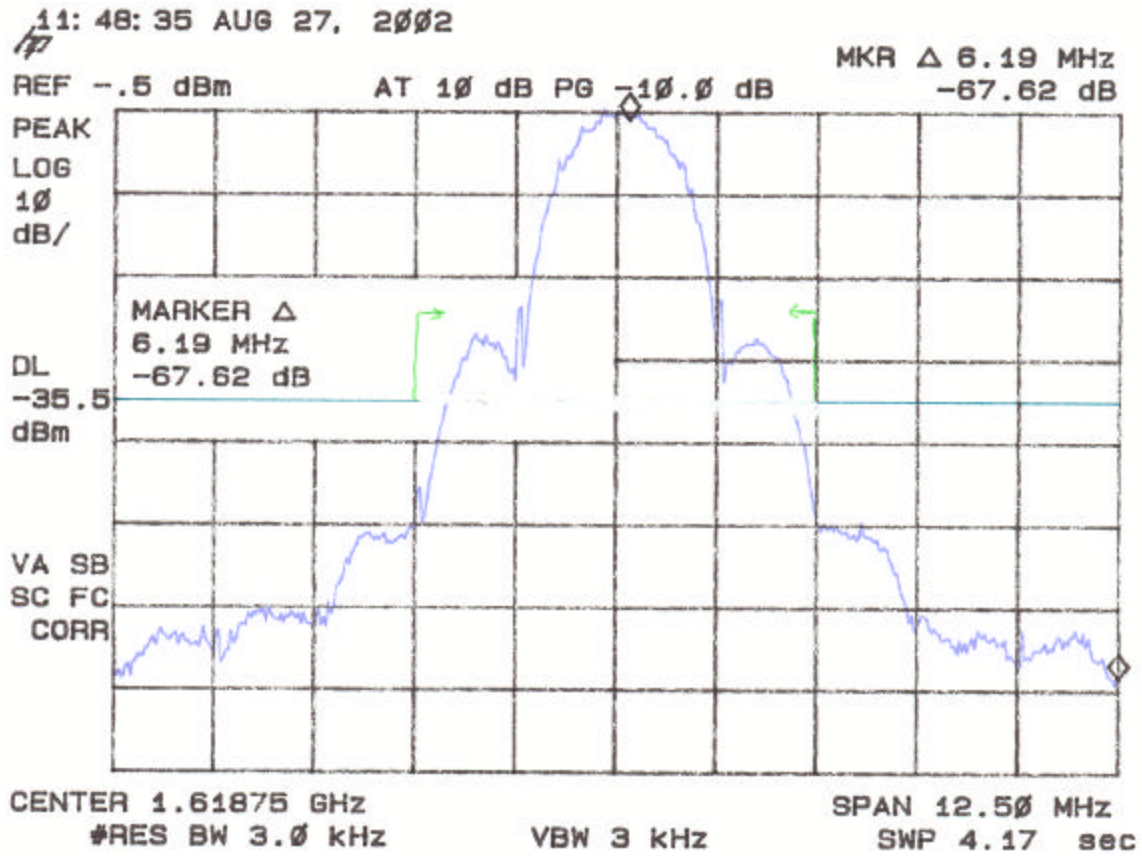

2.9 Spurious Emissions at Antenna Terminals (FCC Section 2.1051)

Spurious emissions appearing at the antenna terminals were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminals or across the antenna leads on the PCB as specified by the manufacturer. Results are shown in Figures 6a - 6p.

Protection of the radio-navigation-satellite service. Mobile earth stations operating in the 1610-1626.5 MHz band shall limit out-of-band emissions in the 1574.397-1576.443 MHz band so as not to exceed an e.i.r.p. density level of -70 dB (W/MHz) averaged over any 20 ms period. The e.i.r.p. of any discrete spurious emission (i.e., bandwidth less than 600 Hz) in the 1574.397-1576.443 MHz band shall not exceed -80 dBW.

FCC Minimum Standard (FCC Section 25.202(f))

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), at least

$$43 + 10 \log (P_{\text{Watts}}) \text{ attenuation below the mean power of the transmitter.}$$

$$\text{For Lowest Channel} = 43 + 10 \log (0.1462) = 34.6 \text{ dB}$$

$$\text{For Highest Channel} = 43 + 10 \log (0.1563) = 34.9 \text{ dB}$$

The following plots show that all emissions were at least 50.4 dB below the fundamental.


Note:

A 10 kHz RBW was used instead. This was deemed to be comparable to 4 kHz RBW.

Additional requirement for 1574.397 - 157.443 MHz (FCC Section 25.213(b))

- 80 dBW (- 50 dBm)

Figure 6a.
Spurious Emissions at Antenna Terminals

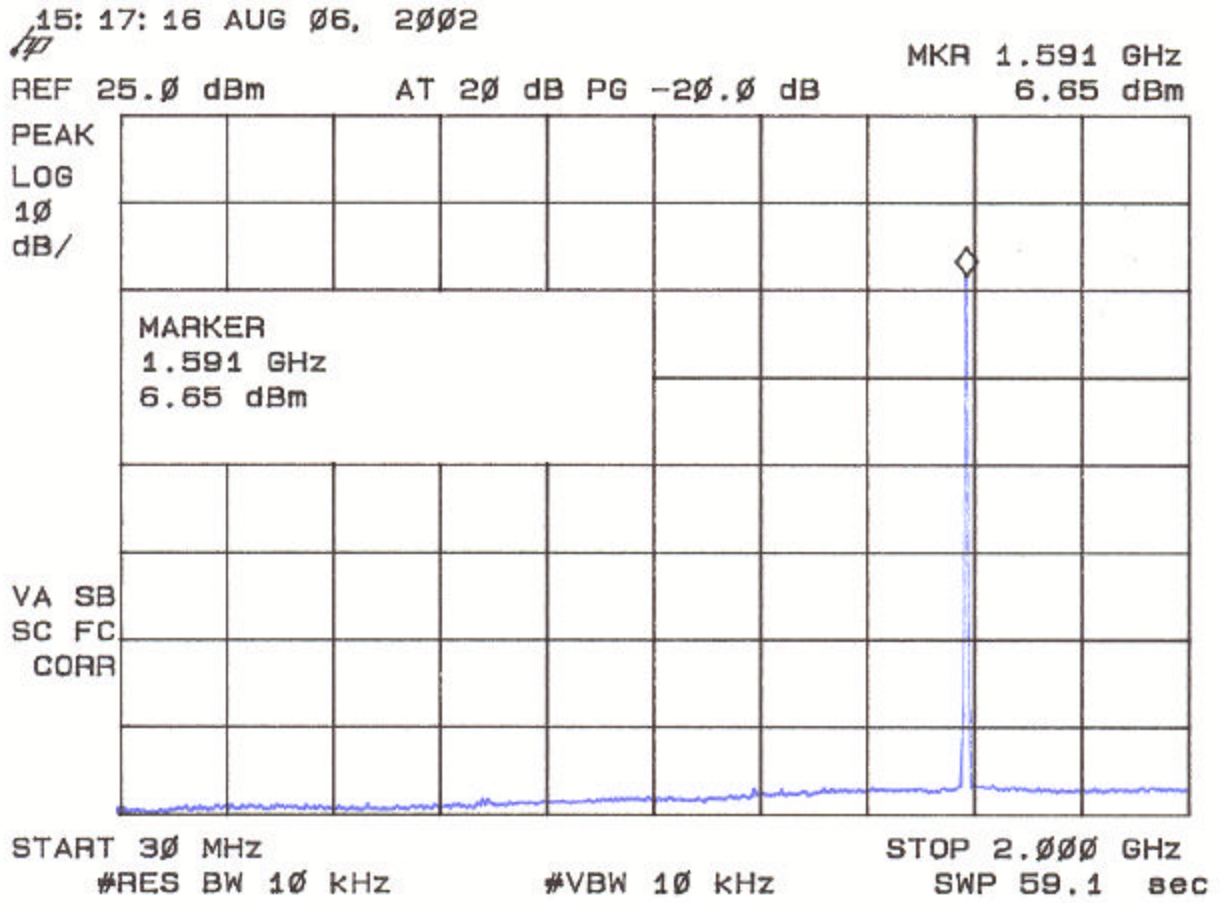

NOTE: Marker shows Fundamental Frequency

Figure 6b.
Spurious Emissions at Antenna Terminals

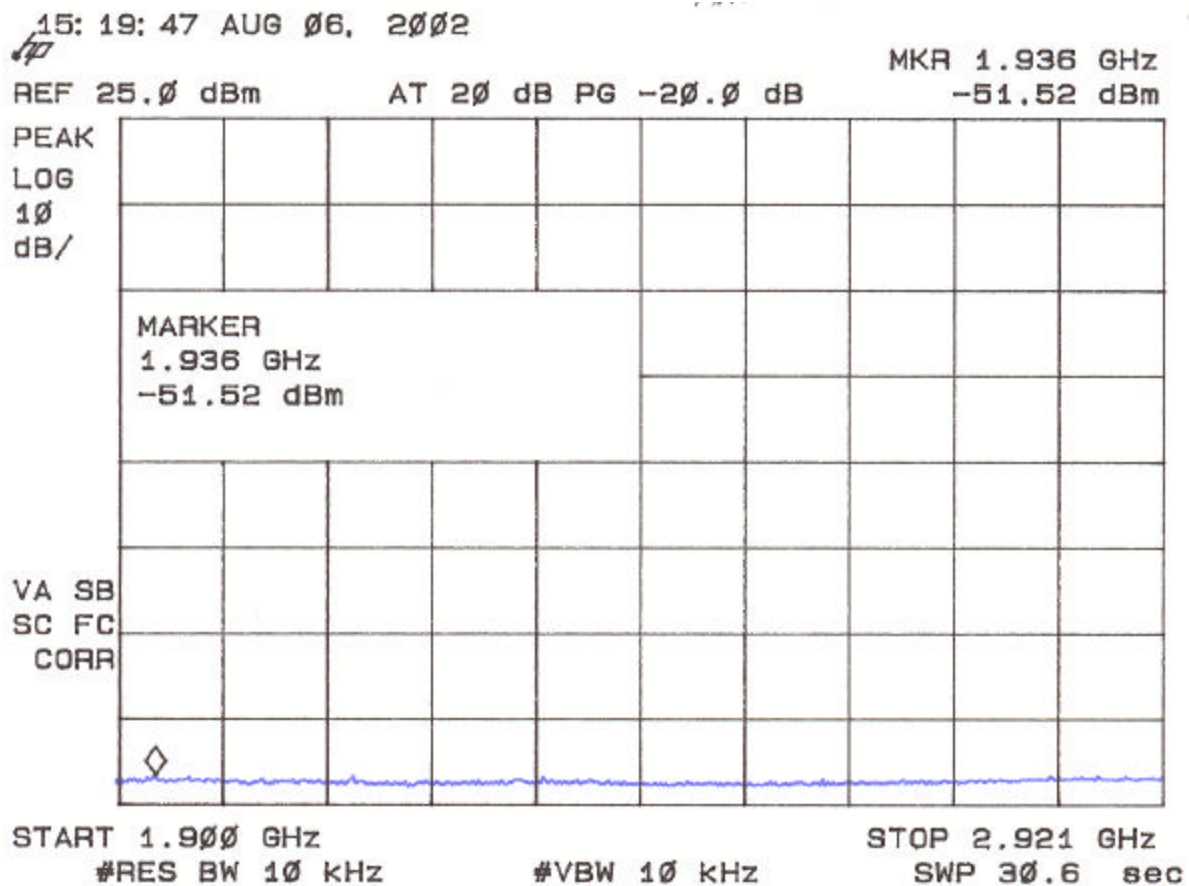


Figure 6c.
Spurious Emissions at Antenna Terminals

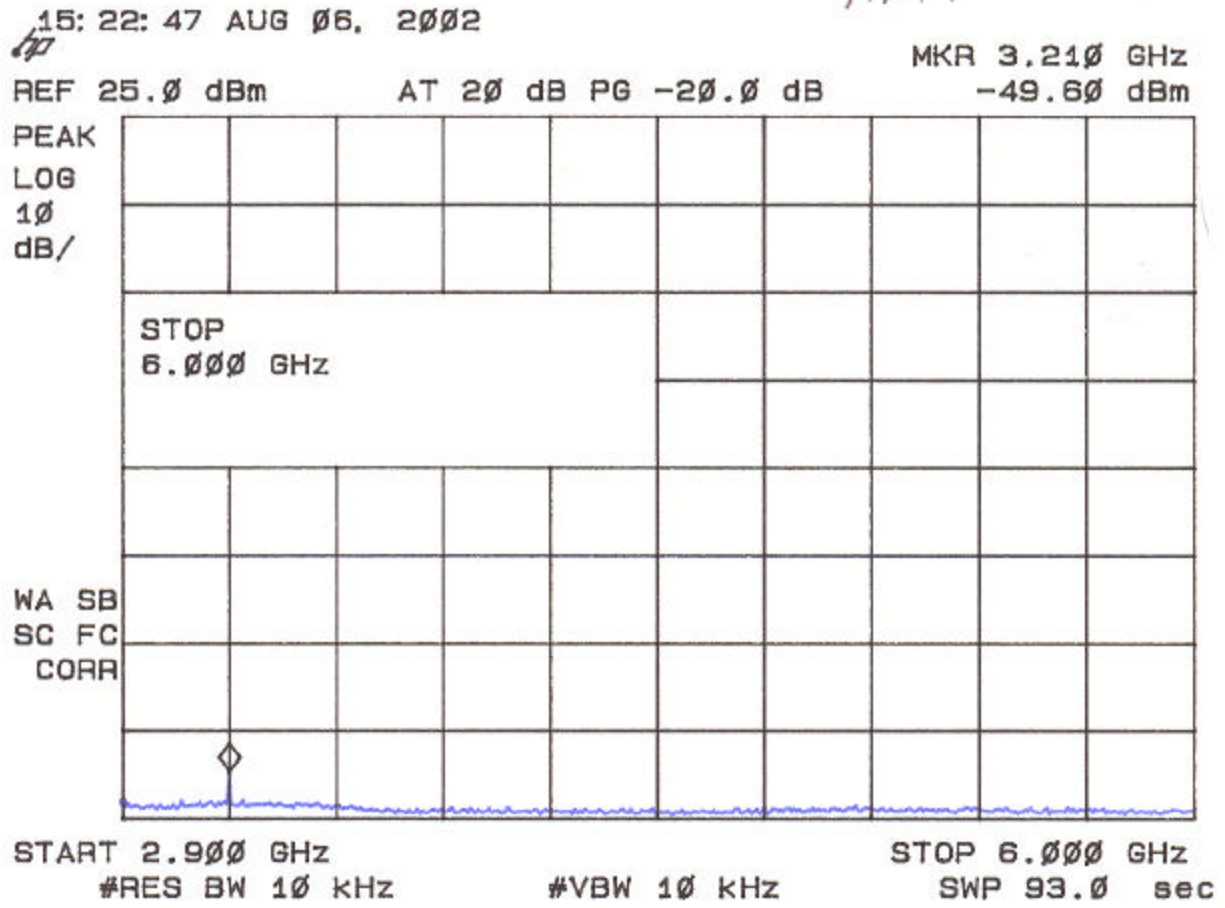


Figure 6d.
Spurious Emissions at Antenna Terminals

15: 25: 33 AUG 06, 2002


MKR 8.124 GHz

REF 25.0 dBm

AT 20 dB PG -20.0 dB

-46.83 dBm

PEAK
LOG
10
dB/

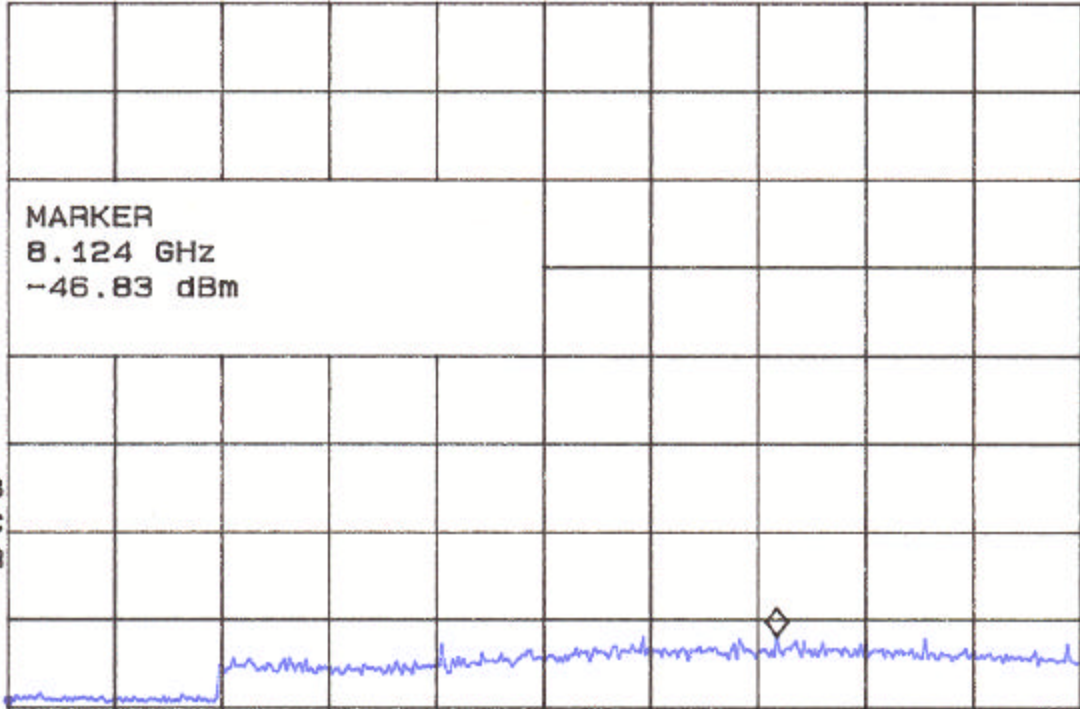

VA SB
SC FC
CORR

START 5.900 GHz

#RES BW 10 kHz

#VBW 10 kHz

STOP 9.000 GHz

SWP 93.0 sec

Figure 6f.
Spurious Emissions at Antenna Terminals

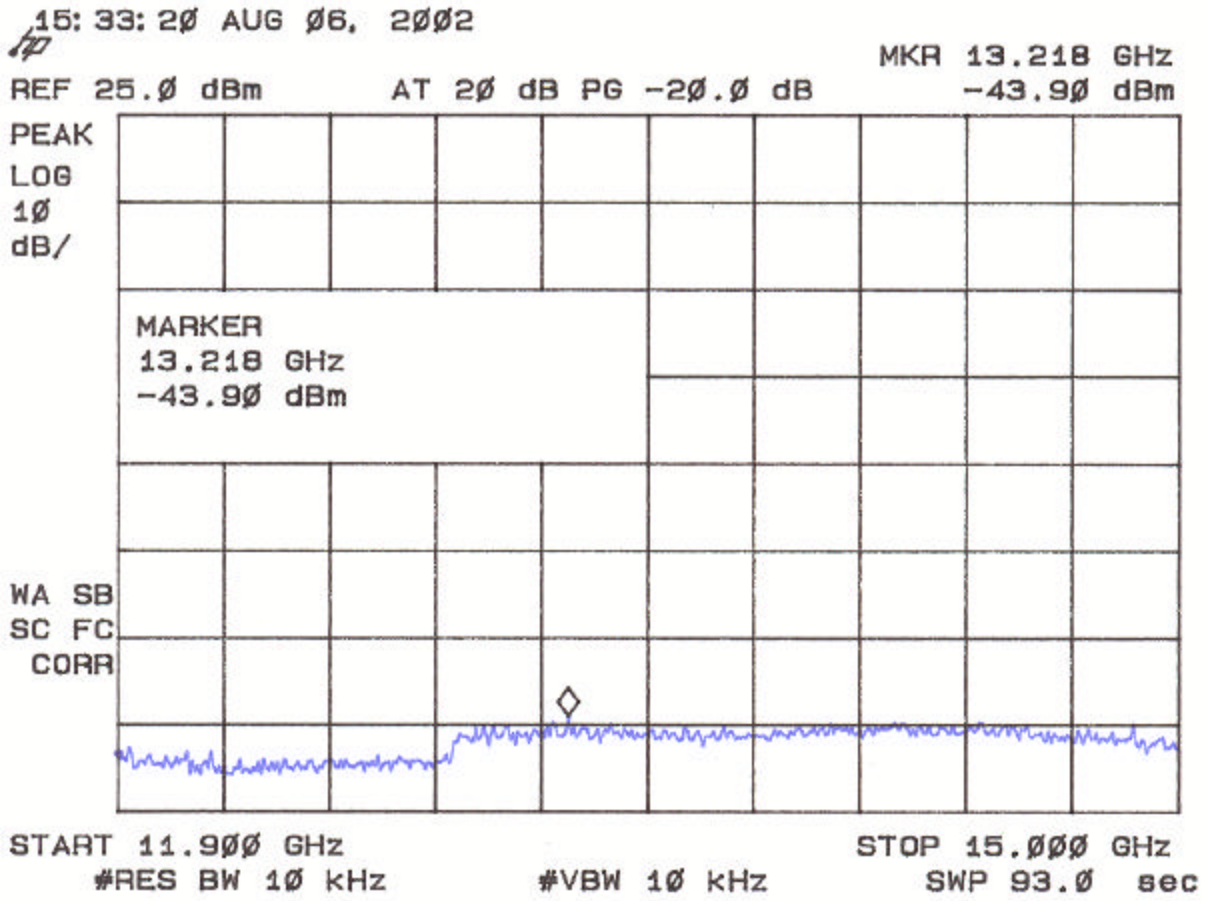


Figure 6g.
Spurious Emissions at Antenna Terminals

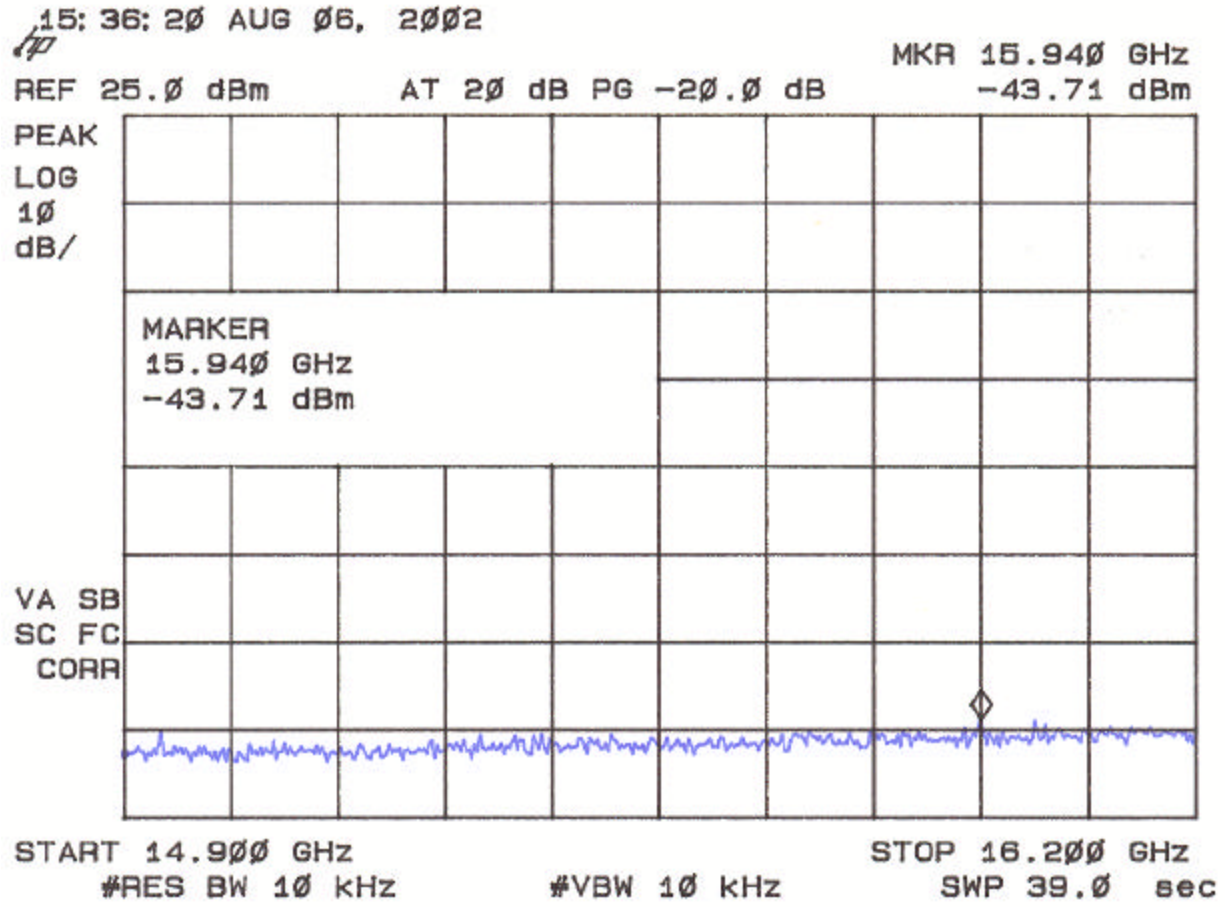


Figure 6h.
Spurious Emissions at Antenna Terminals

Limit = -80 dBW = -50 dBm


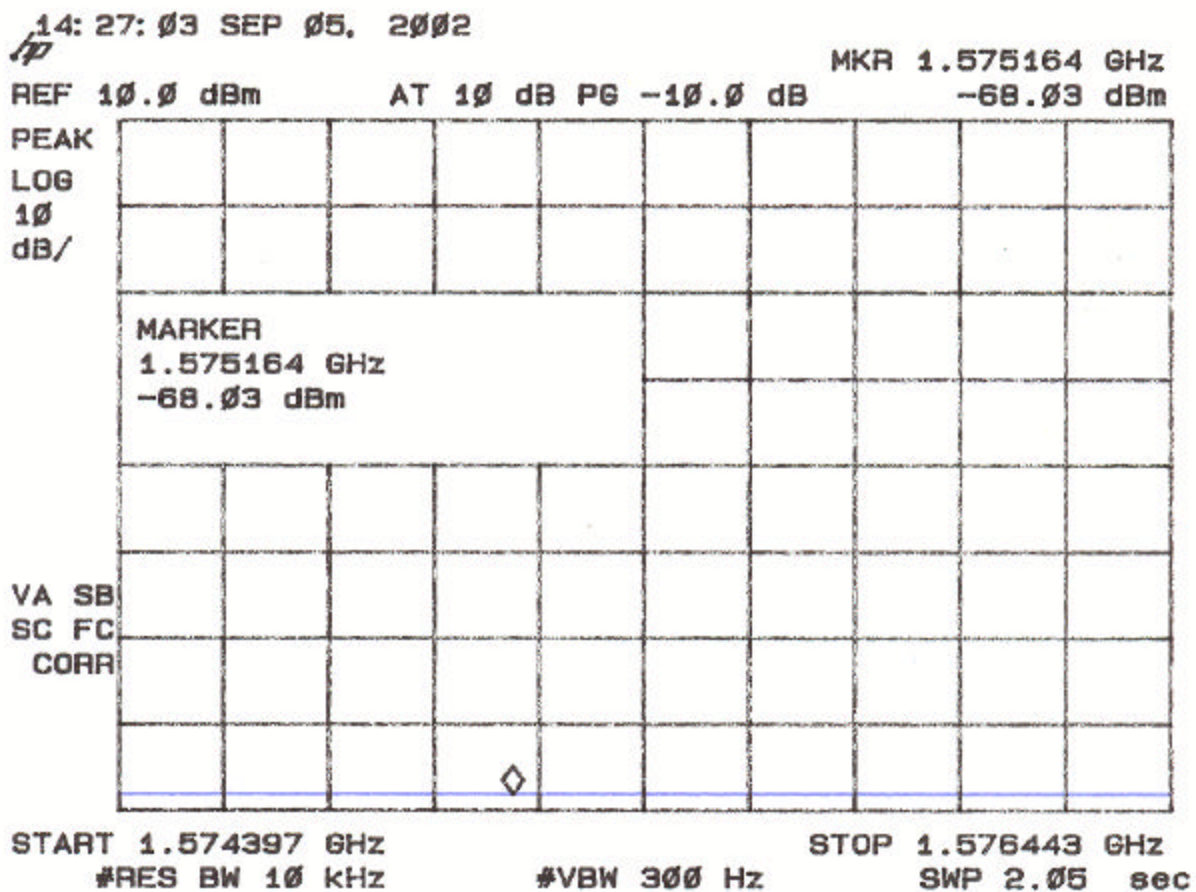


Figure 6i.
Spurious Emissions at Antenna Terminals

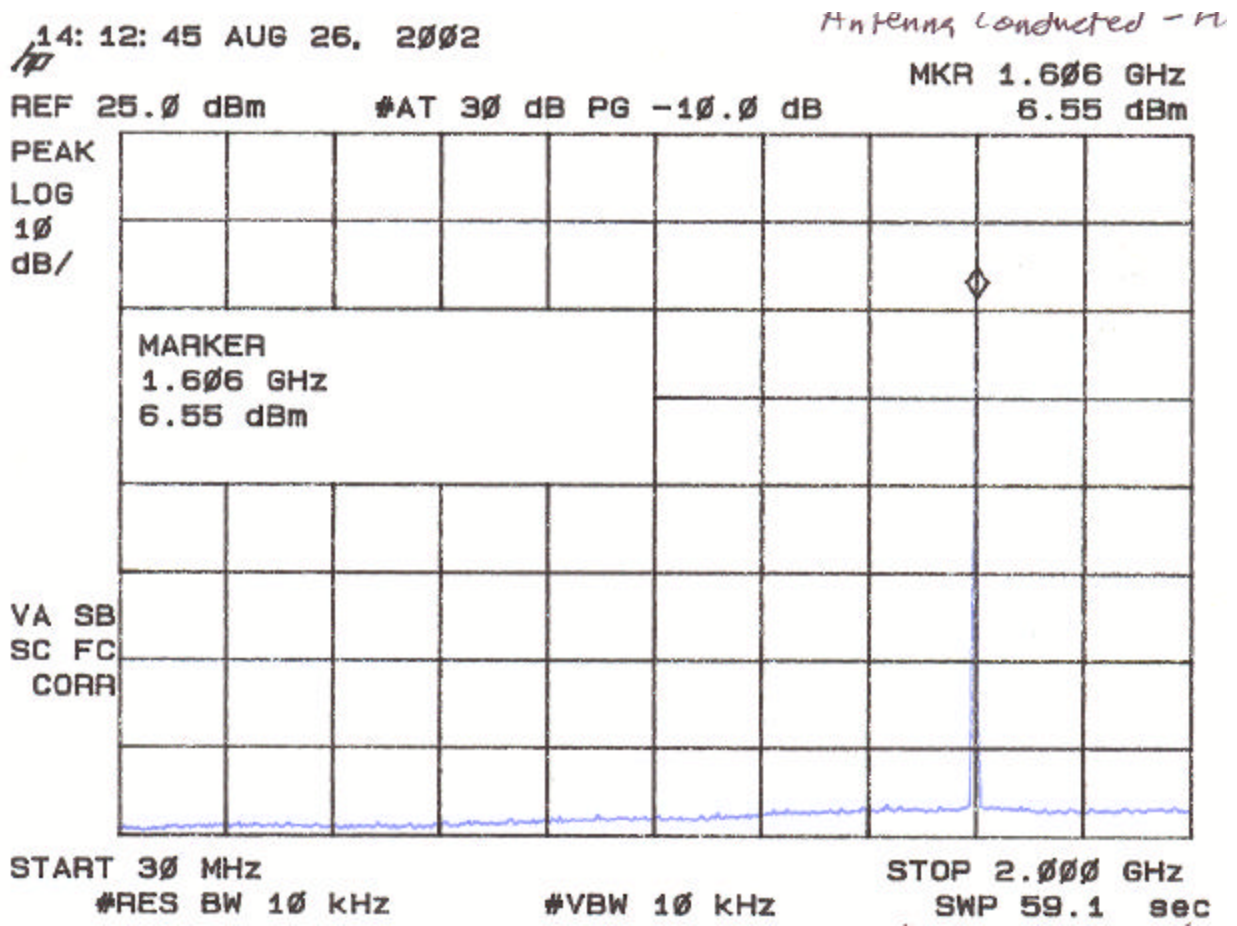

NOTE: Marker shows Fundamental Frequency

Figure 6j.
Spurious Emissions at Antenna Terminals

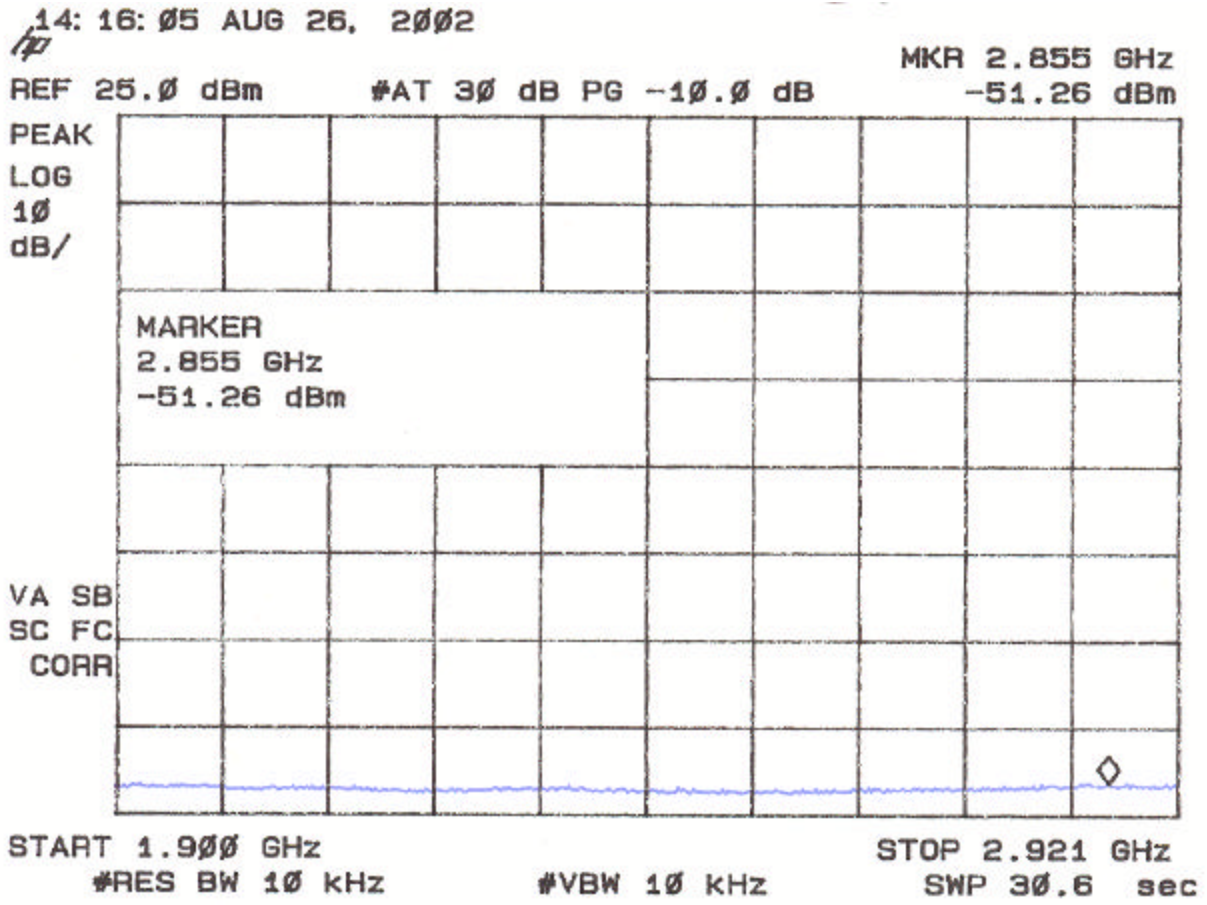


Figure 6k.
Spurious Emissions at Antenna Terminals

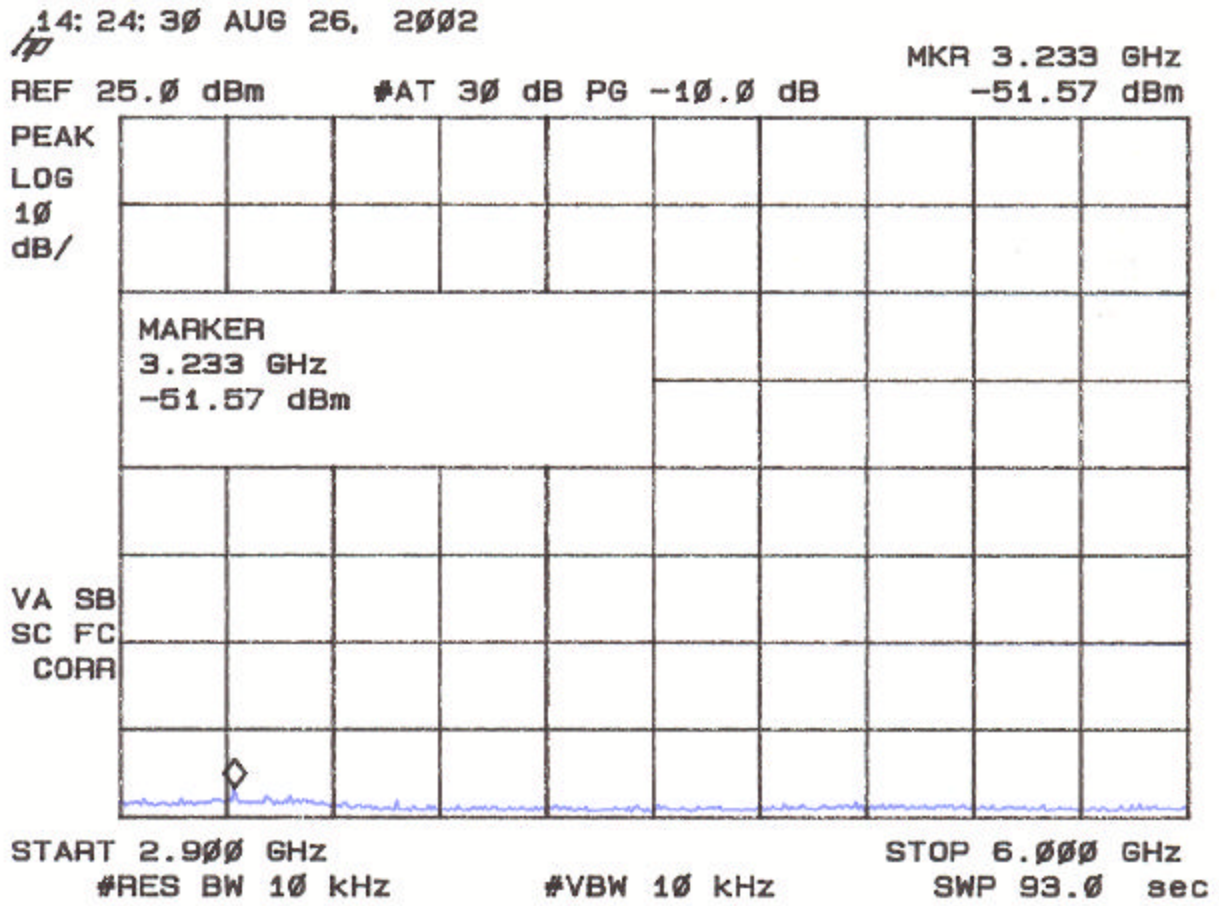


Figure 6l.
Spurious Emissions at Antenna Terminals


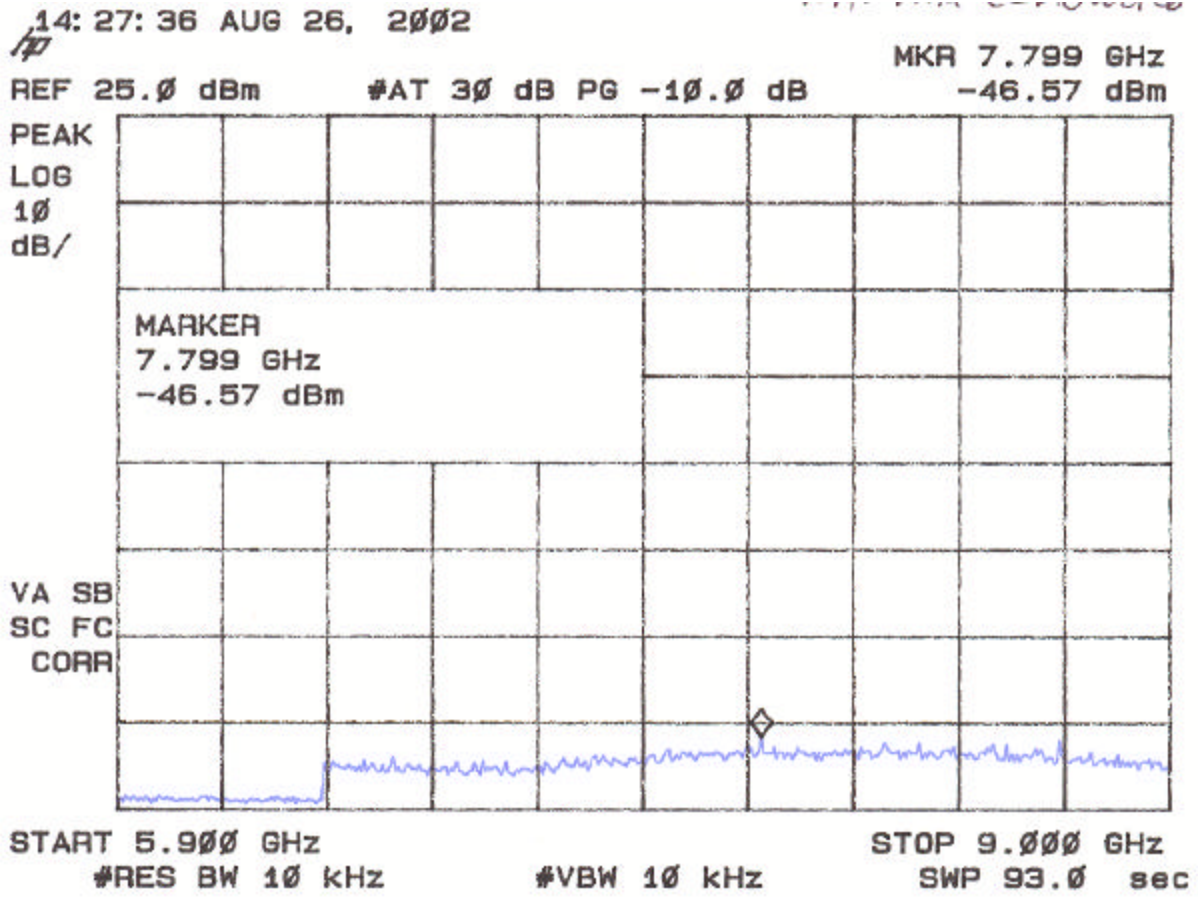


Figure 6m.
Spurious Emissions at Antenna Terminals

14:35:57 AUG 26, 2002

REF 25.0 dBm #AT 30 dB PG -10.0 dB MKR 11.318 GHz
-45.60 dBm

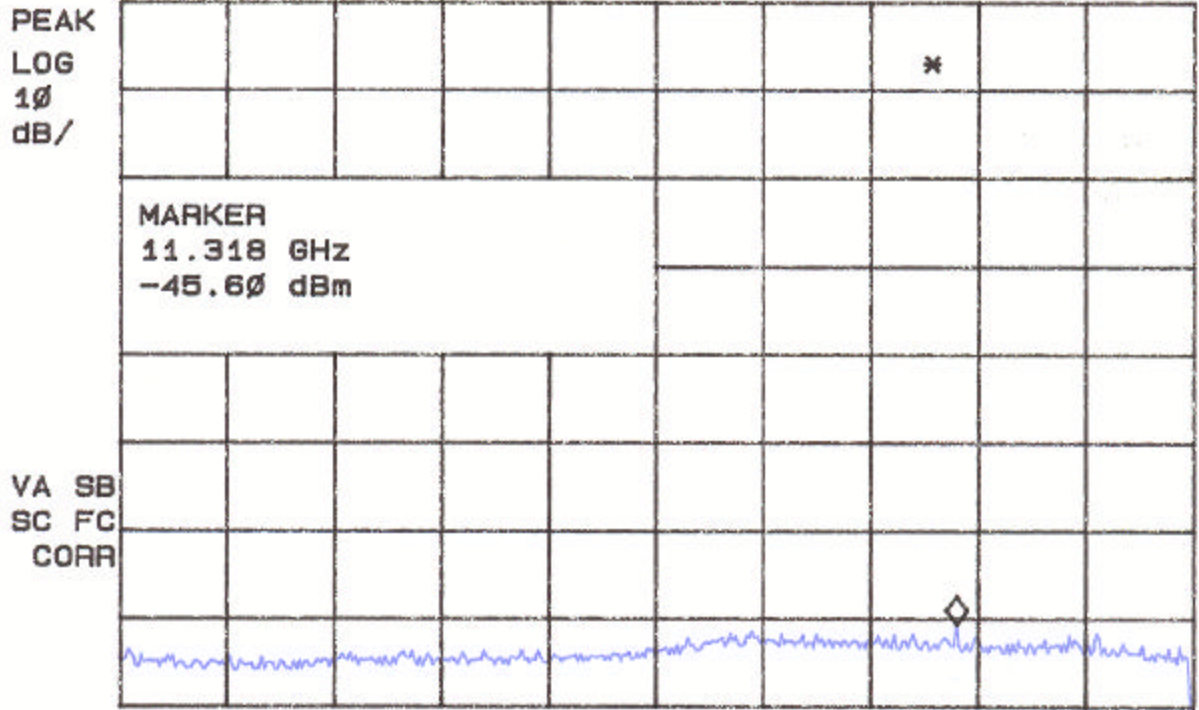

START 8.900 GHz #RES BW 10 kHz #VBW 10 kHz STOP 12.000 GHz
SWP 93.0 sec

Figure 6n.
Spurious Emissions at Antenna Terminals

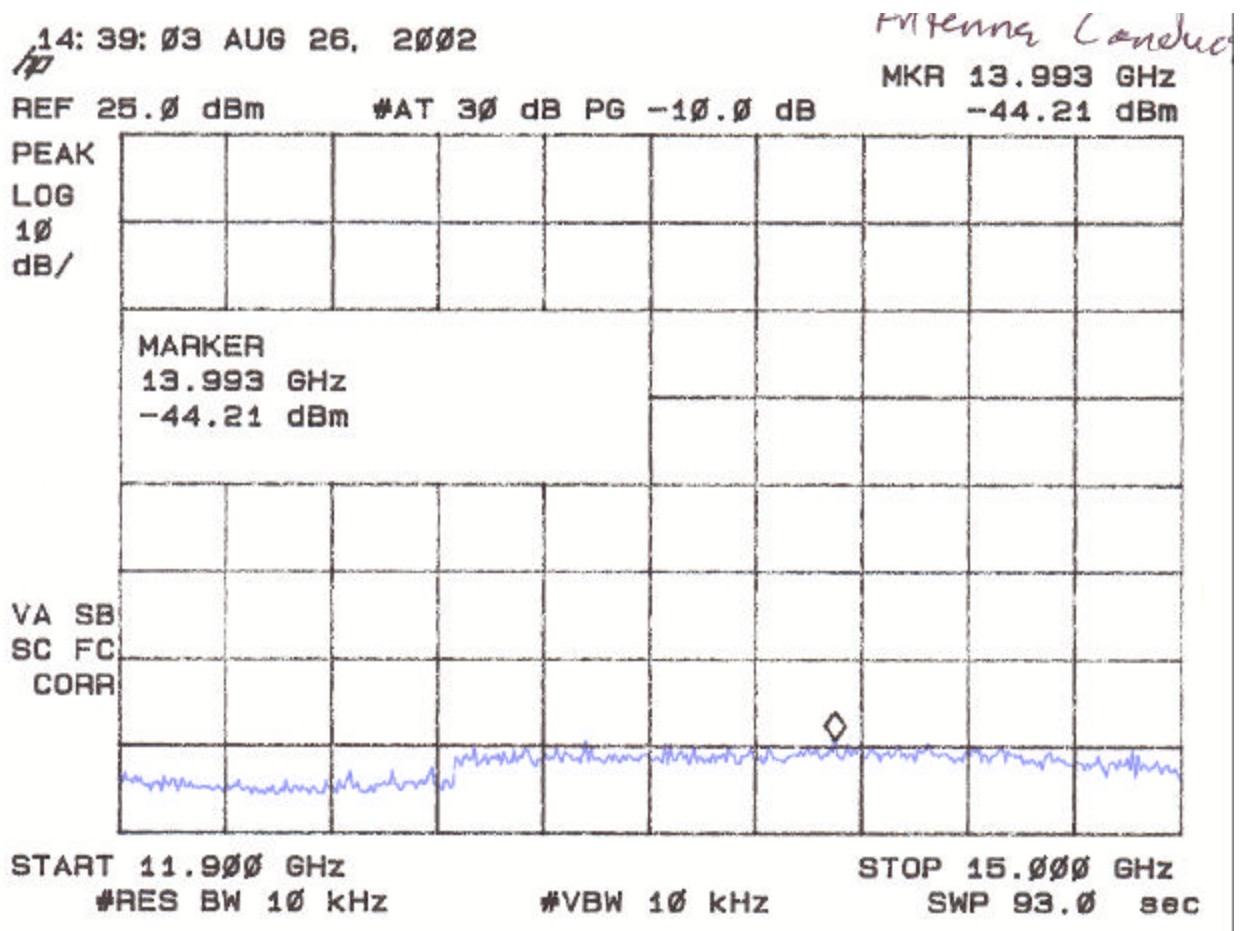


Figure 6o.
Spurious Emissions at Antenna Terminals

14: 42: 22 AUG 26, 2002

REF 25.0 dBm


#AT 30 dB PG -10.0 dB

MKR 16.153 GHz

-44.26 dBm

PEAK
LOG
10
dB/

VA SB
SC FC
CORR

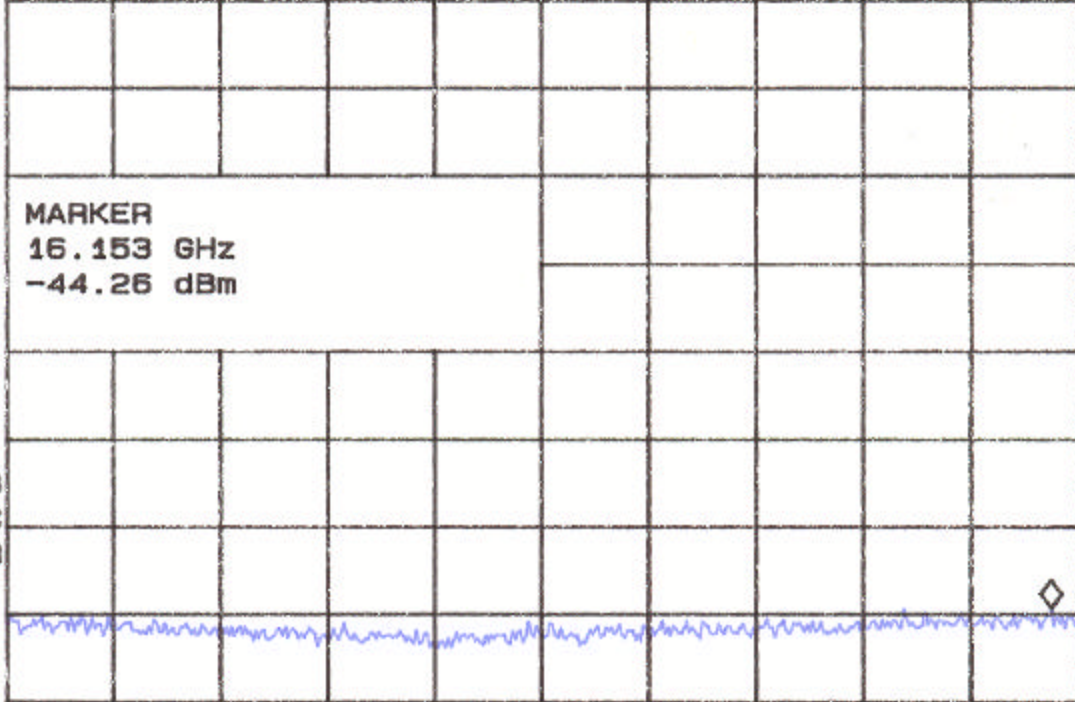

START 14.300 GHz

#RES BW 10 kHz

#VBW 10 kHz

STOP 16.200 GHz

SWP 57.0 sec

Figure 6p.
Spurious Emissions at Antenna Terminals

Limit= -80 dBW = -50 dBm

14: 32: 20 SEP 05, 2002

MKR 1.575164 GHz

REF 11.0 dBm


AT 20 dB PG -10.0 dB

-67.63 dBm

PEAK
LOG
10
dB/

RES BW
300 Hz

VA SB
SC FC
CORR

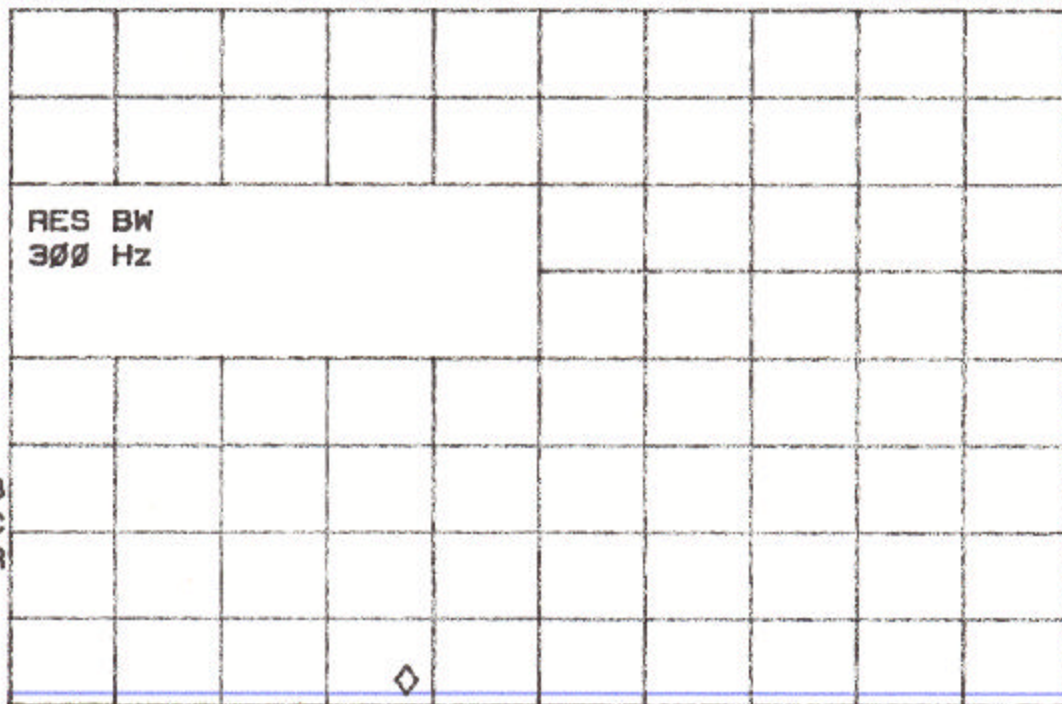

START 1.574397 GHz

#RES BW 300 Hz

STOP 1.576443 GHz

#VBW 300 Hz

SWP 68.2 sec

2.10 Field Strength of Spurious Radiation (FCC Section 2.1053)

Spurious emissions were evaluated from 30 MHz to 16.2 GHz at an EUT to antenna distance of 1 or 3 meters. The EUT was tested with an external power source and modulated by its own internal sources. Both a low and high channel were tested. The EUT was placed on an open area test site and the spurious emissions tested as stipulated by EIT/TIA-603: 1992 section 2.2.12. Measurements for 30 to 1000 MHz were made with the analyzer's bandwidth set to 120 kHz. Measurements above 1 GHz were made with the analyzer's bandwidth set to 1 MHz. The worse case results are shown in Table 4.

FCC Minimum Standard (FCC Section 25.202(f))

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), at least

$$43 + 10 \log (P_{\text{Watts}}) \text{ attenuation below the mean power of the transmitter.}$$

$$\text{For Lowest Channel} = 43 + 10 \log (0.1462) = 34.6 \text{ dB}$$

$$\text{For Highest Channel} = 43 + 10 \log (0.1563) = 34.9 \text{ dB}$$

FIELD STRENGTH OF SPURIOUS RADIATION

Limit: $43 + 10 \log (P_{\text{Watts}}) = 43 + 10 \log (0.1462) = 34.6 \text{ dB}$

TABLE 4

Worse Case Mode = High Channel

Frequency (MHz)	Polarity (H or V)	Corrected Substitution Level Relative to Dipole (dBm)	Attenuated Level Below Carrier Power (dB)
3223	V	-34.9	56.5

SAMPLE CALCULATION:

Attenuated Level Below Carrier Power =
 $10 \log (\text{TX Power in mW}) - \text{Corrected Substitution Level (dBm)}$
 $10 \log (146.2) - -34.9 = 56.5$

Test Date: June 26, 2003

Tester

Signature:  David Blethen

2.11 Frequency Stability (FCC Section 2.1055 and 25.202(d))


The frequency tolerance of the carrier signal was measured by while ambient temperature was varied from -30 to 50 degrees centigrade. The frequency tolerance was verified at 10 degree increments. Additionally, the supply voltage was varied from 85% to 115% of the nominal value (except for hand carried, battery powered equipment which was additionally measured at battery endpoint).

FCC Minimum Standard

None

FCC Verification
 Axonn Model G-SENS STU
 Frequency Stability vs. Temperature (At Startup)

Test Results Reviewed By:




Timothy R. Johnson
 NARTE Certified Engineer

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.254800	3.0
-20	1611.254605	2.9
-10	1611.255092	3.2
0	1611.253494	2.2
10	1611.253762	2.3
20	1611.253917	2.4
30	1611.253370	2.1
40	1611.253438	2.1
50	1611.254805	3.0

Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = 0.001% or 10 ppm

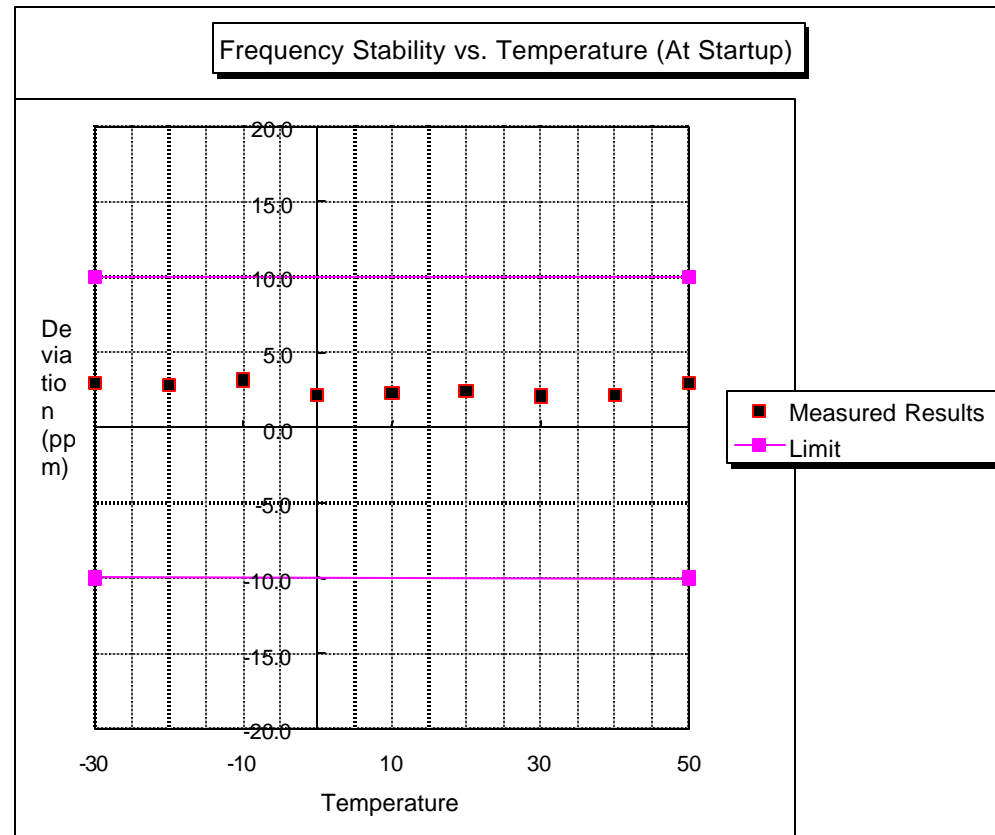

FCC Verification
 Axonn Model G-SENS STU
 Frequency Stability vs. Temperature (2 minutes after startup)

Test Results Reviewed By:




Timothy R. Johnson
 NARTE Certified Engineer

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.254700	2.9
-20	1611.254561	2.8
-10	1611.255036	3.1
0	1611.253346	2.1
10	1611.253730	2.3
20	1611.253989	2.5
30	1611.253366	2.1
40	1611.253609	2.2
50	1611.254733	2.9


Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = 0.001% or 10 ppm

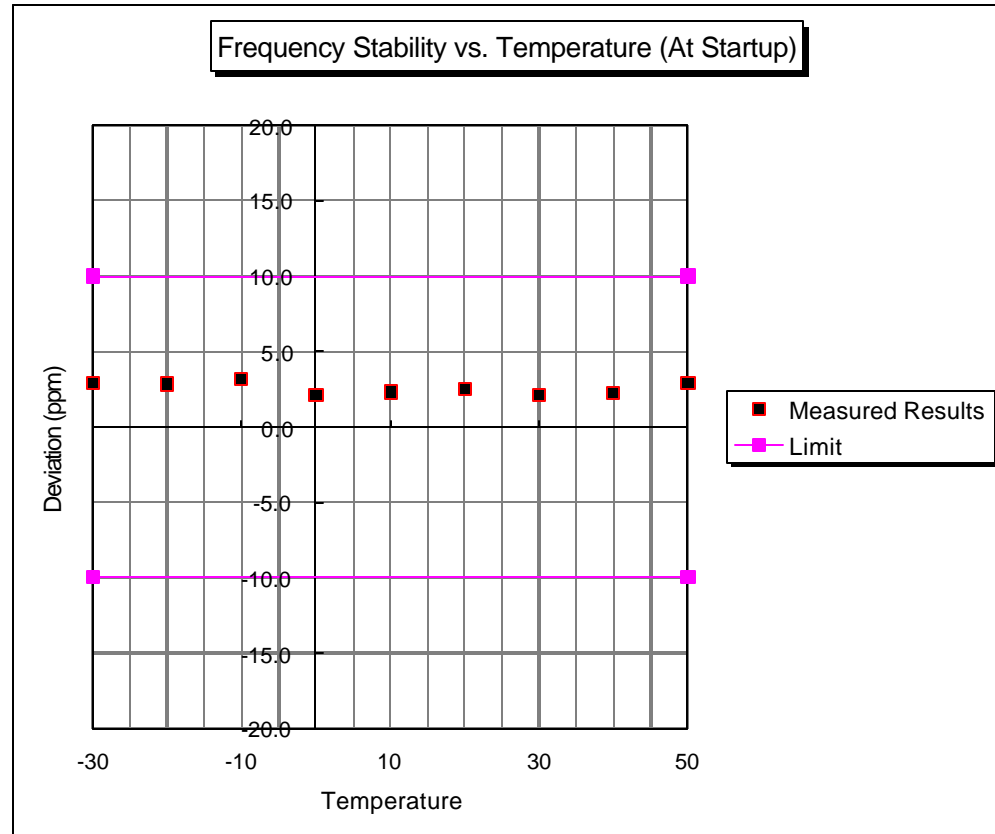

FCC Verification
 Axonn Model G-SENS STU
 Frequency Stability vs. Temperature (5 minutes after startup)

Test Results Reviewed By:




Timothy R. Johnson
 NARTE Certified Engineer

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.254900	3.0
-20	1611.254613	2.9
-10	1611.255040	3.1
0	1611.253374	2.1
10	1611.253757	2.3
20	1611.253953	2.5
30	1611.253318	2.1
40	1611.253554	2.2
50	1611.254673	2.9


Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = 0.001% or 10 ppm

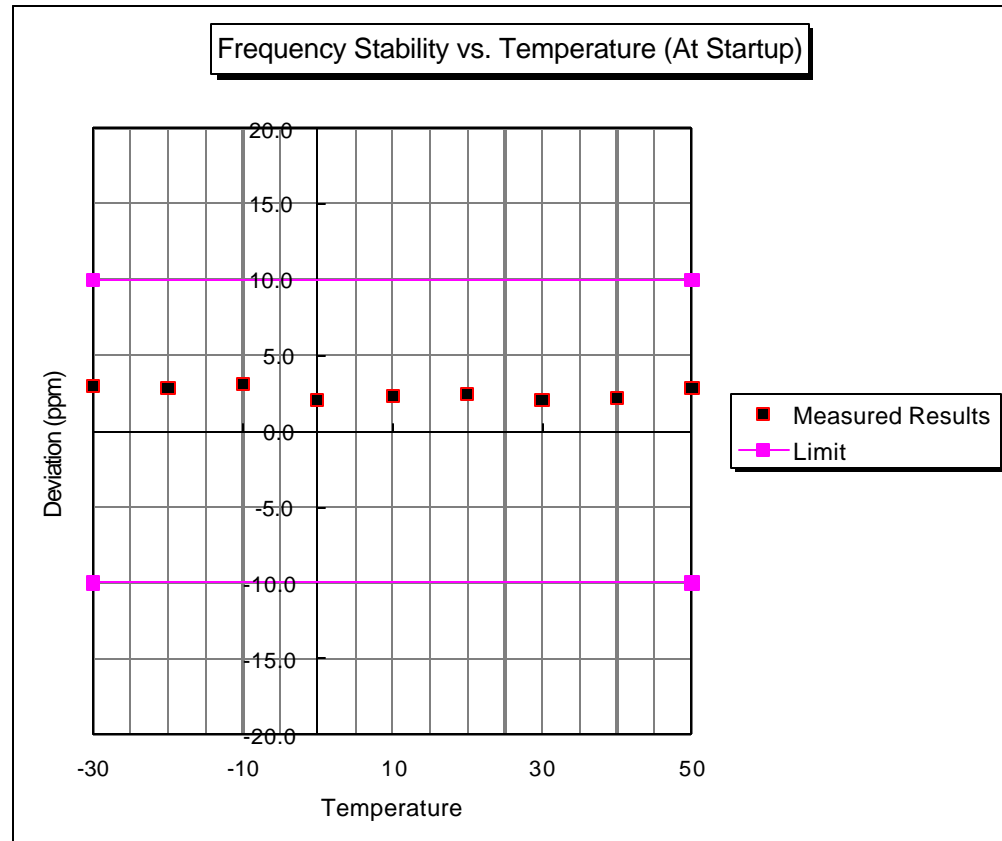

FCC Verification
 Axonn Model G-SENS STU
 Frequency Stability vs. Temperature (10 minutes after startup)

Test Results Reviewed By:




Timothy R. Johnson
 NARTE Certified Engineer


Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.255050	3.1
-20	1611.254581	2.8
-10	1611.255036	3.1
0	1611.253398	2.1
10	1611.253773	2.3
20	1611.253973	2.5
30	1611.253346	2.1
40	1611.253562	2.2
50	1611.254661	2.9

Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = 0.001% or 10 ppm

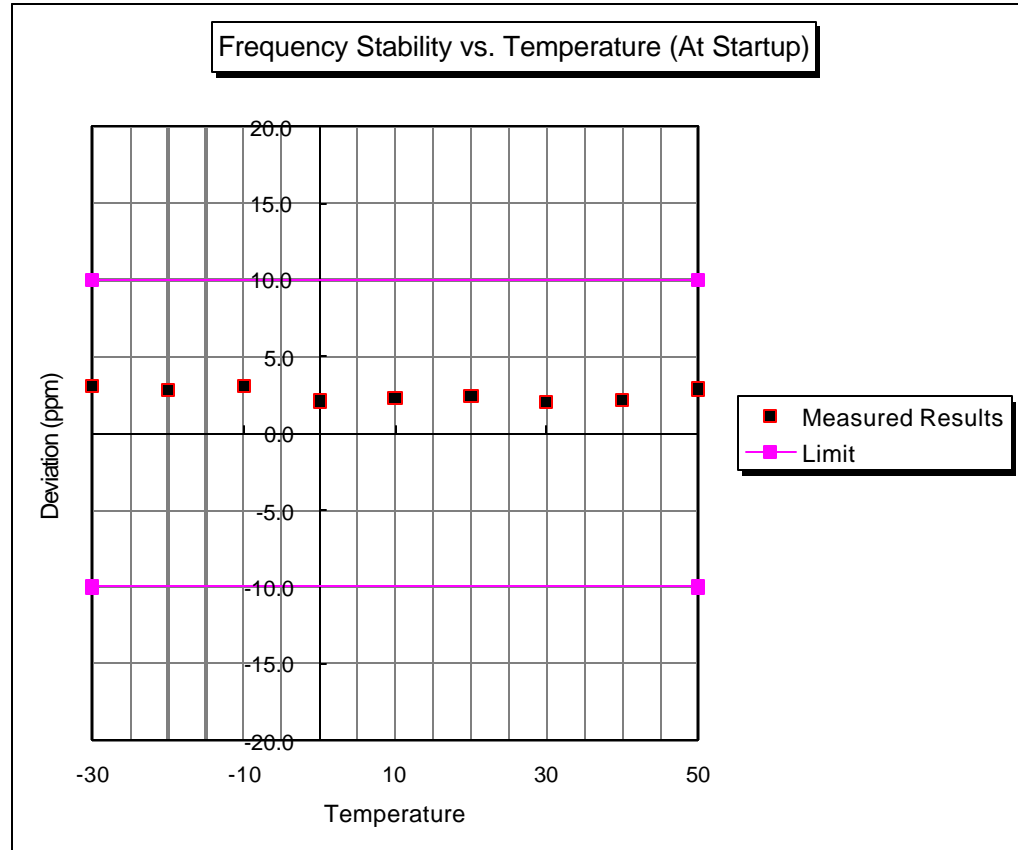


FCC Verification
 Axonn Model G-SENS STU
 Frequency Stability vs. Voltage

Test Results Reviewed By:

 Timothy R. Johnson
 NARTE Certified Engineer

Voltage (V DC)	Measured Frequency (MHz)	Deviation (ppm)
4.25	1611.253554	2.2
5	1611.252602	1.6
5.75	1611.253689	2.3

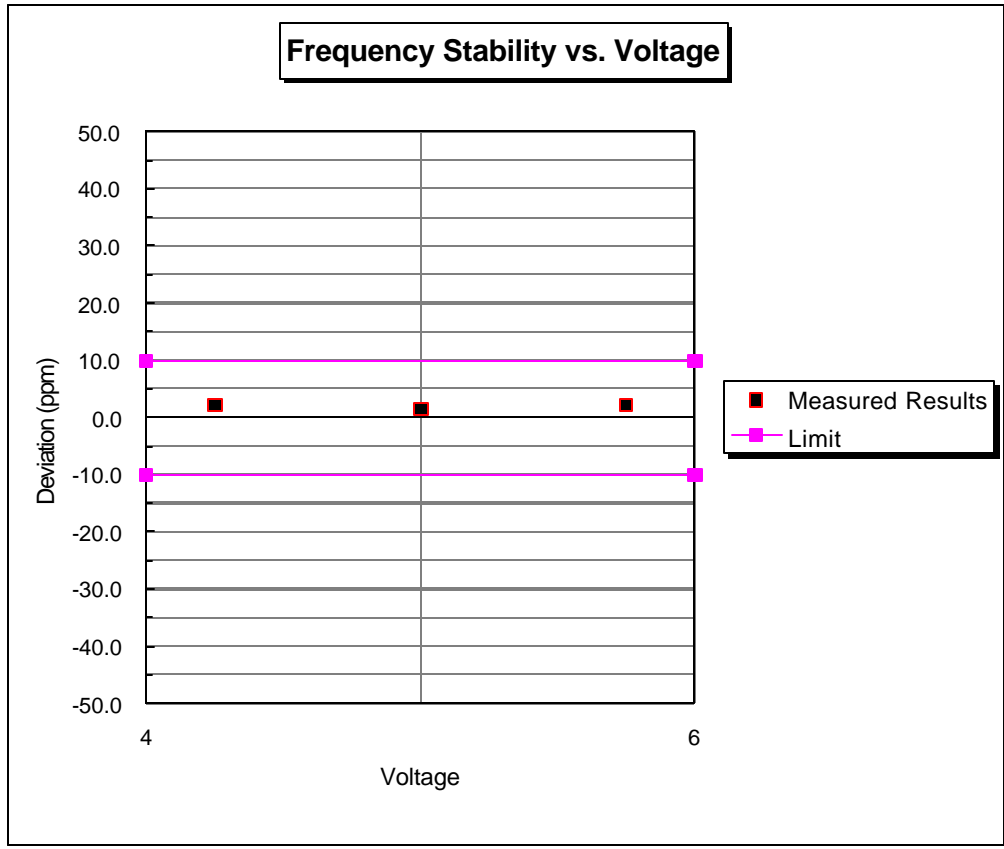Actual TX Frequency was: 1611.250 MHz
 Maximum Deviation = N/A



2.12 Emissions from Mobile Earth Stations for Protection of Aeronautical Radionavigation-Satellite Service. (FCC Section 25.216)

Emissions from the EUT were evaluated from 1559 MHz – 1605 MHz and did not exceed the limit at -70dBW/MHz, averaged over 20 milliseconds.

Emissions from the EUT were evaluated from 1605 MHz – 1610 MHz and did not exceed the limits ranging from -70 dBW/MHz at 1605 MHz to -10dBW/MHz at 1610 MHz, averaged over 20 milliseconds.

Emissions were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminal with the Resolution Bandwidth set to 1 MHz. Results are shown on figures 7a -7c.

Figure 7b.
Emissions from Mobile Earth Stations for Protection
of Aeronautical Radionavigation-Satellite Service

Limit = - 70 dBW/MHz + 4 dBi (-44 dBm)

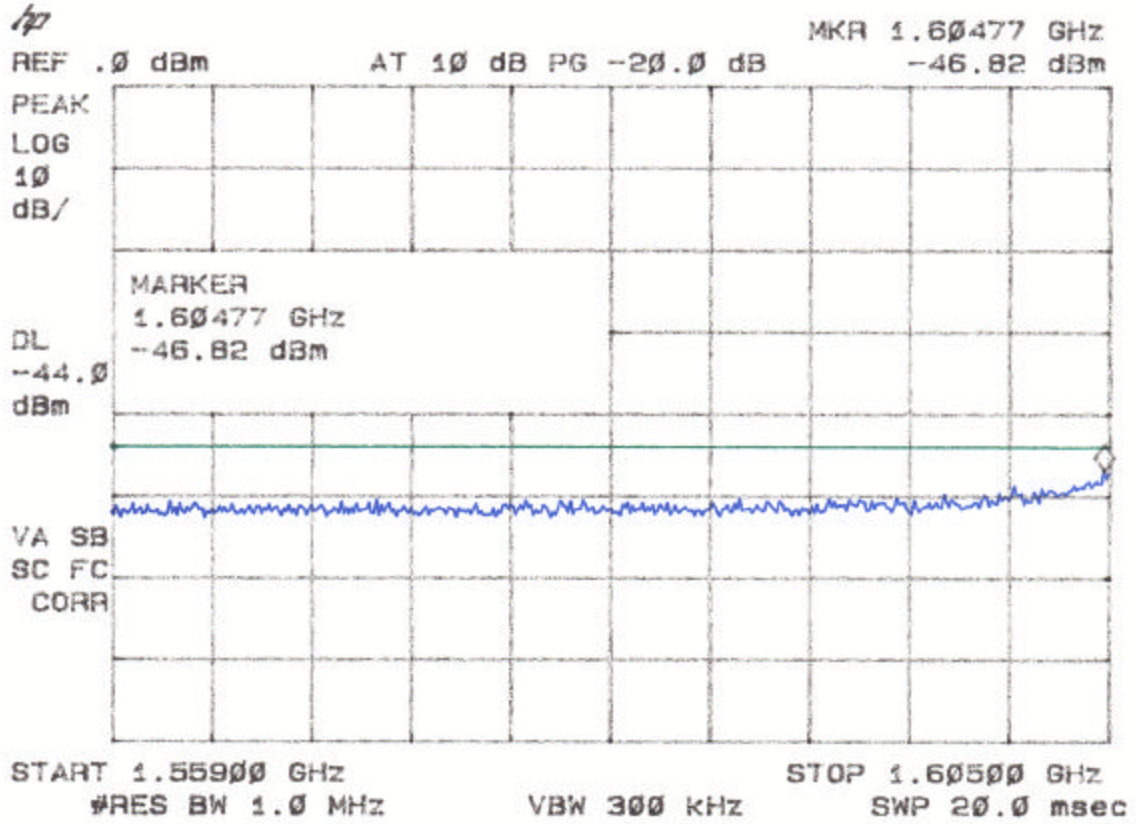


Figure 7c.
 Emissions from Mobile Earth Stations for Protection
 of Aeronautical Radionavigation-Satellite Service

Limit = -70 dBW/MHz to -10 dBW/MHz + 4 dBi (-44 dBm to +16dBm)

