

FCC Test Report

(PART 27)

Report No.: RFBFKV-WTW-P21060810-2

FCC ID: L6AITF100-2

Test Model: ITF100-2, ITF100-3 (Refer to item 3.1 for more details)

Received Date: Jul. 10, 2021

Test Date: Sep. 30, 2021 ~ Oct. 06, 2021

Issued Date: Oct. 27, 2021

Applicant: BlackBerry Limited

Address: 2200 University Avenue East, Waterloo, Ontario, Canada N2K 0A7

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	7
2.2 Test Site and Instruments	8
3 General Information	10
3.1 General Description of EUT	10
3.2 Configuration of System under Test	12
3.2.1 Description of Support Units	12
3.3 Test Mode Applicability and Tested Channel Detail	12
3.4 EUT Operating Conditions	16
3.5 General Description of Applied Standards and references	16
4 Test Types and Results	17
4.1 Output Power Measurement	17
4.1.1 Limits of Output Power Measurement	17
4.1.2 Test Procedures	17
4.1.3 Test Setup	18
4.1.4 Test Results	19
4.2 Modulation Characteristics Measurement	29
4.2.1 Limits of Modulation Characteristics	29
4.2.2 Test Setup	29
4.2.3 Test Procedure	29
4.2.4 Test Results	30
4.3 Frequency Stability Measurement	31
4.3.1 Limits of Frequency Stability Measurement	31
4.3.2 Test Procedure	31
4.3.3 Test Setup	31
4.3.4 Test Results	32
4.4 Occupied Bandwidth Measurement	42
4.4.1 Limits of Occupied Bandwidth Measurement	42
4.4.2 Test Procedure	42
4.4.3 Test Setup	42
4.4.4 Test Result	43
4.5 Band Edge Measurement	48
4.5.1 Limits of Band Edge Measurement	48
4.5.2 Test Setup	48
4.5.3 Test Procedures	48
4.5.4 Test Results	49
4.6 Peak to Average Ratio	59
4.6.1 Limits of Peak to Average Ratio Measurement	59
4.6.2 Test Setup	59
4.6.3 Test Procedures	59
4.6.4 Test Results	60
4.7 Conducted Spurious Emissions	65
4.7.1 Limits of Conducted Spurious Emissions Measurement	65
4.7.2 Test Setup	65
4.7.3 Test Procedure	65
4.7.4 Test Results	66
4.8 Radiated Emission Measurement	76
4.8.1 Limits of Radiated Emission Measurement	76
4.8.2 Test Procedure	76
4.8.3 Deviation from Test Standard	76
4.8.4 Test Setup	77

4.8.5 Test Results	78
5 Pictures of Test Arrangements.....	98
Appendix – Information of the Testing Laboratories	99

Release Control Record

Issue No.	Description	Date Issued
RFBFKV-WTW-P21060810-2	Original Release	Oct. 27, 2021

1 Certificate of Conformity

Product: Radar H2

Brand: BlackBerry

Test Model: ITF100-2, ITF100-3 (Refer to item 3.1 for more details)

Sample Status: Identical Prototype


Applicant: BlackBerry Limited

Test Date: Sep. 30, 2021 ~ Oct. 06, 2021

Standards: FCC Part 27, Subpart C, H, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :  , Date: Oct. 27, 2021
Lena Wang / Specialist

Approved by :  , Date: Oct. 27, 2021
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)	Equivalent Isotropically radiated power	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Out of Band Emission Measurements	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.12 dB at 3421.40 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)	Equivalent radiated power	Pass	Meet the requirement of limit.
2.1047	Modulation characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Out of Band Emission Measurements	Pass	Meet the requirement of limit.
--	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -36.06 dB at 1422.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 09, 2021	Apr. 08, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 10, 2021	Jun. 09, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 06, 2020	Nov. 05, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 06, 2020	Nov. 05, 2021
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 05, 2021	Jun. 04, 2022
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 17, 2021	Feb. 16, 2022
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM- SM8000	CABLE-CH9-02 (248780+171006)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9- (250795/4)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 05, 2021	Jun. 04, 2022
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Standard Temperature And Humidity Chamber TERCHY	MHU-225AU	920842	Jun. 15, 2021	Jun. 14, 2022
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
True RMS Clamp Meter Fluke	325	31130711WS	Jun. 02, 2021	Jun. 01, 2022
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 26, 2021	Aug. 25, 2022
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Feb. 07, 2021	Feb. 06, 2022
Radio Communication Tester ROHDE & SCHWARZ	CMU200	101095	Nov. 18, 2020	Nov. 17, 2021
DC power supply Keysight	U8002A	MY56330015	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.

3 General Information

3.1 General Description of EUT

Product	Radar H2		
Brand	BlackBerry		
Test Model	ITF100-2, ITF100-3		
Model Difference	Refer to Note as below		
Status of EUT	Identical Prototype		
Power Supply Rating	7.2 Vdc (battery)		
Modulation Type	LTE	QPSK, 16QAM	
Frequency Range	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz	
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz	
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz	
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz	
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz	
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz	
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz	
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz	
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz	
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz	
Emission Designator	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1M09D7W	
	LTE Band 4 (Channel Bandwidth: 3 MHz)	2M70G7D	
	LTE Band 4 (Channel Bandwidth: 5 MHz)	4M49D7W	
	LTE Band 4 (Channel Bandwidth: 10 MHz)	8M97D7W	
	LTE Band 4 (Channel Bandwidth: 15 MHz)	13M5G7D	
	LTE Band 4 (Channel Bandwidth: 20 MHz)	18M0D7W	
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	1M09D7W	
	LTE Band 12 (Channel Bandwidth: 3 MHz)	2M70G7D	
	LTE Band 12 (Channel Bandwidth: 5 MHz)	4M49D7W	
	LTE Band 12 (Channel Bandwidth: 10 MHz)	8M99D7W	
Max. ERP Power		QPSK	16QAM
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	52.723 mW (17.22dBm)	41.687 mW (16.20dBm)
	LTE Band 12 (Channel Bandwidth: 3 MHz)	52.240 mW (17.18dBm)	41.210 mW (16.15dBm)
	LTE Band 12 (Channel Bandwidth: 5 MHz)	51.050 mW (17.08dBm)	40.832 mW (16.11dBm)
	LTE Band 12 (Channel Bandwidth: 10 MHz)	51.168 mW (17.09dBm)	41.020 mW (16.13dBm)
Max. EIRP Power	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	250.035 mW (23.98dBm)	200.909 mW (23.03dBm)
	LTE Band 4 (Channel Bandwidth: 3 MHz)	258.821 mW (24.13dBm)	203.704 mW (23.09dBm)
	LTE Band 4 (Channel Bandwidth: 5 MHz)	263.633 mW (24.21dBm)	206.538 mW (23.15dBm)
	LTE Band 4 (Channel Bandwidth: 10 MHz)	261.818 mW (24.18dBm)	209.411 mW (23.21dBm)
	LTE Band 4 (Channel Bandwidth: 15 MHz)	256.448 mW	208.449 mW

		(24.09dBm)	(23.19dBm)
	LTE Band 4 (Channel Bandwidth: 20 MHz)	260.615 mW (24.16dBm)	200.909 mW (23.03dBm)
Antenna Type	Refer to Note as below		
Antenna Gain	Refer to Note as below		
Accessory Device	Refer to Note as below		
Data Cable Supplied	N/A		

Note:

1. All models are listed as below.

Mode	Brand	Supplier Code	Model	Difference
A	BlackBerry	B13	ITF100-3	with battery model 63320-001 /7.2V,38Ah
B		B12	ITF100-2	with battery model 63318-001 /7.2V,19Ah

2. The EUT contains following accessory devices.

Product	Brand	Model	Description	Remark
Battery 1	BlackBerry	BAT-63320-001	7.2 Vdc, 38 A	(for ITF100-3)
Battery 2	BlackBerry	BAT-63318-001	7.2 Vdc, 19 A	(for ITF100-2)

*The both difference are only in battery, therefore ITF100-2 only verifies the Radiated Spurious Emissions below 1GHz

3. The antenna information is listed as below.


Antenna Type	Monopole with gnd resonator	
Band	LTE	
	4	12
Gain (dBi)	2.54	-3.32

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test> & <E.R.P. / E.I.R.P. Test>

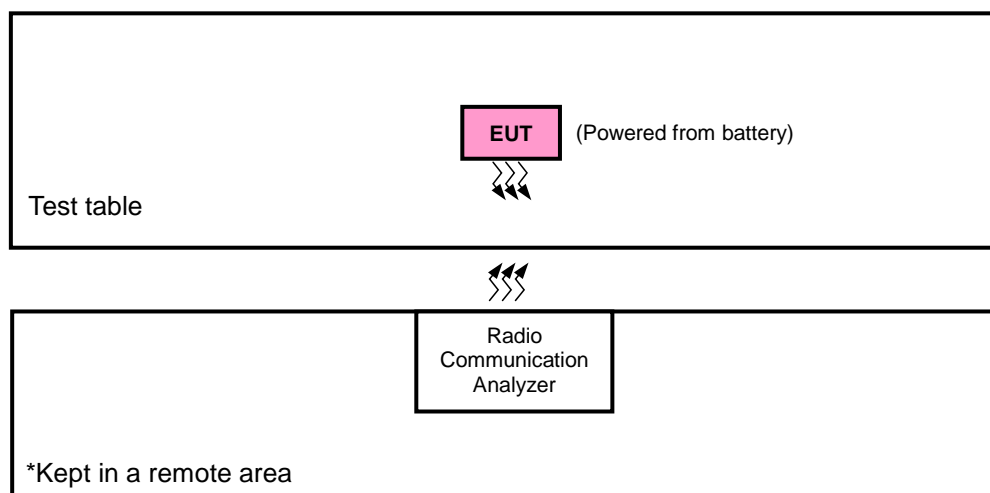

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

For Mode A

Band	Radiated Emission
LTE Band 4	Y-plane
LTE Band 12	Y-plane

For Mode B

Band	Radiated Emission
LTE Band 4	X-plane
LTE Band 12	X-plane

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
A	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	Modulation Characteristics	20050 to 20300	20175	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
A	Frequency Stability	19957 to 20393	19957, 20393	1.4 MHz	QPSK	6 RB / 0 RB Offset
		19965 to 20385	19965, 20385	3 MHz	QPSK	15 RB / 0 RB Offset
		19975 to 20375	19975, 20375	5 MHz	QPSK	25 RB / 0 RB Offset
		20000 to 20350	20000, 20350	10 MHz	QPSK	50 RB / 0 RB Offset
		20025 to 20325	20025, 20325	15 MHz	QPSK	75 RB / 0 RB Offset
		20050 to 20300	20050, 20300	20 MHz	QPSK	100 RB / 0 RB Offset
A	Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
A	Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
A	Band Edge	19957 to 20393	19957	1.4 MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			20393	1.4 MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		19965 to 20385	19965	3 MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			20385	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		19975 to 20375	19975	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			20375	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		20000 to 20350	20000	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			20350	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		20025 to 20325	20025	15 MHz	QPSK	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			20325	15 MHz	QPSK	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		20050 to 20300	20050	20 MHz	QPSK	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
			20300	20 MHz	QPSK	1 RB / 99 RB Offset 100 RB / 0 RB Offset		
		A	Conducted Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
				19965 to 20385	19965, 20175, 20385	3 MHz	QPSK	1 RB / 7 RB Offset
				19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
				20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
20025 to 20325	20025, 20175, 20325			15 MHz	QPSK	1 RB / 74 RB Offset		
20050 to 20300	20050, 20175, 20300			20 MHz	QPSK	1 RB / 0 RB Offset		
A, B	Radiated Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset		
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset		
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset		

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521-1 Section 6.6.3.1.4.1 and 3GPP 38.521-1 Section 6.5.3.1.4.1, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For Mode B only radiated emissions below 1 GHz test had been performed and presented in this report.

LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
A	ERP	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	Modulation Characteristics	23060 to 23130	23095	10 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
A	Frequency Stability	23017 to 23173	23017, 23173	1.4 MHz	QPSK	6 RB / 0 RB Offset
		23025 to 23165	23025, 23165	3 MHz	QPSK	15 RB / 0 RB Offset
		23035 to 23155	23035, 23155	5 MHz	QPSK	25 RB / 0 RB Offset
		23060 to 23130	23060, 23130	10 MHz	QPSK	50 RB / 0 RB Offset
A	Occupied Bandwidth	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	Peak to Average Ratio	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	Band Edge	23017 to 23173	23017	1.4 MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
			23173	1.4 MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		23025 to 23165	23025	3 MHz	QPSK	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
			23165	3 MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		23035 to 23155	23035	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			23155	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
23060 to 23130	23060	10 MHz	QPSK	1 RB / 0 RB Offset		
				50 RB / 0 RB Offset		
	23130	10 MHz	QPSK	1 RB / 49 RB Offset		
				50 RB / 0 RB Offset		
A	Conducted Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
A, B	Radiated Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521-1 Section 6.6.3.1.4.1 and 3GPP 38.521-1 Section 6.5.3.1.4.1, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For Mode B only radiated emissions below 1 GHz test had been performed and presented in this report.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	7.2 Vdc	Noah Chen
Modulation Characteristics	25 deg. C, 65 % RH	7.2 Vdc	Noah Chen
Frequency Stability	25 deg. C, 65 % RH	7.2 Vdc	Noah Chen
Occupied Bandwidth	25 deg. C, 65 % RH	7.2 Vdc	Noah Chen
Band Edge	25 deg. C, 65 % RH	7.2 Vdc	Noah Chen
Peak to Average Ratio	25 deg. C, 65 % RH	7.2 Vdc	Noah Chen
Conducted Emission	25 deg. C, 65 % RH	7.2 Vdc	Noah Chen
Radiated Emission	25 deg. C, 65 % RH	7.2 Vdc	Greg Lin, Rex Wang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

For LTE Band 4:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

For LTE Band 12:

Control and mobile stations in the 698-746 MHz band are limited to 30 watts ERP.

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, WCDMA, LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

$$\text{ERP} = P_{\text{Meas}} + G_{\text{T}} - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)


P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission above 1 GHz>

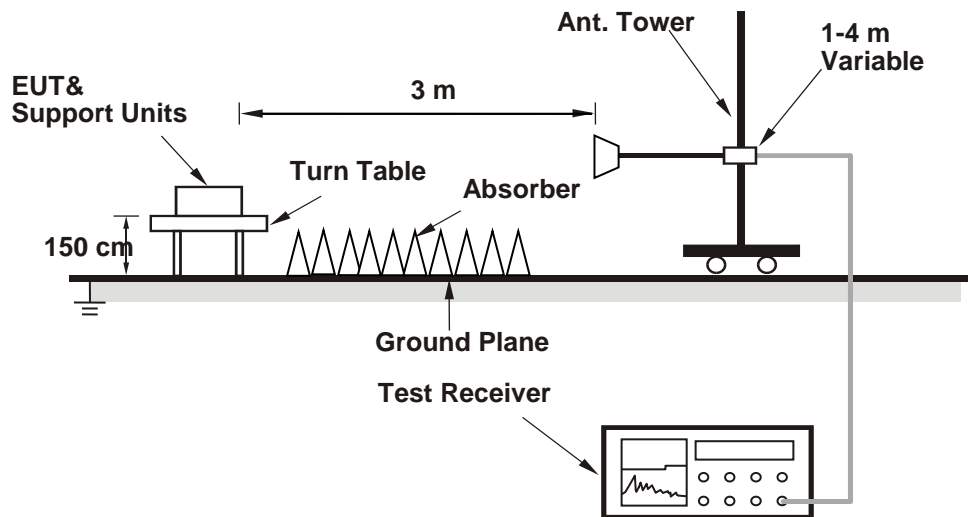

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

LTE Band 4						
BW	MCS Index	Channel		19957	20175	20393
		Frequency (MHz)		1710.7	1732.5	1754.3
1.4M	QPSK	1	0	21.40	21.33	21.40
		1	2	21.42	21.25	21.39
		1	5	21.38	21.44	21.42
		3	0	20.38	20.32	20.55
		3	1	20.49	20.35	20.45
		3	3	20.63	20.28	20.55
		6	0	20.41	20.46	20.37
	16QAM	1	0	20.47	20.34	20.49
		1	2	20.26	20.29	20.37
		1	5	20.34	20.36	20.35
		3	0	19.49	19.32	19.58
		3	1	19.35	19.35	19.37
		3	3	19.56	19.32	19.42
		6	0	19.50	19.54	19.47
BW	MCS Index	Channel		19965	20175	20385
		Frequency (MHz)		1711.5	1732.5	1753.5
3M	QPSK	1	0	21.42	21.59	21.43
		1	7	21.33	21.38	21.40
		1	14	21.47	21.45	21.28
		8	0	20.30	20.28	20.56
		8	3	20.60	20.36	20.62
		8	7	20.41	20.46	20.31
		15	0	20.41	20.41	20.52
	16QAM	1	0	20.38	20.47	20.35
		1	7	20.23	20.41	20.55
		1	14	20.47	20.52	20.29
		8	0	19.38	19.37	19.67
		8	3	19.54	19.36	19.56
		8	7	19.36	19.45	19.34
		15	0	19.27	19.25	19.50

LTE Band 4						
BW	MCS Index	Channel		19975	20175	20375
		Frequency (MHz)		1712.5	1732.5	1752.5
5M	QPSK	1	0	21.67	21.54	21.33
		1	12	21.48	21.58	21.54
		1	24	21.23	21.51	21.34
		12	0	20.46	20.37	20.42
		12	6	20.36	20.36	20.38
		12	13	20.51	20.38	20.36
		25	0	20.54	20.26	20.48
	16QAM	1	0	20.61	20.47	20.30
		1	12	20.51	20.59	20.53
		1	24	20.38	20.34	20.40
		12	0	19.63	19.34	19.40
		12	6	19.40	19.47	19.42
		12	13	19.45	19.34	19.39
		25	0	19.42	19.28	19.55
BW	MCS Index	Channel		20000	20175	20350
		Frequency (MHz)		1715	1732.5	1750
10M	QPSK	1	0	21.56	21.57	21.50
		1	24	21.46	21.56	21.64
		1	49	21.53	21.48	21.40
		25	0	20.55	20.45	20.29
		25	12	20.43	20.62	20.45
		25	25	20.38	20.59	20.41
		50	0	20.34	20.46	20.48
	16QAM	1	0	20.60	20.67	20.38
		1	24	20.46	20.60	20.46
		1	49	20.60	20.42	20.47
		25	0	19.47	19.42	19.40
		25	12	19.52	19.63	19.41
		25	25	19.27	19.51	19.41
		50	0	19.43	19.47	19.68

LTE Band 4						
BW	MCS Index	Channel		20025	20175	20325
		Frequency (MHz)		1717.5	1732.5	1747.5
15M	QPSK	1	0	21.28	21.32	21.34
		1	37	21.51	21.22	21.50
		1	74	21.55	21.42	21.47
		36	0	20.45	20.36	20.53
		36	19	20.51	20.34	20.41
		36	39	20.41	20.40	20.49
		75	0	20.35	20.48	20.57
	16QAM	1	0	20.31	20.35	20.31
		1	37	20.43	20.34	20.65
		1	74	20.49	20.37	20.46
		36	0	19.59	19.45	19.37
		36	19	19.53	19.35	19.45
		36	39	19.40	19.26	19.45
		75	0	19.35	19.42	19.48
BW	MCS Index	Channel		20050	20175	20300
		Frequency (MHz)		1720	1732.5	1745
20M	QPSK	1	0	21.47	21.54	21.62
		1	50	21.49	21.43	21.31
		1	99	21.37	21.29	21.47
		50	0	20.60	20.39	20.52
		50	25	20.34	20.42	20.34
		50	50	20.45	20.33	20.42
		100	0	20.38	20.27	20.24
	16QAM	1	0	20.37	20.40	20.48
		1	50	20.48	20.42	20.38
		1	99	20.45	20.32	20.49
		50	0	19.56	19.38	19.62
		50	25	19.45	19.31	19.27
		50	50	19.38	19.30	19.53
		100	0	19.39	19.39	19.39

LTE Band 12						
BW	MCS Index	Channel		23017	23095	23173
		Frequency (MHz)		699.7	707.5	715.3
1.4M	QPSK	1	0	22.69	22.47	22.50
		1	2	22.51	22.28	22.49
		1	5	22.30	22.60	22.39
		3	0	21.61	21.45	21.53
		3	1	21.50	21.30	21.38
		3	3	21.32	21.54	21.52
		6	0	21.36	21.48	21.55
	16QAM	1	0	21.62	21.29	21.62
		1	2	21.56	21.37	21.46
		1	5	21.47	21.67	21.30
		3	0	20.54	20.35	20.48
		3	1	20.48	20.34	20.41
		3	3	20.39	20.56	20.44
		6	0	20.45	20.58	20.52
BW	MCS Index	Channel		23025	23095	23165
		Frequency (MHz)		700.5	707.5	714.5
3M	QPSK	1	0	22.37	22.58	22.64
		1	7	22.37	22.56	22.61
		1	14	22.38	22.42	22.65
		8	0	21.64	21.41	21.46
		8	3	21.47	21.42	21.40
		8	7	21.36	21.41	21.26
		15	0	21.43	21.55	21.58
	16QAM	1	0	21.32	21.56	21.60
		1	7	21.49	21.60	21.62
		1	14	21.38	21.36	21.60
		8	0	20.65	20.53	20.42
		8	3	20.39	20.23	20.29
		8	7	20.53	20.51	20.28
		15	0	20.52	20.64	20.56

LTE Band 12						
BW	MCS Index	Channel		23035	23095	23155
		Frequency (MHz)		701.5	707.5	713.5
5M	QPSK	1	0	22.55	22.33	22.37
		1	12	22.48	22.49	22.26
		1	24	22.38	22.29	22.38
		12	0	21.44	21.61	21.48
		12	6	21.42	21.39	21.22
		12	13	21.43	21.64	21.44
		25	0	21.41	21.35	21.59
	16QAM	1	0	21.48	21.33	21.42
		1	12	21.36	21.58	21.41
		1	24	21.38	21.46	21.40
		12	0	20.40	20.57	20.41
		12	6	20.50	20.43	20.40
		12	13	20.56	20.50	20.40
		25	0	20.38	20.40	20.51
BW	MCS Index	Channel		23060	23095	23130
		Frequency (MHz)		704	707.5	711
10M	QPSK	1	0	22.56	22.54	22.53
		1	24	22.28	22.49	22.42
		1	49	22.46	22.46	22.38
		25	0	21.35	21.41	21.51
		25	12	21.45	21.29	21.56
		25	25	21.41	21.39	21.46
		50	0	21.44	21.48	21.49
	16QAM	1	0	21.51	21.38	21.57
		1	24	21.42	21.54	21.60
		1	49	21.55	21.42	21.23
		25	0	20.43	20.47	20.55
		25	12	20.50	20.34	20.49
		25	25	20.45	20.42	20.38
		50	0	20.38	20.54	20.45

EIRP Power(dBm)

LTE Band 4						
BW	MCS Index	Channel		19957	20175	20393
		Frequency (MHz)		1710.7	1732.5	1754.3
1.4M	QPSK	1	0	23.94	23.87	23.94
		1	2	23.96	23.79	23.93
		1	5	23.92	23.98	23.96
		3	0	22.92	22.86	23.09
		3	1	23.03	22.89	22.99
		3	3	23.17	22.82	23.09
		6	0	22.95	23.00	22.91
	16QAM	1	0	23.01	22.88	23.03
		1	2	22.80	22.83	22.91
		1	5	22.88	22.90	22.89
		3	0	22.03	21.86	22.12
		3	1	21.89	21.89	21.91
		3	3	22.10	21.86	21.96
		6	0	22.04	22.08	22.01
BW	MCS Index	Channel		19965	20175	20385
		Frequency (MHz)		1711.5	1732.5	1753.5
3M	QPSK	1	0	23.96	24.13	23.97
		1	7	23.87	23.92	23.94
		1	14	24.01	23.99	23.82
		8	0	22.84	22.82	23.10
		8	3	23.14	22.90	23.16
		8	7	22.95	23.00	22.85
		15	0	22.95	22.95	23.06
	16QAM	1	0	22.92	23.01	22.89
		1	7	22.77	22.95	23.09
		1	14	23.01	23.06	22.83
		8	0	21.92	21.91	22.21
		8	3	22.08	21.90	22.10
		8	7	21.90	21.99	21.88
		15	0	21.81	21.79	22.04

*EIRP = Conducted + antenna gain (2.54dBi)

LTE Band 4						
BW	MCS Index	Channel		19975	20175	20375
		Frequency (MHz)		1712.5	1732.5	1752.5
5M	QPSK	1	0	24.21	24.08	23.87
		1	12	24.02	24.12	24.08
		1	24	23.77	24.05	23.88
		12	0	23.00	22.91	22.96
		12	6	22.90	22.90	22.92
		12	13	23.05	22.92	22.90
		25	0	23.08	22.80	23.02
	16QAM	1	0	23.15	23.01	22.84
		1	12	23.05	23.13	23.07
		1	24	22.92	22.88	22.94
		12	0	22.17	21.88	21.94
		12	6	21.94	22.01	21.96
		12	13	21.99	21.88	21.93
		25	0	21.96	21.82	22.09
BW	MCS Index	Channel		20000	20175	20350
		Frequency (MHz)		1715	1732.5	1750
10M	QPSK	1	0	24.10	24.11	24.04
		1	24	24.00	24.10	24.18
		1	49	24.07	24.02	23.94
		25	0	23.09	22.99	22.83
		25	12	22.97	23.16	22.99
		25	25	22.92	23.13	22.95
		50	0	22.88	23.00	23.02
	16QAM	1	0	23.14	23.21	22.92
		1	24	23.00	23.14	23.00
		1	49	23.14	22.96	23.01
		25	0	22.01	21.96	21.94
		25	12	22.06	22.17	21.95
		25	25	21.81	22.05	21.95
		50	0	21.97	22.01	22.22

*EIRP = Conducted + antenna gain (2.54dBi)

LTE Band 4						
BW	MCS Index	Channel		20025	20175	20325
		Frequency (MHz)		1717.5	1732.5	1747.5
15M	QPSK	1	0	23.82	23.86	23.88
		1	37	24.05	23.76	24.04
		1	74	24.09	23.96	24.01
		36	0	22.99	22.90	23.07
		36	19	23.05	22.88	22.95
		36	39	22.95	22.94	23.03
		75	0	22.89	23.02	23.11
	16QAM	1	0	22.85	22.89	22.85
		1	37	22.97	22.88	23.19
		1	74	23.03	22.91	23.00
		36	0	22.13	21.99	21.91
		36	19	22.07	21.89	21.99
		36	39	21.94	21.80	21.99
		75	0	21.89	21.96	22.02
BW	MCS Index	Channel		20050	20175	20300
		Frequency (MHz)		1720	1732.5	1745
20M	QPSK	1	0	24.01	24.08	24.16
		1	50	24.03	23.97	23.85
		1	99	23.91	23.83	24.01
		50	0	23.14	22.93	23.06
		50	25	22.88	22.96	22.88
		50	50	22.99	22.87	22.96
		100	0	22.92	22.81	22.78
	16QAM	1	0	22.91	22.94	23.02
		1	50	23.02	22.96	22.92
		1	99	22.99	22.86	23.03
		50	0	22.10	21.92	22.16
		50	25	21.99	21.85	21.81
		50	50	21.92	21.84	22.07
		100	0	21.93	21.93	21.93

*EIRP = Conducted + antenna gain (2.54dBi)

ERP Power (dBm)

LTE Band 12						
BW	MCS Index	Channel		23017	23095	23173
		Frequency (MHz)		699.7	707.5	715.3
1.4M	QPSK	1	0	17.22	17.00	17.03
		1	2	17.04	16.81	17.02
		1	5	16.83	17.13	16.92
		3	0	16.14	15.98	16.06
		3	1	16.03	15.83	15.91
		3	3	15.85	16.07	16.05
		6	0	15.89	16.01	16.08
	16QAM	1	0	16.15	15.82	16.15
		1	2	16.09	15.90	15.99
		1	5	16.00	16.20	15.83
		3	0	15.07	14.88	15.01
		3	1	15.01	14.87	14.94
		3	3	14.92	15.09	14.97
		6	0	14.98	15.11	15.05
BW	MCS Index	Channel		23025	23095	23165
		Frequency (MHz)		700.5	707.5	714.5
3M	QPSK	1	0	16.90	17.11	17.17
		1	7	16.90	17.09	17.14
		1	14	16.91	16.95	17.18
		8	0	16.17	15.94	15.99
		8	3	16.00	15.95	15.93
		8	7	15.89	15.94	15.79
		15	0	15.96	16.08	16.11
	16QAM	1	0	15.85	16.09	16.13
		1	7	16.02	16.13	16.15
		1	14	15.91	15.89	16.13
		8	0	15.18	15.06	14.95
		8	3	14.92	14.76	14.82
		8	7	15.06	15.04	14.81
		15	0	15.05	15.17	15.09

*ERP = Conducted + antenna gain (-3.32dBi)-2.15

LTE Band 12						
BW	MCS Index	Channel		23035	23095	23155
		Frequency (MHz)		701.5	707.5	713.5
5M	QPSK	1	0	17.08	16.86	16.90
		1	12	17.01	17.02	16.79
		1	24	16.91	16.82	16.91
		12	0	15.97	16.14	16.01
		12	6	15.95	15.92	15.75
		12	13	15.96	16.17	15.97
		25	0	15.94	15.88	16.12
	16QAM	1	0	16.01	15.86	15.95
		1	12	15.89	16.11	15.94
		1	24	15.91	15.99	15.93
		12	0	14.93	15.10	14.94
		12	6	15.03	14.96	14.93
		12	13	15.09	15.03	14.93
		25	0	14.91	14.93	15.04
BW	MCS Index	Channel		23060	23095	23130
		Frequency (MHz)		704	707.5	711
10M	QPSK	1	0	17.09	17.07	17.06
		1	24	16.81	17.02	16.95
		1	49	16.99	16.99	16.91
		25	0	15.88	15.94	16.04
		25	12	15.98	15.82	16.09
		25	25	15.94	15.92	15.99
		50	0	15.97	16.01	16.02
	16QAM	1	0	16.04	15.91	16.10
		1	24	15.95	16.07	16.13
		1	49	16.08	15.95	15.76
		25	0	14.96	15.00	15.08
		25	12	15.03	14.87	15.02
		25	25	14.98	14.95	14.91
		50	0	14.91	15.07	14.98

*ERP = Conducted + antenna gain (-3.32dBi)-2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A



4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

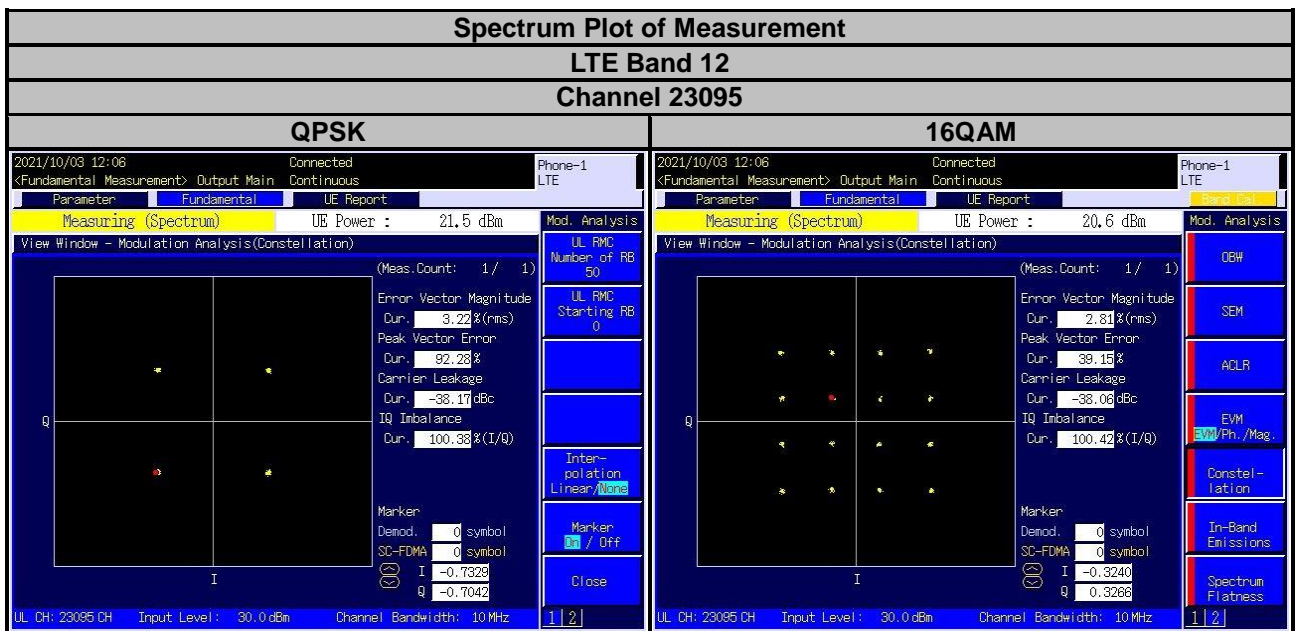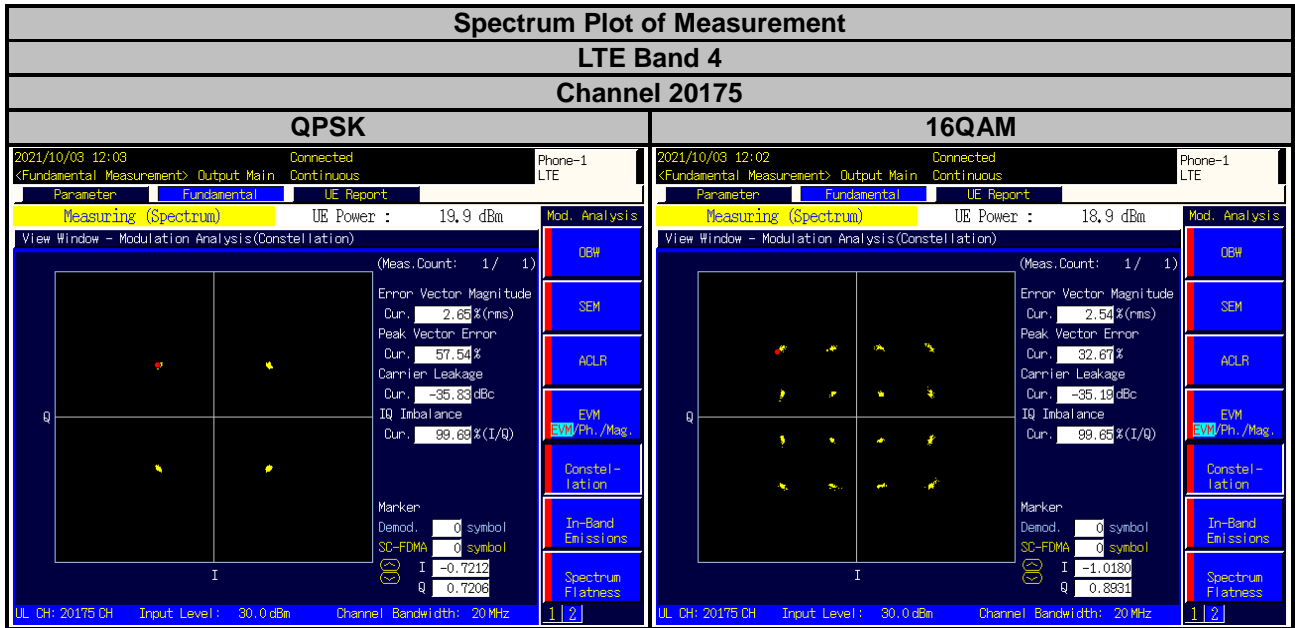

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

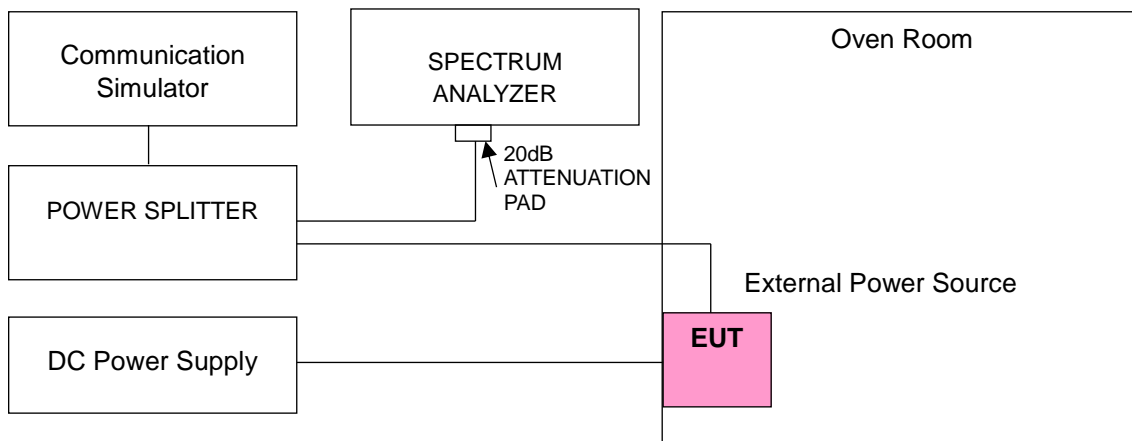

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1710.700004	0.002	1754.300002	0.001
6.12	1710.700003	0.002	1754.300004	0.002
8.28	1710.700004	0.002	1754.300002	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	1710.700002	0.001	1754.300004	0.002
-30	1710.700002	0.001	1754.300004	0.002
-20	1710.700004	0.002	1754.300002	0.001
-10	1710.700004	0.002	1754.300001	0.001
0	1710.700002	0.001	1754.300001	0.001
10	1710.700003	0.002	1754.300004	0.002
20	1710.699996	-0.002	1754.299998	-0.001
30	1710.699998	-0.001	1754.299998	-0.001
40	1710.699996	-0.002	1754.299998	-0.001
50	1710.699996	-0.002	1754.299997	-0.002
60	1710.700003	0.002	1754.299998	-0.001
70	1710.700002	0.001	1754.299997	-0.002
85	1710.700003	0.002	1754.299997	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1711.500003	0.001	1753.500002	0.001
6.12	1711.500003	0.002	1753.500003	0.002
8.28	1711.500002	0.001	1753.500001	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	1711.500003	0.002	1753.500002	0.001
-30	1711.500004	0.002	1753.500002	0.001
-20	1711.500002	0.001	1753.500001	0.001
-10	1711.500004	0.002	1753.500002	0.001
0	1711.500001	0.001	1753.500003	0.001
10	1711.500002	0.001	1753.500003	0.002
20	1711.499997	-0.002	1753.499997	-0.002
30	1711.499999	-0.001	1753.499998	-0.001
40	1711.499996	-0.002	1753.499996	-0.002
50	1711.499996	-0.002	1753.499998	-0.001
60	1711.499999	-0.001	1753.499997	-0.002
70	1711.499998	-0.001	1753.499999	-0.001
85	1711.499998	-0.001	1753.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1712.500001	0.001	1752.500003	0.001
6.12	1712.500002	0.001	1752.500003	0.002
8.28	1712.500002	0.001	1752.500002	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	1712.500002	0.001	1752.500003	0.002
-30	1712.500002	0.001	1752.500004	0.002
-20	1712.500003	0.002	1752.500002	0.001
-10	1712.500002	0.001	1752.500004	0.002
0	1712.500003	0.002	1752.500003	0.002
10	1712.500003	0.002	1752.500001	0.001
20	1712.499996	-0.002	1752.499997	-0.002
30	1712.499997	-0.002	1752.499998	-0.001
40	1712.499997	-0.002	1752.499997	-0.002
50	1712.499999	-0.001	1752.499997	-0.002
60	1712.500002	0.001	1752.499998	-0.001
70	1712.500004	0.002	1752.499997	-0.002
85	1712.500002	0.001	1752.499997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1715.000004	0.002	1750.000004	0.002
6.12	1715.000004	0.002	1750.000002	0.001
8.28	1715.000002	0.001	1750.000004	0.002

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	1715.000004	0.002	1750.000002	0.001
-30	1715.000004	0.002	1750.000002	0.001
-20	1715.000004	0.002	1750.000003	0.002
-10	1715.000001	0.001	1750.000003	0.002
0	1715.000002	0.001	1750.000002	0.001
10	1715.000003	0.002	1750.000003	0.002
20	1714.999997	-0.002	1749.999998	-0.001
30	1714.999996	-0.002	1749.999998	-0.001
40	1714.999996	-0.002	1749.999997	-0.001
50	1714.999997	-0.002	1749.999997	-0.002
60	1715.000002	0.001	1750.000002	0.001
70	1715.000003	0.001	1749.999997	-0.002
85	1715.000002	0.001	1749.999997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1717.500003	0.002	1747.500004	0.002
6.12	1717.500004	0.002	1747.500003	0.002
8.28	1717.500003	0.002	1747.500003	0.002

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	1717.500003	0.002	1747.500004	0.002
-30	1717.500002	0.001	1747.500004	0.002
-20	1717.500002	0.001	1747.500004	0.002
-10	1717.500004	0.002	1747.500001	0.001
0	1717.500001	0.001	1747.500003	0.002
10	1717.500003	0.001	1747.500003	0.002
20	1717.499998	-0.001	1747.499997	-0.002
30	1717.499998	-0.001	1747.499998	-0.001
40	1717.499997	-0.002	1747.499998	-0.001
50	1717.499998	-0.001	1747.499997	-0.002
60	1717.500002	0.001	1747.500004	0.002
70	1717.500004	0.002	1747.500004	0.002
85	1717.500001	0.001	1747.499997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	1720.000001	0.001	1745.000004	0.002
6.12	1720.000003	0.002	1745.000003	0.002
8.28	1720.000002	0.001	1745.000003	0.002

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	1720.000002	0.001	1745.000002	0.001
-30	1720.000002	0.001	1745.000002	0.001
-20	1720.000001	0.001	1745.000002	0.001
-10	1720.000004	0.002	1745.000003	0.002
0	1720.000002	0.001	1745.000003	0.002
10	1720.000002	0.001	1745.000003	0.002
20	1719.999997	-0.002	1744.999997	-0.002
30	1719.999996	-0.002	1744.999998	-0.001
40	1719.999997	-0.002	1744.999998	-0.001
50	1719.999996	-0.002	1744.999998	-0.001
60	1719.999997	-0.002	1745.000003	0.002
70	1719.999996	-0.003	1745.000002	0.001
85	1719.999999	-0.001	1744.999997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	699.700002	0.003	715.300003	0.004
6.12	699.700002	0.003	715.300004	0.005
8.28	699.700003	0.004	715.300001	0.001

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	699.699999	-0.002	715.299997	-0.004
-30	699.700001	0.002	715.300003	0.005
-20	699.700003	0.004	715.300003	0.005
-10	699.700002	0.003	715.300004	0.005
0	699.700003	0.004	715.300004	0.005
10	699.700004	0.006	715.300004	0.005
20	699.699997	-0.005	715.299998	-0.003
30	699.699998	-0.003	715.299999	-0.002
40	699.699998	-0.003	715.299996	-0.005
50	699.699999	-0.002	715.299996	-0.005
60	699.699998	-0.003	715.300002	0.003
70	699.699999	-0.002	715.300003	0.004
85	699.699997	-0.004	715.300003	0.003

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	700.500003	0.004	714.500004	0.005
6.12	700.500002	0.003	714.500001	0.002
8.28	700.500004	0.005	714.500004	0.005

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	700.500002	0.002	714.500003	0.005
-30	700.500001	0.001	714.500004	0.006
-20	700.500004	0.005	714.500001	0.002
-10	700.500004	0.005	714.500003	0.004
0	700.500003	0.004	714.500003	0.004
10	700.500002	0.003	714.500003	0.004
20	700.499996	-0.005	714.499998	-0.003
30	700.499996	-0.005	714.499999	-0.001
40	700.499998	-0.002	714.499997	-0.004
50	700.499997	-0.004	714.499997	-0.004
60	700.499997	-0.004	714.499997	-0.004
70	700.499997	-0.004	714.499999	-0.002
85	700.499996	-0.005	714.499999	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	701.500002	0.003	713.500004	0.005
6.12	701.500001	0.001	713.500002	0.003
8.28	701.500002	0.003	713.500001	0.002

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	701.500003	0.004	713.500003	0.004
-30	701.500002	0.003	713.500003	0.005
-20	701.500003	0.004	713.500001	0.002
-10	701.500002	0.003	713.500003	0.004
0	701.500004	0.005	713.500002	0.002
10	701.500003	0.004	713.500003	0.004
20	701.499996	-0.005	713.499996	-0.005
30	701.499997	-0.004	713.499997	-0.005
40	701.499998	-0.003	713.499996	-0.005
50	701.499999	-0.002	713.499996	-0.006
60	701.500002	0.003	713.500001	0.002
70	701.499997	-0.004	713.500004	0.005
85	701.499997	-0.004	713.500002	0.003

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
7.2	704.000002	0.003	711.000003	0.004
6.12	704.000003	0.004	711.000003	0.004
8.28	704.000003	0.004	711.000003	0.005

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-40	704.000002	0.003	711.000003	0.004
-30	704.000002	0.003	711.000003	0.004
-20	704.000001	0.002	711.000003	0.004
-10	704.000002	0.003	711.000001	0.002
0	704.000002	0.003	711.000002	0.003
10	704.000003	0.004	711.000002	0.003
20	703.999997	-0.004	710.999999	-0.002
30	703.999999	-0.002	710.999997	-0.004
40	703.999998	-0.003	710.999998	-0.003
50	703.999997	-0.005	710.999997	-0.004
60	703.999998	-0.003	710.999998	-0.003
70	703.999998	-0.003	710.999999	-0.002
85	703.999998	-0.003	710.999999	-0.002

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Refer to ANSI C63.26 section 5.4.4. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth. For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

4.4.3 Test Setup

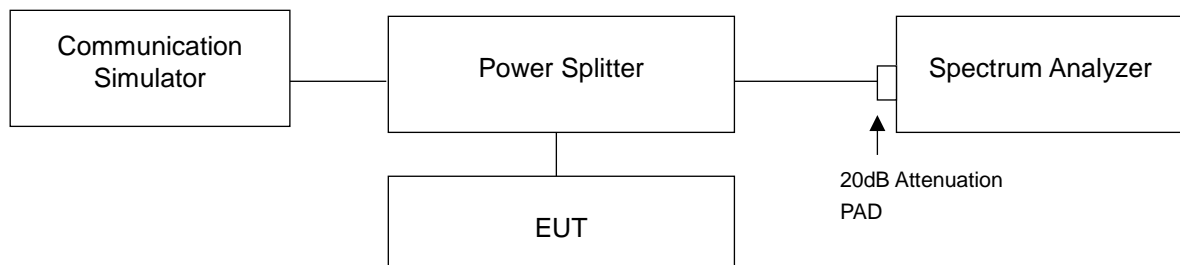


4.4.4 Test Result

LTE Band 4					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19957	1710.7	1.09	1.09	1.21	1.21
20175	1732.5	1.09	1.09	1.22	1.21
20393	1754.3	1.09	1.09	1.21	1.21
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19965	1711.5	2.70	2.70	2.92	2.93
20175	1732.5	2.70	2.69	2.92	2.93
20385	1753.5	2.70	2.70	2.93	2.94

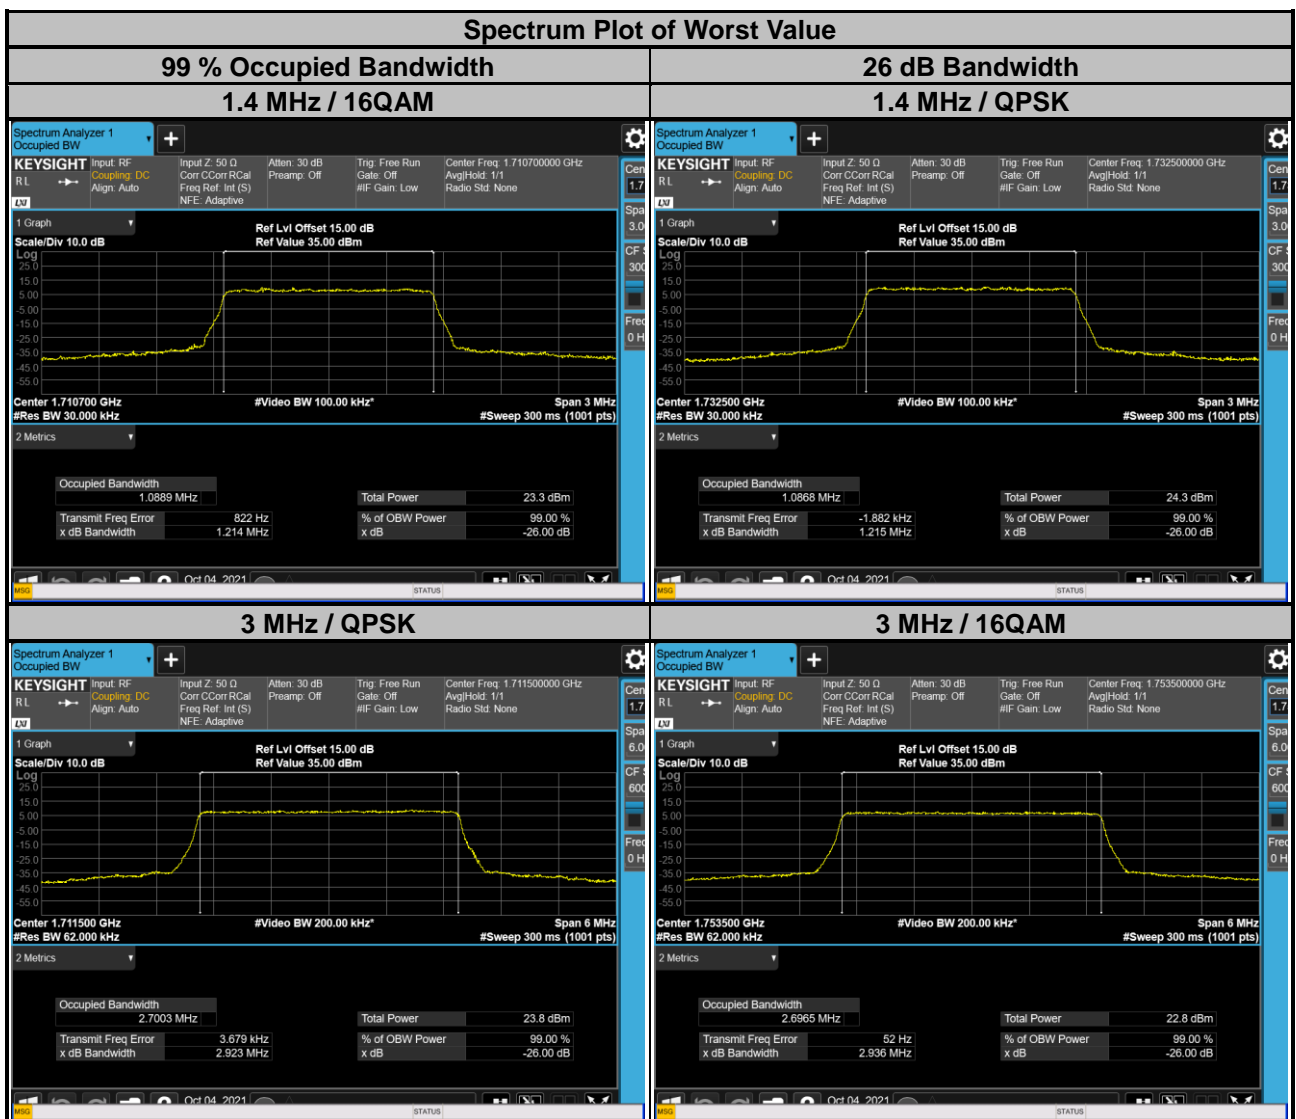

LTE Band 4					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
19975	1712.5	4.49	4.49	4.80	4.80
20175	1732.5	4.49	4.49	4.79	4.80
20375	1752.5	4.49	4.49	4.81	4.80

Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20000	1715.0	8.96	8.96	9.49	9.51
20175	1732.5	8.97	8.97	9.52	9.51
20350	1750.0	8.96	8.96	9.50	9.52

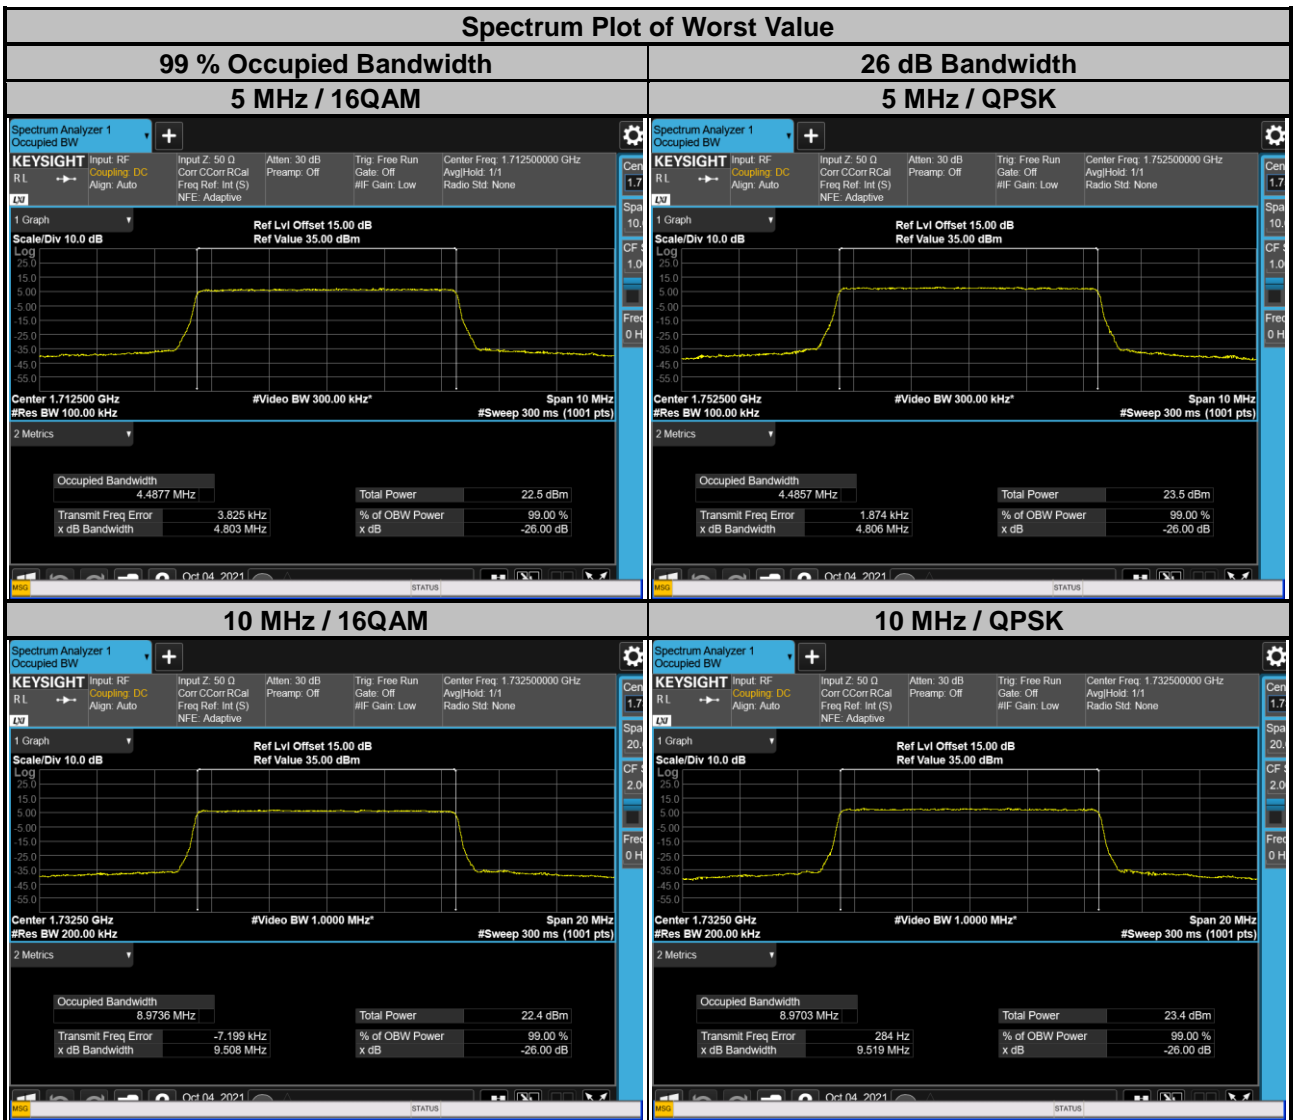


LTE Band 4					
Channel Bandwidth: 15 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20025	1717.5	13.43	13.42	14.24	14.23
20175	1732.5	13.47	13.46	14.26	14.25
20325	1747.5	13.45	13.43	14.24	14.24

Channel Bandwidth: 20 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
20050	1720.0	17.85	17.87	18.98	18.98
20175	1732.5	17.94	17.96	19.03	19.03
20300	1745.0	17.92	17.94	19.02	19.02




LTE Band 12					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23017	699.7	1.09	1.09	1.22	1.21
23095	707.5	1.09	1.09	1.21	1.21
23173	715.3	1.09	1.09	1.21	1.21

Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23025	700.5	2.70	2.69	2.91	2.92
23095	707.5	2.70	2.70	2.93	2.93
23165	714.5	2.70	2.69	2.92	2.91

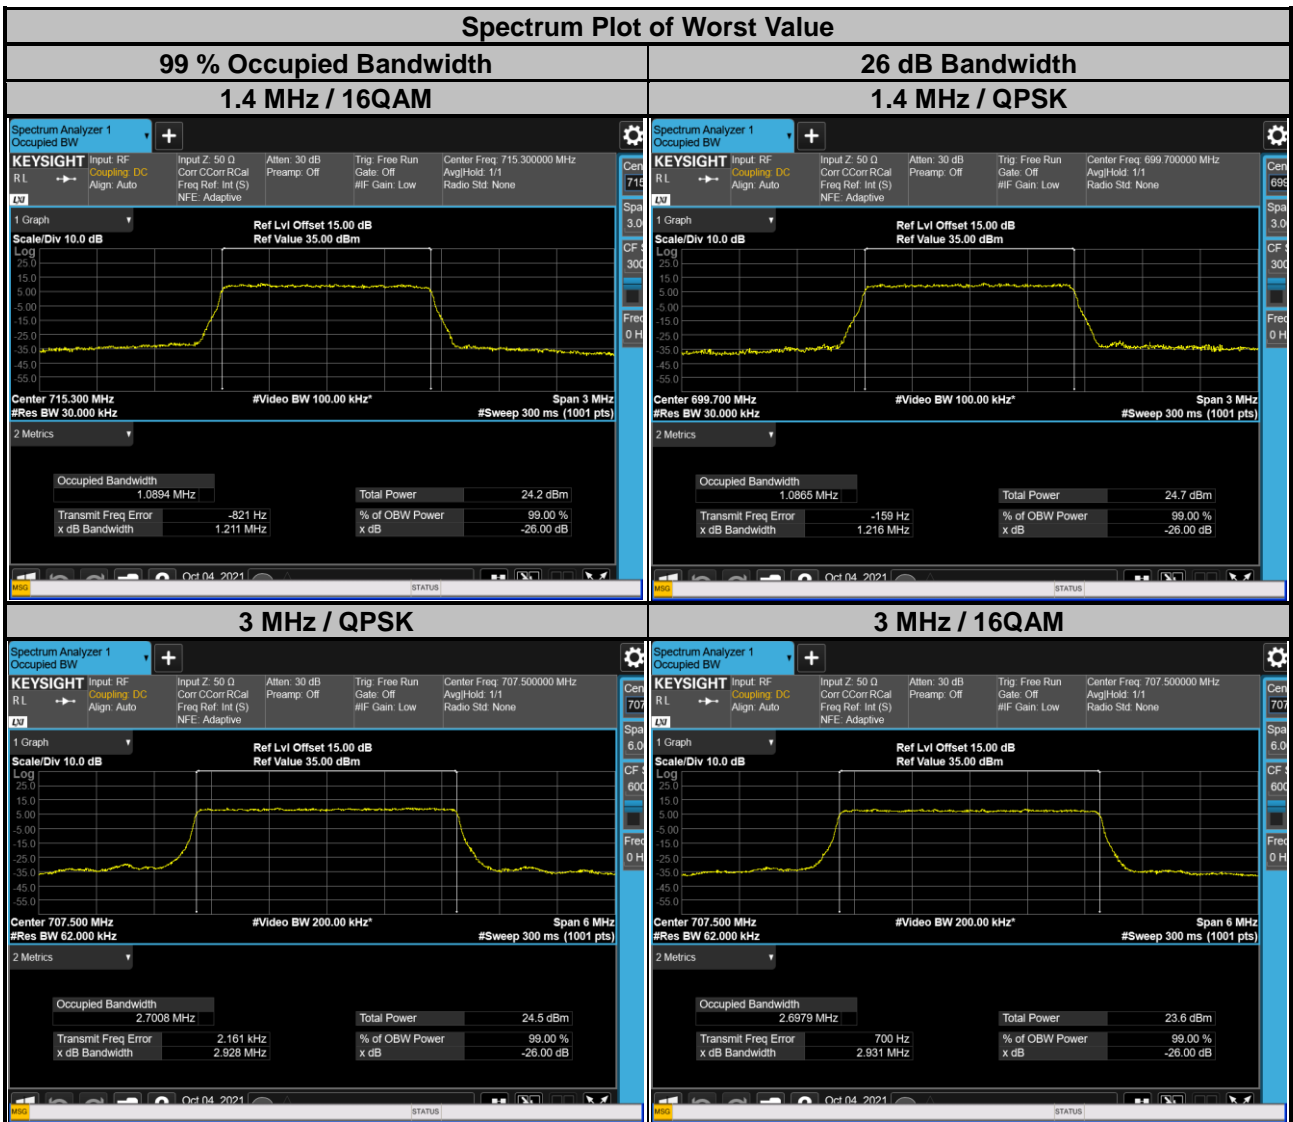

LTE Band 12					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23035	701.5	4.48	4.48	4.77	4.78
23095	707.5	4.49	4.49	4.81	4.81
23155	713.5	4.47	4.48	4.78	4.77
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23060	704.0	8.94	8.94	9.48	9.48
23095	707.5	8.99	8.99	9.52	9.51
23130	711.0	8.94	8.95	9.48	9.49

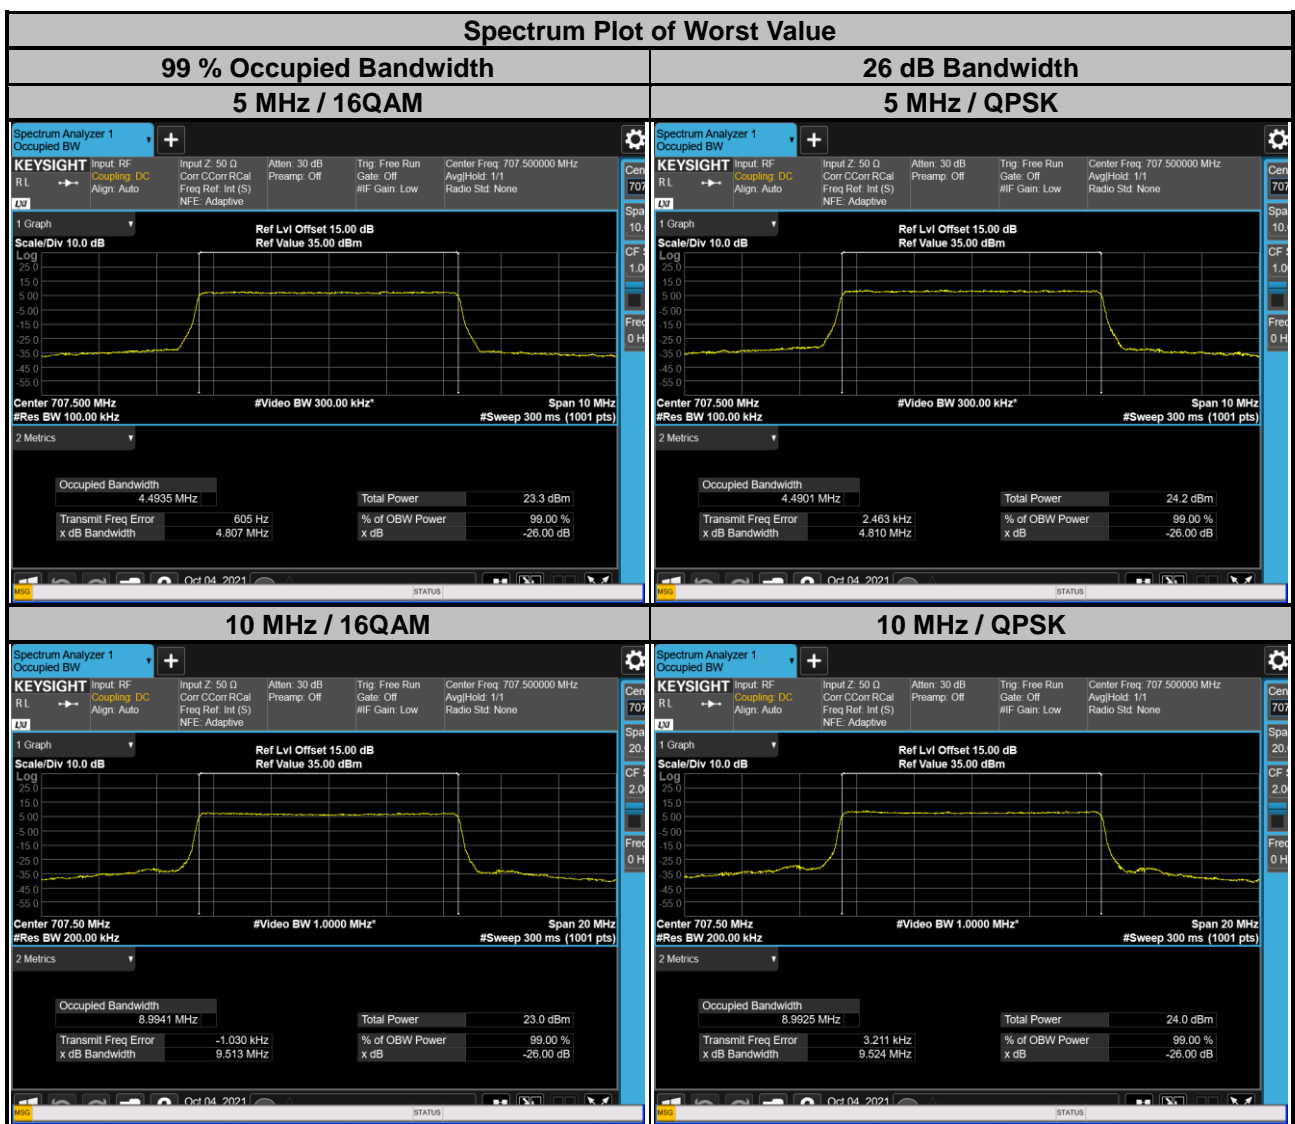

4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement


For LTE Band 12:

According to FCC 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For LTE Band 4:

According to FCC 27.53(h), for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz, 1915-1920MHz, 1995-2000 MHz, 2000-2020MHz, 2110-2155MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.5.2 Test Setup

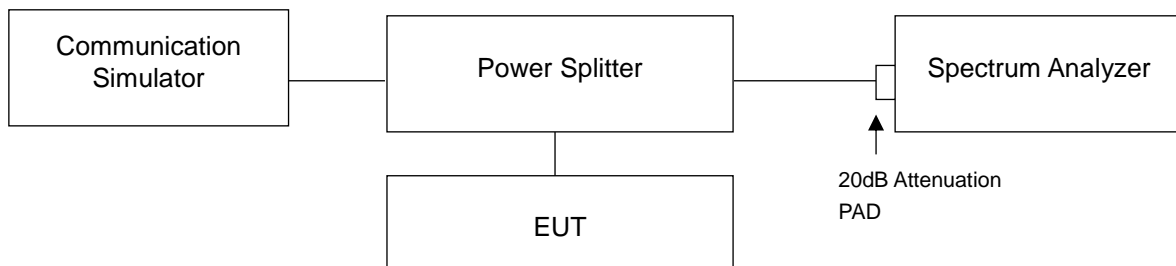



4.5.3 Test Procedures

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz or 30 kHz and VB of the spectrum is 51 kHz or 100 kHz (LTE Bandwidth 1.4 MHz).
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 51 kHz and VB of the spectrum is 160 kHz (LTE Bandwidth 5 MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- g. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- h. Record the max. trace plot into the test report.


4.5.4 Test Results

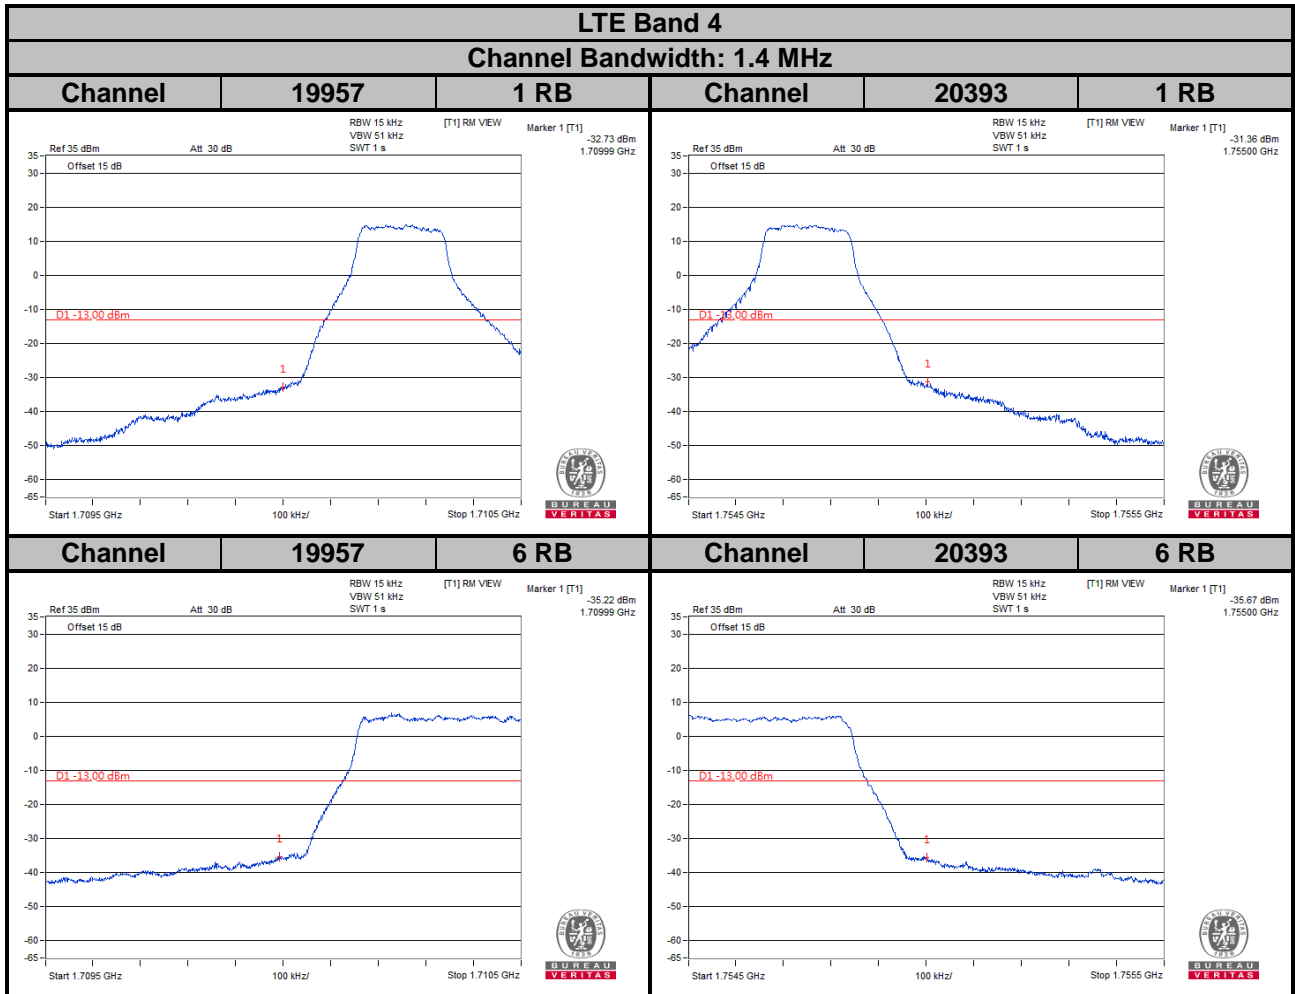

LTE Band 4
Channel Bandwidth: 3 MHz

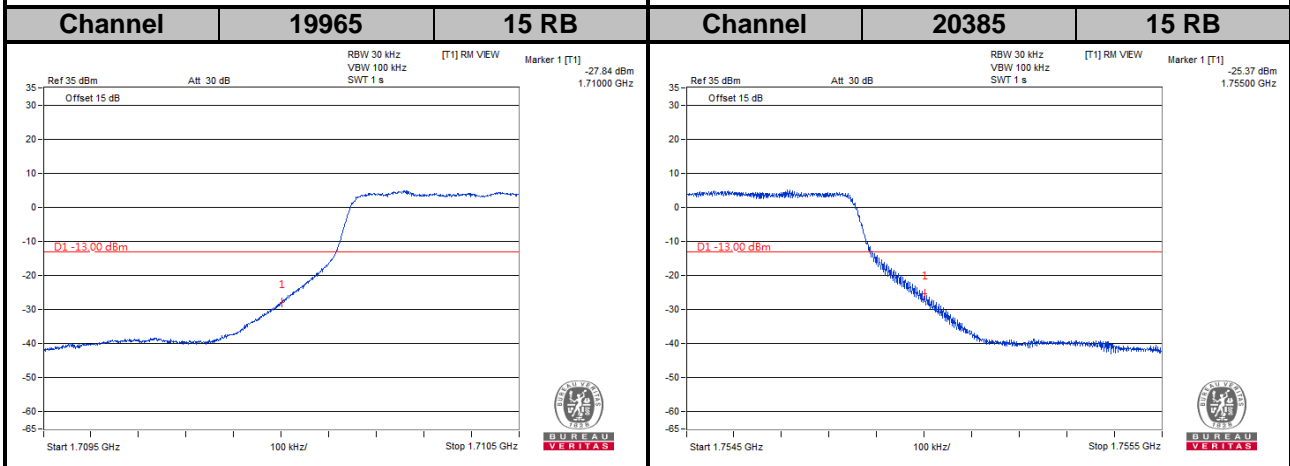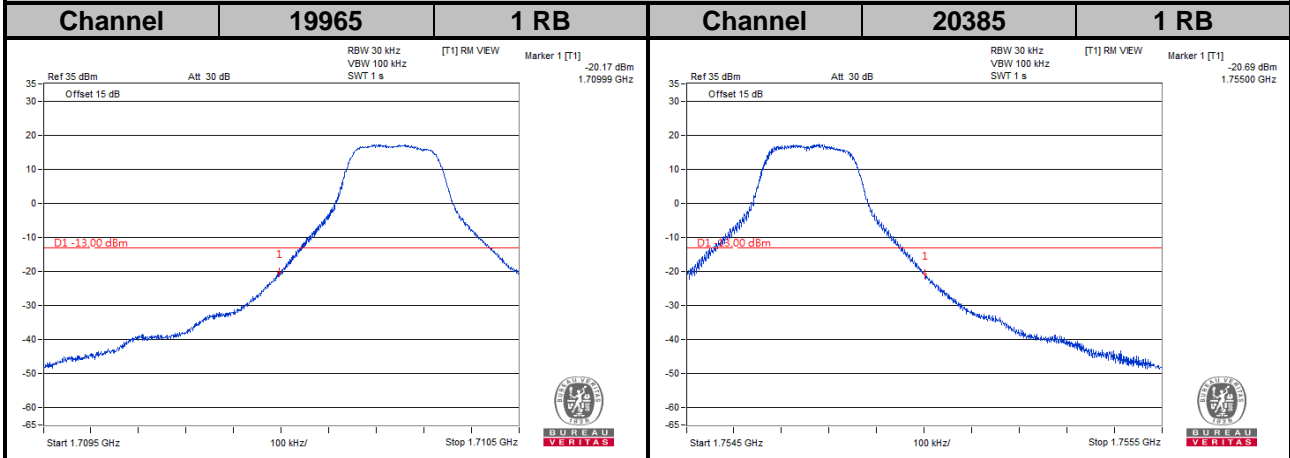


LTE Band 4
Channel Bandwidth: 5 MHz

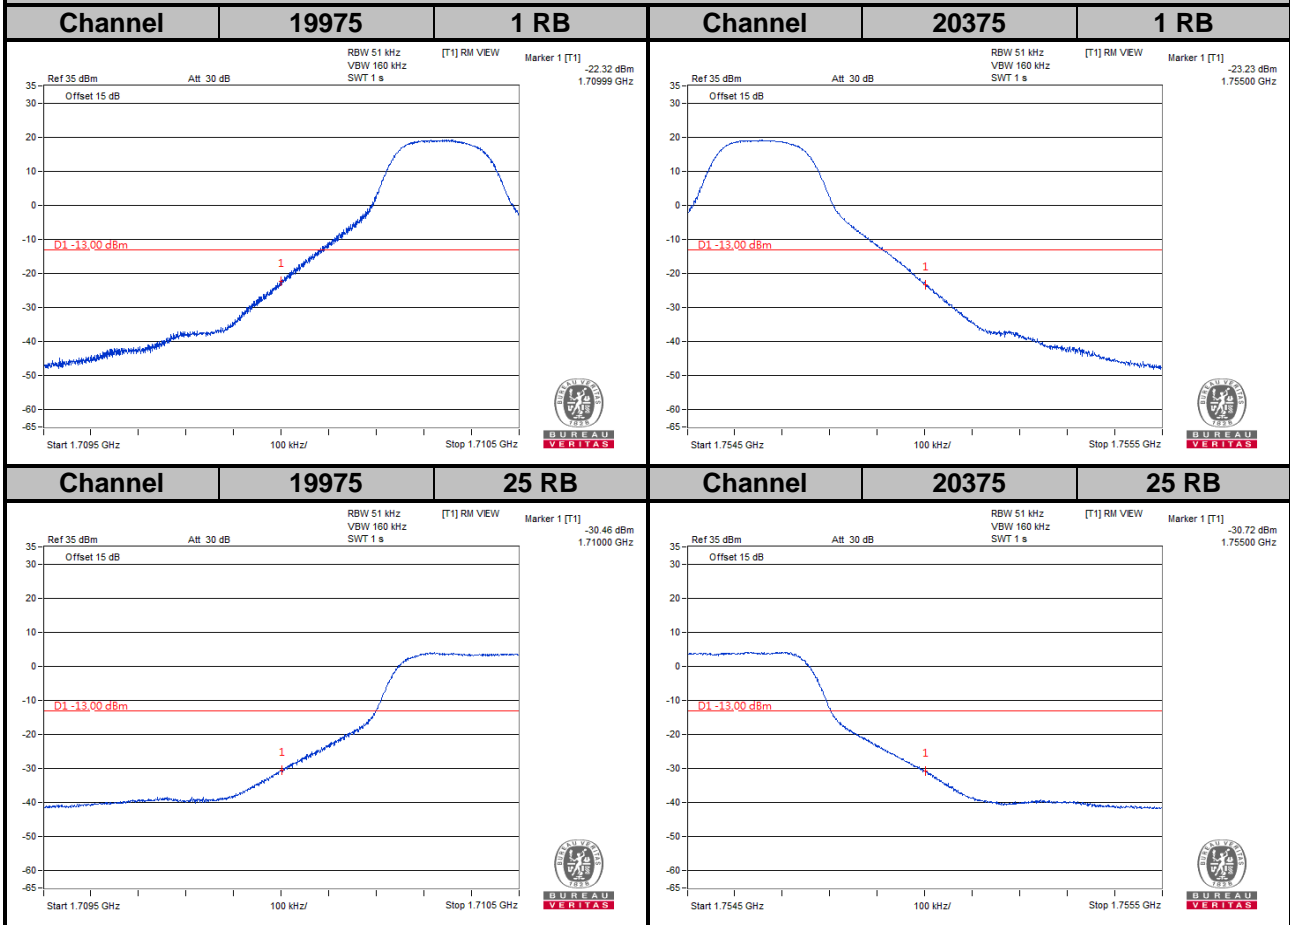


LTE Band 4

Channel Bandwidth: 10 MHz


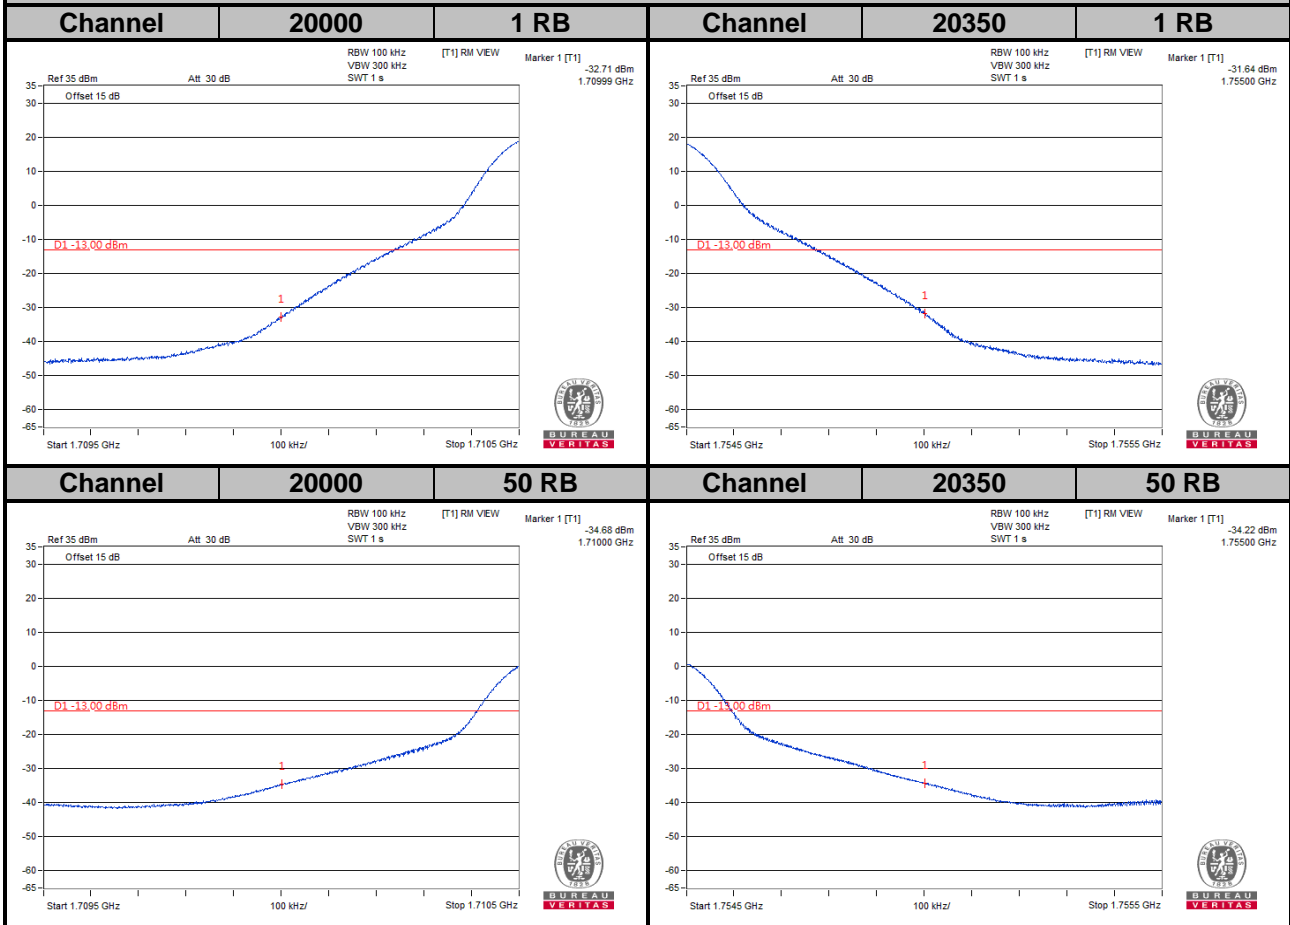


LTE Band 4

Channel Bandwidth: 15 MHz

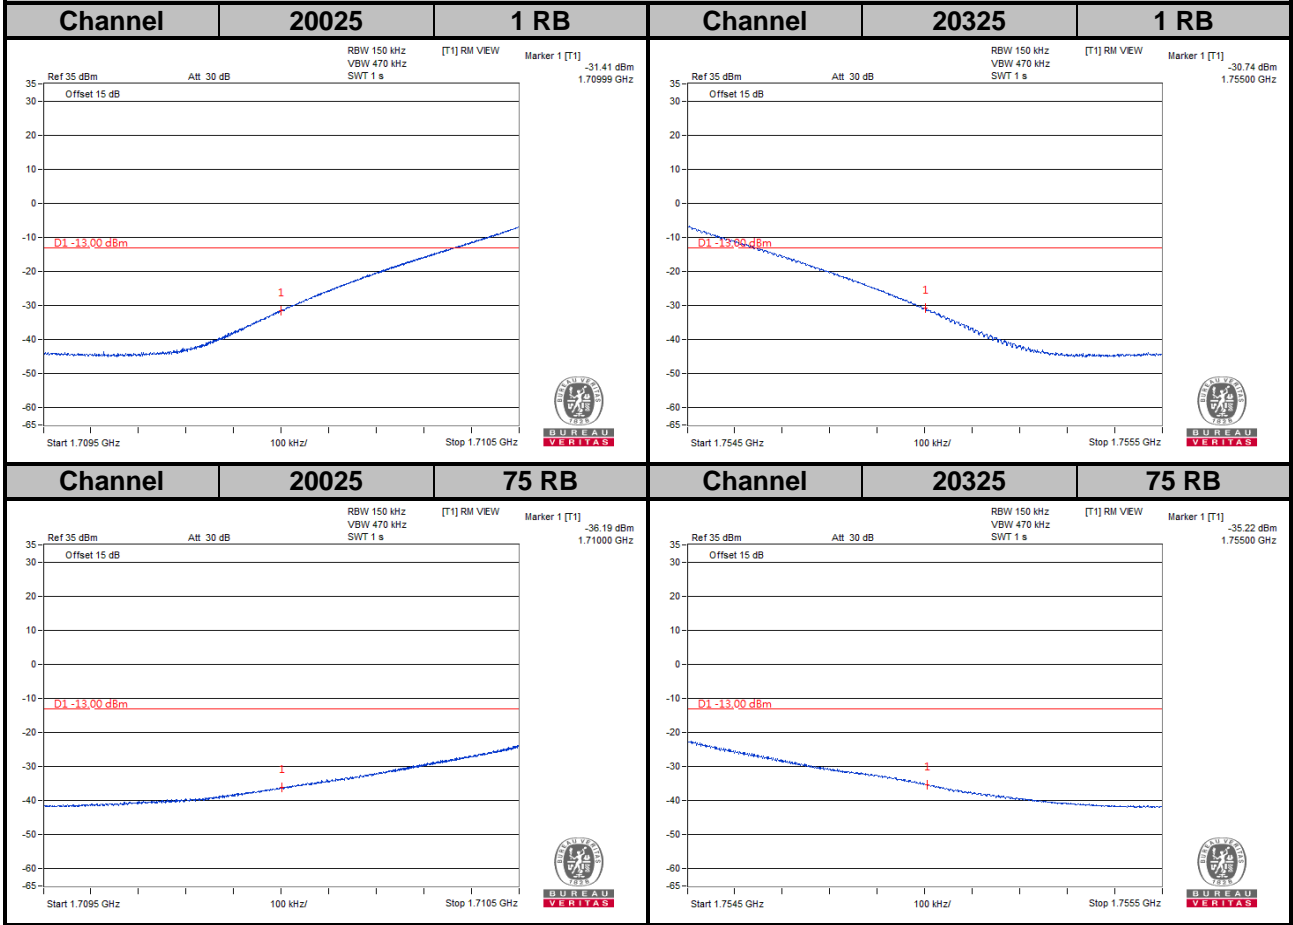


LTE Band 4
Channel Bandwidth: 20 MHz

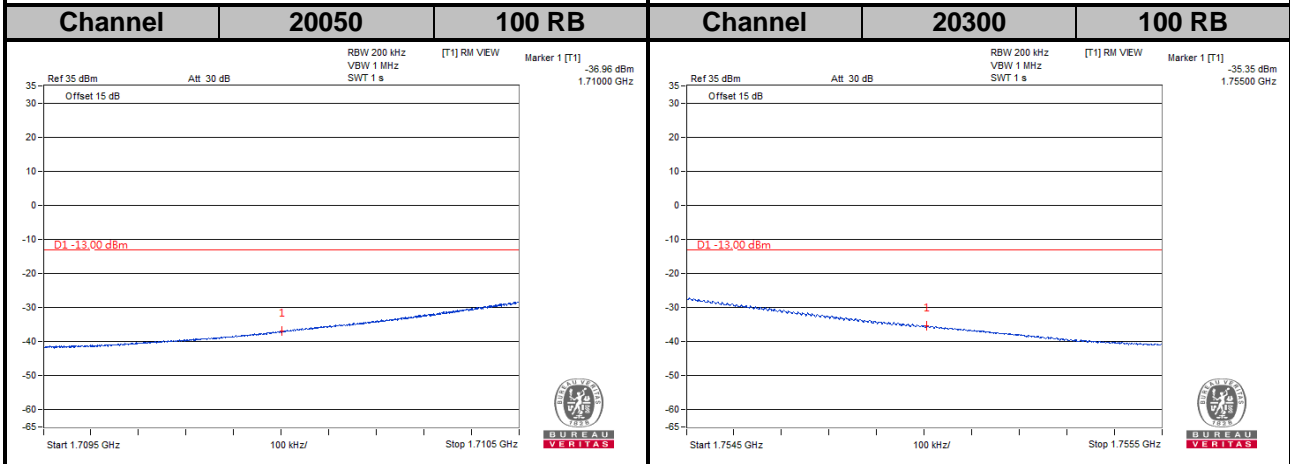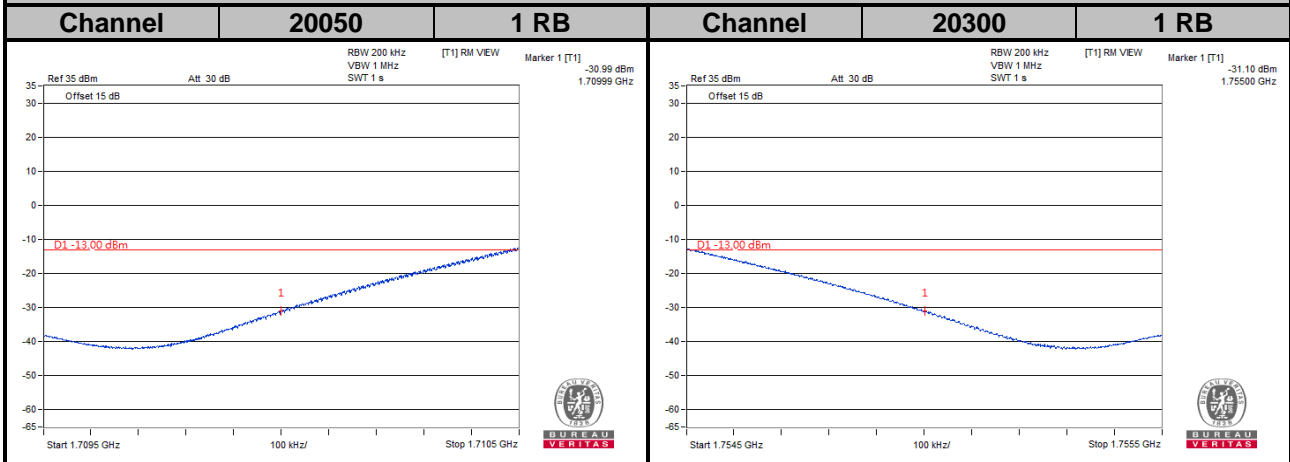


LTE Band 12


Channel Bandwidth: 1.4 MHz

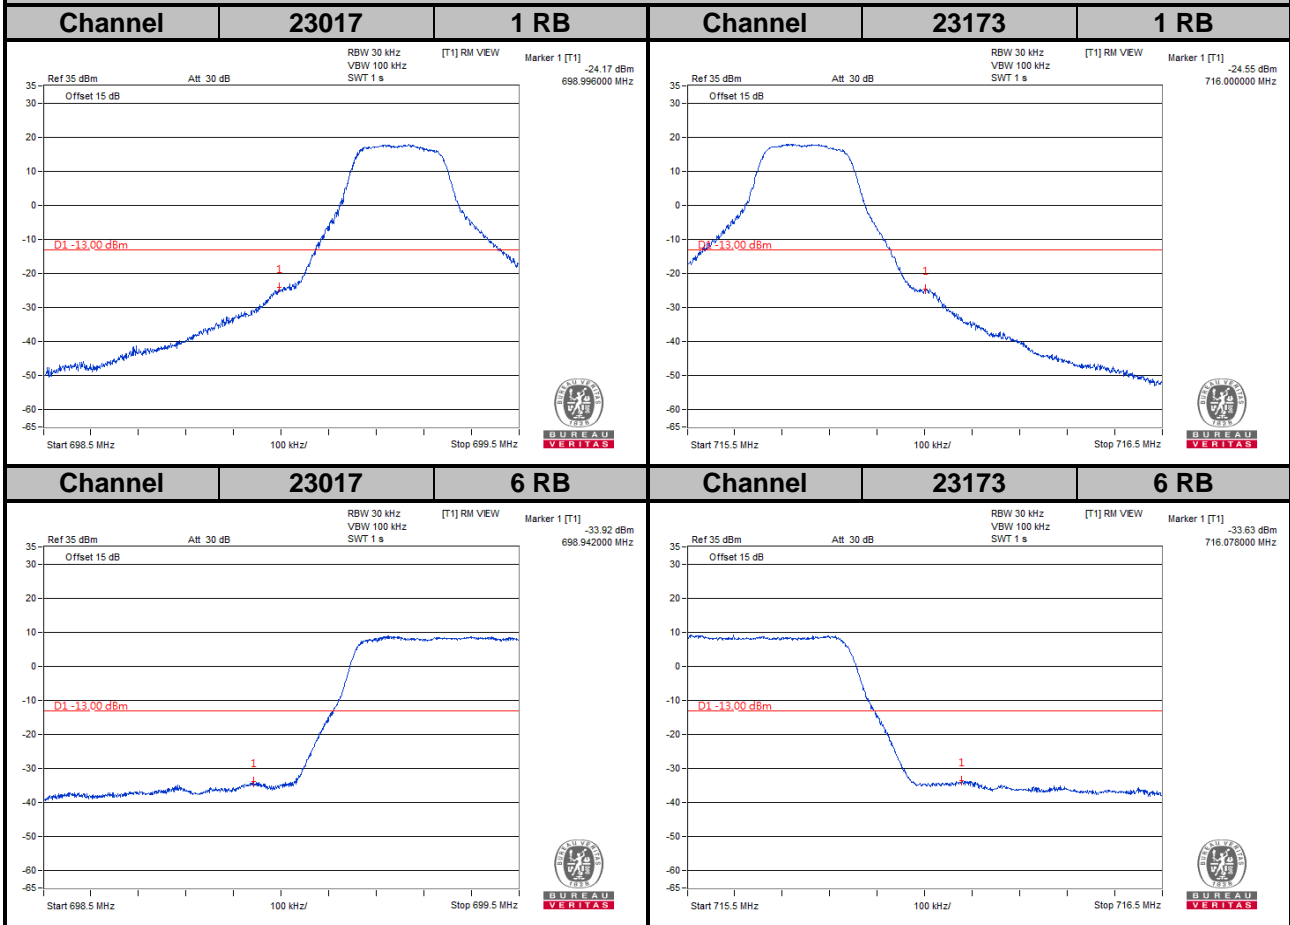

LTE Band 12
Channel Bandwidth: 3 MHz

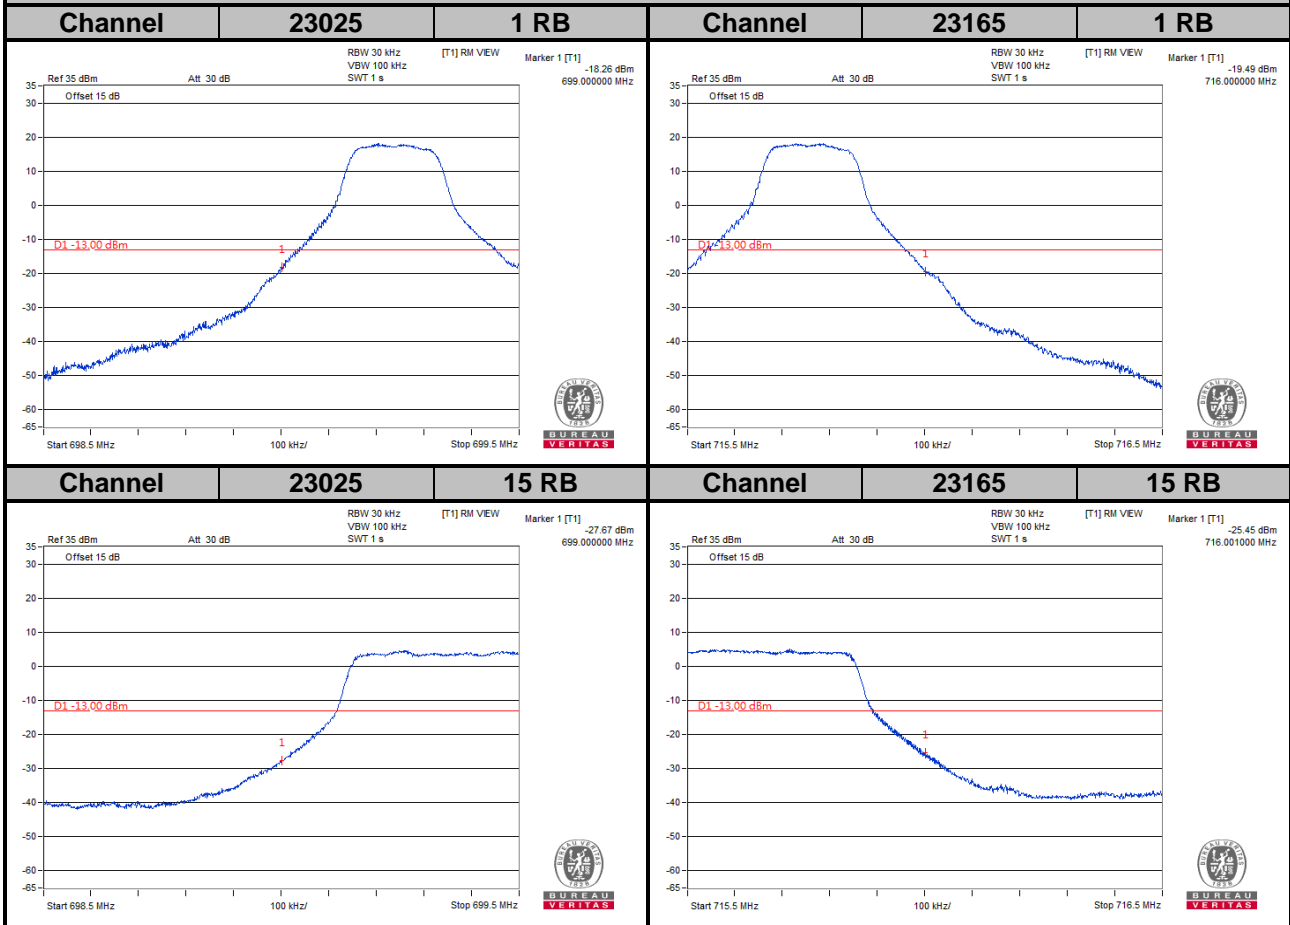


LTE Band 12
Channel Bandwidth: 5 MHz

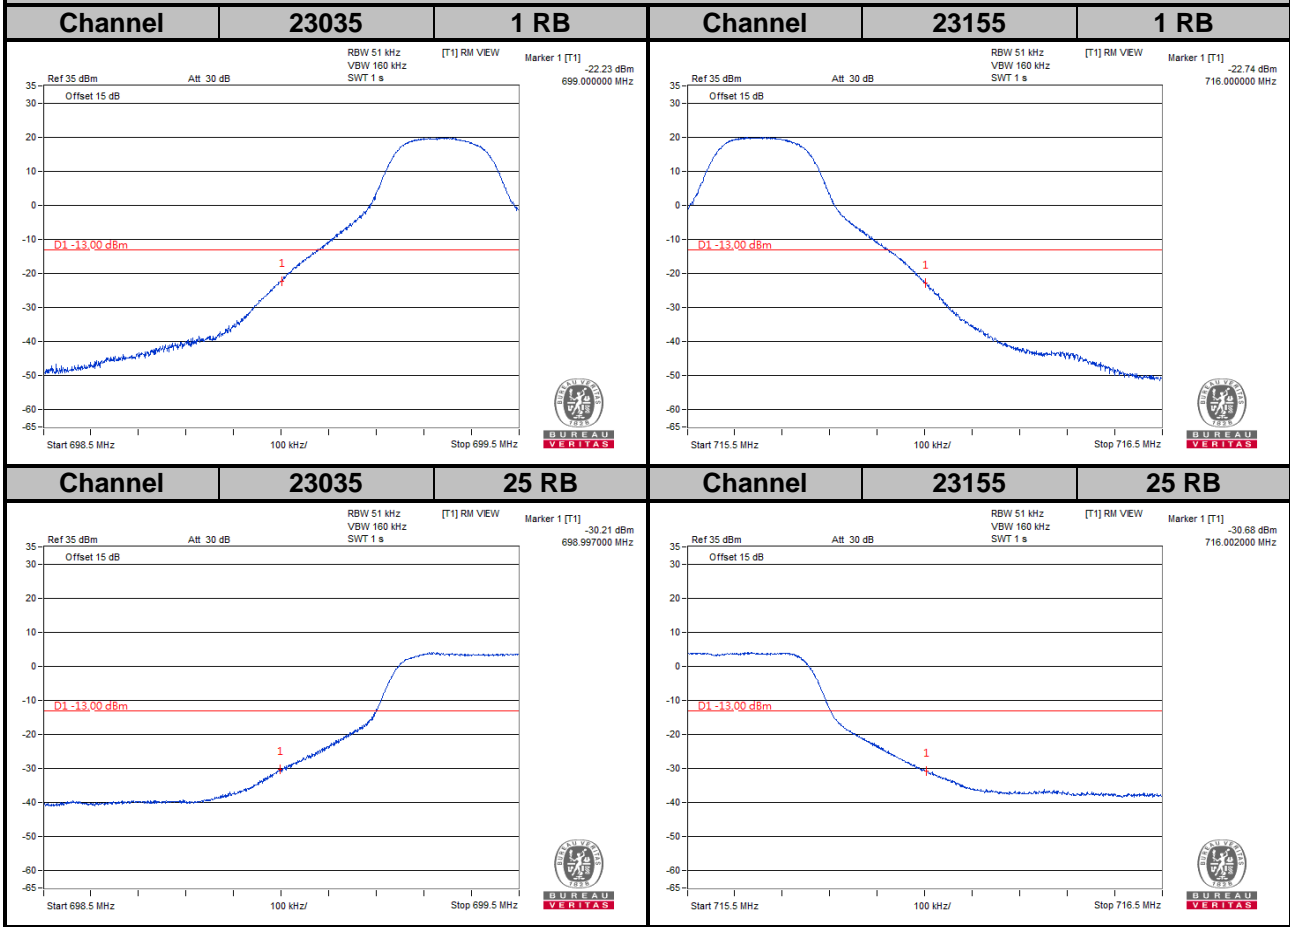

LTE Band 12

Channel Bandwidth: 10 MHz

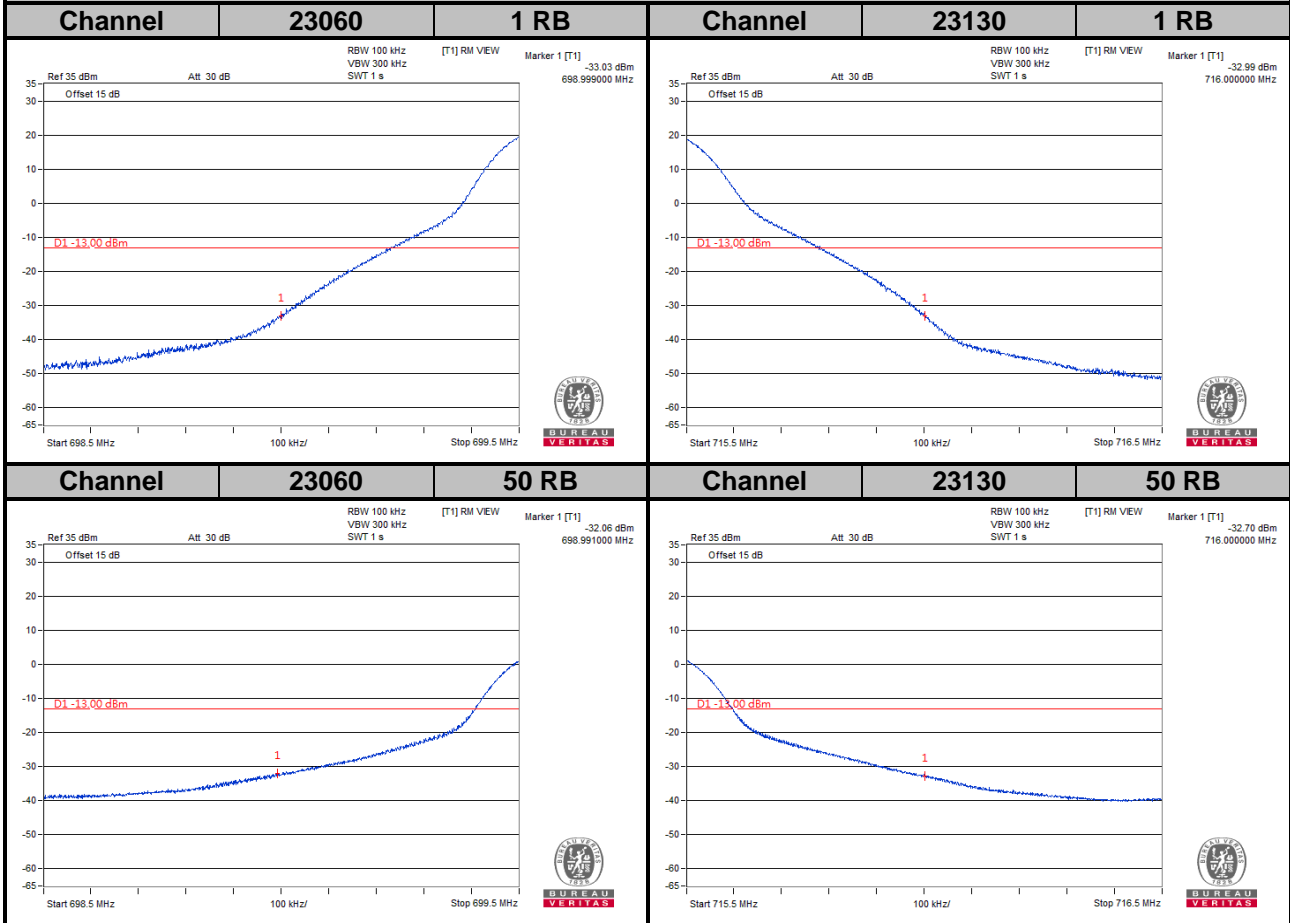


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

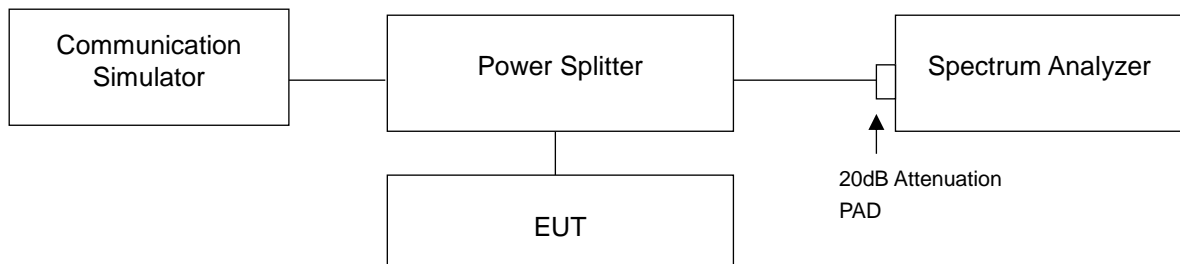


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	4.84	5.63	19965	1711.5	4.69	5.44
20175	1732.5	4.80	5.57	20175	1732.5	4.61	5.40
20393	1754.3	4.86	5.64	20385	1753.5	4.69	5.47

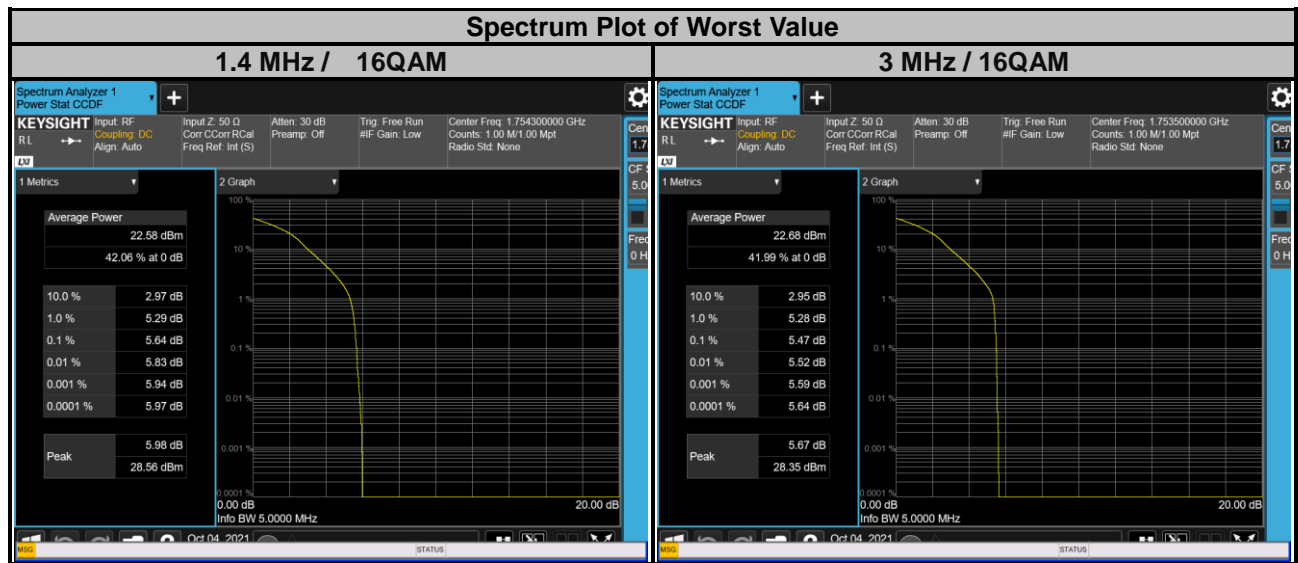


LTE Band 4							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.65	5.41	20000	1715.0	4.63	5.32
20175	1732.5	4.59	5.38	20175	1732.5	4.61	5.44
20375	1752.5	4.66	5.44	20350	1750.0	4.59	5.35

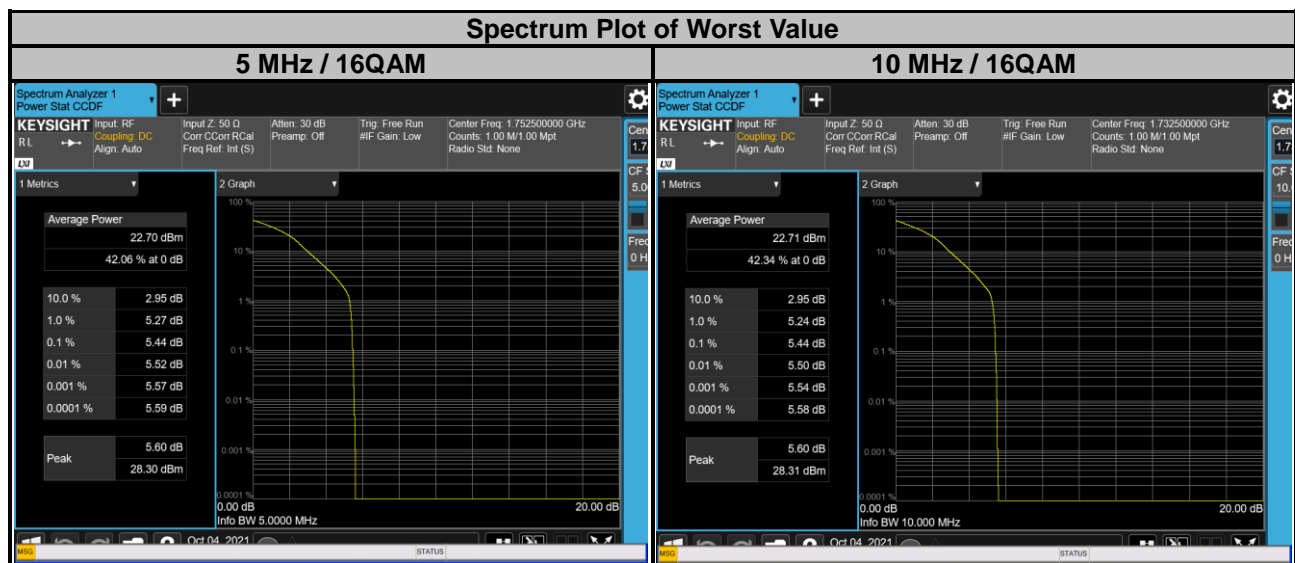


LTE Band 4							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	4.58	5.36	20050	1720.0	4.58	5.40
20175	1732.5	4.59	5.34	20175	1732.5	4.59	5.34
20325	1747.5	4.52	5.30	20300	1745.0	4.51	5.22

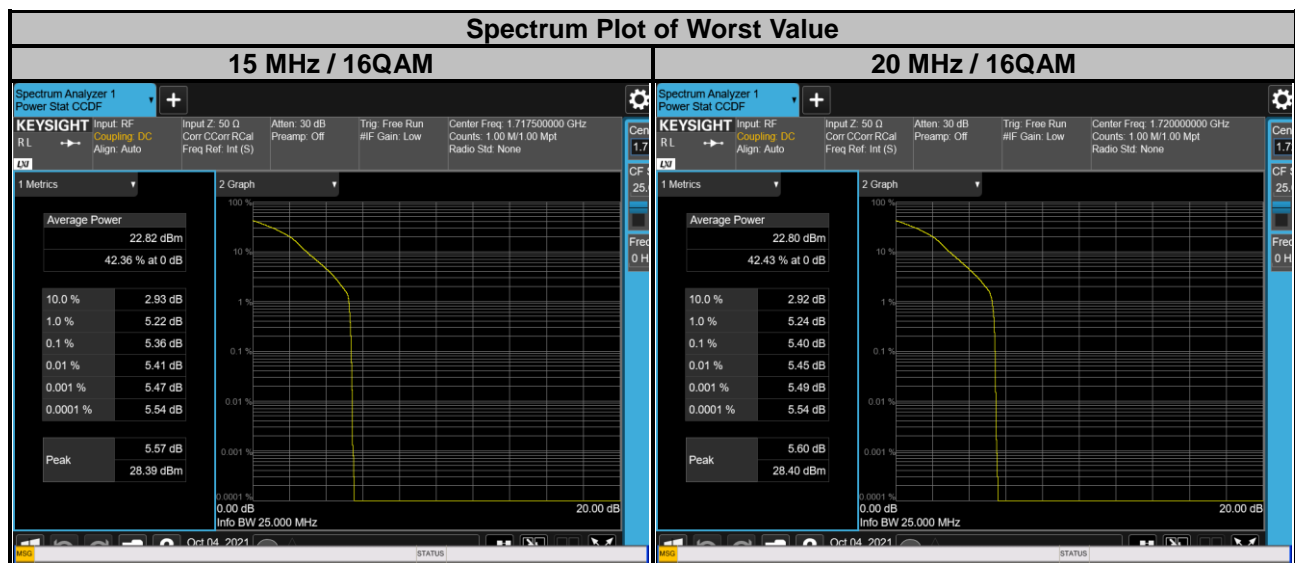

LTE Band 12							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	3.96	4.78	23025	700.5	3.89	4.70
23095	707.5	4.28	5.07	23095	707.5	4.13	4.93
23173	715.3	4.09	4.88	23165	714.5	3.87	4.62

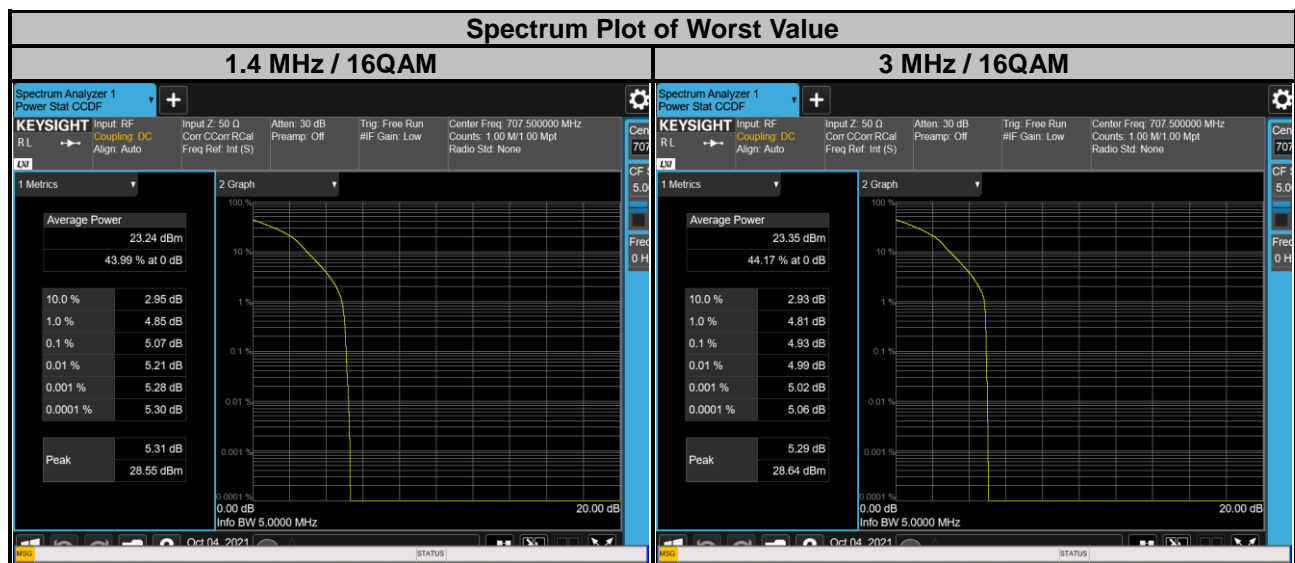

LTE Band 12							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	3.89	4.67	23060	704.0	3.84	4.62
23095	707.5	4.18	4.96	23095	707.5	4.14	4.89
23155	713.5	3.87	4.63	23130	711.0	4.08	4.83

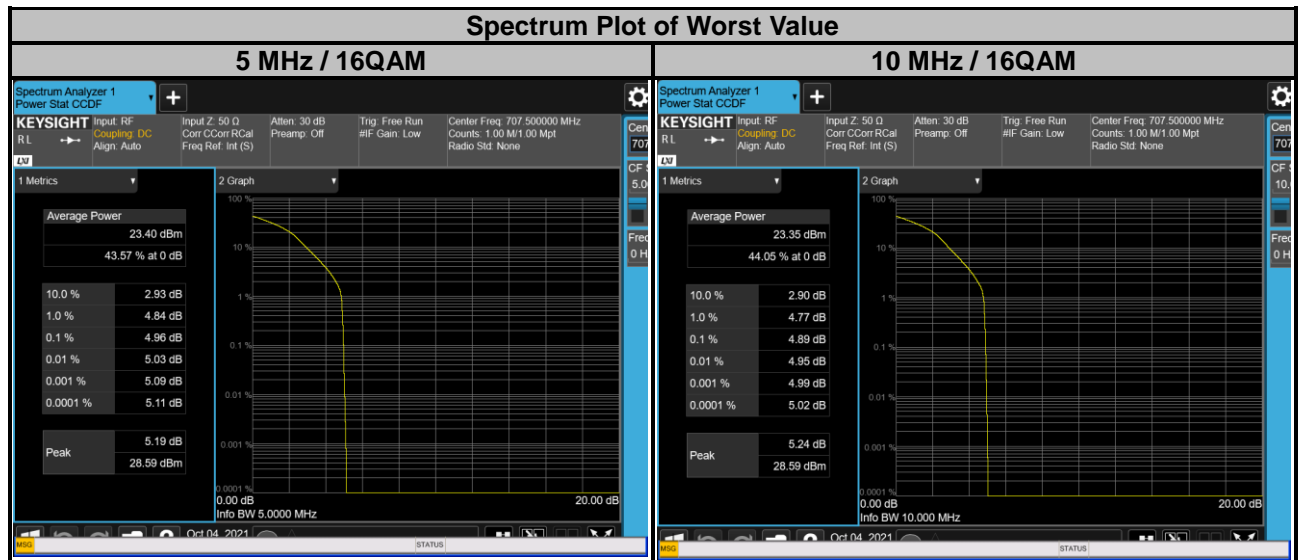

4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement


For LTE Band 12:

According to FCC 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. The limit of emissions is equal to -13 dBm.

For LTE Band 4:

According to FCC 27.53(h), for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB.


4.7.2 Test Setup

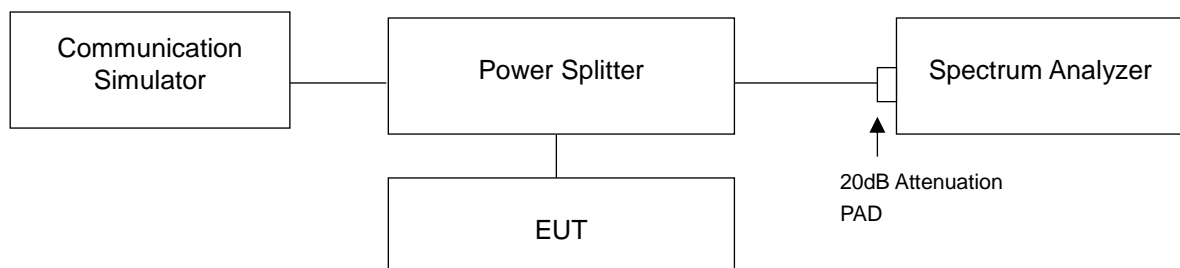

4.7.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for LTE band 12 conducted emission measurement.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for LTE band 4 conducted emission measurement.
- Measuring frequency range is from 1 GHz to 8 GHz / 18 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

4.7.4 Test Results

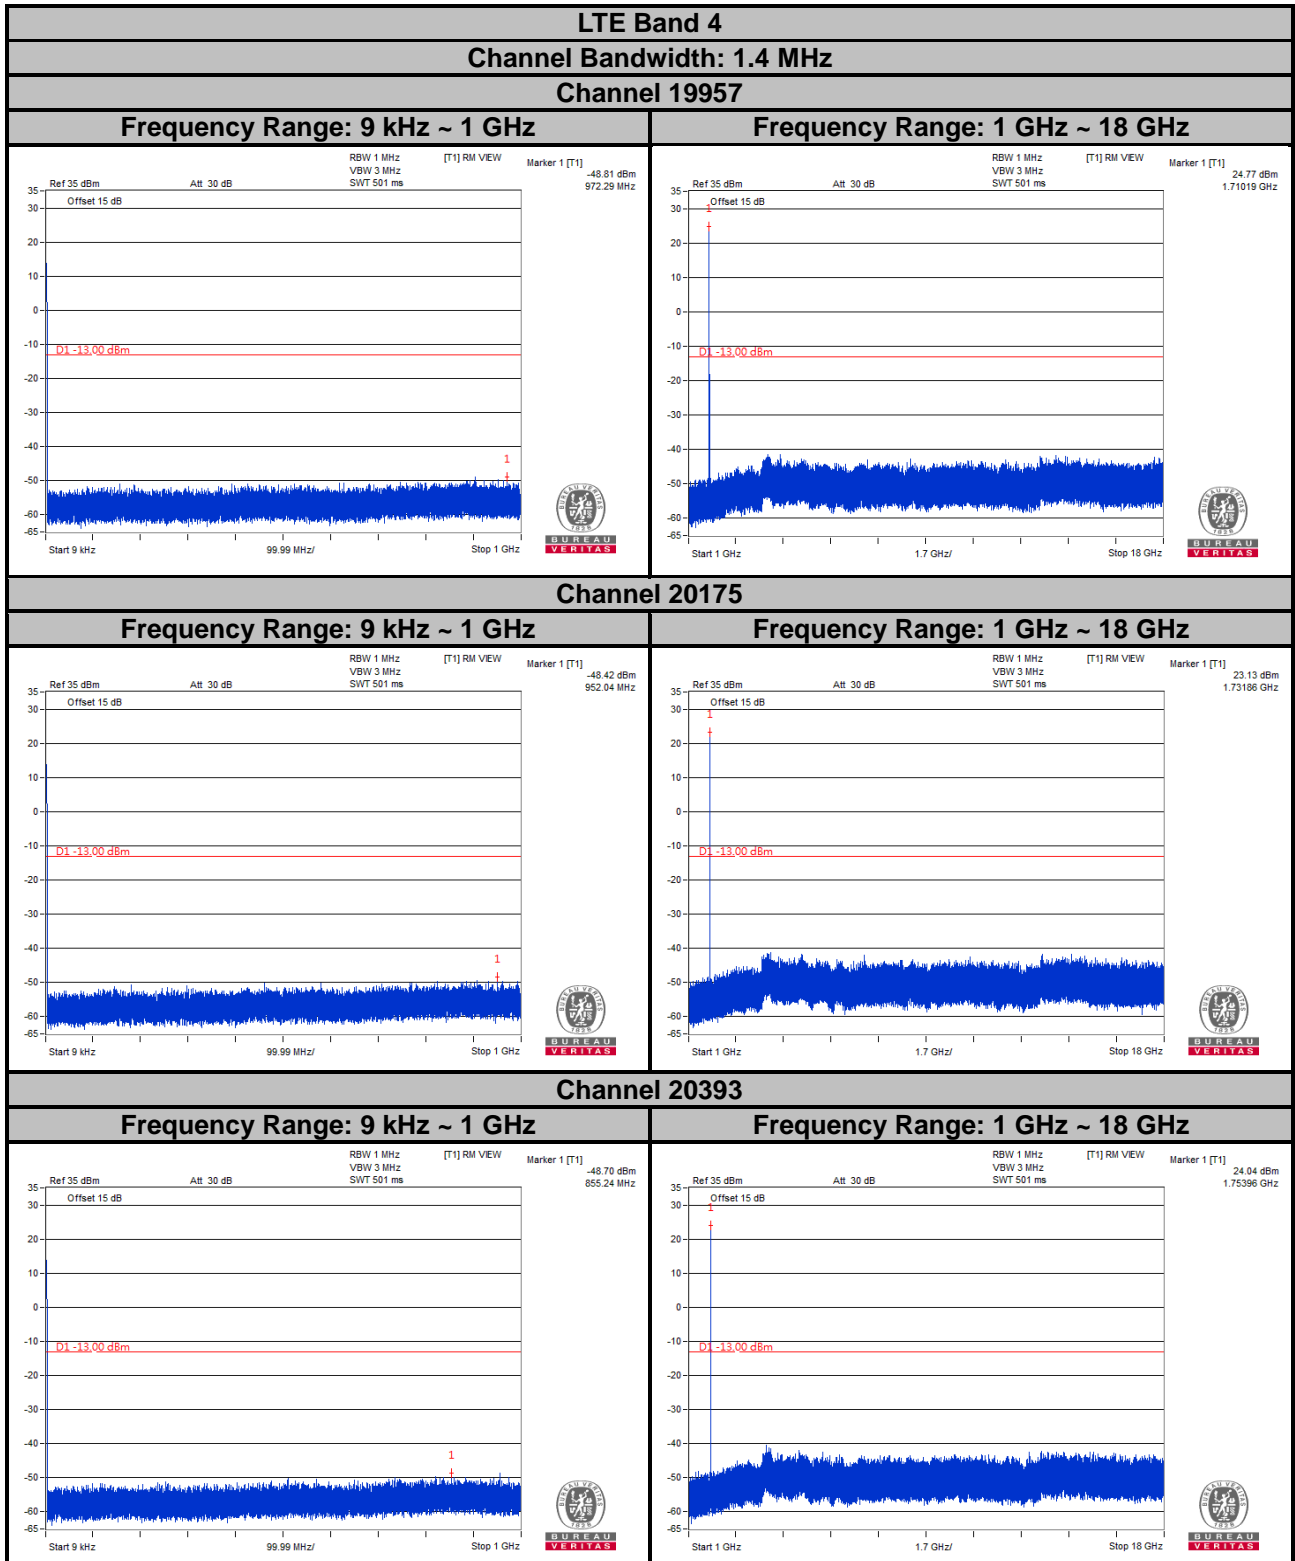


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 4
Channel Bandwidth: 3 MHz
Channel 19965

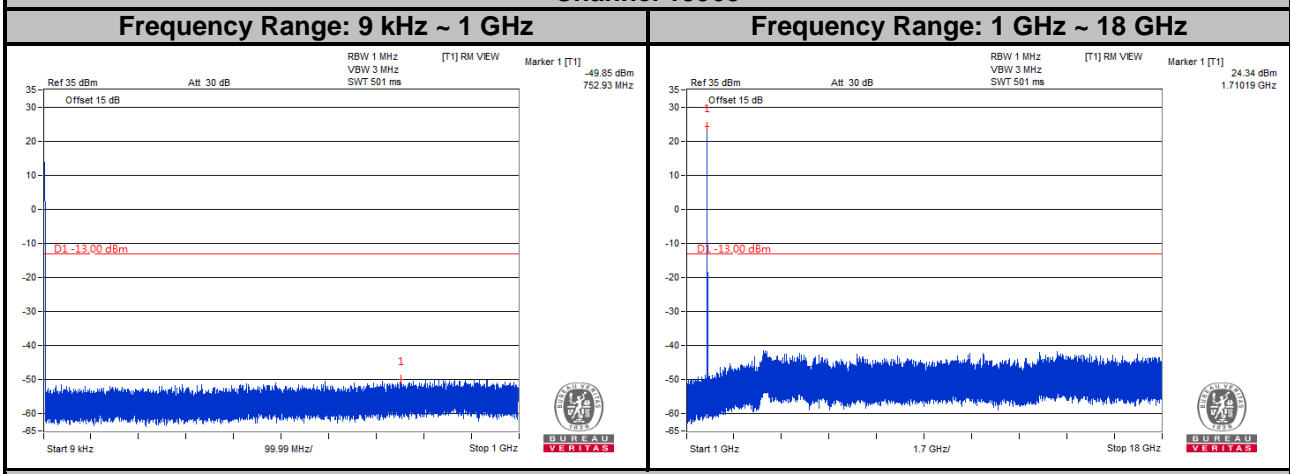

Channel 20175

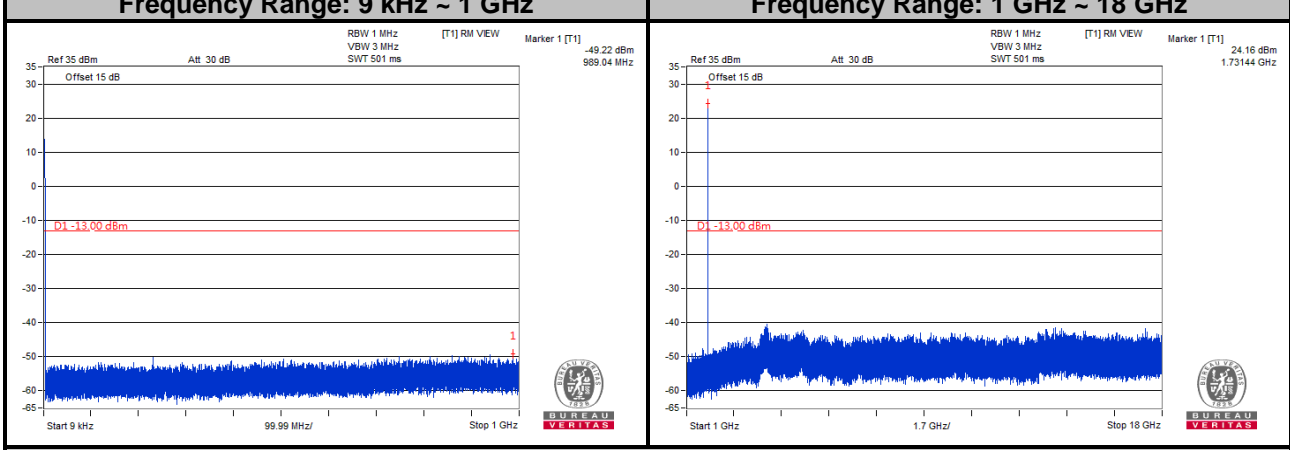


Channel 20385

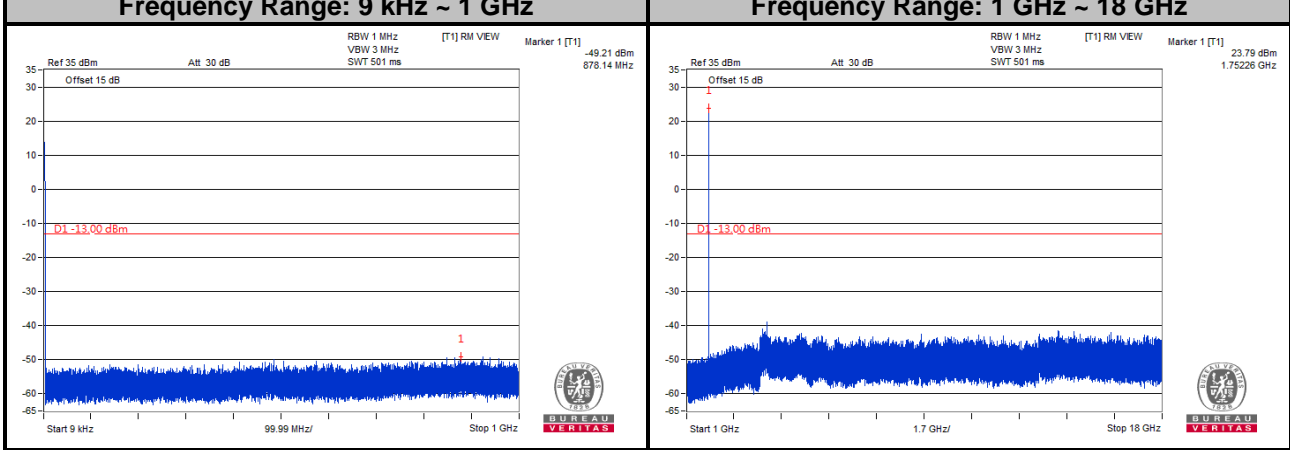


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 4
Channel Bandwidth: 5 MHz
Channel 19975

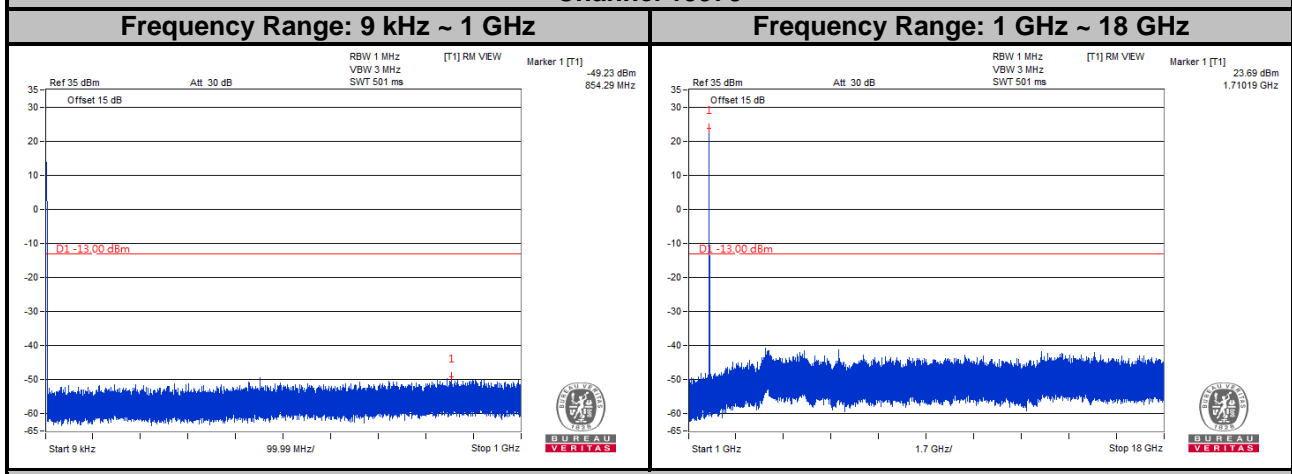

Channel 20175

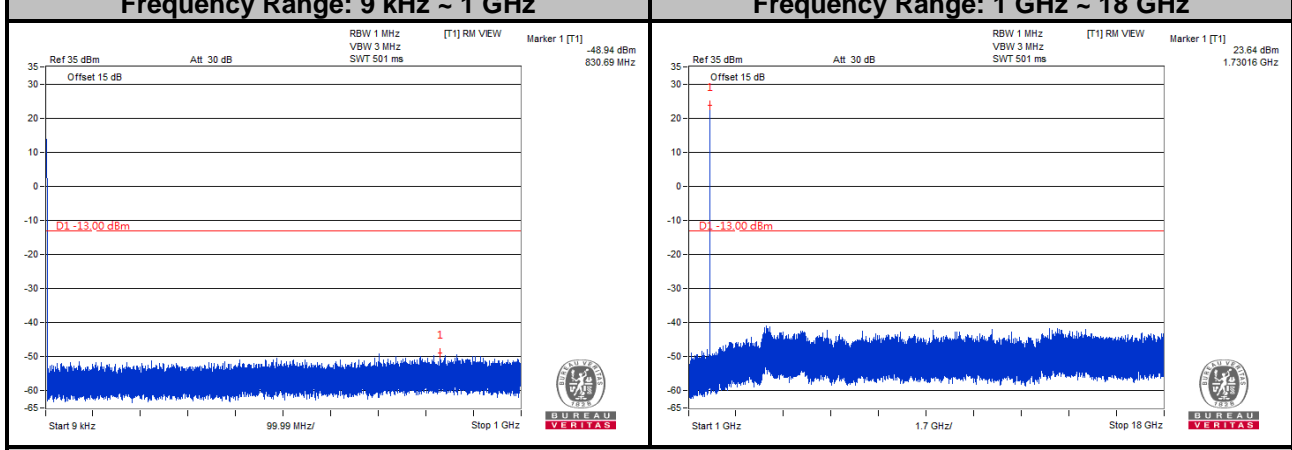


Channel 20375

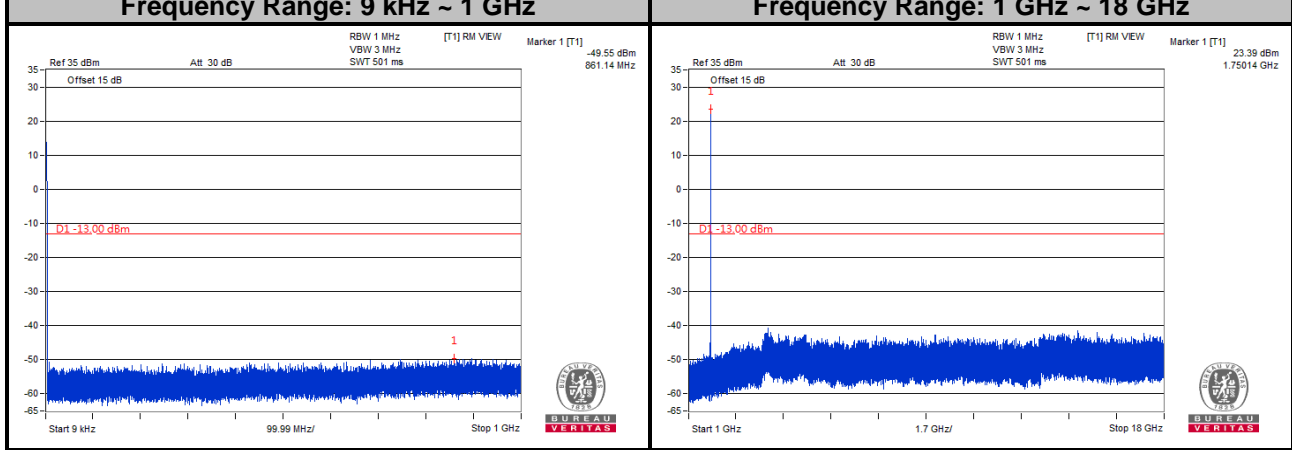


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 4
Channel Bandwidth: 10 MHz
Channel 20000

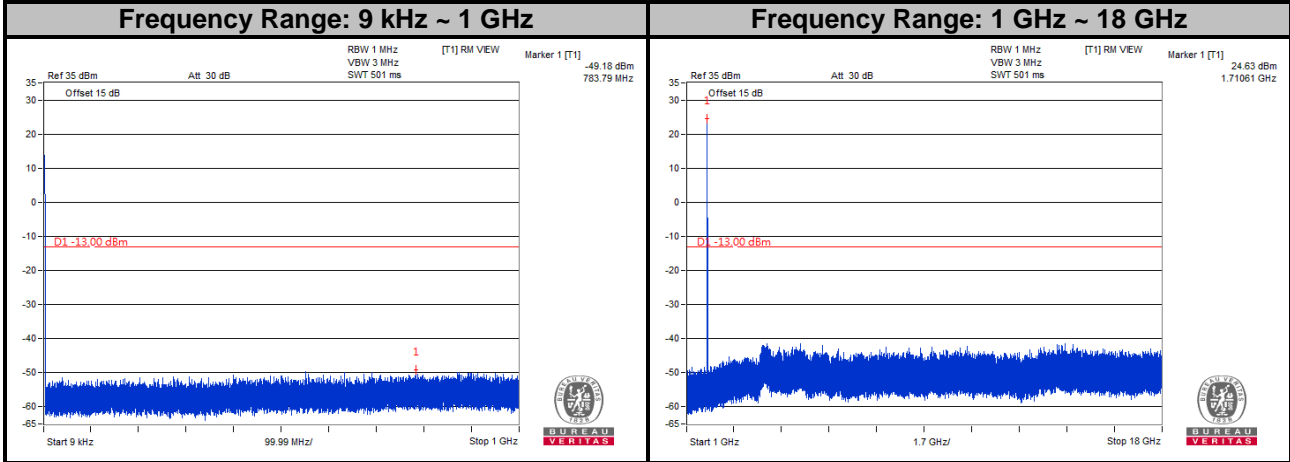

Channel 20175

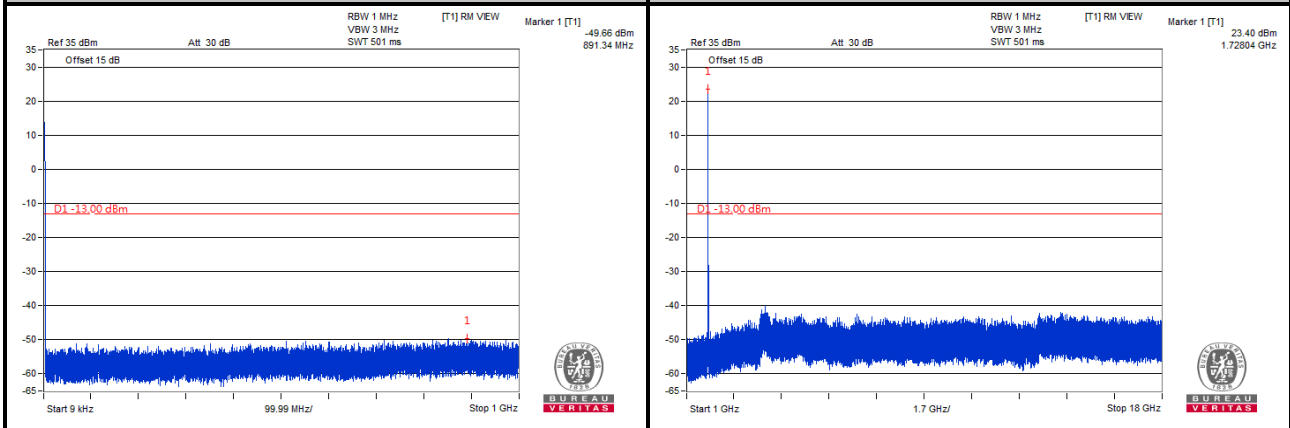


Channel 20350

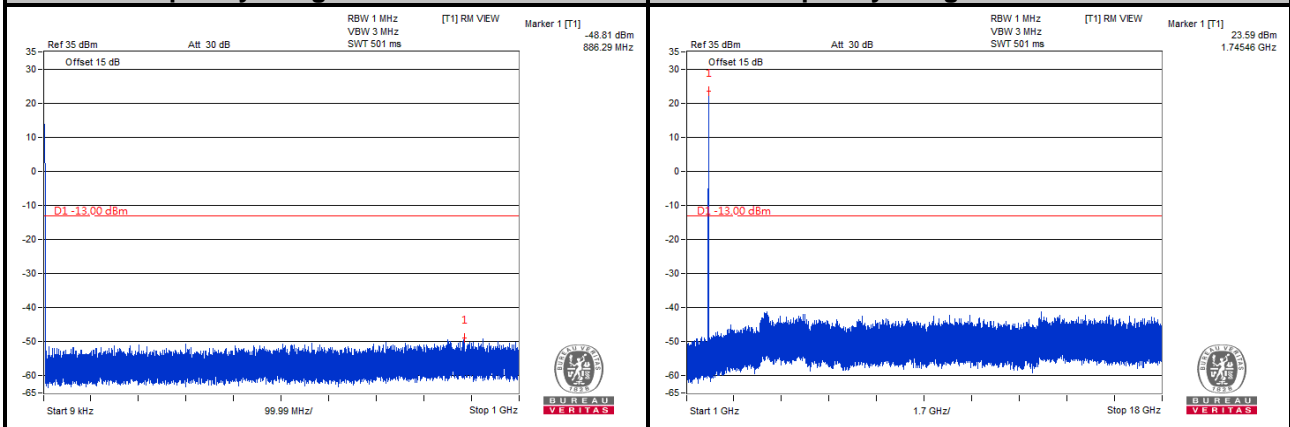


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 4
Channel Bandwidth: 15 MHz


Channel 20025

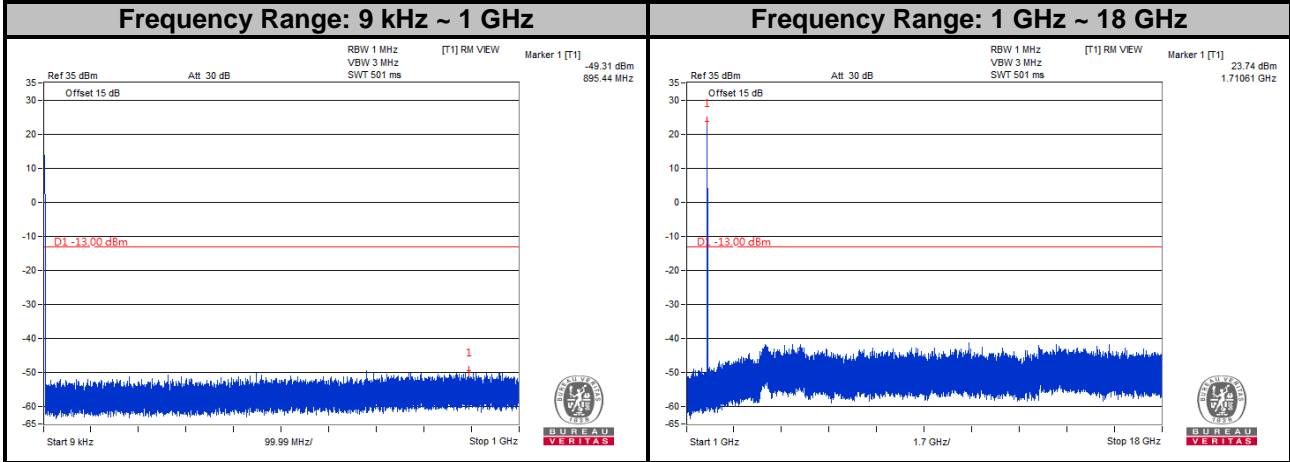

Channel 20175

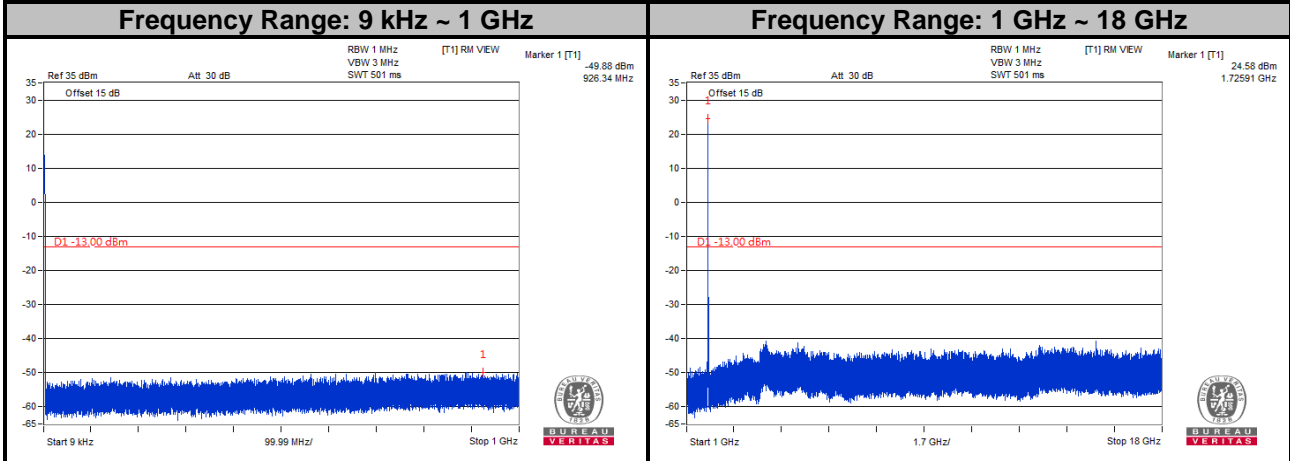


Channel 20325

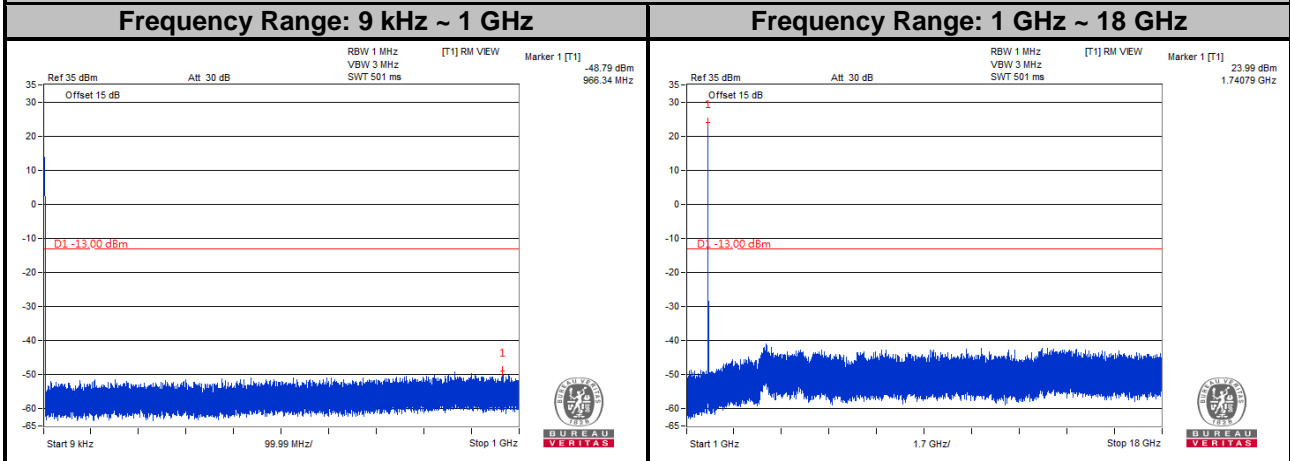


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 4
Channel Bandwidth: 20 MHz

Channel 20050

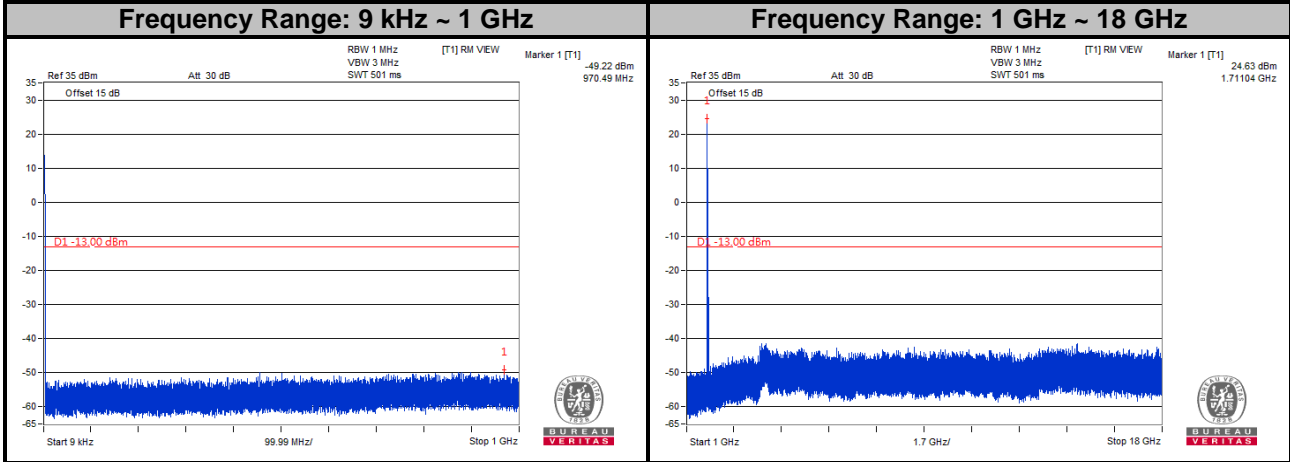


Channel 20175

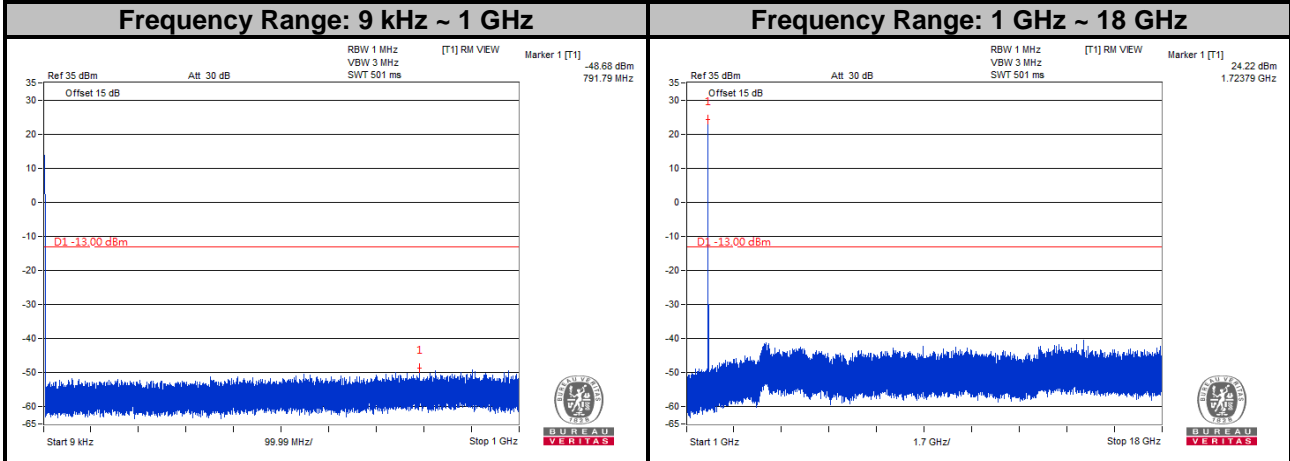


Channel Bandwidth: 20 MHz

Channel 20300

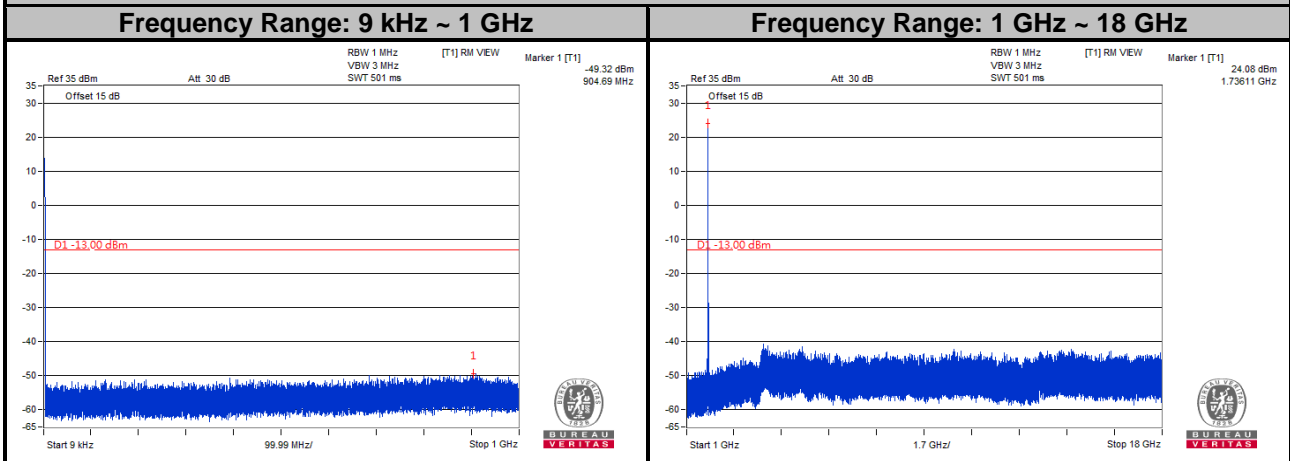


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 12
Channel Bandwidth: 1.4 MHz
Channel 23017

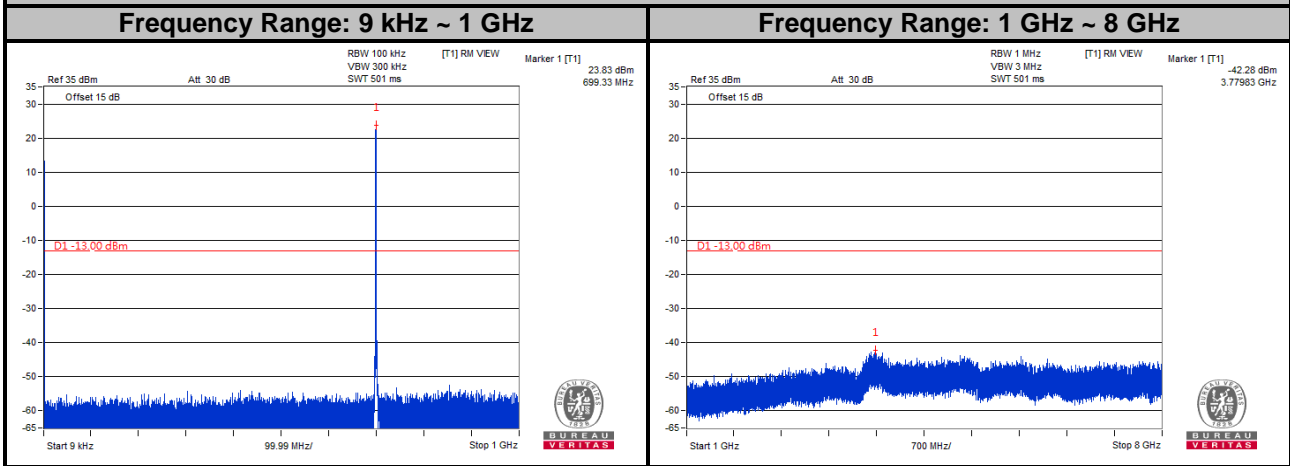

Channel 23095


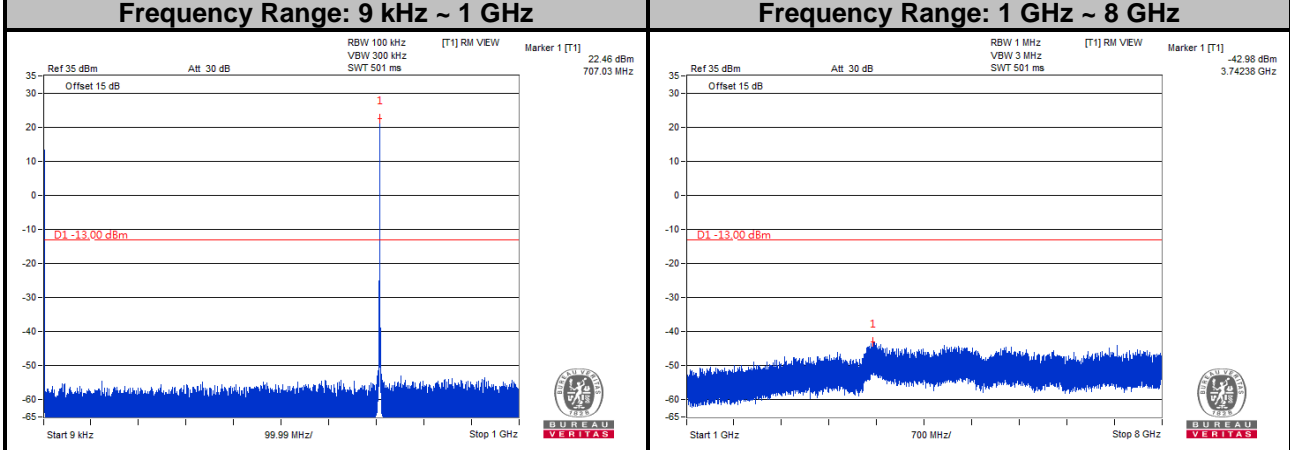


Channel 23173


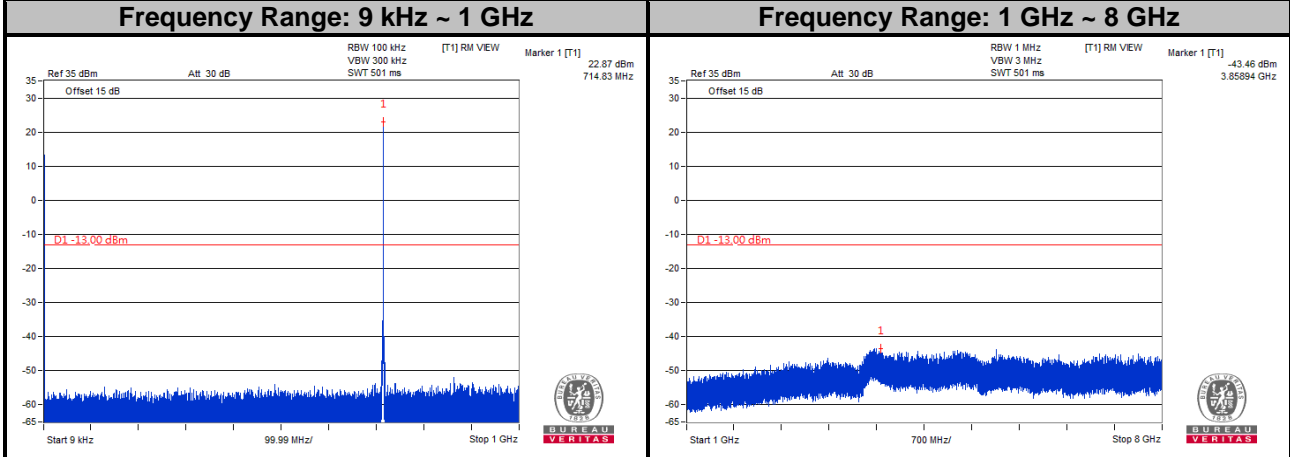


Note: The signal over the limit in 9 kHz is from spectrum analyzer.



LTE Band 12
Channel Bandwidth: 3 MHz
Channel 23025

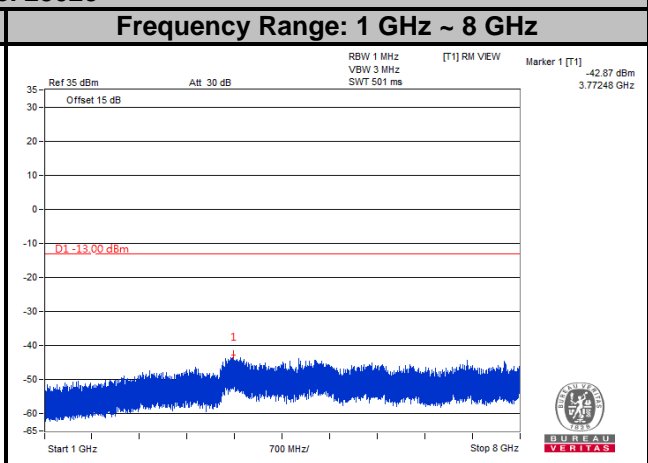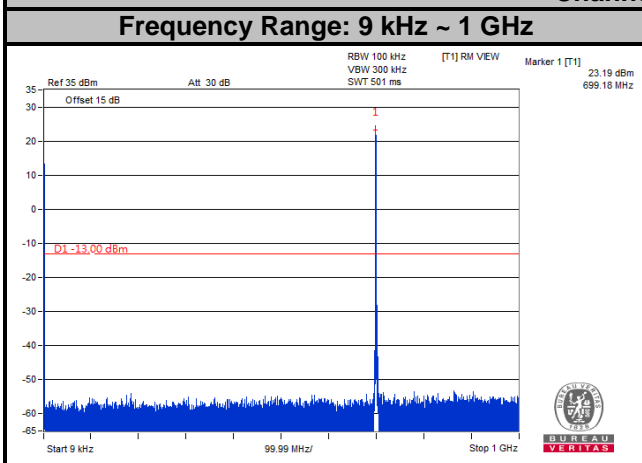

Channel 23095

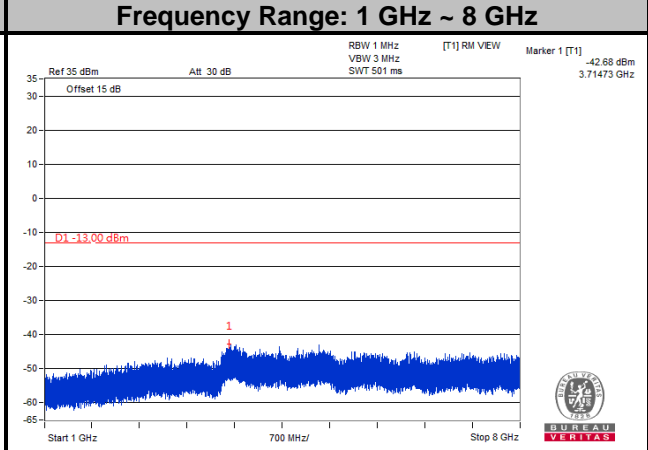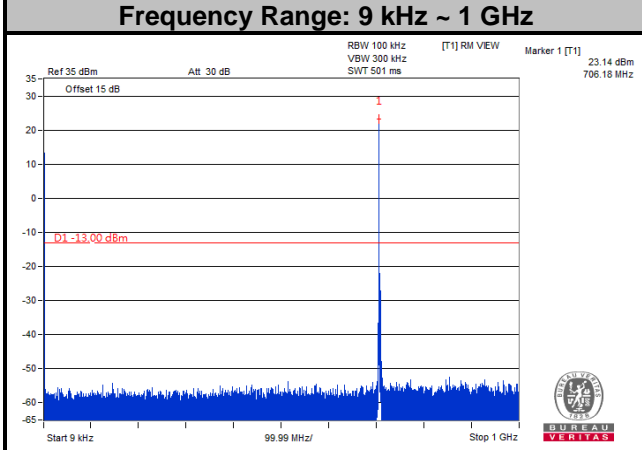


Channel 23165

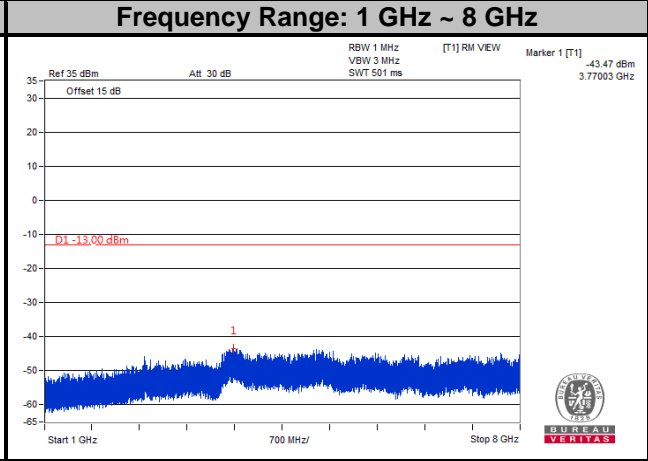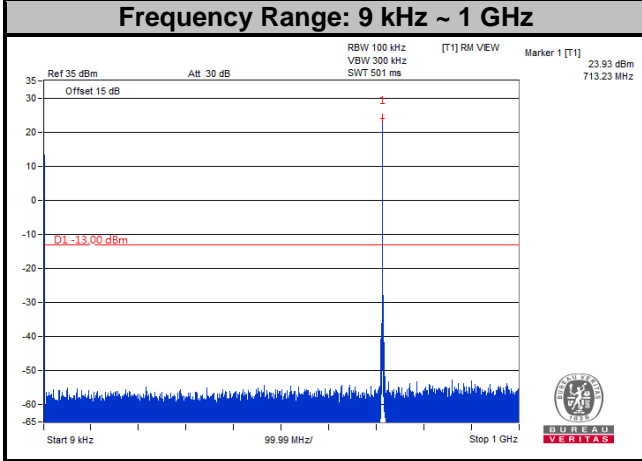


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 12
Channel Bandwidth: 5 MHz
Channel 23035

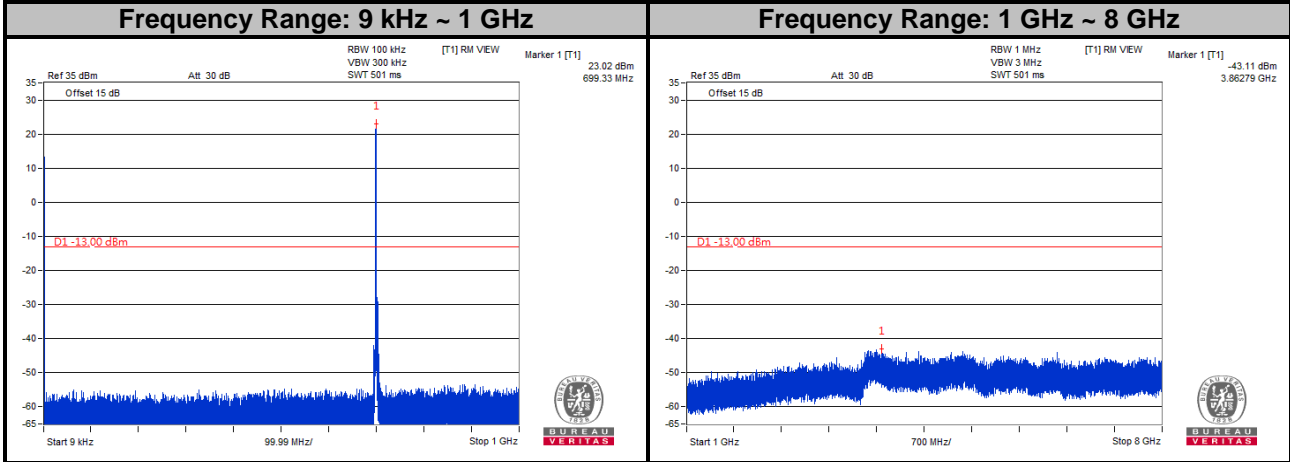

Channel 23095

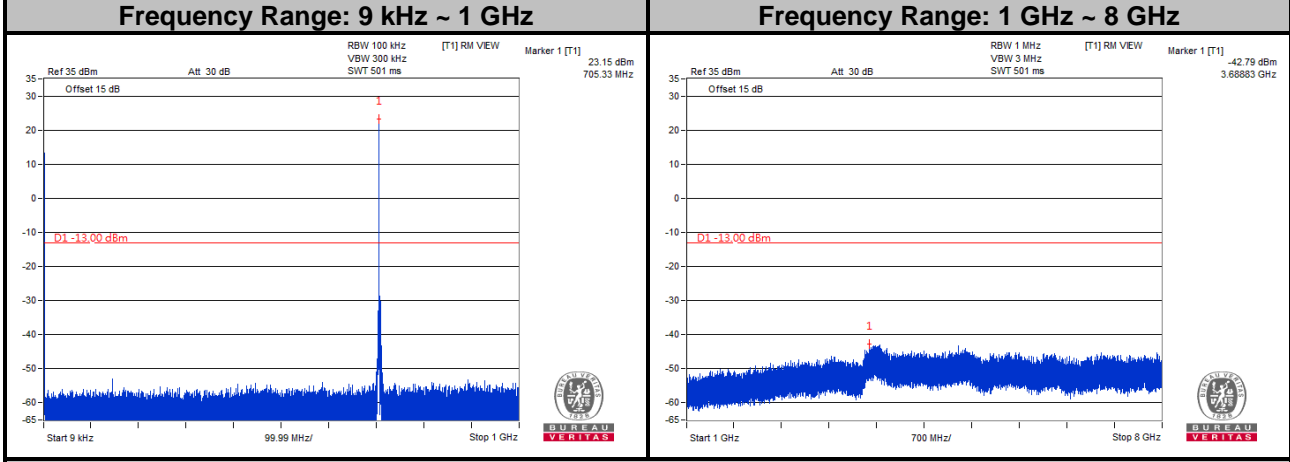


Channel 23155

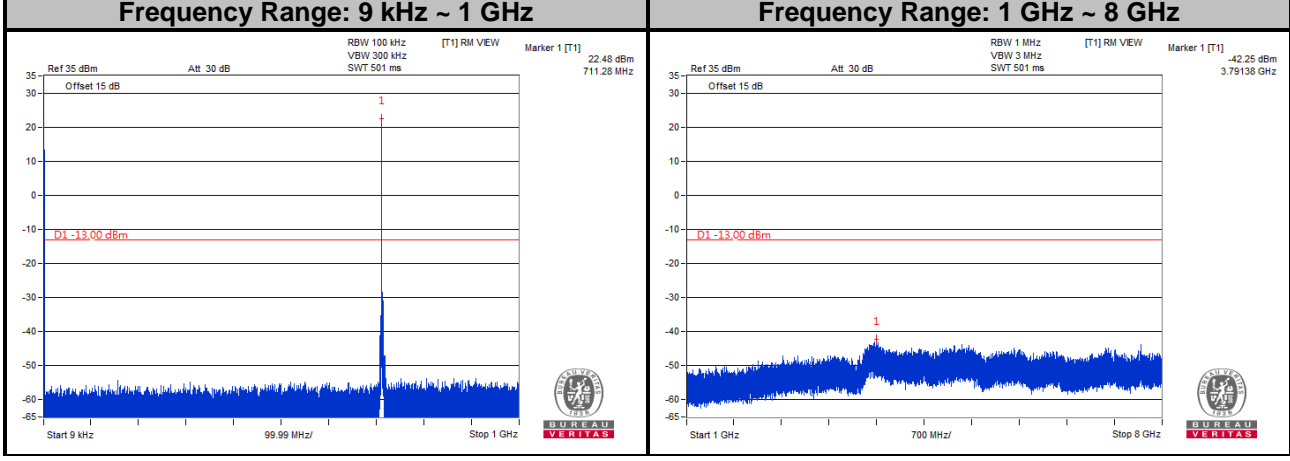


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 12
Channel Bandwidth: 10 MHz
Channel 23060

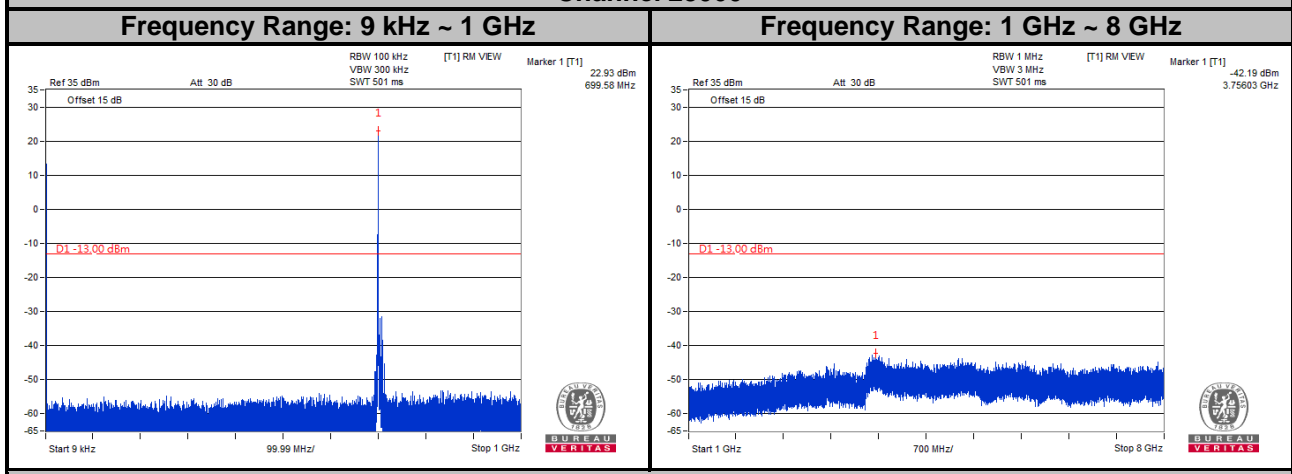

Channel 23095

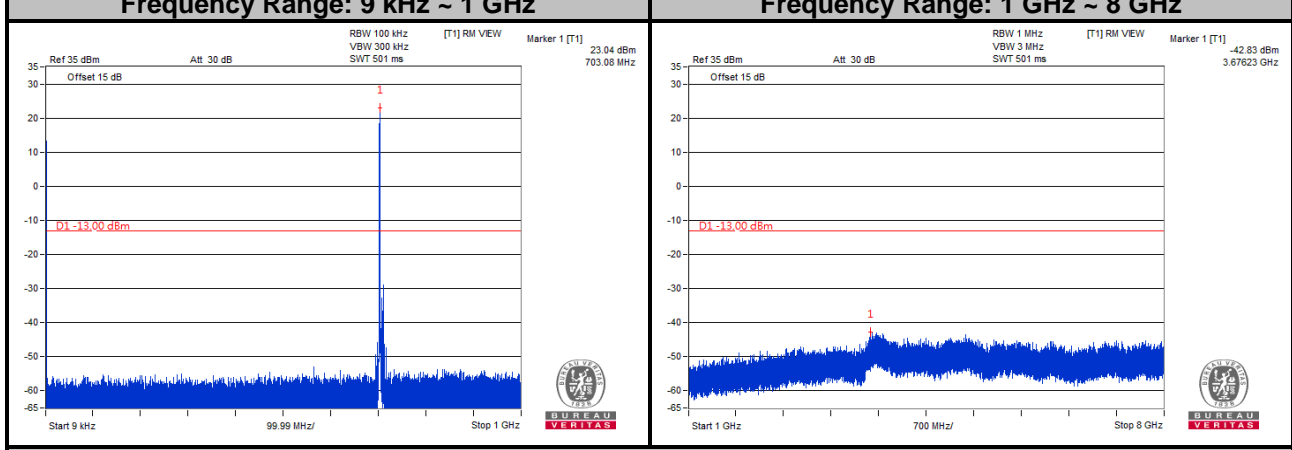

Channel 23130

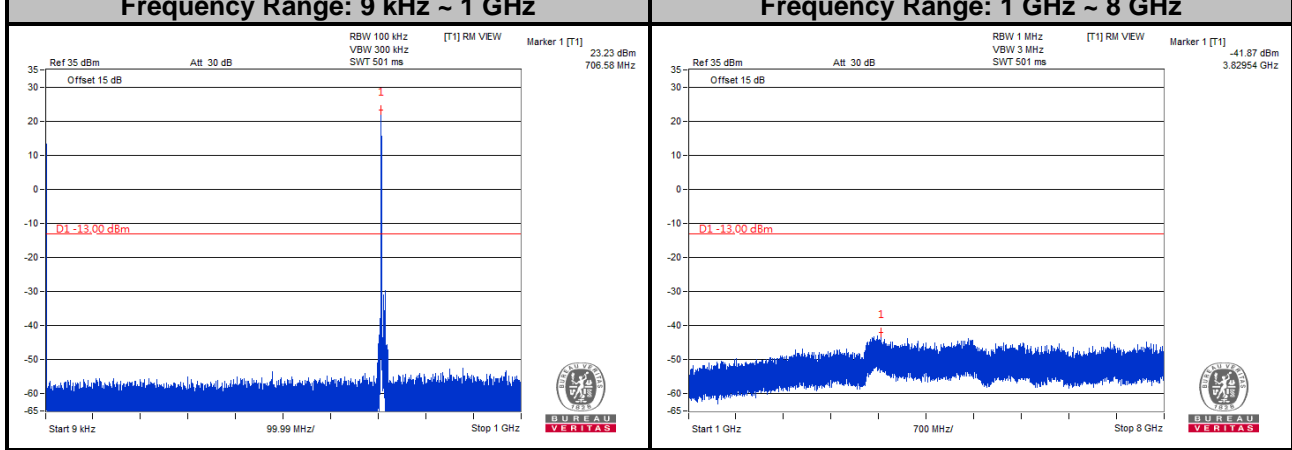

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

For LTE Band 12:

According to FCC 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. The limit of emissions is equal to -13 dBm.

For LTE Band 4:

According to FCC 27.53(h), for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB.

4.8.2 Test Procedure

- a. E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

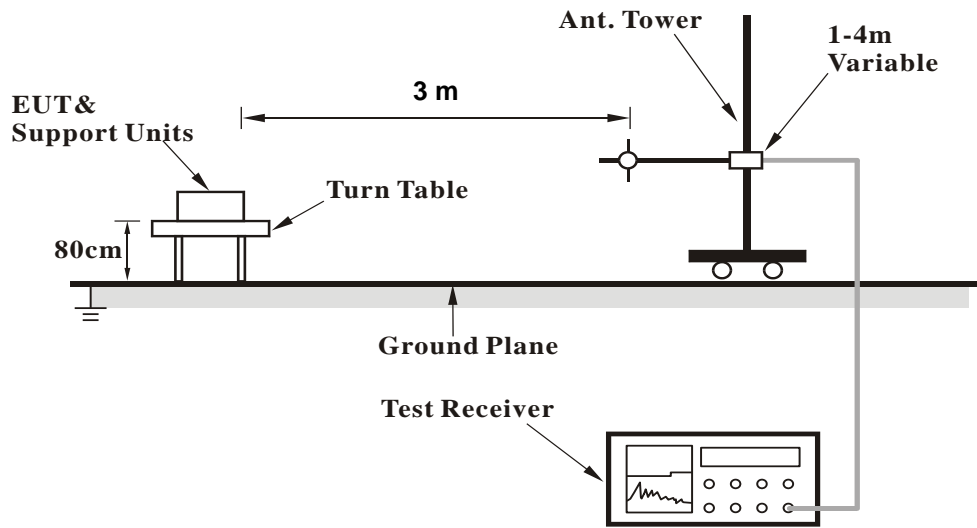

<Radiated Emission above 1 GHz>

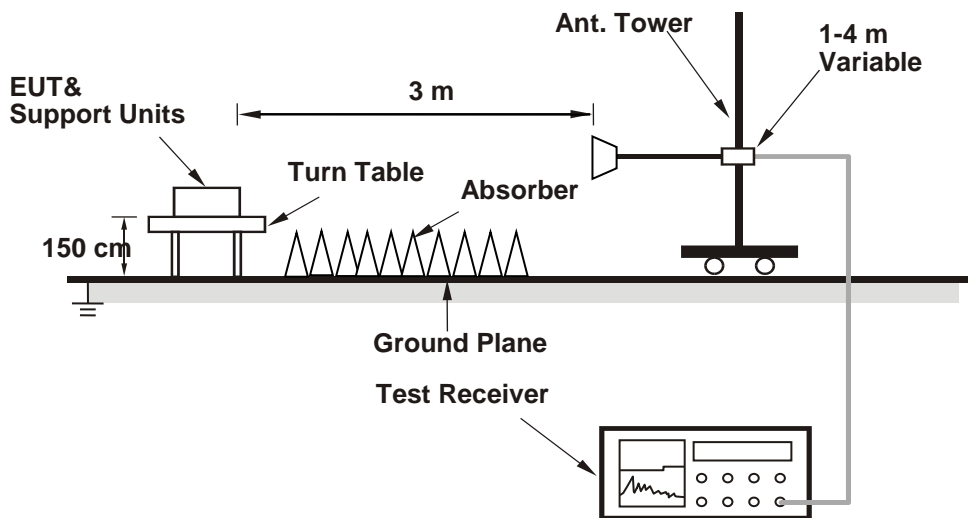

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz

Mode A


LTE Band 4, Channel Bandwidth: 1.4MHz

RF Mode	TX LTE Band IV- 1.4MHz	Channel	CH 19957 : 1710.7 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-50.79	-13.00	-37.79	1.25 H	91	54.51	-105.30
2	60.07	-56.77	-13.00	-43.77	1.00 H	34	47.92	-104.69
3	104.69	-63.02	-13.00	-50.02	1.25 H	320	44.83	-107.85
4	664.38	-67.45	-13.00	-54.45	1.50 H	327	27.11	-94.56
5	797.27	-64.38	-13.00	-51.38	1.00 H	6	27.39	-91.77
6	988.36	-62.07	-13.00	-49.07	1.25 H	223	26.66	-88.73

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

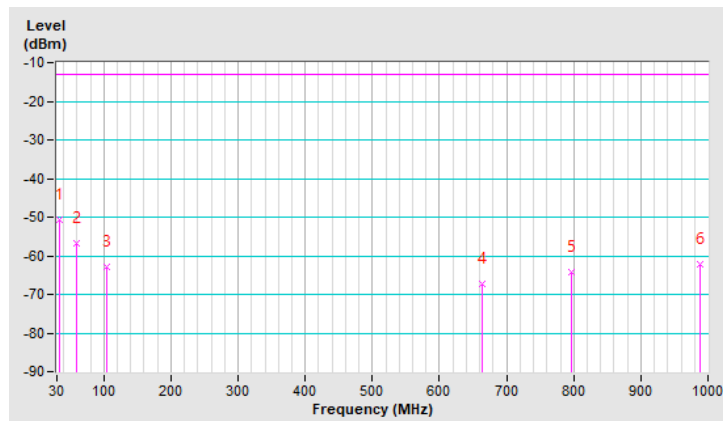


RF Mode	TX LTE Band IV- 1.4MHz	Channel	CH 19957 : 1710.7 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-49.22	-13.00	-36.22	1.00 V	247	56.08	-105.30
2	83.35	-58.32	-13.00	-45.32	1.00 V	300	51.03	-109.35
3	166.77	-66.37	-13.00	-53.37	1.50 V	70	37.58	-103.95
4	286.08	-67.60	-13.00	-54.60	1.00 V	18	34.76	-102.36
5	653.71	-62.03	-13.00	-49.03	1.25 V	39	32.64	-94.67
6	893.30	-59.27	-13.00	-46.27	1.25 V	323	30.72	-89.99

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

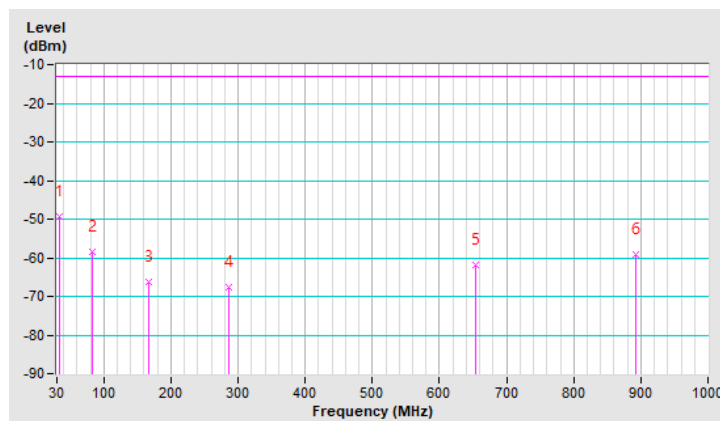


LTE Band 12, Channel Bandwidth: 10MHz

RF Mode	TX LTE Band XII-10MHz	Channel	CH 23130 : 711 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.43	-52.96	-13.00	-39.96	1.25 H	231	53.33	-106.29
2	89.17	-52.81	-13.00	-39.81	1.00 H	56	59.15	-111.96
3	256.01	-60.51	-13.00	-47.51	1.00 H	112	45.47	-105.98
4	416.06	-63.72	-13.00	-50.72	1.50 H	316	38.00	-101.72
5	790.48	-56.94	-13.00	-43.94	1.00 H	15	37.05	-93.99
6	939.86	-55.12	-13.00	-42.12	1.25 H	128	36.01	-91.13

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

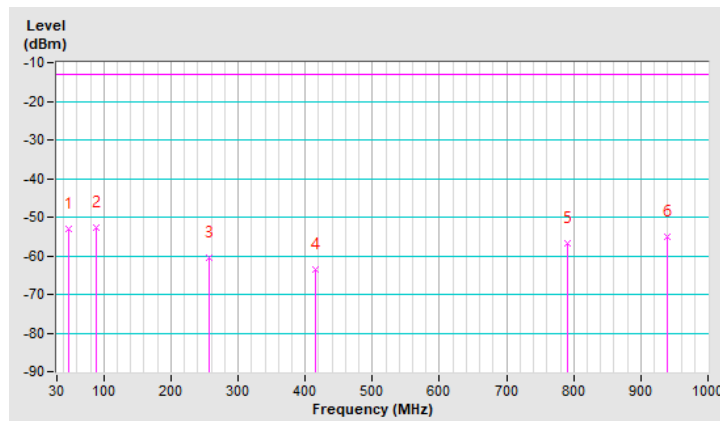


RF Mode	TX LTE Band XII-10MHz	Channel	CH 23130 : 711 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	-51.43	-13.00	-38.43	1.25 V	10	56.35	-107.78
2	79.47	-55.00	-13.00	-42.00	1.00 V	108	55.67	-110.67
3	245.34	-50.68	-13.00	-37.68	1.00 V	108	55.67	-106.35
4	373.38	-59.71	-13.00	-46.71	1.50 V	108	42.89	-102.60
5	760.41	-65.13	-13.00	-52.13	1.00 V	17	29.55	-94.68
6	990.30	-63.41	-13.00	-50.41	1.25 V	10	27.51	-90.92

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

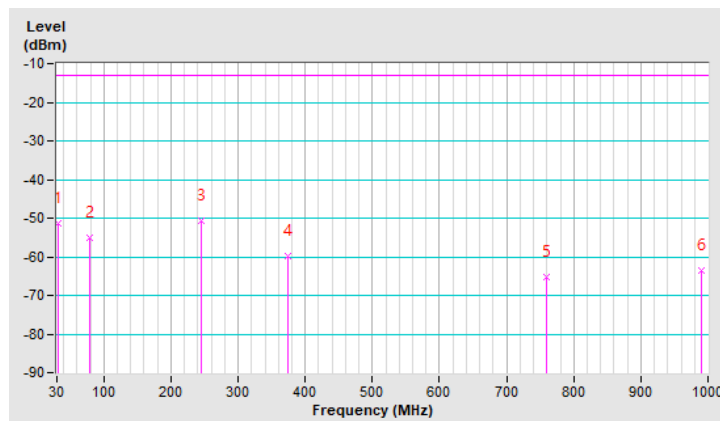

Mode B


LTE Band 4, Channel Bandwidth: 1.4MHz

RF Mode	TX LTE Band IV-1.4MHz	Channel	CH 19957 : 1710.7 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.67	-57.42	-13.00	-44.42	1.00 H	18	47.31	-104.73
2	95.96	-59.84	-13.00	-46.84	1.50 H	135	49.54	-109.38
3	291.90	-64.43	-13.00	-51.43	1.00 H	187	37.78	-102.21
4	505.30	-58.77	-13.00	-45.77	1.25 H	256	38.64	-97.41
5	746.83	-53.91	-13.00	-40.91	1.00 H	5	39.10	-93.01
6	933.07	-50.61	-13.00	-37.61	1.00 H	84	38.30	-88.91

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

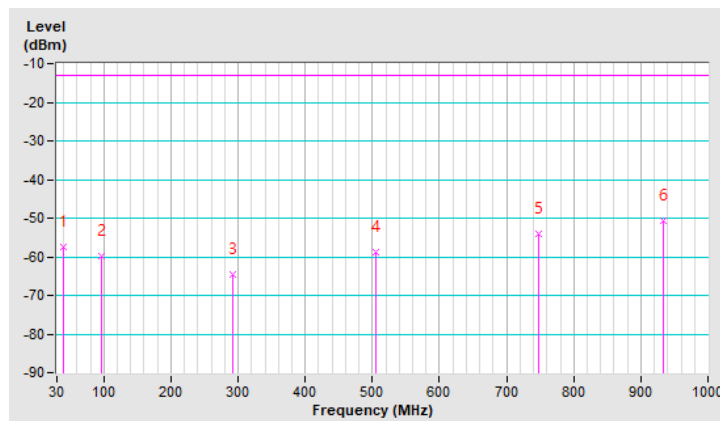


RF Mode	TX LTE Band IV- 1.4MHz	Channel	CH 19957 : 1710.7 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.95	-51.04	-13.00	-38.04	1.50 V	156	54.27	-105.31
2	129.91	-51.10	-13.00	-38.10	1.00 V	149	54.14	-105.24
3	258.92	-56.56	-13.00	-43.56	1.25 V	167	47.16	-103.72
4	484.93	-60.96	-13.00	-47.96	1.00 V	4	36.93	-97.89
5	674.08	-58.18	-13.00	-45.18	1.00 V	157	36.23	-94.41
6	838.98	-54.39	-13.00	-41.39	1.25 V	291	36.73	-91.12

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

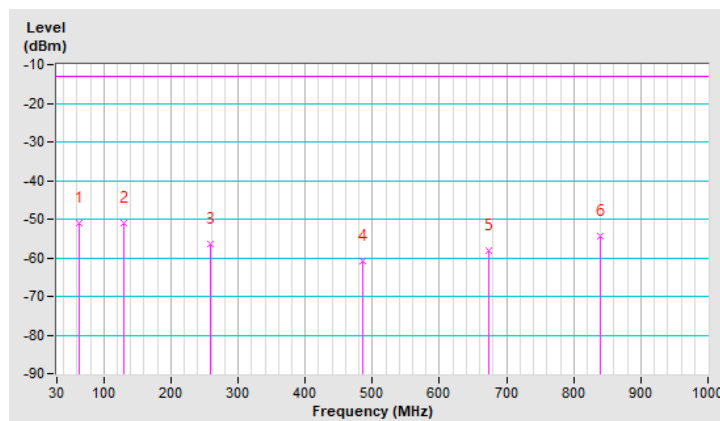


LTE Band 12, Channel Bandwidth: 10MHz

RF Mode	TX LTE Band XII-10MHz	Channel	CH 23130 : 711 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	-61.73	-13.00	-48.73	1.25 H	5	45.72	-107.45
2	71.71	-59.32	-13.00	-46.32	1.00 H	258	49.43	-108.75
3	195.87	-59.14	-13.00	-46.14	1.00 H	250	49.70	-108.84
4	590.66	-60.68	-13.00	-47.68	1.25 H	162	37.15	-97.83
5	708.03	-58.66	-13.00	-45.66	1.50 H	18	37.42	-96.08
6	894.27	-56.36	-13.00	-43.36	1.00 H	18	35.75	-92.11

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

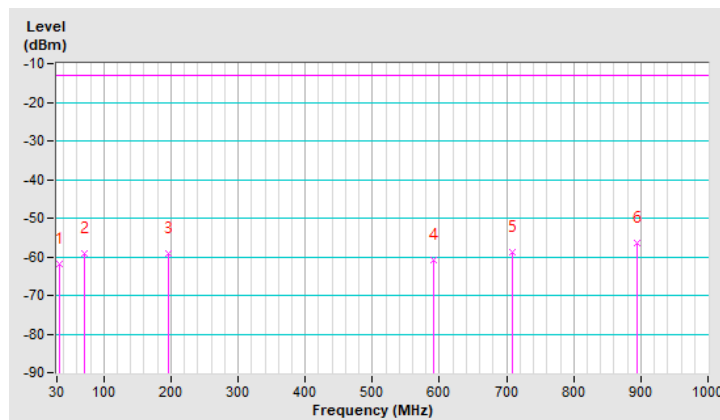


RF Mode	TX LTE Band XII-10MHz	Channel	CH 23130 : 711 MHz
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	-49.95	-13.00	-36.95	1.50 V	173	57.68	-107.63
2	81.41	-62.80	-13.00	-49.80	1.00 V	331	48.40	-111.20
3	159.98	-62.19	-13.00	-49.19	1.25 V	156	43.75	-105.94
4	480.08	-60.88	-13.00	-47.88	1.00 V	254	39.23	-100.11
5	627.52	-57.14	-13.00	-44.14	1.50 V	181	39.95	-97.09
6	887.48	-54.18	-13.00	-41.18	1.50 V	14	38.14	-92.32

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

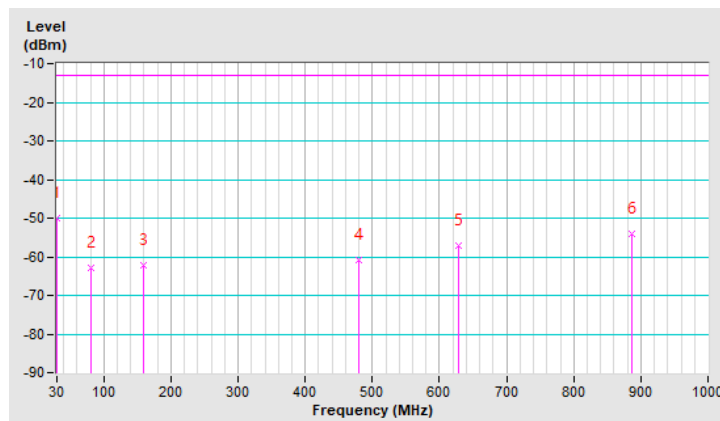

Above 1GHz

LTE Band 4, Channel Bandwidth: 1.4MHz

RF Mode	TX LTE Band IV- 1.4MHz	Channel	CH 19957 : 1710.7 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-51.54	-13.00	-38.54	3.39 H	214	41.66	-93.20

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-50.12	-13.00	-37.12	1.39 V	82	43.08	-93.20

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band IV- 1.4MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-51.34	-13.00	-38.34	3.23 H	201	41.53	-92.87

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-51.76	-13.00	-38.76	1.19 V	73	41.11	-92.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band IV- 1.4MHz	Channel	CH 20393 : 1754.3 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-50.72	-13.00	-37.72	3.34 H	218	41.79	-92.51
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-50.83	-13.00	-37.83	1.31 V	80	41.68	-92.51

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 4, Channel Bandwidth: 5MHz

RF Mode	TX LTE Band IV-5MHz	Channel	CH 19975 : 1712.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-51.84	-13.00	-38.84	3.36 H	214	41.33	-93.17
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-50.92	-13.00	-37.92	1.37 V	68	42.25	-93.17

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band IV-5MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-51.63	-13.00	-38.63	3.38 H	196	41.24	-92.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-52.23	-13.00	-39.23	1.28 V	90	40.64	-92.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band IV-5MHz	Channel	CH 20375 : 1752.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-52.08	-13.00	-39.08	3.35 H	219	40.46	-92.54
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-50.69	-13.00	-37.69	1.35 V	73	41.85	-92.54

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 4, Channel Bandwidth: 20MHz

RF Mode	TX LTE Band IV-20MHz	Channel	CH 20050 : 1720 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-51.54	-13.00	-38.54	3.28 H	194	41.54	-93.08
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-50.62	-13.00	-37.62	1.17 V	103	42.46	-93.08

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band IV-20MHz	Channel	CH 20175 : 1732.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-52.17	-13.00	-39.17	3.36 H	198	40.70	-92.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-50.82	-13.00	-37.82	1.15 V	81	42.05	-92.87

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	TX LTE Band IV-20MHz	Channel	CH 20300 : 1745 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-52.24	-13.00	-39.24	3.31 H	199	40.42	-92.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-50.82	-13.00	-37.82	1.24 V	75	41.84	-92.66

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 12, Channel Bandwidth: 1.4MHz

RF Mode	TX LTE Band XII-1.4MHz	Channel	CH 23017 : 699.7 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-52.45	-13.00	-39.45	3.33 H	197	49.15	-101.60
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-49.89	-13.00	-36.89	1.21 V	82	51.71	-101.60

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band XII-1.4MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-52.24	-13.00	-39.24	3.34 H	195	49.39	-101.63
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-49.13	-13.00	-36.13	1.23 V	87	52.50	-101.63

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band XII- 1.4MHz	Channel	CH 23173 : 715.3 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-51.69	-13.00	-38.69	3.26 H	197	49.98	-101.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-49.87	-13.00	-36.87	1.15 V	84	51.80	-101.67

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 12, Channel Bandwidth: 5MHz

RF Mode	TX LTE Band XII-5MHz	Channel	CH 23035 : 701.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-52.72	-13.00	-39.72	3.15 H	208	48.89	-101.61
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-49.92	-13.00	-36.92	1.17 V	89	51.69	-101.61

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band XII-5MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-52.48	-13.00	-39.48	3.26 H	214	49.15	-101.63
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-49.34	-13.00	-36.34	1.19 V	94	52.29	-101.63

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band XII-5MHz	Channel	CH 23155 : 713.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-51.96	-13.00	-38.96	3.17 H	202	49.69	-101.65

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-49.72	-13.00	-36.72	1.17 V	76	51.93	-101.65

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 12, Channel Bandwidth: 10MHz

RF Mode	TX LTE Band XII-10MHz	Channel	CH 23060 : 704 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-52.37	-13.00	-39.37	3.26 H	217	49.24	-101.61
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-49.37	-13.00	-36.37	1.63 V	87	52.24	-101.61

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band XII-10MHz	Channel	CH 23095 : 707.5 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-52.47	-13.00	-39.47	3.12 H	218	49.16	-101.63
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-49.53	-13.00	-36.53	1.47 V	93	52.10	-101.63

Remarks:

1. ERP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8 – 2.15
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

RF Mode	TX LTE Band XII-10MHz	Channel	CH 23130 : 711 MHz
Frequency Range	1GMHz ~ 18GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-52.74	-13.00	-39.74	3.09 H	217	48.90	-101.64
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-49.06	-13.00	-36.06	1.53 V	72	52.58	-101.64

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---