

 RESEARCH IN MOTION	Document Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		Page 1(23)
Author Data Daoud Attayi	Dates of Test July 23 – 28 & August 11 – 12, 2004	Test Report No RIM-0102-0407-08	FCC ID L6ARAL11IN

APPENDIX A: SAR DISTRIBUTION COMPARISON FOR THE ACCURACY VERIFICATION

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		2(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/23/04 12:40:53

Test Laboratory: Research In Motion Limited

835 MHz dipole validation; Ambient temp. 24.4; Liquid temp. 23.6 deg.cel

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 MHz Head Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.5 V/m; Power Drift = 0.004 dB

Maximum value of SAR (measured) = 10.4 mW/g



Peak SAR (extrapolated) = 14 W/kg

SAR(1 g) = 9.64 mW/g; SAR(10 g) = 6.32 mW/g

Unnamed procedure/Area Scan (81x151x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 115.5 V/m; Power Drift = 0.004 dB

Maximum value of SAR (interpolated) = 10.4 mW/g

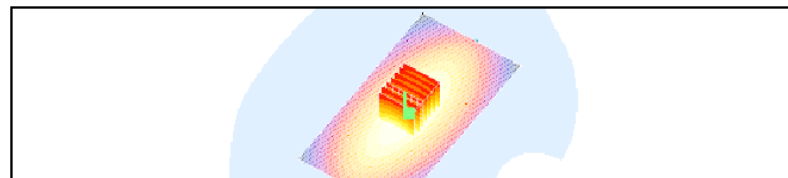

0 dB = 10.4mW/g

file://C:\Program%20Files\DASY4\Print_Templates\835%20MHz%20dipole%20validati... 23/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		3(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 08/12/04 09:23:25

Test Laboratory: Research In Motion Limited

835 MHz dipole validation; Ambient temp. 24.5; Liquid temp. 23.2 deg.cel

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:446

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 MHz Head Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 43.5$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure 2/Area Scan (81x151x1); Measurement grid: dx=10mm, dy=10mm

Reference Value = 111.9 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 10.5 mW/g


Unnamed procedure 2/Zoom Scan (7x7x7)/Cube 0; Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 111.9 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 10.6 mW/g

Peak SAR (extrapolated) = 14.1 W/kg

SAR(1 g) = 9.81 mW/g; SAR(10 g) = 6.46 mW/g

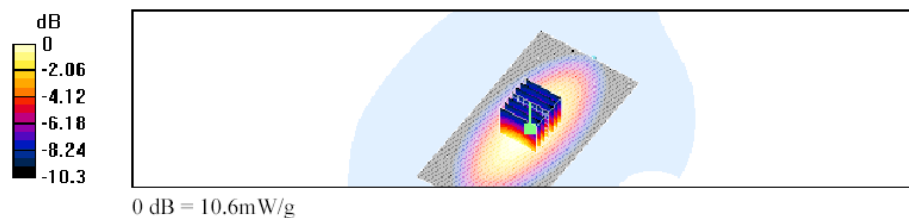

file://C:\Program%20Files\DASY4\Print_Templates\835%20MHz%20dipole%20validati... 12/08/2004

 RESEARCH IN MOTION	Document Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		Page 4(23)
Author Data Daoud Attayi	Dates of Test July 23 – 28 & August 11 – 12, 2004	Test Report No RIM-0102-0407-08	FCC ID L6ARAL11IN

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		5(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/26/04 13:11:43

Test Laboratory: Research In Motion Limited

**Touch left; Mid frequency (815.50 MHz); Retracted antenna; Ambient temp. 24.1;
Liquid temp. 22.8 deg.cel**

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3
Medium: 835 MHz Head Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 27.4 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.648 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.4 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.647 mW/g

Peak SAR (extrapolated) = 0.846 W/kg

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.395 mW/g

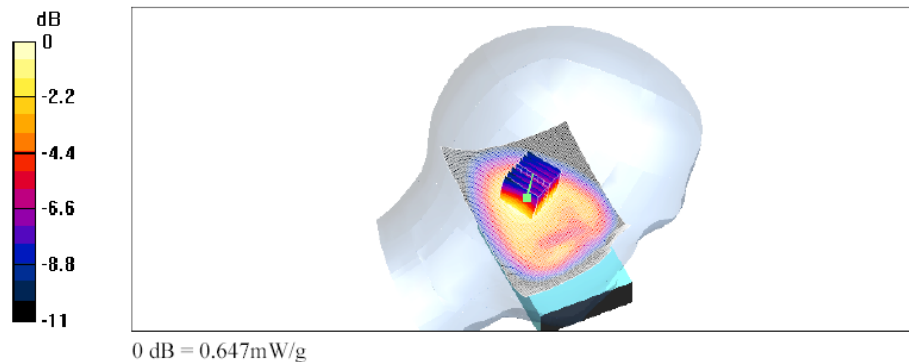

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20left;%20Mid%20frequen... 26/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		6(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/26/04 13:56:10

Test Laboratory: Research In Motion Limited

**Tilted left; Mid frequency (815.50 MHz); Retracted antenna; Ambient temp. 23.8;
Liquid temp. 22.6 deg.cel**

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3
Medium: 835 MHz Head Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 26.9 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.634 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.9 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.620 mW/g

Peak SAR (extrapolated) = 0.766 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.411 mW/g

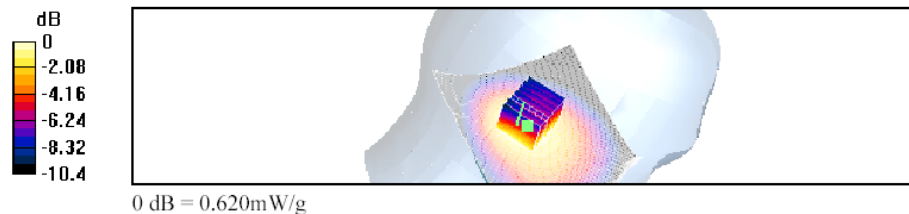

file://C:\Program%20Files\DASY4\Print_Templates\Tilted%20left;%20Mid%20frequenc... 26/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		7(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/23/04 14:21:57

Test Laboratory: Research In Motion Limited

Touch right; Mid frequency (815.50 MHz); Retracted antenna; Ambient temp. 24.0; Liquid temp. 23.2 deg.cel

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3
Medium: 835 MHz Head Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 24.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.751 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.2 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.758 mW/g

Peak SAR (extrapolated) = 0.999 W/kg

SAR(1 g) = 0.706 mW/g; SAR(10 g) = 0.473 mW/g

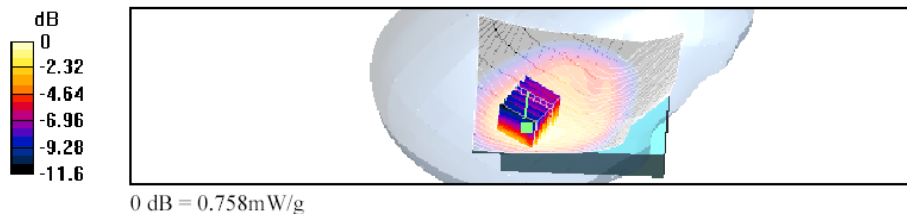

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20freque... 23/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		8(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/23/04 17:06:48

Test Laboratory: Research In Motion limited

**Touch right; Mid frequency (815.50 MHz); Extended antenna; Ambient temp. 23.8;
Liquid temp. 22.9 deg.cel**

DUT: BlackBerry 7520 Wireless Handheld Ext; Type: Sample (Extended Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3
Medium: 835 MHz Head Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 20.7 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.527 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.7 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.526 mW/g

Peak SAR (extrapolated) = 0.678 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.333 mW/g

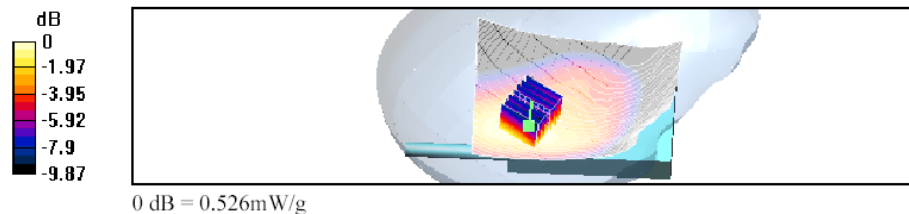

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20freque... 23/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		9(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/26/04 16:06:55

Test Laboratory: Research In Motion Limited

**Touch right; Mid frequency (815.50 MHz); Retracted antenna; Sanyo battery;
Ambient temp. 23.6; Liquid temp. 22.8 deg.cel**

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)


Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3
Medium: 835 MHz Head Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Reference Value = 24.3 V/m; Power Drift = -0.2 dB
Maximum value of SAR (interpolated) = 0.847 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 24.3 V/m; Power Drift = -0.2 dB
Maximum value of SAR (measured) = 0.829 mW/g
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.479 mW/g

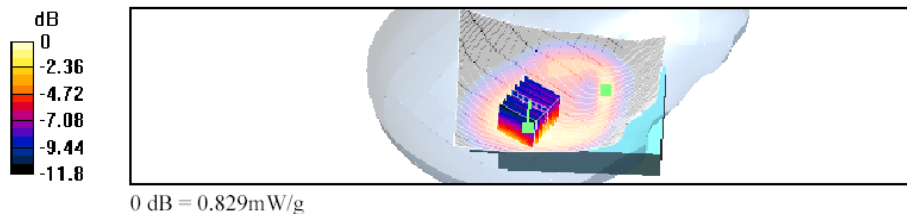

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20freque... 26/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		10(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/26/04 16:51:41

Test Laboratory: Research In Motion Limited

**Touch right; Mid frequency (815.50 MHz); Retracted antenna; higher cap battery;
Ambient temp. 23.2; Liquid temp. 22.6 deg.cel**

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3
Medium: 835 MHz Head Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 20.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.751 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.764 mW/g

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.449 mW/g

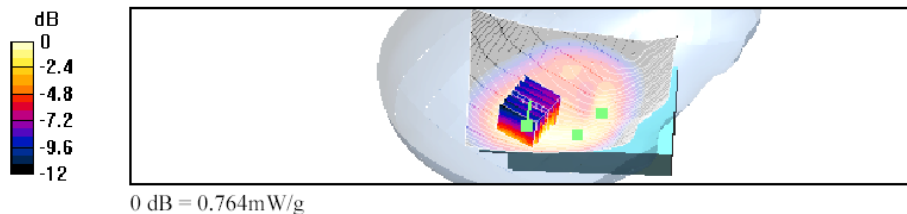

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20freque... 26/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		11(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/27/04 09:03:05

Test Laboratory: Research In Motion Limited

**Touch right; Mid frequency (815.50 MHz) with Bluetooth ON; Retracted antenna;
Sanyo battery; Ambient temp. 24.5; Liquid temp. 23.3 deg.cel**

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3
Medium: 835 MHz Head Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.5, 6.5, 6.5); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 20.6 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.732 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.6 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.776 mW/g

Peak SAR (extrapolated) = 1.07 W/kg


SAR(1 g) = 0.703 mW/g; SAR(10 g) = 0.451 mW/g

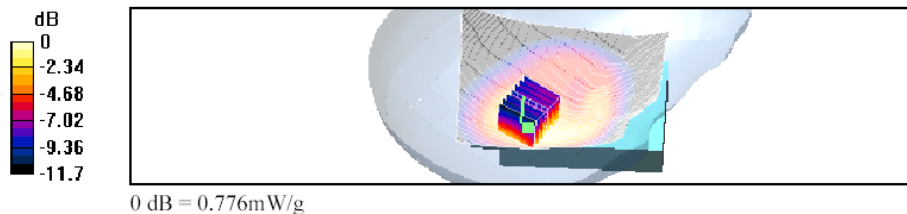

file://C:\Program%20Files\DASY4\Print_Templates\Touch%20right;%20Mid%20freque... 27/07/2004

 RESEARCH IN MOTION	Document Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		Page 12(23)
Author Data Daoud Attayi	Dates of Test July 23 – 28 & August 11 – 12, 2004	Test Report No RIM-0102-0407-08	FCC ID L6ARAL11IN

Z-Axis plots for the each worst case configuration:

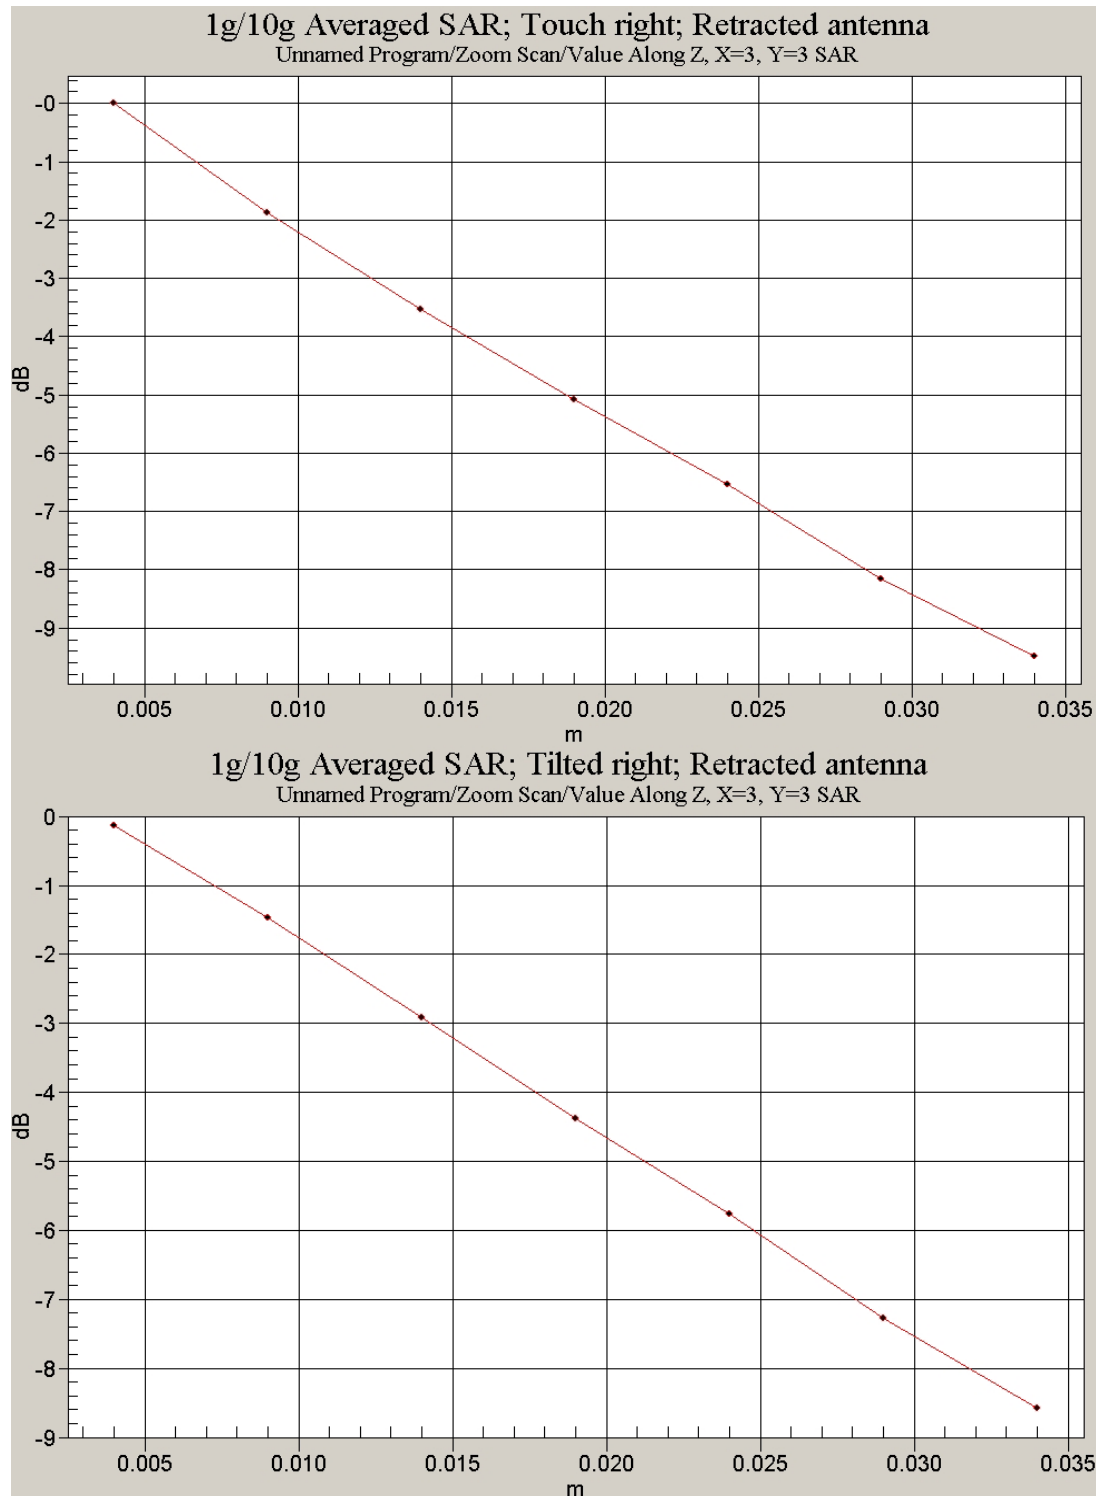

 RESEARCH IN MOTION	Document Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		Page 13(23)
Author Data Daoud Attayi	Dates of Test July 23 – 28 & August 11 – 12, 2004	Test Report No RIM-0102-0407-08	FCC ID L6ARAL11IN

APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN SAR CONFIGURATION

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		14(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/27/04 12:43:18

Test Laboratory: Research In Motion Limited

Body-worn with Plastic Swivel Holster; Mid frequency (815.50 MHz); Retracted antenna; GS Melcotec battery; Ambient temp. 24.4; Liquid temp. 23.4 deg.cel

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3

Medium: M 835 Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 21.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.436 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.448 mW/g

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.319 mW/g

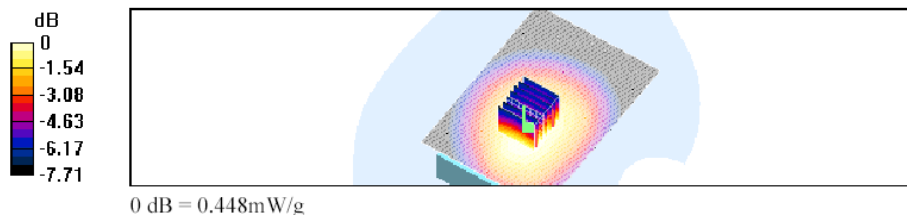

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20Plastic%20... 27/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		15(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/27/04 14:08:36

Test Laboratory: Research In Motion Limited

Body-worn with Plastic Swivel Holster; Mid frequency (815.50 MHz); Retracted antenna; Sanyo battery; Ambient temp. 24.3; Liquid temp. 23.0 deg.cel

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3

Medium: M 835 Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 21.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.436 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.4 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.442 mW/g

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.320 mW/g

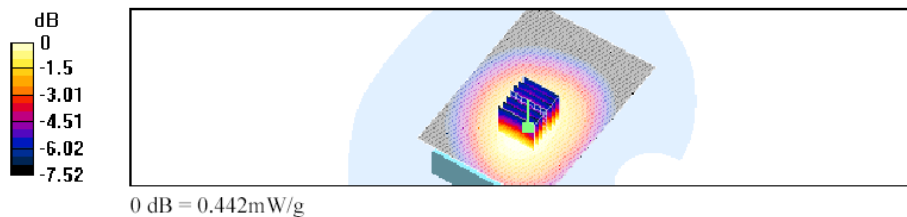

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20Plastic%20... 27/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		16(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/27/04 14:47:26

Test Laboratory: Research In Motion Limited

Body-worn with Plastic Swivel Holster; Mid frequency (815.50 MHz); Retracted antenna; Higher cap. battery; Ambient temp. 24.2; Liquid temp. 22.9 deg.cel

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.);

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3

Medium: M 835 Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 21.6 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.448 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.6 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.456 mW/g

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.325 mW/g

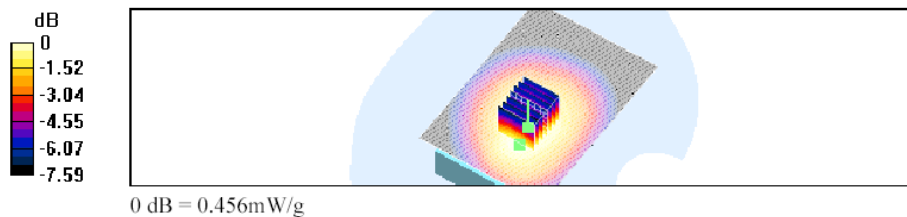

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20Plastic%20... 27/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		17(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/27/04 16:04:16

Test Laboratory: Research In Motion Limited

Body-worn with Plastic Swivel Holster; Mid frequency (815.50 MHz) with headset and Bluetooth ON; Retracted antenna; Higher cap. battery; Ambient temp. 24.2; Liquid temp. 22.8 deg.cel

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3

Medium: M 835 Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 21.1 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.439 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.1 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.445 mW/g

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.319 mW/g

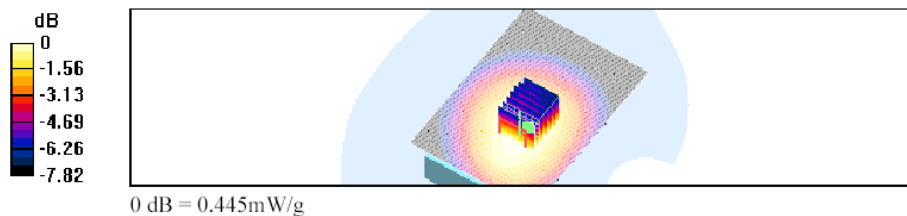

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20Plastic%20... 27/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		18(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 07/27/04 15:24:48

Test Laboratory: Research In Motion Limited

Body-worn with Plastic Swivel Holster; Mid frequency (815.50 MHz); Extended antenna; Higher cap. battery; Ambient temp. 24.2; Liquid temp. 22.8 deg.cel

DUT: BlackBerry 7520 Wireless Handheld Ext; Type: Sample (Extended Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3

Medium: M 835 Medium parameters used: $f = 815.5 \text{ MHz}$; $\sigma = 1 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Area Scan (101x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Reference Value = 21.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.421 mW/g


Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.437 mW/g

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.309 mW/g

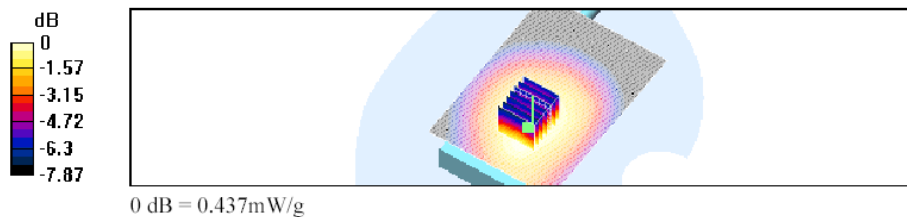

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20Plastic%20... 27/07/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		19(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 08/12/04 10:51:14

Test Laboratory: Research In Motion Limited

Body-worn with Vertical Foam Holster; Mid frequency (815.50 MHz); Retracted antenna; Back side; GS Melcotec battery; Ambient temp. 24.7; Liquid temp. 23.3 deg.cel

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3

Medium: M 835 Medium parameters used: $f = 815.5$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.7 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.629 mW/g


Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.452 mW/g

Unnamed procedure/Area Scan (101x151x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 25.7 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.622 mW/g

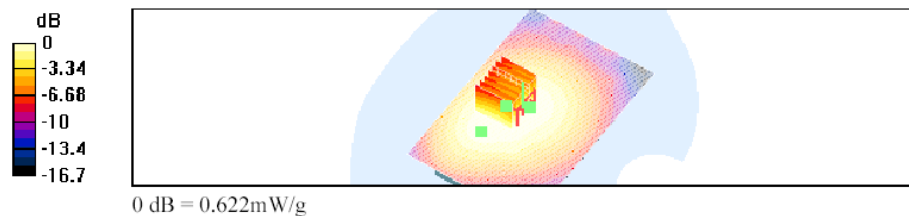

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20Vertical%2... 12/08/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		20(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 08/12/04 11:30:18

Test Laboratory: Research In Motion Limited

Body-worn with Horizontal Foam Holster; Mid frequency (815.50 MHz); Retracted antenna; Back side; GS Melcotec battery; Ambient temp. 24.6; Liquid temp. 23.2 deg.cel

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3

Medium: M 835 Medium parameters used: $f = 815.5$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.814 mW/g


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.526 mW/g

Unnamed procedure/Area Scan (101x151x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 26.9 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.808 mW/g

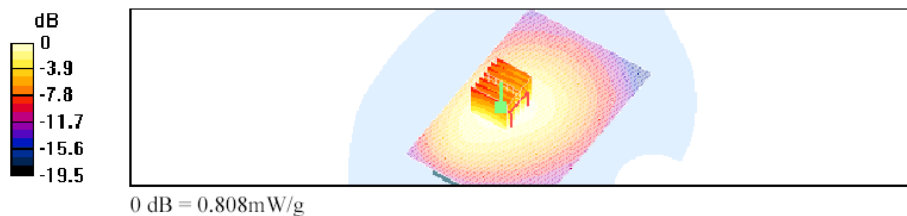

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20Horizontal... 12/08/2004

 RESEARCH IN MOTION	Document		Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN		21(23)
Author Data	Dates of Test	Test Report No	FCC ID
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN

Page 1 of 1

Date/Time: 08/12/04 13:35:57

Test Laboratory: Research In Motion Limited

Body-worn with Horizontal Foam Holster; Mid frequency (815.50 MHz); Retracted antenna; Back side; higher cap battery; Ambient temp. 24.5; Liquid temp. 23.0 deg.cel

DUT: BlackBerry 7520 Wireless Handheld; Type: Sample (Retracted Ant.)

Communication System: IDEN ; Frequency: 815.5 MHz; Duty Cycle: 1:3

Medium: M 835 Medium parameters used: $f = 815.5$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1643; ConvF(6.3, 6.3, 6.3); Calibrated: 09/10/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn473;
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.9 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.855 mW/g


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.792 mW/g; SAR(10 g) = 0.555 mW/g

Unnamed procedure/Area Scan (101x151x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 25.9 V/m; Power Drift = 0.0 dB



Maximum value of SAR (interpolated) = 0.847 mW/g

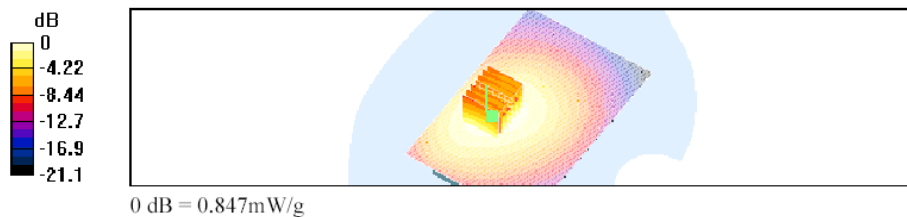

file://C:\Program%20Files\DASY4\Print_Templates\Body-worn%20with%20Horizontal... 12/08/2004

 RESEARCH IN MOTION	Document Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN	Page 22(23)
Author Data Daoud Attayi	Dates of Test July 23 – 28 & August 11 – 12, 2004	Test Report No RIM-0102-0407-08 FCC ID L6ARAL11IN

Z-Axis plots for the each worst case configuration:

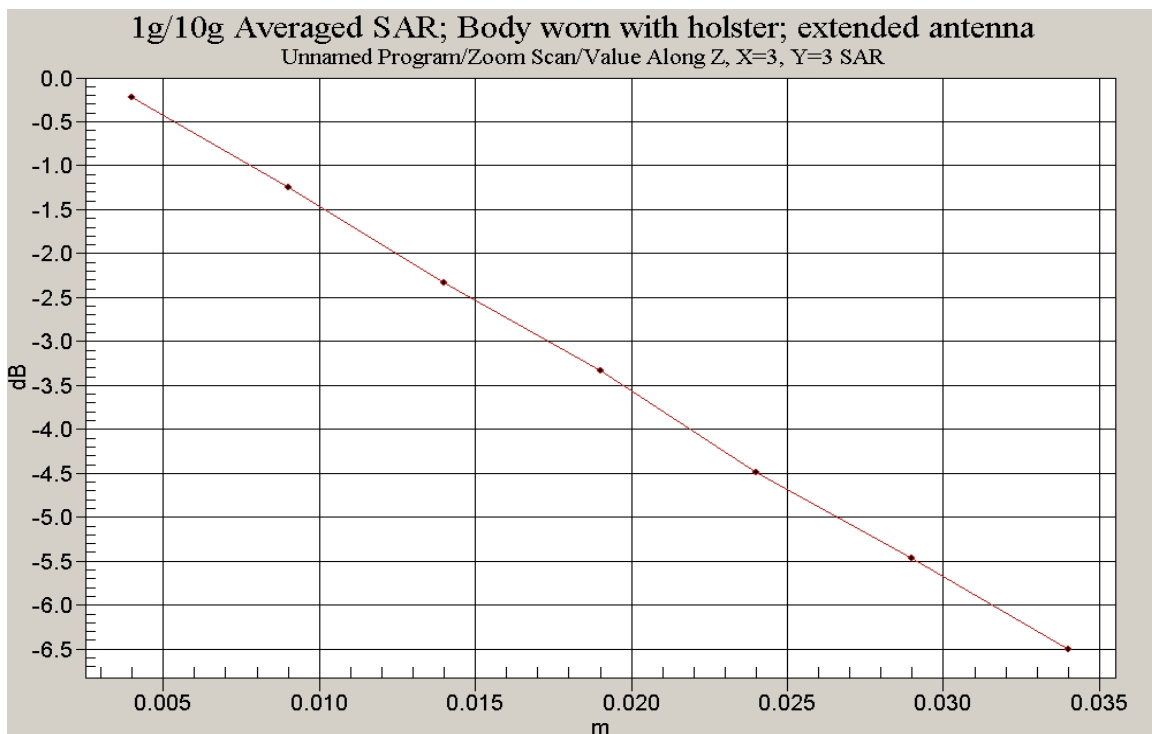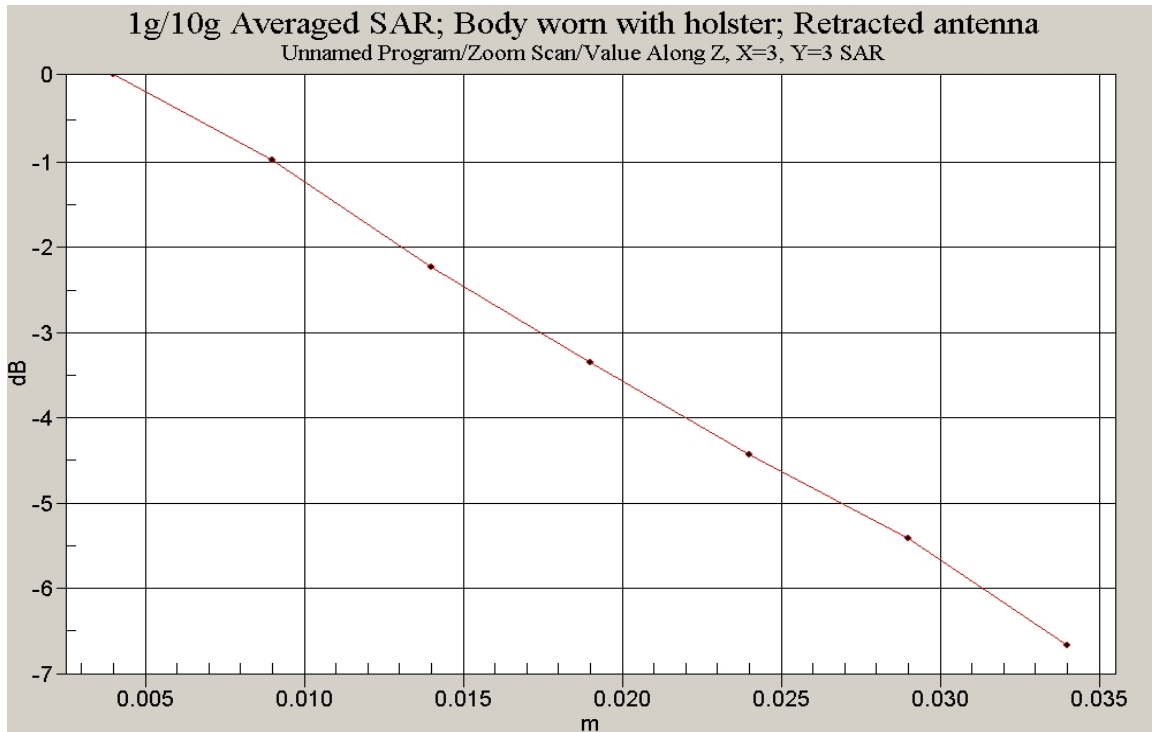

 RESEARCH IN MOTION	Document			Page
	Appendices to SAR Compliance Test Report for BlackBerry 7520 Wireless Handheld Model No. RAL11IN			23(23)
Author Data	Dates of Test	Test Report No	FCC ID	
Daoud Attayi	July 23 – 28 & August 11 – 12, 2004	RIM-0102-0407-08	L6ARAL11IN	

